



COMPLETE RANGE OF CONCEALED RUNNERS FOR WOODEN DRAWERS USING INDAUX TECHNOLOGY: PIN OR CLIP MOUNTING. SINGLE OR FULL EXTENSION. GRAVITY SELF-CLOSING OR SPRING SELF-CLOSING OR **INDAMATIC** SOFT CLOSING OR “IMPULSE” REVERSE OPENING.

“MARC” runners

FOR WOODEN DRAWERS

INDAmatic
gradual closing

"MARC" concealed runners for wooden drawers

PIN OR CLIP MOUNTING.

SINGLE OR FULL EXTENSION.

GRAVITY SELF-CLOSING OR SPRING SELF-CLOSING OR **INDAMATIC** SOFT CLOSING
OR "IMPULSE" REVERSE OPENING.

1	"MARC" RUNNERS: SINGLE EXTENSION	386
■	GRAVITY SELF-CLOSING	386
	- PLASTIC ROLLER-BEARING.	
	- PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.	
	- LENGTHS FROM 250 TO 650MM.	
■	GRAVITY SELF-CLOSING + "IMPULSE" REVERSE OPENING PREMOUNTED	388
	- PLASTIC ROLLER-BEARING "IMPULSE" REVERSE OPENING PREMOUNTED.	
	- PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.	
	- LENGTHS FROM 250 TO 650MM.	
■	DIRECT SELF-CLOSING	390
	- PLASTIC ROLLER-BEARING. SPRING-CLOSING.	
	- PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.	
	- LENGTHS FROM 250 TO 650MM.	
■	INDAMATIC GRADUAL SOFT-CLOSING	392
	- PLASTIC ROLLER-BEARING.	
	- PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.	
	- LENGTHS FROM 250 TO 650MM.	
	- SPRING SELF-CLOSING + SOFT-CLOSING.	
2	"MARC" RUNNERS: FULL EXTENSION	394
■	DIRECT SELF-CLOSING	394
	- FULL EXTENSION RUNNER. SPRING SELF-CLOSING.	
	- METAL ROLLER-BEARING.	
	- PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.	
	- LENGTHS FROM 300 TO 600M.	
■	INDAMATIC GRADUAL SOFT-CLOSING	396
	- FULL EXTENSION RUNNER WITH INDAMATIC GRADUAL CLOSING SYSTEM.	
	- METAL ROLLER-BEARING.	
	- PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.	
	- LENGTHS FROM 350 TO 650MM.	

1 "MARC" RUNNERS: SINGLE EXTENSION


GRAVITY SELF-CLOSING

PLASTIC ROLLER-BEARING.
PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.
LENGTHS FROM 250 TO 650MM.



SINGLE EXTENSION. GRAVITY SELF-CLOSING. PIN MOUNTING.

LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	C
25Kp	250	766.525.034	62	180
	300	766.530.030	62	205
	350	766.535.033	62	230
	400	766.540.036	82	265
	450	766.545.032	82	290
	500	766.550.035	104	325
	550	766.555.031	104	350
	600	766.560.034	104	375
	650	766.565.030	104	400



24

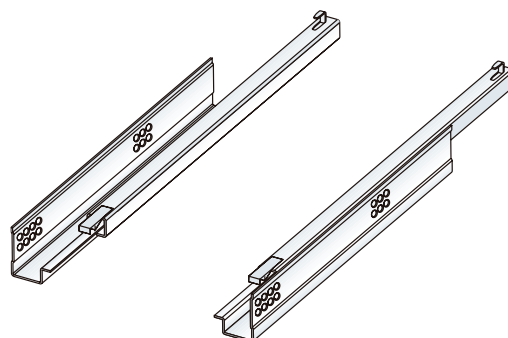

Drilling Pattern

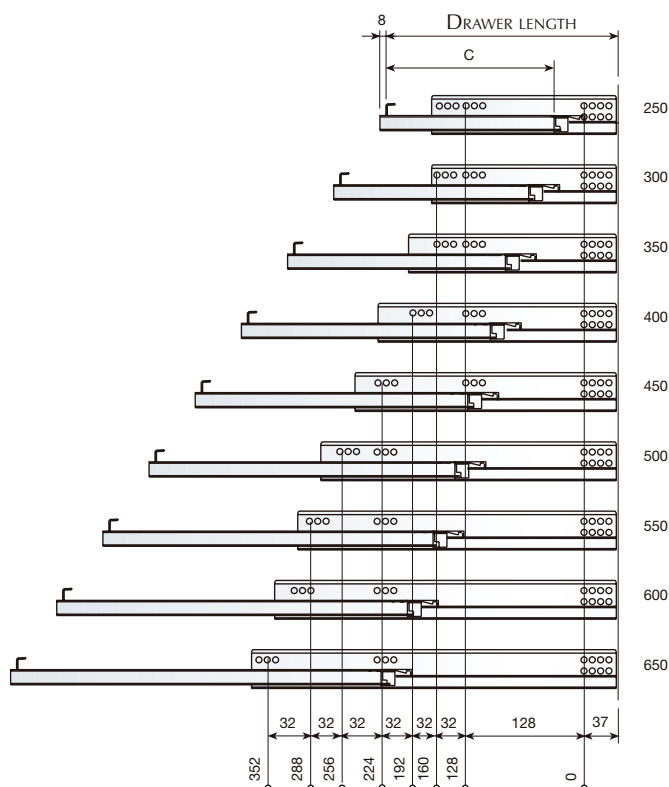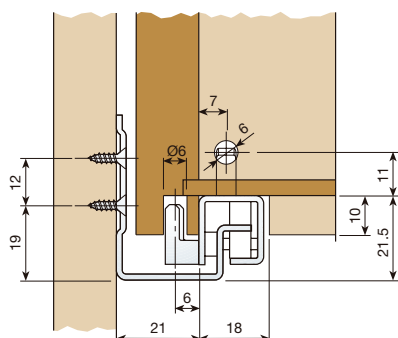


Assembly & Adjustment

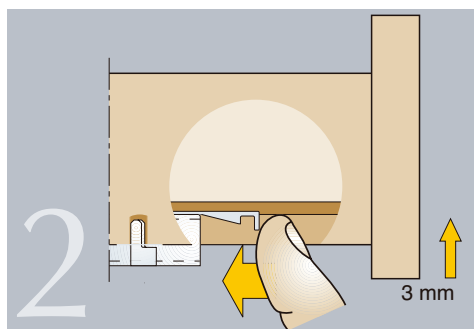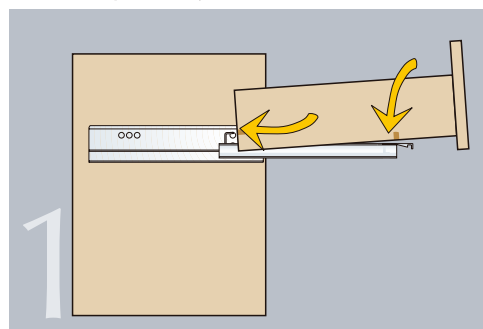

GRAVITY SELF-CLOSING

SINGLE EXTENSION. GRAVITY SELF-CLOSING. CLIP-MOUNTING.



LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	L	
25Kp	250	766.425.030	62	0	24
	300	766.430.033	62	30	
	350	766.435.036	62	55	
	400	766.440.032	82	70	
	450	766.445.035	82	95	
	500	766.450.031	104	110	
	550	766.455.034	104	135	
	600	766.460.030	104	160	
	650	766.465.033	104	185	

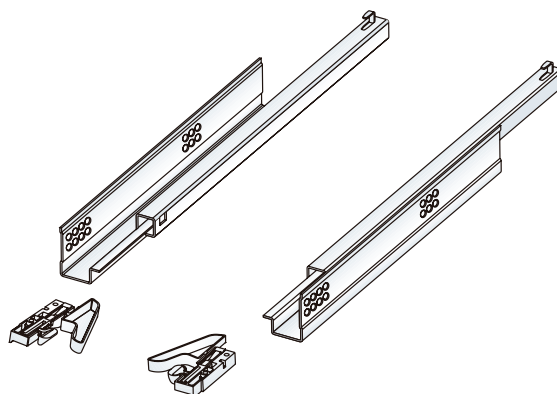



CLIP-ON BRACKETS.

SET		
731.245.104		100

Drilling Pattern

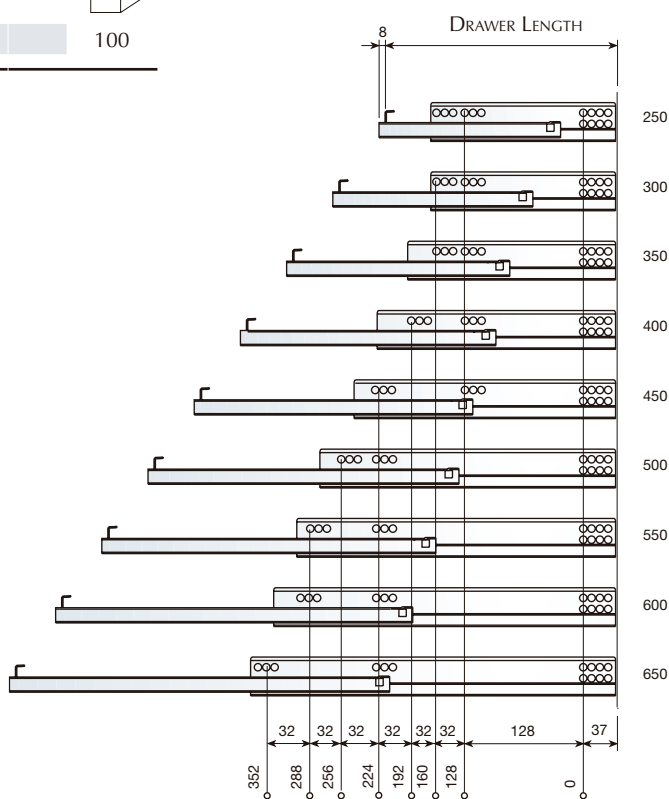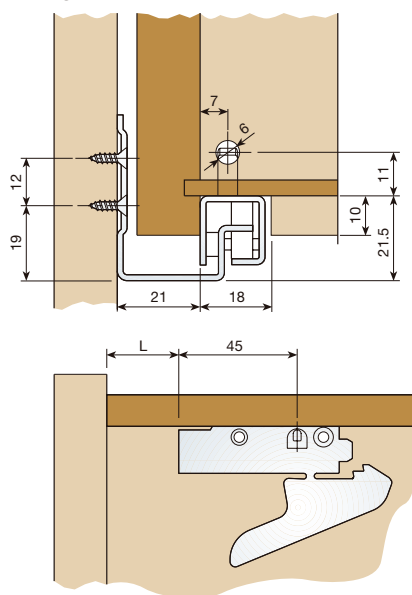

Assembly & Adjustment

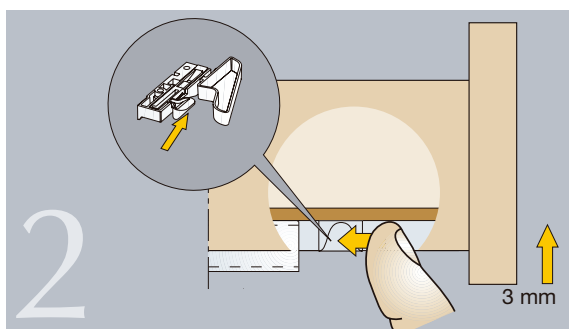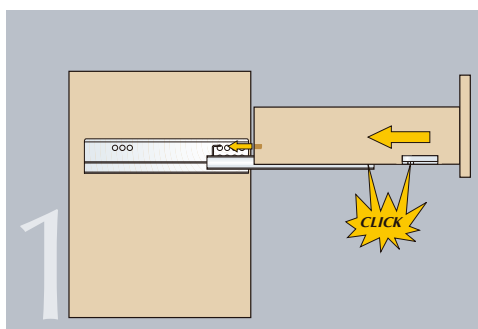

■ GRAVITY SELF-CLOSING + “IMPULSE” REVERSE OPENING PREMOUNTED, PIN MOUNTING

PLASTIC ROLLER-BEARING.


“IMPULSE” REVERSE OPENING PREMOUNTED ON A GRAVITY SELF-CLOSING RUNNER

PIN MOUNTING. 3MM HEIGHT ADJUSTMENT.

LENGTHS FROM 250 TO 650MM.

SINGLE EXTENSION. GRAVITY SELF-CLOSING. PIN MOUNTING.

LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	C	
25Kp	250	766.125.032	62	180	24
	300	766.130.035	62	205	
	350	766.135.031	62	230	
	400	766.140.034	82	265	
	450	766.145.030	82	290	
	500	766.150.033	104	325	
	550	766.155.036	104	350	
	600	766.160.032	104	375	
	650	766.165.035	104	400	



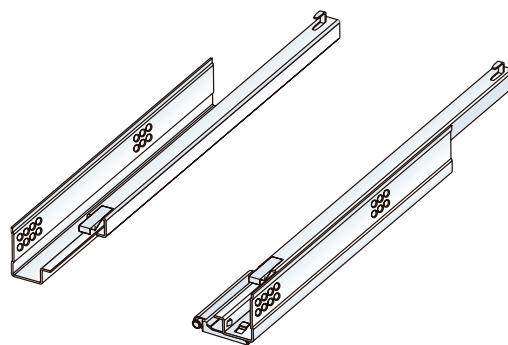


NOTE



“IMPULSE” REVERSE OPENING PUSH-LATCH

DELIVERED UNASSEMBLED

Drilling Pattern

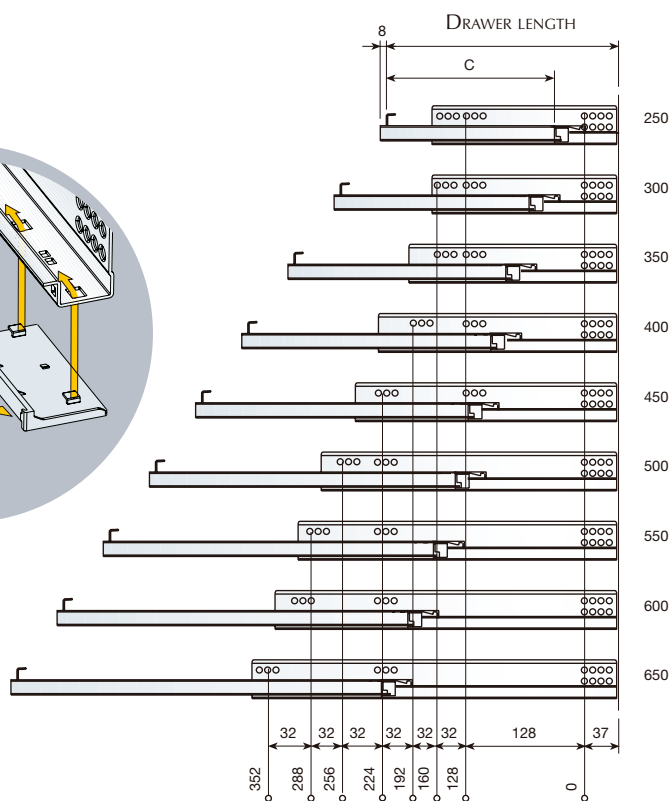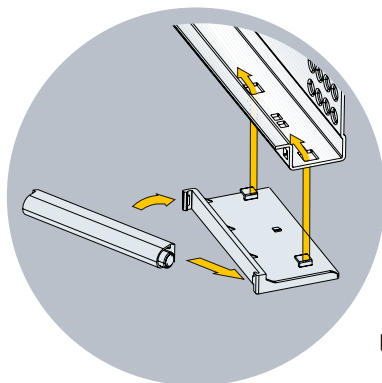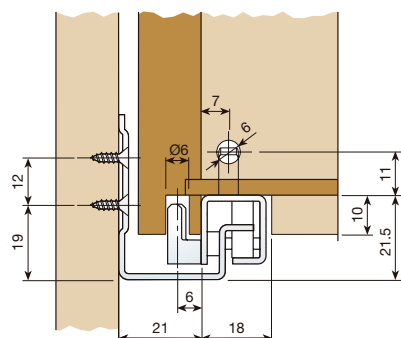

Assembly & Adjustment

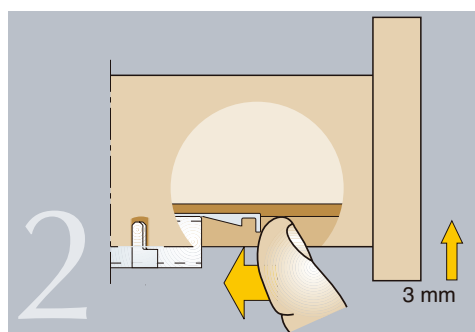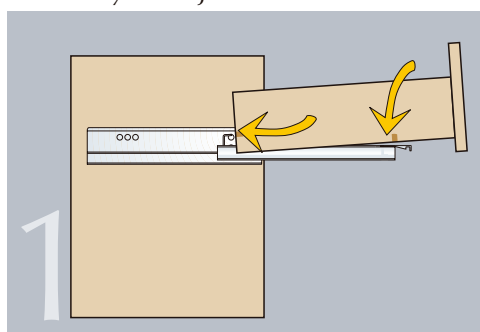


■ GRAVITY SELF-CLOSING + "IMPULSE" REVERSE OPENING PREMOUNTED, CLIP MOUNTING

SINGLE EXTENSION. GRAVITY SELF-CLOSING. CLIP-ON MOUNTING.

LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	L	
25Kp	250	766.025.035	62	0	24
	300	766.030.031	62	30	
	350	766.035.034	62	55	
	400	766.040.030	82	70	
	450	766.045.033	82	95	
	500	766.050.036	104	110	
	550	766.055.032	104	135	
	600	766.060.035	104	160	
	650	766.065.031	104	185	

CLIP-ON BRACKETS.




SET	
731.245.104	100

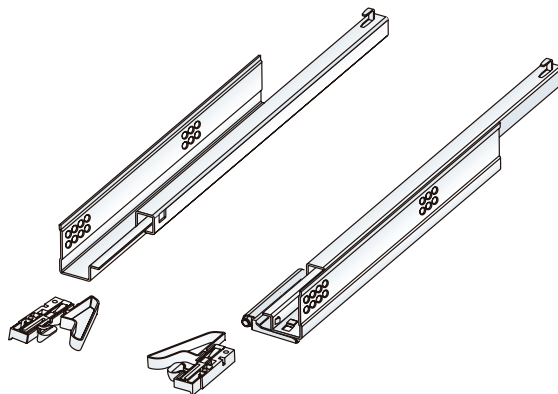



NOTE

"IMPULSE" REVERSE OPENING PUSH-LATCH
DELIVERED UNASSEMBLED.

Drilling Pattern

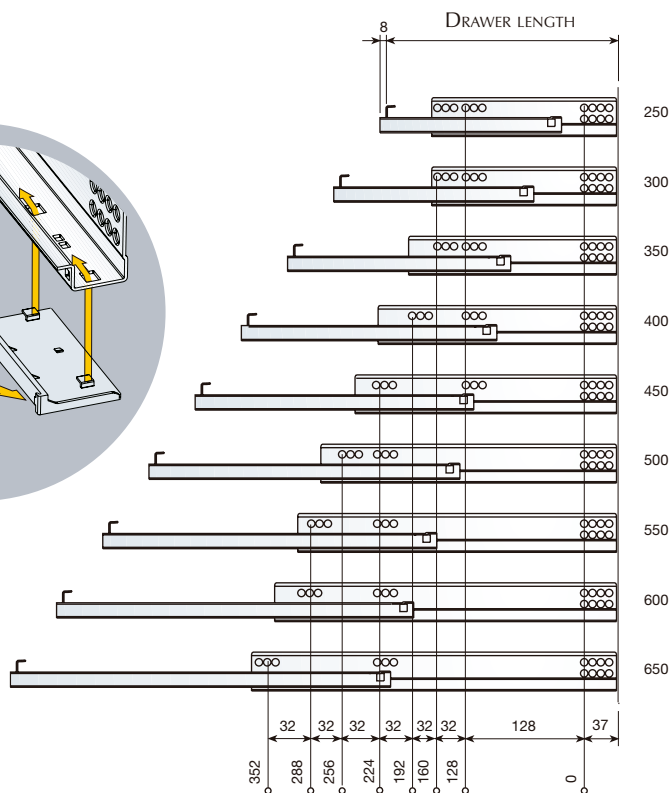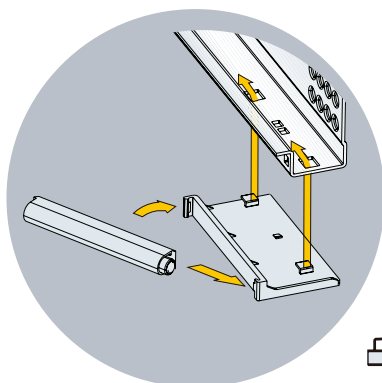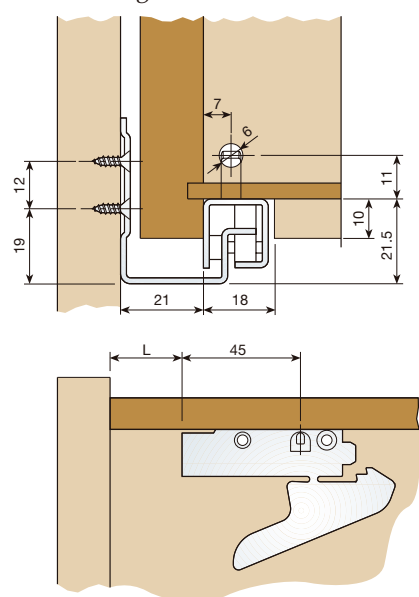

Assembly & Adjustment

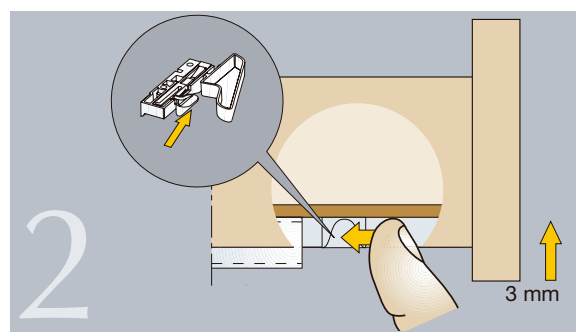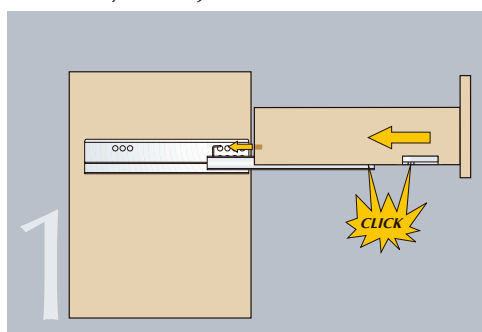

DIRECT SELF-CLOSING, PIN MOUNTING

PLASTIC ROLLER-BEARING.


PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.

LENGTHS FROM 350 TO 650MM.



SPRING SELF-CLOSING.

SINGLE EXTENSION. SELF-CLOSING. PIN MOUNTING.



LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	C	
25Kp	350	769.635.031	62	310	24
	400	769.640.034	82	330	
	450	769.645.030	82	355	
	500	769.650.033	104	395	
	550	769.655.036	104	420	
	600	769.660.032	104	445	
	650	769.665.035	104	470	

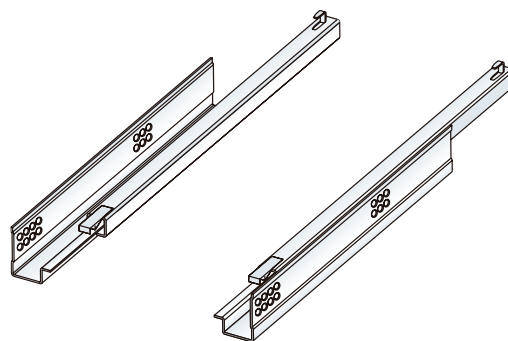

Drilling pattern

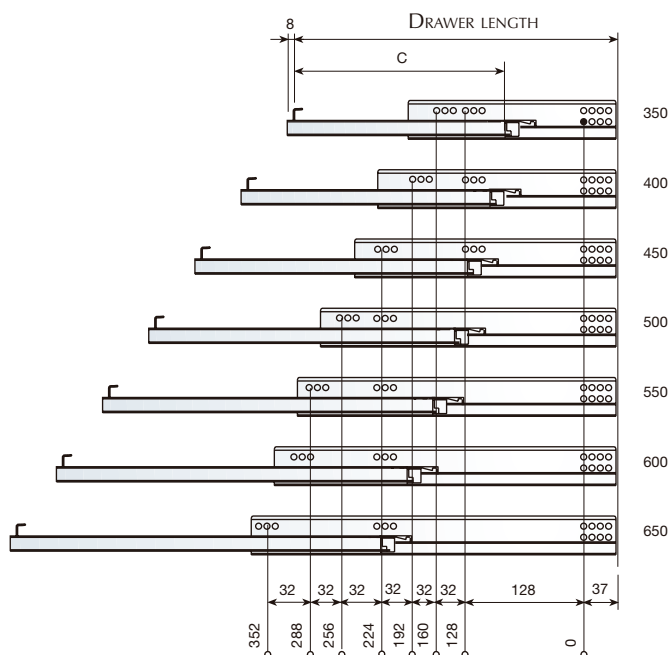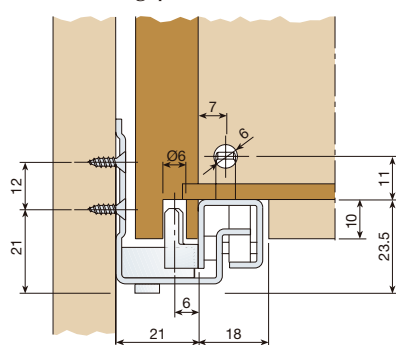


Assembly & Adjustment

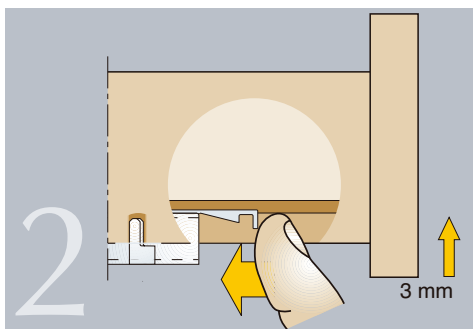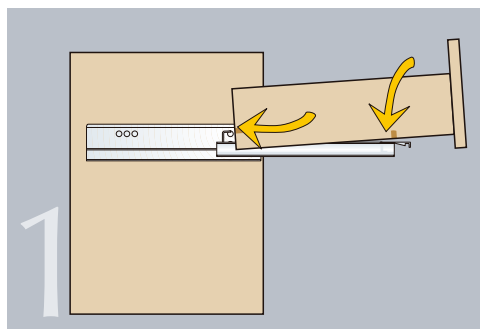

DIRECT SELF-CLOSING, CLIP MOUNTING

SINGLE EXTENSION. SELF-CLOSING. CLIP-MOUNTING.



LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	L	
25Kp	350	769.435.030	62	25	24
	400	769.440.033	82	40	
	450	769.445.036	82	65	
	500	769.450.032	104	80	
	550	769.455.035	104	105	
	600	769.460.031	104	130	
	650	769.465.034	104	155	

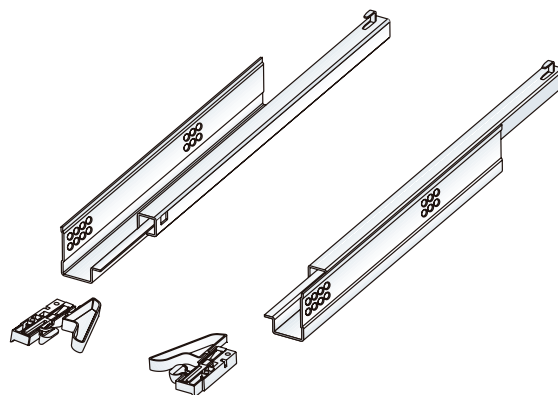



CLIP-ON BRACKETS.

SET	
731.245.104	100

Drilling pattern

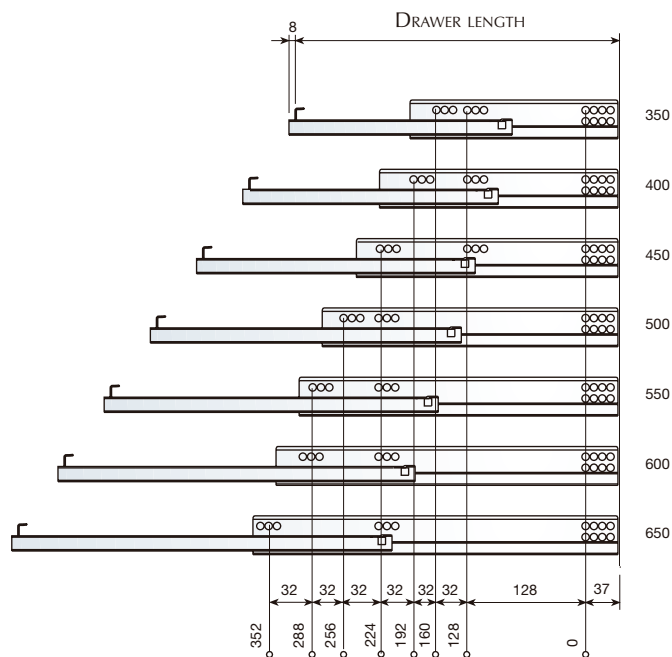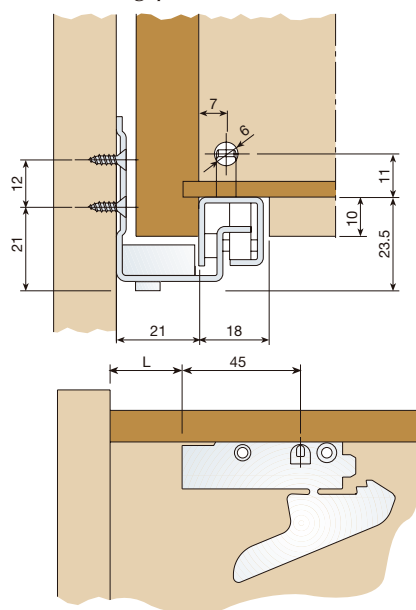

Assembly & Adjustment

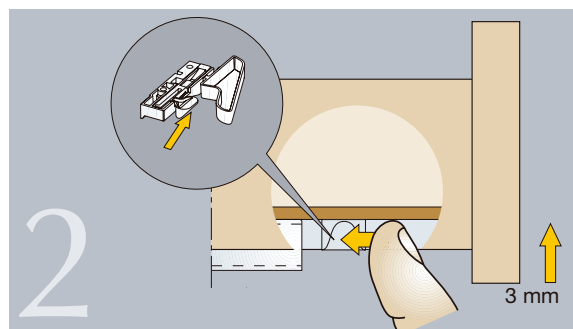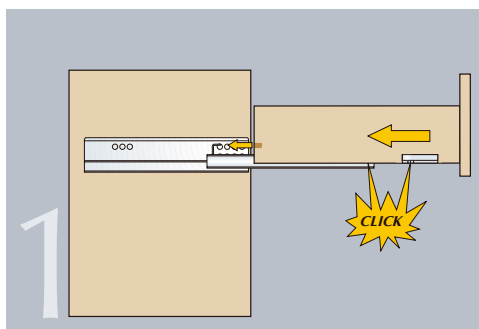


GRADUAL SOFT-CLOSING, PIN MOUNTING

PLASTIC ROLLER-BEARING.
PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.
LENGTHS FROM 350 TO 650MM.



INDAmatic
gradual closing

SINGLE EXTENSION. SELF & SOFT CLOSING. PIN MOUNTING. INDAMATIC.



LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	C	
25Kp	350	769.735.035	62	310	24
	400	769.740.031	82	330	
	450	769.745.034	82	355	
	500	769.750.030	104	395	
	550	769.755.033	104	420	
	600	769.760.036	104	445	
	650	769.765.032	104	470	

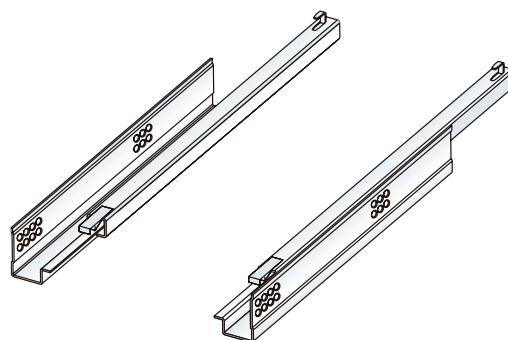

Drilling pattern

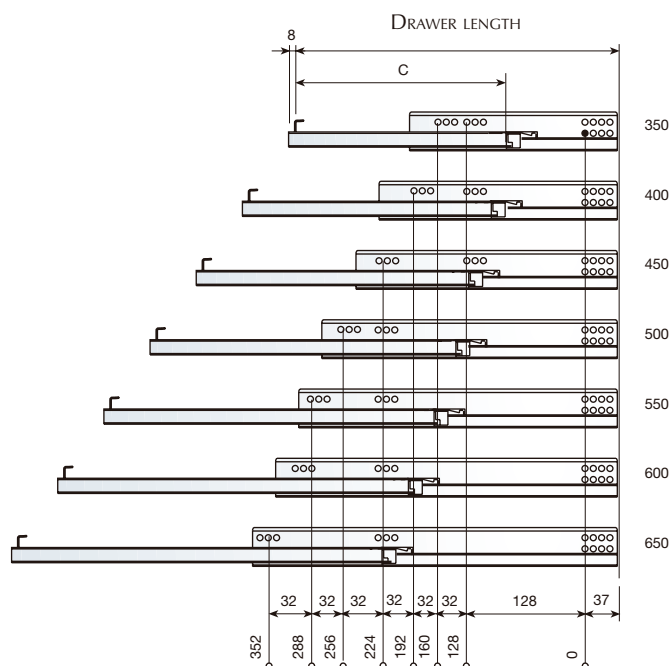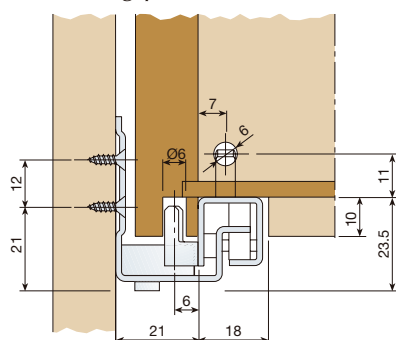

Assembly & Adjustment

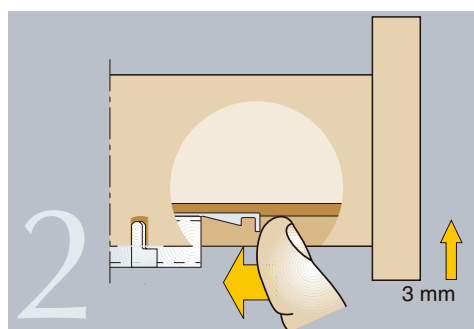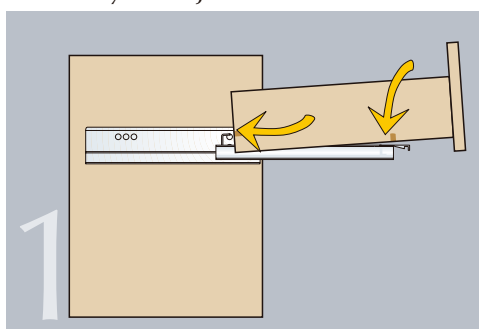

■ GRADUAL SOFT-CLOSING, CLIP MOUNTING


INDAmatic
gradual closing

SINGLE EXTENSION. CLIP-MOUNTING. INDAMATIC.



LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	L	
25Kp	350	769.535.034	62	25	24
	400	769.540.030	82	40	
	450	769.545.033	82	65	
	500	769.550.036	104	80	
	550	769.555.032	104	105	
	600	769.560.035	104	130	
	650	769.565.031	104	155	

CLIP-ON BRACKETS



SET		
731.245.104	100	

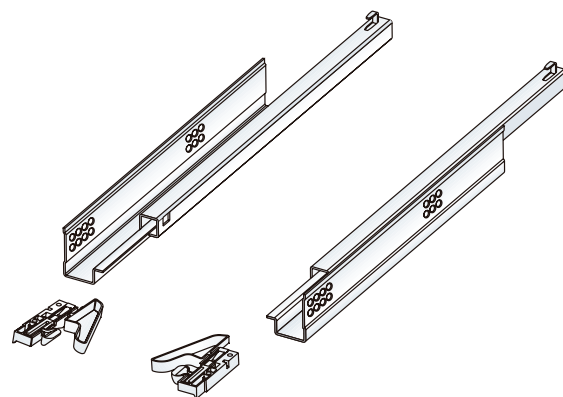

Drilling pattern

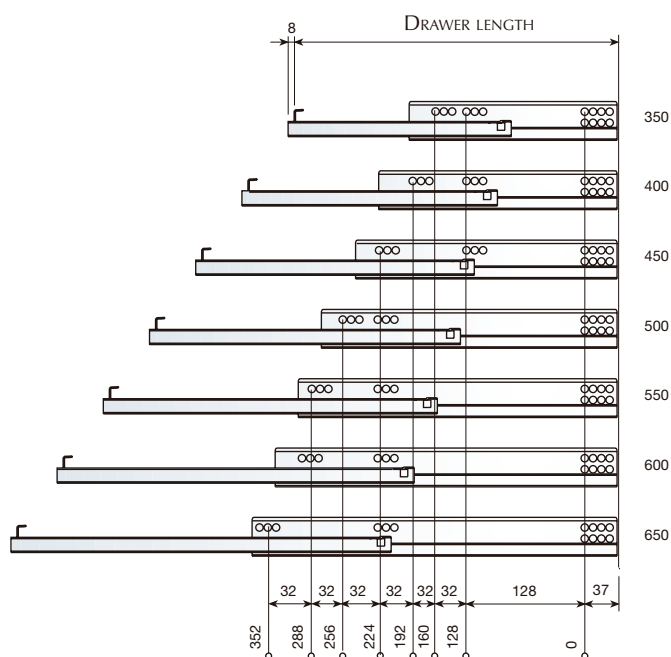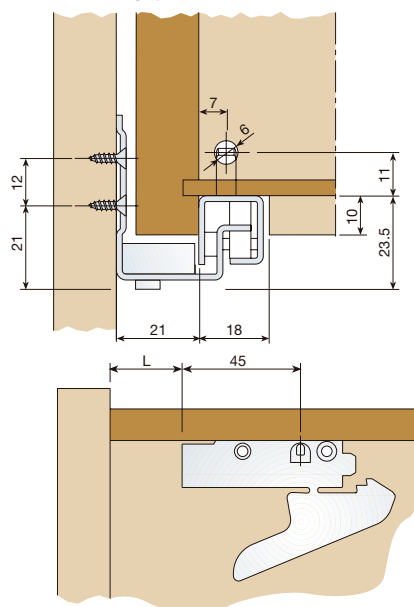

Assembly & Adjustment

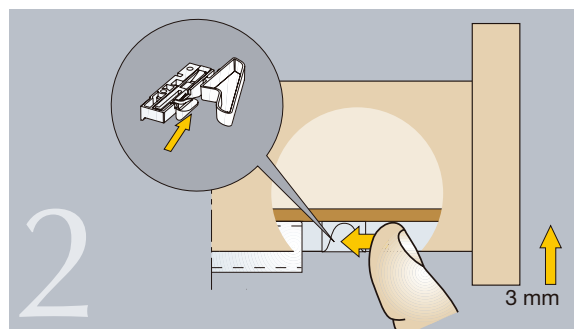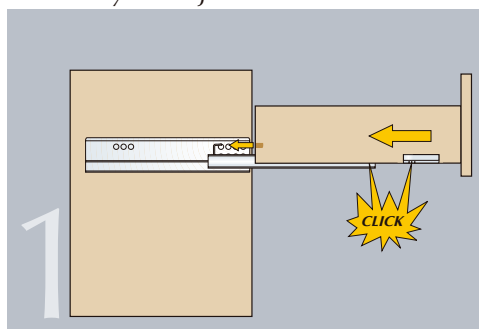

2 "MARC" RUNNERS: FULL EXTENSION

DIRECT SELF-CLOSING, PIN MOUNTING

METAL ROLLER-BEARING.


PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.

LENGTHS FROM 300 TO 650MM.



SPRING SELF-CLOSING.

FULL EXTENSION. SELF-CLOSING. PIN MOUNTING.



LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	C	
25Kp	300	762.630.035	0	281	20
	350	762.635.031	0	331	
	400	762.640.034	0	381	
	450	762.645.030	0	431	
	500	762.650.033	0	481	
	550	762.655.036	0	531	
	600	762.660.032	0	581	

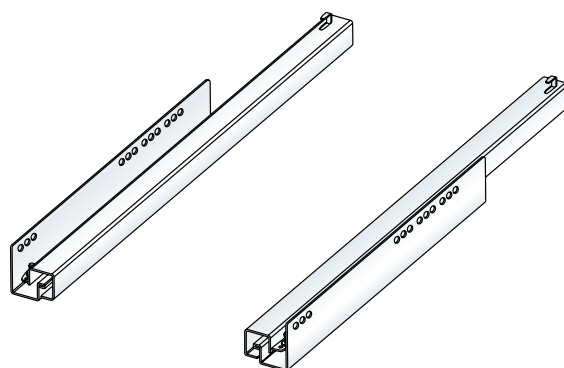

Drilling Pattern

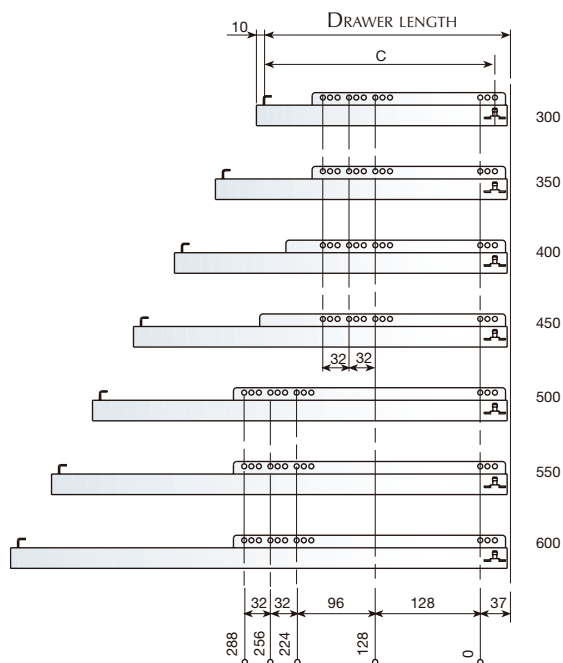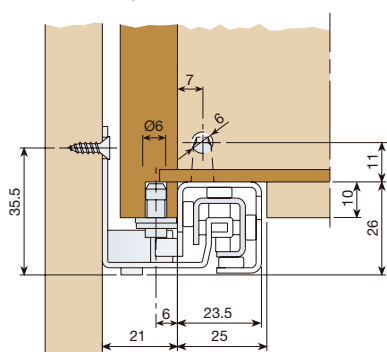

Assembly & Adjustment

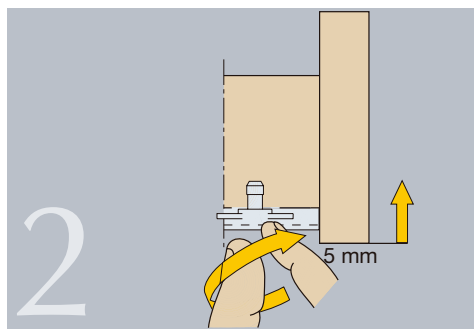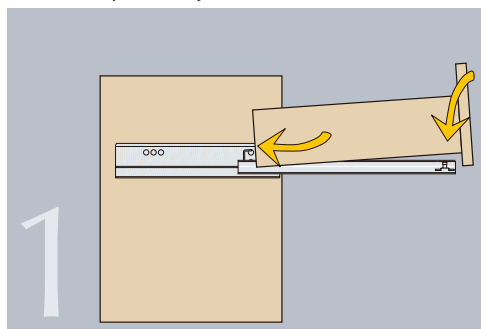


DIRECT SELF-CLOSING, CLIP MOUNTING

FULL EXTENSION. SELF-CLOSING. CLIP-MOUNTING.



LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	
25KP	300	763.030.030	0	20
	350	763.035.033	0	
	400	763.040.036	0	
	450	763.045.032	0	
	500	763.050.035	0	
	550	763.055.031	0	
	600	763.060.034	0	

CLIP-ON BRACKETS.



SET	
731.245.104	100

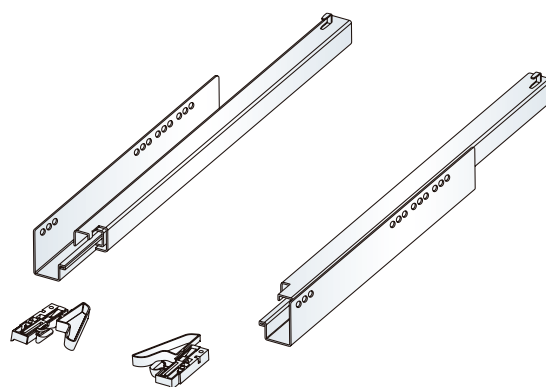

Drilling pattern

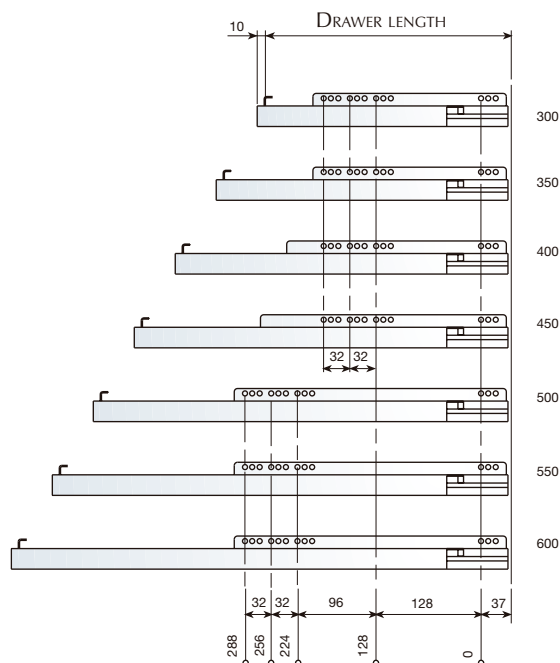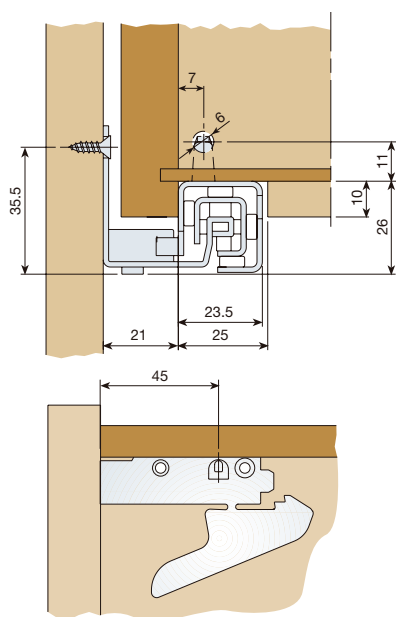

Assembly & Adjustment

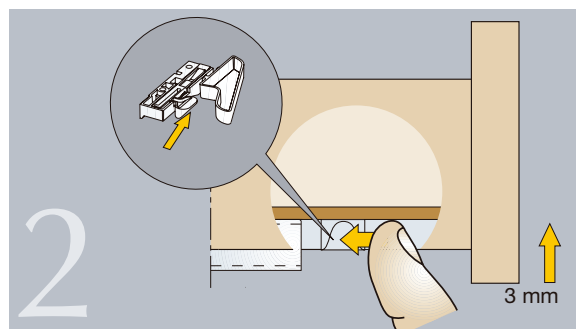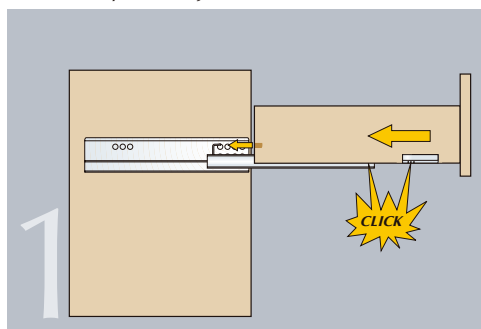

GRADUAL SOFT-CLOSING, PIN MOUNTING

METAL ROLLER-BEARING.


PIN OR CLIP-MOUNTING. 3MM HEIGHT ADJUSTMENT.

LENGTHS FROM 300 TO 600MM.



INDAmatic
gradual closing

FULL EXTENSION. SOFT-CLOSING. PIN MOUNTING. **INDAMATIC.**



LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	C	
25Kp	300	762.730.032	0	281	20
	350	762.735.035	0	331	
	400	762.740.031	0	381	
	450	762.745.034	0	431	
	500	762.750.030	0	481	
	550	762.755.033	0	531	
	600	762.760.036	0	581	

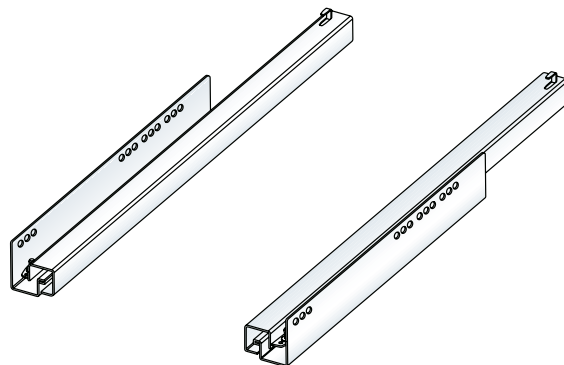

Drilling pattern

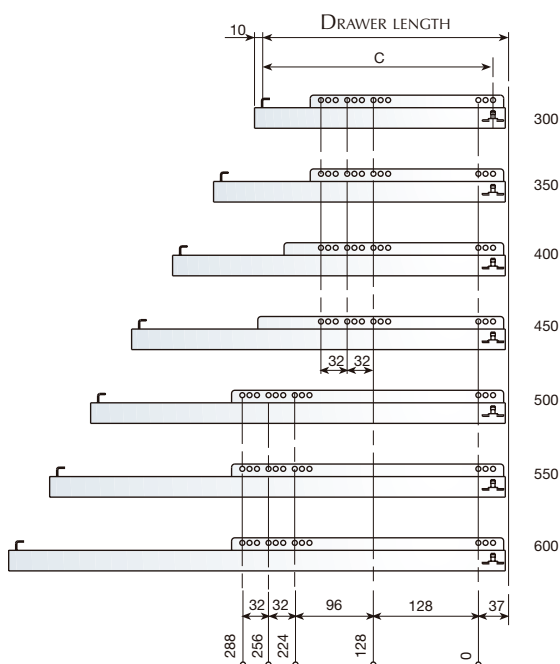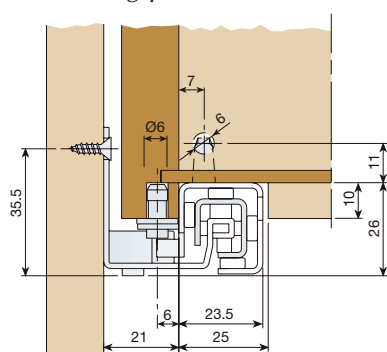

Assembly & Adjustment

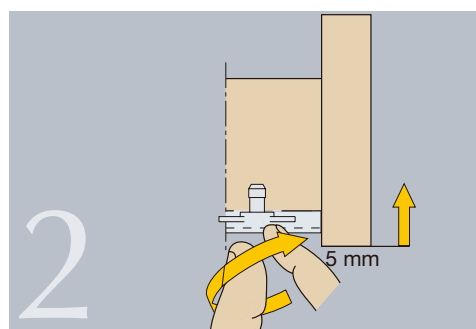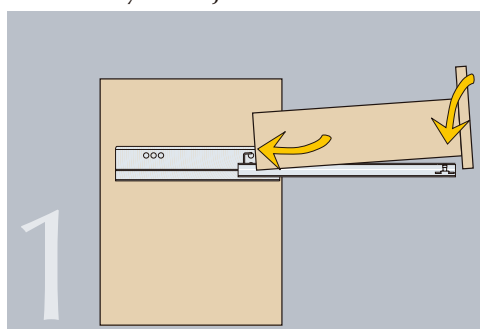

■ GRADUAL SOFT-CLOSING, CLIP MOUNTING


INDAmatic
gradual closing

FULL EXTENSION. SOFT-CLOSING. CLIP-MOUNTING. **INDAMATIC.**



LOAD	DRAWER LENGTH	REFERENCE	EXTENSION LOSS	
25Kp	300	763.130.034	0	20
	350	763.135.030	0	
	400	763.140.033	0	
	450	763.145.036	0	
	500	763.150.032	0	
	550	763.155.035	0	
	600	763.160.031	0	

CLIP-ON BRACKETS.

	SET	
	731.245.104	100

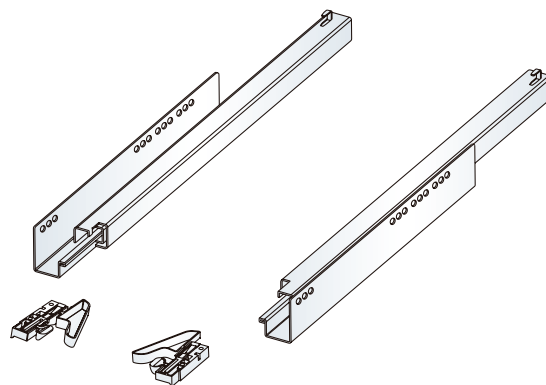

Drilling pattern

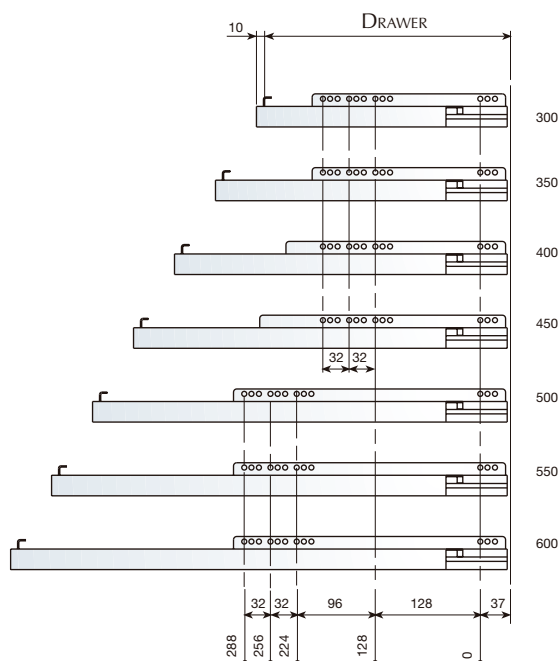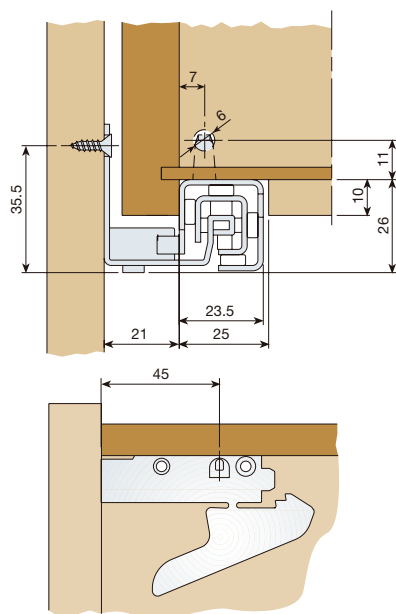

Assembly & Adjustment

