INDAUX

FURNITURE FITTINGS MANUFACTURER

2011/12

General Catalogue

INDAUX
FURNITURE FITTINGS MANUFACTURER

Technological solutions for
the furniture industry.

INDAUX
FURNITURE FITTINGS MANUFACTURER

General Index

Indaux has been creating, developing, manufacturing and marketing fittings and components for the furniture industry since 1962.
Our strong commitment to innovation and quality, along with our international vocation, has made us a leading company in the sector.

1 LOCKS AND LATCHES › *2*

Espagnolette locks ... *5*
Magnetic latches ... *17*
IMPULSE Push-latch ... *20*
INDAMATIC Dampers ... *29*

2 HINGES AND LIFTING SYSTEMS › *32*

Factors to consider when choosing a hinge ... *34*

Quick assembly Ø35 cup:
› MESUCO 14 rapid ... *37*
› MESUCO 143 rapid ... *51*
› MESUCO 131X rapid ... *67*

***SLIDE ON* assembly Ø35 cup**:
› MESUCO 14 ... *75*
› MESUCO 121 ... *89*
› MESUCO 131X ... *107*

Ø26 cup:
› MESUCO 8 ... *115*
› MESUCO 8X ... *121*

Special hinges:
› For corner doors ... *130*
› Concealed ... *132*
› For desks ... *135*
› For folding tables ... *137*
› Single-shaft hinges ... *138*

Pivot arms and fittings for up-and-over doors
› Pivot arms for folding doors ... *141*
› Multi-purpose fitting DELTA ... *147*
› Fittings for up-and-over doors ... *157*

3 KITCHEN EQUIPMENT AND SUPPORT ELEMENTS › *166*

Legs ... *168*
› Supporting leg for sides 1 ... *169*
› Supporting leg for sides 2 ... *171*
› Legs for units ... *173*
› MAMUT-6 Leg ... *177*
› SANDY Leg ... *184*
› Legs for tables ... *185*
› Supporting legs ... *185*
Accessories for skirting boards ... *187*
› Plastic pin and supports ... *188*
› Steel pin and supports ... *189*
› FLEXY skirting board hook support ... *190*
› Skirting board joint and terminal ... *191*
Equipment for inside the cabinet ... *192*
› Storage frames ... *194*
› Extension fittings ... *198*
› Bottle rack ... *200*
› Baskets ... *202*
› Swivel trays ... *210*
› Waste bins ... *212*
› Pull-out hangers ... *214*
› Plate racks ... *213*
Kitchen accessories ... *217*
› Work surface accessories ... *218*
› Kitchen accessories ... *222*
› Ventilation grille ... *223*

4 ASSEMBLIES › *224*

Cams:
› Ø15 Cam ... *227*
› Ø25 Cam ... *237*
› Ø25 Snail cam ... *243*
› Ø25 Spiral cam ... *249*
› Ø35 Spiral cam ... *257*
Joining assemblies:
› Joining assemblies ... *263*
› Tightening bolt ... *271*
› Right-hand screws ... *275*
› Brackets ... *277*
› Screws and nuts ... *279*
› Assemblies for work surfaces ... *283*
› Bed side rails support ... *285*
› Accessories ... *287*
Shelf supports:
› CLOCK shelf assemblies ... *293*
› Shelf supports ... *299*

5 HANGING SUPPORTS › *304*

Supports for low suspended modules
› ATLAS ... *307*
SCARPI cabinet hangers
› SCARPI-4 ... *315*
› SCARPI 5 ... *319*
TRASER concealed hangers
› TRASER-6 ... *323*
› TRASER-8 ... *331*
› TRASER-7 ... *339*
Miscellaneous hangers ... *343*
TENTI shelf supports
› TENTI-4 ... *347*
› TENTI-3 ... *348*
› TENTI-4C ... *349*
› TENTI-5 ... *350*
› TENTI-7 ... *351*
› TENTI-8 ... *352*
› TENTI-9 ... *353*

6 RUNNERS › *356*

CISNE ball bearing runners ... *358*
GACELA roller runners ... *371*
MARC concealed runners ... *383*

7 DRAWERS › *398*

ATTRACTION ... *401*
ALUX ... *441*
EUROPA ... *451*
EUROPA-2 ... *463*
SUPRA ... *485*
INDAUX ... *497*
COMBI ... *503*
BARANDILLA ... *517*
UNDER-OVEN ... *519*
SUPRAPLEX and SUPRAKIT ... *523*
OFFIBOX ... *563*
Computer keyboard trays ... *585*

8 FITTINGS FOR SLIDING DOORS › *592*



For light doors ... *595*
› JUNIOR-0 ... *596*
› JUNIOR-1 ... *597*
› MINI ... *598*
› TALL ... *599*
› UPPER ... *600*
› DÚO ... *602*
For cupboard doors / hanging ... *604*
› MASTER LUX ... *606*
› MASTER MAS ... *610*
› GHOST ... *614*
› SISTEMA-4 ... *617*
For cupboard doors / supported ... *624*
› JUNIOR-4 ... *626*
› JUNIOR-2 ... *628*
› JUNIOR-3 ... *632*
› JUNIOR-5 ... *636*
› JUNIOR-6 ... *639*
› JUNIOR-7 ... *655*
For cupboard doors / coplanar ... *662*
› MAGIC ... *664*
For cupboard doors / folding ... *667*
For interior doors ... *673*
› OVER ... *674*
› SOFT CLOSING DIVIDER DOORS ... *679*
For vertical doors ... *691*
› VERTIKAL ... *693*
› SALISCENDI 40 ... *699*
Straighteners ... *701*
› Straightener 1 ... *702*
› Straightener 3 ... *704*
› Straightener 4 ... *705*
Accessories ... *707*

9 FURNITURE ACCESSORIES › *706*

Cupboard doors ... *709*
› SCREEN ... *710*
› SCREEN FUSION ... *712*
› SCREEN CLICK ... *714*
› SCREEN EASY ... *716*
› SCREEN 3 ... *718*
› SCREEN 4 ... *720*
Glass cabinet doors ... *723*
› Mechanised 20x20 R1 ... *724*
› Mechanised 20x20 R6 ... *726*
› Mechanised 20x20x7,5 ... *728*
› Mechanised 35x20x7,5 ... *730*
› Mechanised 45x20x7,5 ... *732*
› Mechanised 45x20x1,2 ... *734*
› Mechanised 45x20x20 ... *736*
› Mechanised 50x20x7,5 ... *738*
› Non-mechanised SCREEN-KIT ... *740*
Handles and edge profiles ... *743*
Panelling systems ... *746*
› Horizontal RASTY ... *746*
› Vertical FORTE ... *753*
› Horizontal/Vertical HEAVY ... *756*
› Horizontal/Vertical THIN WALL ... *762*
› Horizontal, accessories ... *764*
› Vertical, accessories ... *770*
Profiles for structures ... *777*
› Multi-purpose structure STRUKT ... *778*
› Structure 40x40 ... *780*
› Structure 20x20 ... *782*
Equipment for inside cabinets ... *785*
› CD, DVD, VHS holder profiles ... *786*
› Aluminium shelf ... *788*
› Wiring ducting ... *790*
› Aluminium tie rack ... *791*
› Trouser hanger ... *792*
› Clothes rails ... *793*
› Clothes hooks ... *797*
› Folding clothes hangers ... *797*
› Shoe rack ... *798*
› Tie rack ... *798*
› Trouser rack ... *799*
› Movable hanger ... *800*

INDAUX
FURNITURE FITTINGS MANUFACTURER

Indaux main headquarters in Getaria (Spain).

INDAUX GETARIA (Spain)

INDAUX AIA (Spain)

INDAUX AIA 2 (Spain)

HERDESA (Spain)

Global sense and local sensibility.

Indaux brings together different companies working in the manufacture of fittings, hardware and equipment for the furniture industry. The group has four production plants in Spain. Our centres are modern, with all the necessary automatic machinery to enable us to respond quickly to our clients' requests and offer only the very best products.

Our commercial organisation, together with a network of distributors in over 30 countries, ensures that Indaux products are always present in the five continents.

INDAUX is an enterprise with a global vocation.

INDAUX
FURNITURE FITTINGS MANUFACTURER

R&D

At the service of clients' needs.

The **Indaux R+D** department is a pioneer in the search for solutions to the furniture industry's demands. More than 100 patents registered by **Indaux** over the years are proof of this.

Our products combine innovation and the most interesting designs. The balance between these two factors, plus the final personal touch, awards Indaux fittings their very own personality, and makes them prestigious all over the world.

The **Indaux** Group's furniture solutions catalogue covers over 10,000 references, making it the most complete manufacturer in the Spanish market and among the European leaders in the sector.

Full catalogue available also at **www.indaux.com**

ATLAS
SYSTEM

ATLAS system, the effective and secure solution for heavy loads in suspended kitchens and bathroom cabinets (see p.307).

JUNIOR-6 with **INDAmatic**, the exclusive runner cushion system with gradual soft closing by **Indaux** (see p.639).

INDAmatic
gradual closing

The perfect home furniture accesory.

INDAmatic is a closing system with a damper mechanism, patented by Indaux. This system ensures soft and silent closing, improving home comfort.

INDAmatic runs quickly and smoothly. It soft closes silently avoiding unpleasant noises and unclosed drawers.

Indaux's INDAmatic soft-closing is being incorporated throughout the range progressively. One of the main developments is the application of INDAmatic to entry-price runners and drawers.

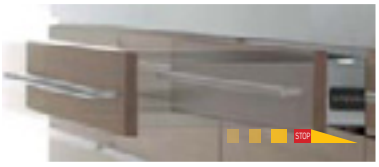



INDAUX
FURNITURE FITTINGS MANUFACTURER

01

LOCKS AND LATCHES

Espagnolette locks

05

1. Rod espagnolettes 06
2. Flat plate espagnolettes 14
3. Keys and keyholes for espagnolette locks 16

Magnetic latches

17

Impulse push-latch

20

1. Push-Latch Series 23
2. Technical Information 26

Dampers

29

1. Independent dampers 31
2. Dampers for mesuco hinges INDA-matic 31

NOTES

ESPAGNOLETTE LOCKS

pp.

1 ROD ESPAGNOLETTES 6

- Plastic-coated 15 and 20mm espagnolettes
  - Espagnolettes 6
  - Accessories 8
- Nickel-plated 20 mm espagnolette
  - Espagnolettes 10
  - Accessories 11
- Common accessories for rod espagnolettes 12

2 FLAT PLATE ESPAGNOLETTES 14

- **LINDA** 20mm vertical closing espagnolette 14
- Accessories 15

3 KEYS AND KEYHOLES FOR ESPAGNOLETTE LOCKS 16

- Keys 16
- Keyholes 16

1 ROD ESPAGNOLETTES

Plastic-coated 15mm espagnolette: *Espagnolettes*

15mm espagnolette lock.

		15 mm.	
White	RAL 9003	210.915.003	
Browin	RAL 8016	210.915.014	250
Black	RAL 9005	210.915.025	

For right or left-hand use.

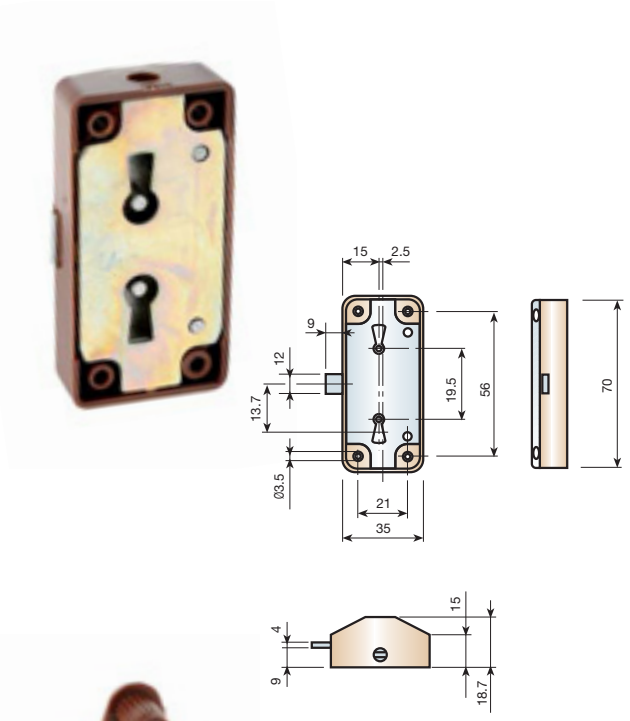

15mm espagnolette lock with pivots.

		15 mm.	
White	RAL 9003	210.015.002	
Browin	RAL 8016	210.015.013	250
Black	RAL 9005	210.015.024	

For right or left-hand use.
Direct assembly lock with central alignment to carry out an Ø8 drill for the pivot and the corresponding drill for the keyhole, as well as the rod and lever clamps in one operation.

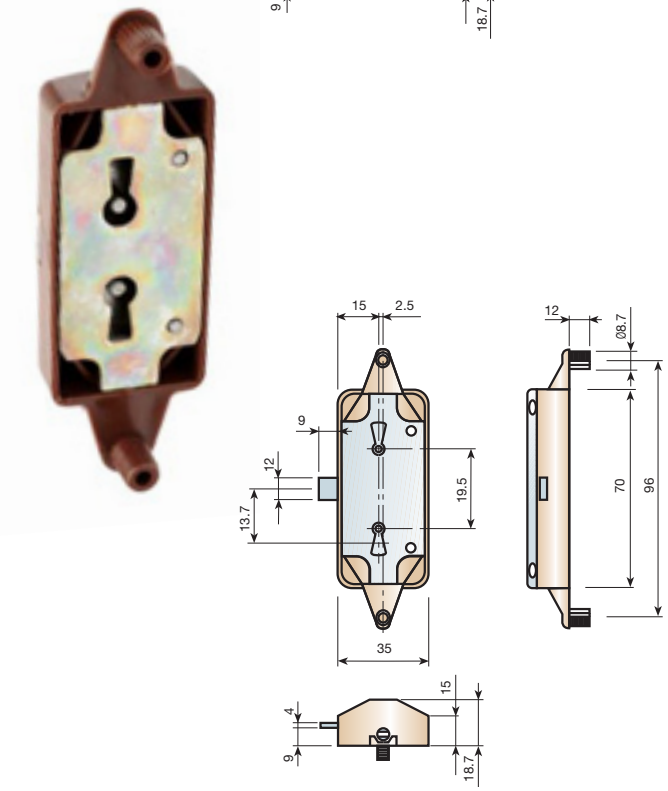

ROD CALCULATION
Sum of the rods = interior cabinet measurement -64mm.
Upper rod = distance to the keyhole -46mm.
Lower rod = distance to the keyhole -18mm.

Plastic-coated 15mm espagnolette: *Espagnolettes*

20mm espagnolette lock.

		20mm.	
White	RAL 9003	210.920.006	
Browin	RAL 8016	210.920.010	250
Black	RAL 9005	210.920.021	

This lock is fully aligned to drill.
the lock fixtures and the keyhole cavity in one single operation.

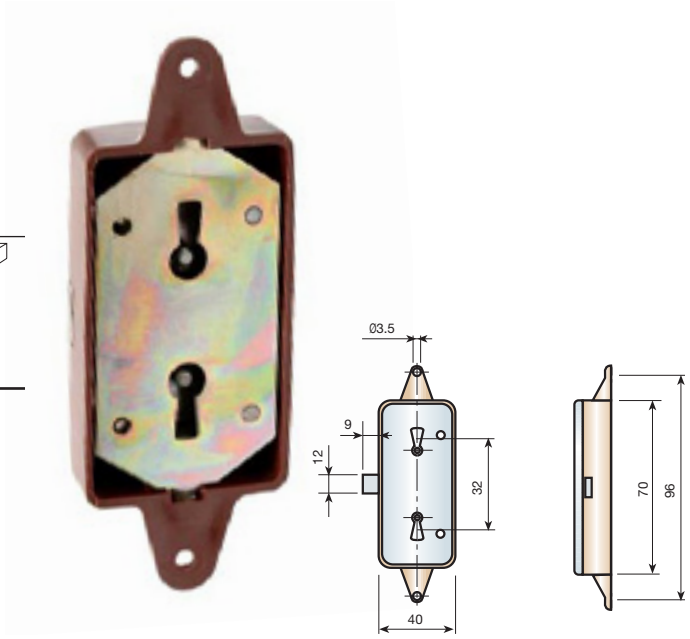



20mm espagnolette lock with pivots.

		20mm.	
White	RAL 9003	210.020.005	
Browin	RAL 8016	210.020.016	250
Black	RAL 9005	210.020.020	

Direct assembly lock with central alignment to carry out an Ø8 drill for the pivot and the corresponding drill for the keyhole, as well as the rod and lever clamps, in one single operation.

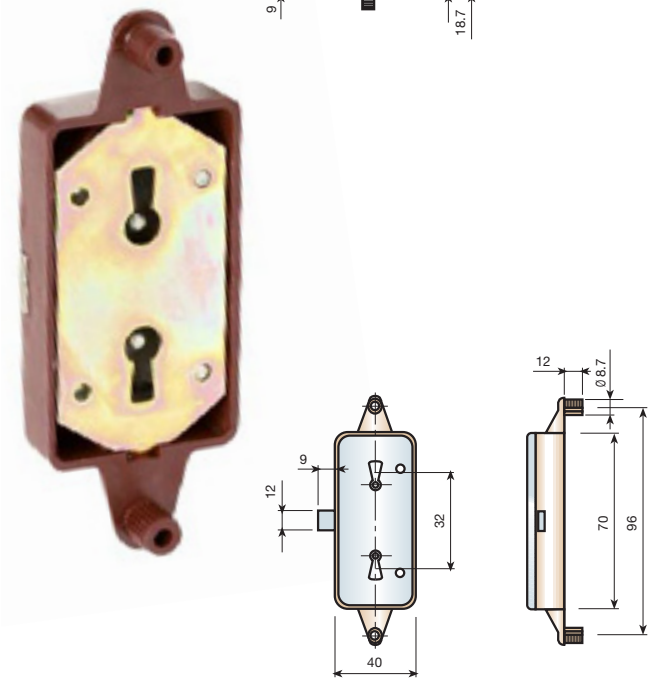



ROD CALCULATION
Sum of the rods = interior cabinet measurement -64mm.
Upper rod = distance to the keyhole -48mm.
lower rod = distance to the keyhole -16mm.

Plastic-coated 15 and 20mm espagnolettes: *Accessories*

Closed guide.

White	RAL 9003	201.001.006	
Browin	RAL 8016	201.001.010	500
Black	RAL 9005	201.001.021	



Short left-hand lever with clamp.

White	RAL 9003	200.211.001	
Browin	RAL 8016	200.211.012	250
Black	RAL 9005	200.211.023	



Short right-hand lever with clamp.

White	RAL 9003	200.212.003	
Browin	RAL 8016	200.212.014	250
Black	RAL 9005	200.212.025	



Long left-hand lever with clamp.

White	RAL 9003	200.111.004	
Browin	RAL 8016	200.111.015	250
Black	RAL 9005	200.111.026	



Long right-hand lever with clamp.

White	RAL 9003	200.112.006	
Browin	RAL 8016	200.112.010	250
Black	RAL 9005	200.112.021	



Open guide, dowel-fix Ø8.

White	RAL 9003	201.002.001	
Browin	RAL 8016	201.002.012	500
Black	RAL 9005	201.002.023	



Plastic-coated 15 and 20mm espagnolettes: *Accessories*

Short left-hand lever with clamp / dowel-fix Ø8.

White	RAL 9003	200.221.000	250
Browin	RAL 8016	200.221.011	
Black	RAL 9005	200.221.022	



Short right-hand lever with clamp / dowel-fix Ø8.

White	RAL 9003	200.222.002	250
Browin	RAL 8016	200.222.013	
Black	RAL 9005	200.222.024	



Long left-hand lever with clamp / dowel-fix Ø8.

White	RAL 9003	200.121.003	250
Browin	RAL 8016	200.121.014	
Black	RAL 9005	200.121.025	



Long right-hand lever with clamp / dowel-fix Ø8.

White	RAL 9003	200.122.005	250
Browin	RAL 8016	200.122.016	
Black	RAL 9005	200.122.020	



Plastic-coated rod.

White	201.102.005	50
Browin	201.102.016	
Black	201.102.020	



Rod with cover (1 metre).

White	201.103.000	40
Browin	201.103.011	

Nickel-plated 20 mm espagnolette: *Espagnolettes*

20mm espagnolette lock.

	20mm.	
Nickel-plated	220.920.066	100

20mm espagnolette lock with nuts.

Nickel-plated	220.020.065	100

Direct assembly lock with central alignment to carry out an 8Ø drill for the pivot and the corresponding drill for the keyhole, as well as the rod and lever clamps, in one operation.

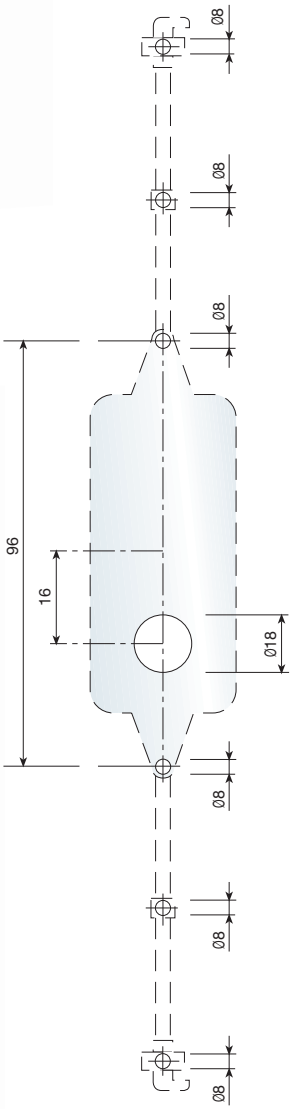

ROD CALCULATION
Sum of the rods = interior cabinet measurement -64mm.
Upper rod = distance to the keyhole -48mm.
lower rod = distance to the keyhole -16mm.

Nickel-plated 20mm espagnolettes: *Accessories*

Long metal right-hand lever.

Nickel-plated	200.552.063	100 or 500



Long metal left-hand lever.

Nickel-plated	200.551.061	100 or 500



Base for the metal lever clamp.

Nickel-plated	200.950.061	100 or 500



Cover for the metal lever clamp.

Nickel-plated	200.970.066	100 or 500



Metal Ø5 rod clamp.

Nickel-plated	201.005.066	100 or 500



Flat part rod.

Nickel-plated	201.102.064	50



Rod guide / dowel-fix Ø8.

Nickel-plated	201.006.061	100 or 1.000



Long right-hand lever and clamp set / dowel-fix Ø8.

Nickel-plated	200.522.066	100 or 500



Long left-hand lever and clamp set / dowel-fix Ø8.

Nickel-plated	200.521.064	100 or 500



Common accessories for rod espagnolettes

Built-in nylon nut M6.

Natural	Ø10 x 11 mm	937.006.103	2.000 or 10.000
Brown	Ø10 x 11 mm	937.006.011	



Self-expanding brass nut M6.

		944.112.105	5.000



Cam pivot.

Zinc-coated		201.202.035	100 or 2.000



Adjustable pivot.

Zinc-coated		201.204.032	100 or 1.000

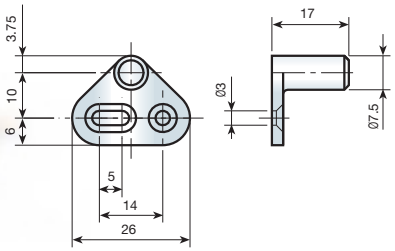

Common accessories for rod espagnolettes

Cam pivot wood thread screw.

Nickel-plated	201.201.066	100 or 2.000



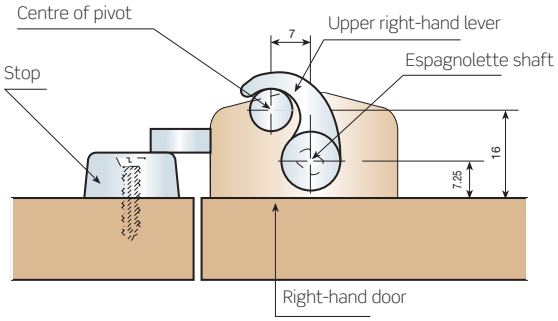

Cam pivot bushing.

White	RAL 9003	TIRAF.	Ø4,2 x 27	201.203.004	100 or 2.000
Browin	RAL 8016	TIRAF	Ø4,2 x 27	201.203.015	
Black	RAL 9005	TIRAF	Ø4,2 x 27	201.203.026	



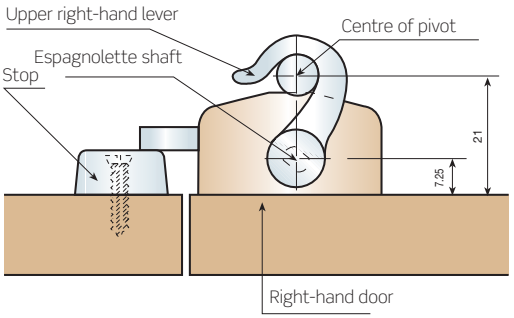

Retaining catch.

Brown	RAL 8016	280.500.010	500
Black	RAL 9005	280.500.021	

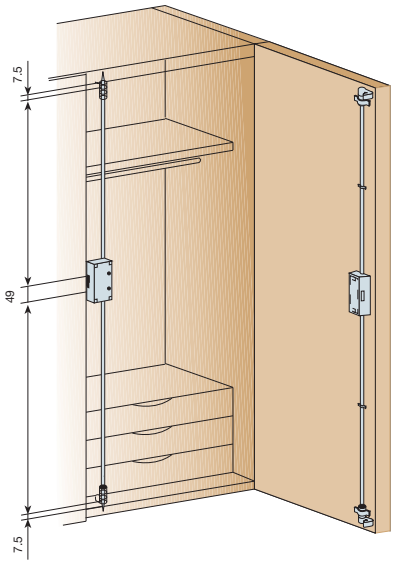

To order the correct espagnolette rods, the cabinet's interior measurements must be taken into account, subtracting 64 mm. to obtain the sum of the two rods. The client must specify the measurement of each rod, depending on the height at which the lock is to be installed. The formula for calculating the rods is indicated on each page of the locks.

2 FLAT PLATE ESPAGNOLETTES

A new espagnolette lock that is different from the current locks in that it includes the novelty of closing vertically, and all its guides are concealed. It is fully aligned so that the holes for the guides, keyholes and the lock itself can be drilled in one operation.

LINDA vertical closing 20mm espagnolette

20mm espagnolette lock.

	left	right	
Nickel-plated	222.120.065	222.220.062	100

Screws are supplied.



Assembly diagram.

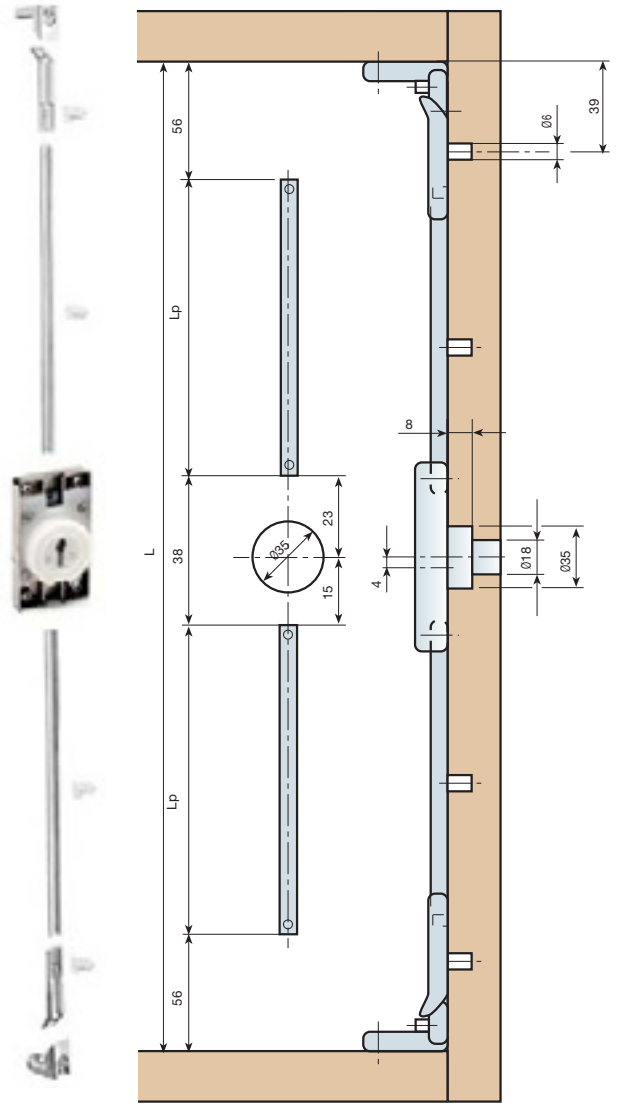

Accessories

Adjustable stop.

Nickel-plated	201.400.065	200



Vertical hook. Upper and lower.

Nickel-plated	200.600.061	200

Concealed guide / dowel-fix.

Natural	201.010.106	1.000



Concealed guide / screw-fix.

Natural	201.020.105	1.000

For Ø2.7 x 15 screw.

Flat plate.

Nickel-plated	201.104.061	50

Lp = length of flat plate, to order.

3 KEYS AND KEYHOLES FOR ESPAGNOLETTE LOCKS

Keys

L	Nickel-plated	varnished brass	
40mm	189.840.066	189.840.571	100 or 1000



L	Nickel-plated	varnished brass	
34mm	188.934.060	188.934.572	100 or 1000

L	Old bronze	
29mm	189.129.511	100 or 1000

Keyholes

Nickel-plated	101.115.066	100 or 1000
Varnished brass	101.115.571	



Varnished brass	101.165.573	100 or 1000



Old bronze	101.205.510	100 or 1000



MAGNETIC LATCHES

Magnetic latches made of plastic with a permanent magnet and zinc-coated soft iron sheet.

pp.

1 MAGNETIC LATCHES 18

- Stops with screws 18
- Screws 18
- To screw on and movable stop 19

1 MAGNETIC LATCHES

Magnetic latches made of plastic, with a permanent magnet and Zinc-coated soft iron sheet.

Magnetic latch.

White		281.004.006	100 or 500
Brown	4 Kgs.	281.004.010	
Black		281.004.021	



Magnetic latch.

White		281.104.003	100 or 500
Brown	4 Kgs.	281.104.014	
Black		281.104.025	



Stops with screws

Latch stop with one screw.

Zinc-coated	282.100.033	100 or 2.000

Supplied with one Ø2.70 X 13 screw.



Latch stop with two screws.

Zinc-coated	282.200.030	1.000 or 5.000

Supplied with two Ø2.70 X 13 screws.



Screws

Body fixture screw.

Ø3 x 15	986.915.031	1.000 or 5.000

To screw on and movable stop

Magnetic latch to screw on and movable stop Ø14 mm.

White		281.404.001	
Brown	4 Kgs.	281.404.012	50 or 500
Black		281.404.023	

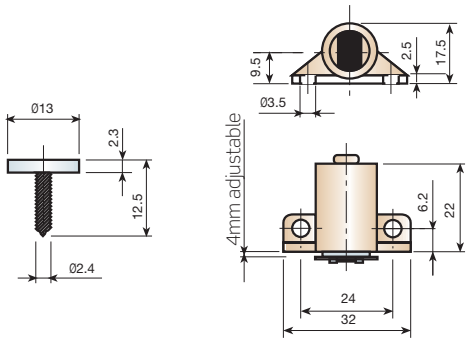

Magnetic latch with sheet to screw on and movable stop Ø14 mm.

White		281.504.005	
Brown	4 Kgs.	281.504.016	50 or 500
Black		281.504.020	

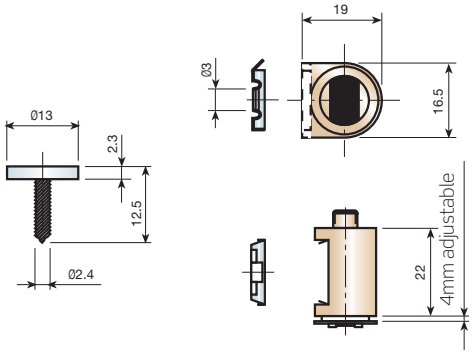

INDAUX

IMPULSE
Push-latch

Doors and drawer fronts do not require handles thanks to this device which is available in a variety of options to satisfy different furniture needs. Its assembly could not be easier as it is available in embedded and lay-on fitting versions with their equivalent fitting bases. The magnetic option, together with our reverse-opening MESUCO 143 hinge, enables the door to be perfectly closed while minimising the gap between the door and the cabinet. At the same time a simple push allows full door extension. The embedded fitting version combined with our MARC runners or with standard hinge opening doors is ideal since it allows maximum 40mm extension.

IMPULSE
Push-latch

pp.

1 PUSH-LATCH SERIES 23

- Embedded 23
- Lay-on 24
- Mounting plates 25

2 TECHNICAL DATA 26

- Fixing of mounting plates 26
- Extension length choice 27
- Mounting plate 27

1 PUSH-LATCH SERIES

			Hinges Standard Opening	Hinges MESUCO 143 Reverse Opening	Runners Gravity Self-closing
Embedded	Magnetic	20mm	—	✓	—
		40mm	—	✓	—
	With stop	20mm	✓	✗	✓
		40mm	✓	✗	✓
Lay-on	Magnetic	20mm	—	✓	—
		40mm	—	✓	—
	With stop	20mm	✓	✗	✓
		40mm	✓	✗	✓

The push-latch is incompatible with mechanical closing runners.

Embedded

Magnetic embedded pulse-latch with adhesive stop Ø10.

	Ejection distance: 20 mm Body length: 51 mm (short)	Ejection distance: 40 mm Body length: 76 mm (long)	
Grey	215.318.316	215.338.314	100

Embedded pulse-latch Ø10.

	Ejection distance: 20 mm Body length: 51 mm (short)	Ejection distance: 40 mm Body length: 76 mm (long)	
Grey	215.218.312	215.238.310	100

Magnetic embedded pulse-latch with screw-fixed stop Ø10.

	Ejection distance: 20 mm Body length: 51 mm (short)	Ejection distance: 40 mm Body length: 76 mm (long)	
Grey	215.418.313	215.438.311	100

Embedded

Embedded **Impulse** magnetic fitting with adhesive stop.

Extension length		20mm.	40mm.	
White	Ral 9001	213.220.000	213.240.005	
Black	Ral 9005	213.220.022	213.240.020	100
Grey	Ral 7040	213.220.313	213.240.311	

Each reference consists of 1 fitting and an adhesive closing stop.

Embedded **Impulse** fitting.

Extension length		20mm.	40mm.	
White	Ral 9001	213.320.004	213.340.002	
Black	Ral 9005	213.320.026	213.340.024	100
Grey	Ral 7040	213.320.310	213.340.315	

Embedded **Impulse** magnetic fitting with stop. Screw-fixed.

Extension length		20mm.	40mm.	
White	Ral 9001	213.920.000	213.940.005	
Black	Ral 9005	213.920.022	213.940.020	100
Grey	Ral 7040	213.920.313	213.940.311	

Each reference consists of 1 fitting, 1 end plate and Ø3x12 screw.

Lay-on

Lay-on magnetic fitting with adhesive stop.

Length of extension		20mm.	40mm.	
White	Ral 9001	213.020.006	213.040.004	
Black	Ral 9005	213.020.021	213.040.026	100
Grey	Ral 7040	213.020.312	213.040.310	

Each reference consists of 1 fitting and an adhesive closing stop.

Lay-on

Lay-on fitting.

Length of extension		20mm.	40mm.	
White	Ral 9001	213.120.003	213.140.001	
Black	Ral 9005	213.120.025	213.140.023	100
Grey	Ral 7040	213.120.316	213.140.314	

Lay-on magnetic fitting with stop. Screw-fixed.

Length of extension		20mm.	40mm.	
White	Ral 9001	213.820.003	213.840.001	
Black	Ral 9005	213.820.025	213.840.023	100
Grey	Ral 7040	213.820.316	213.840.314	

Each reference consists of 1 fitting, 1 end plate with Ø3x12 screw.

Mounting plates

Dowel-fix base plate without stop.

White	Ral 9001	214.000.006	
Black	Ral 9005	214.000.021	100
Grey	Ral 7040	214.000.312	

Screw-fix base plate with stop.

White	Ral 9001	214.100.003	
Black	Ral 9005	214.100.025	100
Grey	Ral 7040	214.100.316	

Screw-fix base plate without stop.

White	Ral 9001	214.200.000	
Black	Ral 9005	214.200.022	100
Grey	Ral 7040	214.200.313	

2 TECHNICAL DATA

Fixing of mounting plates

Screw-fix base plate.

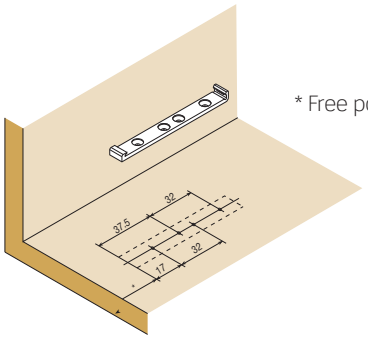

* Free position.

Screw-fix base plate with front stop.

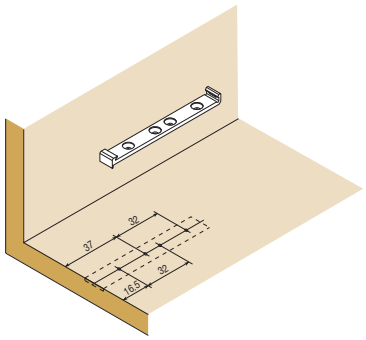

Dowel-fix base plate.

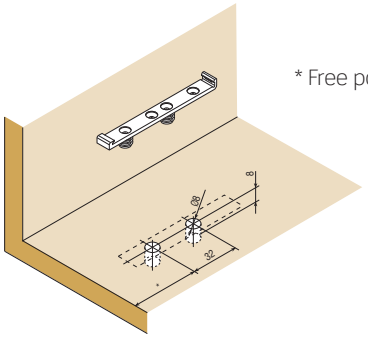

* Free position.

Dowel-fix system 32 base plate.

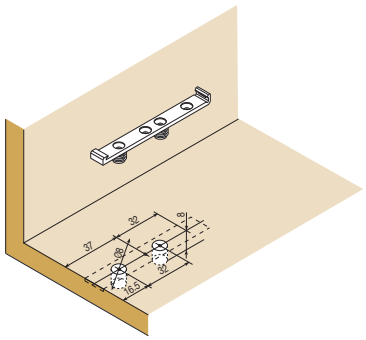

Embedded fitting Ø12.

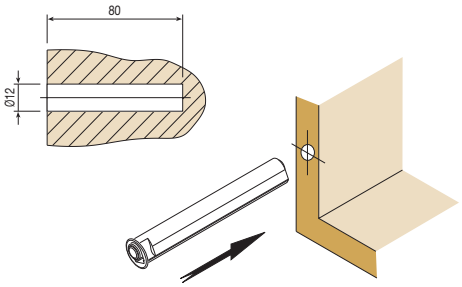

Fixing stop.



Push-latch Ø10.



Push-latch Ø10
51mm.



Push-latch Ø10
76mm.

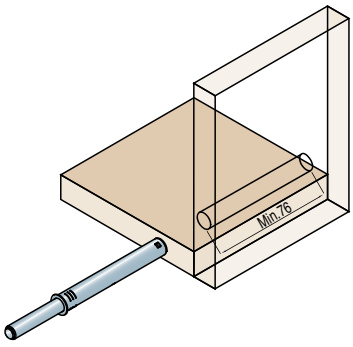

Selection of the ejection distance for pulse-latch Ø12

Adjustment: 4mm.

With the fitting closed, press the tab through the window with a screwdriver to choose the desired extension length.

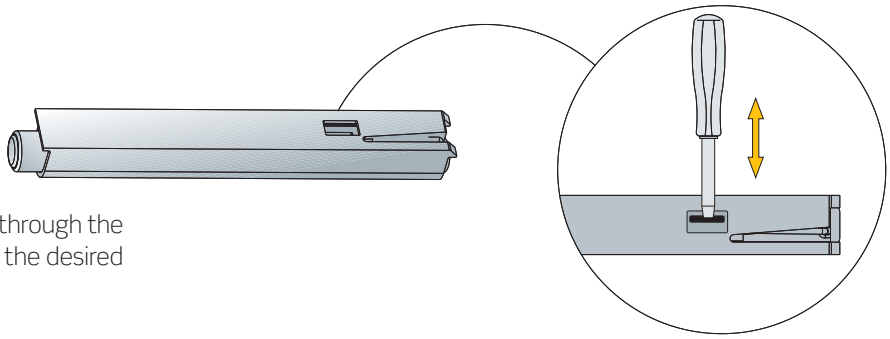

20mm. extension

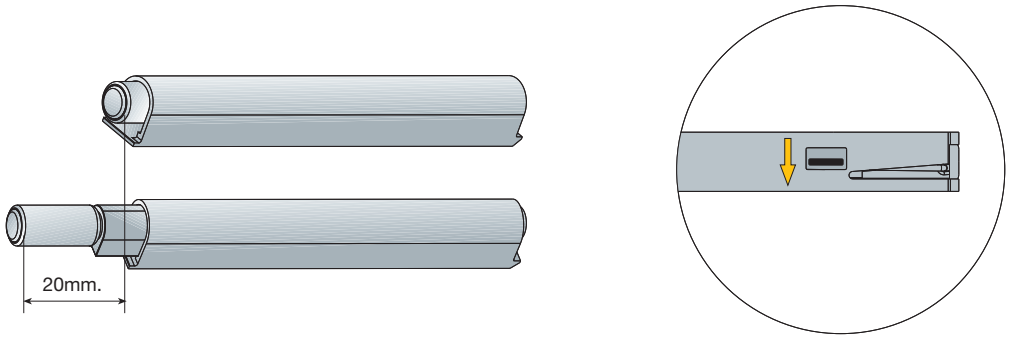

40mm. extension

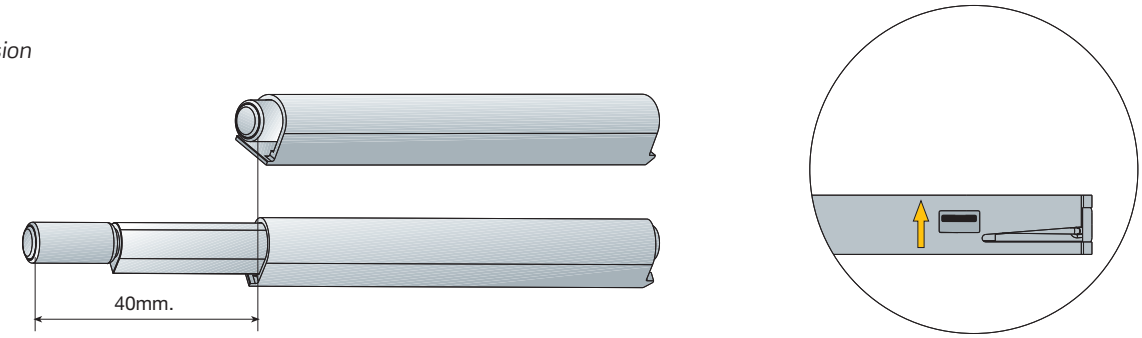

Mounting plate fitting

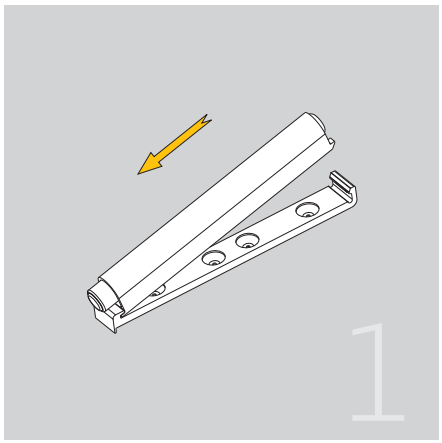

Clip the body to the front of the base plate.

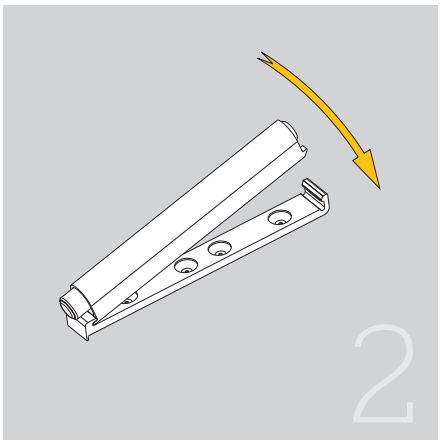

Press the body onto the back of the base plate until fixed.

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

DAMPERS
Indamatic

DAMPERS
Indamatic

INDA-matic
gradual closing

New range of indamatic dampers for doors or drawer fronts, which are silent and easy to close, without any abrupt knocks or bouncing back. Different versions for different machining methods and assemblies: embedded and lay-on dampers, and adjustable to the hinge cup. Suitable for both kitchen and home furniture.

pp.

1 INDEPENDENT DAMPERS 31

- Embedded 31
- Lay-on 31

2 INDAMATIC FOR **MESUCO** HINGES 31

1 INDEPENDENT DAMPERS

Embedded

Indamatic damper.

Gris	RAL 7043	213.400.143	100

Screw base for damper

Grey	RAL 7043	213.700.141	100

The recommended screw Ø3x12 pozi Ref. 982.112.036

INDA-matic
gradual closing

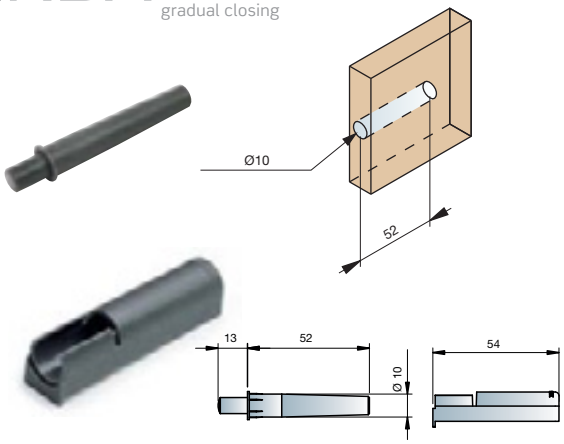

Assembly

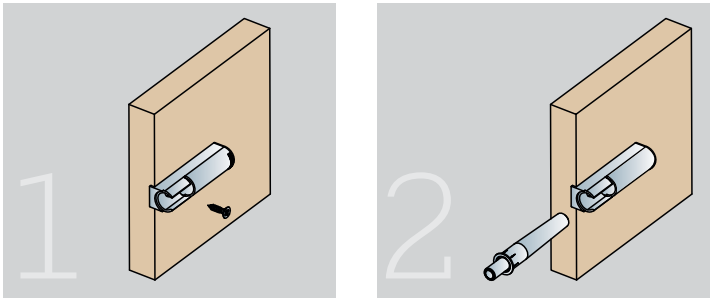

The base provides a flange for positioning on the edge of the furniture. Secure the Ø3x12 screw and then introduce the damper on the front.

Lay-on

Base plate s/32 for damper.

Niquel-plated zamak	213.500.066	100

Reversible base plate: this base plate is valid for positioning the first drill at 28 or 37 mm.

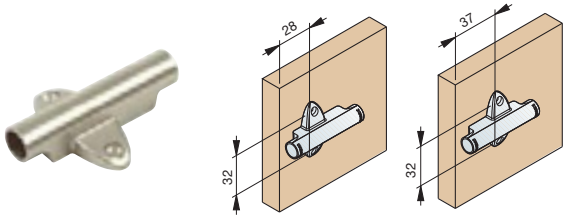

Body and base plate for damper.

Niquel-plated zamak	213.600.063	100

Every ref. has 1 body and 1 base plate.

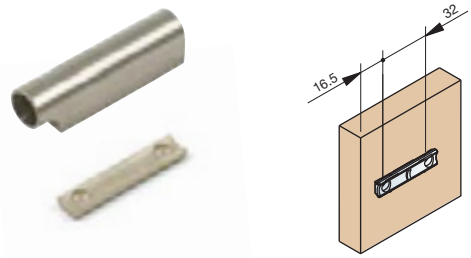

2 INDAMATIC FOR MESUCO HINGES

This solution takes the Indaux high performance **MESUCO** hinges as its starting point, and then the damper is fitted into the cup, in order not to occupy any space inside the cabinet. The damper, which fits comfortably into the hinge, adapts to the weight and size of the doors as well as the closing speed.

INDA-matic
gradual closing

Indamatic for hinge cup.

	Mesuco 143 rapid	Mesuco 131X / Mesuco 131X rapid	
Niquel-plated zamak	197.802.065	197.803.060	125
Niquel-plated zamak	197.805.064	197.805.064	

197.802.065 197.803.060 197.805.064

INDAUX
FURNITURE FITTINGS MANUFACTURER

02

HINGES AND LIFTING SYSTEMS

Factors to consider
when choosing a hinge 34

QUICK ASSEMBLY HINGES - Ø35 CUP

MESUCO 14 rapid 37
Assembly with fail-safe clip, heavy-duty

MESUCO 143 rapid 51
Assembly with simple high-range, clip complete series

MESUCO 131X rapid 67
Assembly with simple mid-range clip

SLIDE ON ASSEMBLY HINGES - Ø35 CUP

MESUCO 14 75
Heavy-duty

MESUCO 121 89
Wide range of solutions

MESUCO 131X 107
Mid-range

SLIDE ON ASSEMBLY HINGES – Ø26 CUP

MESUCO 8 115
Top of the range

MESUCO 8X 121
Mid-range

Special hinges 127

PIVOT ARMS AND FITTINGS FOR UP-AND-OVER DOORS

Pivot arms for folding doors 141
Multi-purpose fitting DELTA 147
Fittings for up-and-over doors ..... 157 / 161
1. Pneumatic pivot arm 2 157
2. Pivot arms for up-and-over doors 162
3. Pivot arm for lift-up lids 163
4. Hinges for up-and-over doors 163
5. Lifting device with spring 164
6. 2-Door lifting device 165

Factors to consider when choosing a hinge.

CONSTANT (K)

The door is usually assembled on the side in three different ways (fig. 1, 2, 3). Each of these assemblies has its own constant. This constant is the distance between the arm depth and the corner of the cup with the hinge closed.

As shown in the figures, each assembly has its own constant, which is set by the different arm heights.



Fig. 1



Fig. 2



Fig. 3

(1) **Full overlay arm:** it has the highest constant to overlay the whole side.
(2) **Half overlay arm:** intermediate constant to overlay part of the side.
(3) **Full inset arm:** minimum constant for embedded doors.

DISTANCE TO THE EDGE (B)



This is the distance from the 35-mm cup hole to the door edge. This value is variable according to the margins for each type of hinge. These margins are specified on the hinge diagrams in the catalogue.

CUP DRILLING DEPTH (H)

This is the minimum required drilling depth for a hinge Cup. Depending on the hinge, this value may be 10.5 or 12.5 mm.



LATERAL DOOR DISPLACEMENT (F)

The front-side corner of the door has a slight lateral displacement. This displacement must be respected in order to open the door. Main factors affecting this displacement are door thickness (g) and distance to the edge (b). See charts in every case.

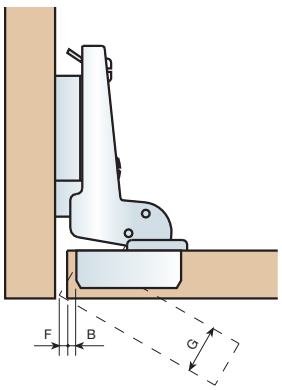

HEIGHT OF THE PLATE

These are the different heights of the mounting plates in order to correctly overlay the door on the side.

CALCULATION OF THE HEIGHT OF THE PLATE

The chocks are calculated according to three variables:
(A) the hinge constant (k).s
(B) the distance from the drill in the door (b).
(C) the degree of overlay of the door on the side in the cases of full and half overlay, or the gap between the door and the side for the full inset version (d).
In these conditions, the formulas used to calculate the heights of the plate in the three different types of arm are shown below.

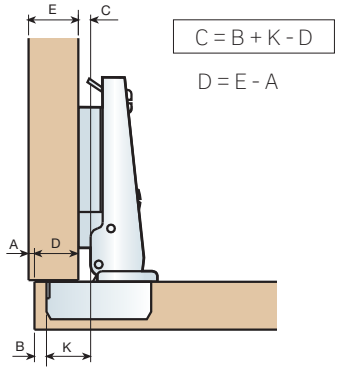

FULL OVERLAY

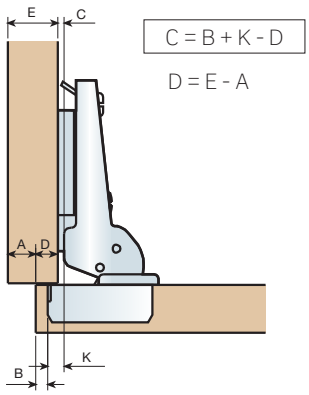

HALF OVERLAY

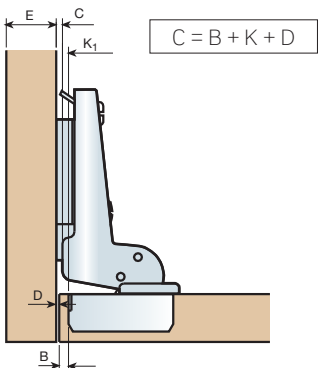

FULL INSET

REQUIRED NUMBER OF HINGES AND HOW TO ARRANGE THEM ON THE DOOR

The number of hinges required depends on several factors, including the type of hinge, the door's weight, height and width, etc. For this reason, and given the number of variables, please check the charts for an estimate (next to the diagrams in the catalogue). You are advised to place the upper and lower hinges at least 80 mm from the edges. When dealing with low or particularly wide doors, the distance to the edges must be reduced as much as possible. Main factors are door width and weight. See diagrams as below, for every hinge later. It is advised to locate upper and lower hinge at less than 80 mm from each edge.



NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

MESUCO 14 rapid

Ø35 cup hinge.
Quick assembly.

Assembly with fail-safe clip, heavy-duty.

MESUCO 14 rapid

Ø35 cup hinge. Quick assembly.

Quick assembly hinge with fail-safe clip.
For heavy-duty use. Minimum drilling depth: 10.5 mm.
Adjustment by eccentric.

pp.

1 HINGE GROUP 40

2 MOUNTING PLATES 42

3 COVERS 43

4 TECHNICAL DATA 44

- Opening 110° 44
- Opening 110° Glass door hinge 45
- Opening 110° Hinge for aluminium frames 46
- Opening 95° Large displacement 47
- Opening 172° 48
- Opening 45°÷155° 49
- Opening 90°÷200° 50

1 HINGE GROUP









988.715.066*

* Supplied to order



α = OPENING ANGLE
H = CUP DEPTH (mm.)

			NICKEL					
			A: 48 , B: 6		A: 45 , B: 9.5		A: 52 , B: 5.5	
			Screw-fixed	With dowels c:Ø10	Screw-fixed	With dowels c:Ø8	Screw-fixed	With dowels c:Ø10
	α = 0° ÷ 110° H = 10.5	0mm.	040.040.125	040.041.120	040.060.926	040.069.923	040.070.925	040.071.920
		5mm.	047.140.122	047.141.124	047.160.923	047.169.920	047.170.922	047.171.924
		10mm.	041.040.123	041.041.125	041.060.924	041.069.921	041.070.923	041.071.925
		17mm.	042.140.125	042.141.120	042.160.926	042.169.923	042.170.925	042.171.920
	Large displacement α = 0° ÷ 95° H = 12.5	0mm.	040.020.013	040.021.015	040.060.016	040.069.013	040.070.015	040.071.010
		10mm.	041.020.011	041.021.013	041.060.014	041.069.011	041.070.013	041.071.015
		17mm.	042.120.013	042.121.015	042.160.016	042.169.013	042.170.015	042.171.010
	α = 0° ÷ 172° H = 10.5	0mm.	040.020.046	040.021.041	040.060.042	040.069.046	040.070.041	040.071.043
		10mm.	041.020.040	041.021.046	041.060.040	041.069.044	041.070.046	041.071.041
	α = 45° ÷ 155° H = 10.5	0mm.	044.020.126	044.021.121	044.060.122	044.069.126	044.070.121	044.071.123
	α = 90° ÷ 200° H = 10.5	0mm.	043.020.121	043.021.123	043.060.124	043.069.121	043.070.123	043.071.125
		10mm.	046.120.126	046.121.121	046.160.122	046.169.126	046.170.121	046.171.123





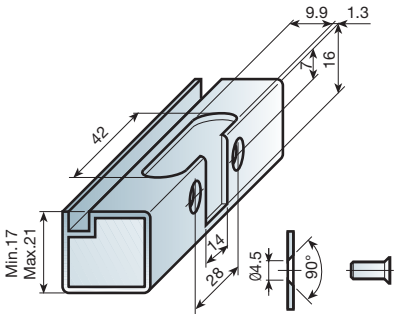

Clamping screw
Ref: 951.610.063

NICKEL

A:48 , B:6	A:45 , B:9.5	A:52 , B:5.5		
Expand	Expand	Expand	Glass door hinge Ø35	Hinge for aluminium frames
040.043.124	040.063.925	040.073.924	040.030.023	090.100.301
047.143.121	047.163.922	047.173.921	047.130.020	090.100.500
041.043.122	041.063.923	041.073.922	041.030.021	090.100.511
042.143.124	042.163.925	042.173.924	042.130.023	090.100.430
040.023.045	040.063.041	040.073.040		
041.023.043	041.063.046	041.073.045		
044.023.125	044.063.121	044.073.120		
043.023.120	043.063.123	043.073.122		
046.123.125	046.163.121	046.173.120		

2 MOUNTING PLATES

HEIGHT in mm.				2	4	7	9
		Screw-fixed	Nickel-plated Zamak	083.001.111	083.001.214	083.001.310	
		Knock-in	Nickel-plated Zamak	083.101.115	083.101.211	083.101.314	
		Screw-fixed	Nickel-plated Zamak	083.203.116	083.203.212	083.203.315	
		Knock-in	Nickel-plated Zamak	083.303.113	083.303.216	083.303.312	
		Pre-mounted euroscrew	Nickel-plated Zamak	083.603.111	083.603.214	083.603.310	
		Screw-fixed (WITH CENTERER)	Nickel-plated Zamak	083.503.114			
		Screw-fixed	Nickel-plated Zamak	083.201.112	083.201.215		083.201.414
		Knock-in	Nickel-plated Zamak	083.301.116	083.301.212		083.301.411
		Pre-mounted euroscrew	Nickel-plated Zamak	083.601.114	083.601.210		083.601.416
	EURO-SCREW H = 11 - Ref.: 951.211.063 H = 13 - Ref.: 951.213.060 (STANDARD)			3 ADJUSTMENTS			

3 COVERS

Glass door covers

Cover

Nylon	Silver-polish	351.700.226
Nylon	Gold-polish	351.700.230
Nylon	Black	351.700.252



Adaptor

Nylon		351.710.004

Cover

Nylon	Silver-polish	351.900.220
Nylon	Gold-polish	351.900.231
Nylon	Black	351.900.253



Adaptor

Nylon		351.910.005

O-ring

Nylon	White	351.110.001
Nylon	Brown	351.111.003
Nylon	Black	351.112.005

Hinge arm cover

Nylon	Black	302.030.024
Nylon	White	302.030.002
Nylon	Brown	302.030.013
Zamak	Nickel	302.030.061



Cover for half overlay and partial overlay hinges.

Nylon	Black	302.040.023
Nylon	White	302.040.001
Nylon	Brown	302.040.012



4 TECHNICAL DATA

MESUCO 14 RAPID Opening 110°

Full overlay

Calculation of the height of the plate
K = 15
B = 3
A = 2
E = 16
C ?
C = K+A+B-E
C = 15+2+3-16
C = 4mm
K = Constant = 15mm

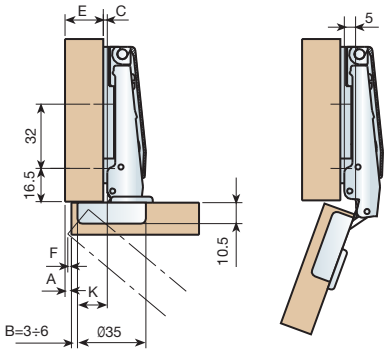

Partial overlay

Calculation of the height of the plate
K = 9
B = 4
A = 5
E = 16
C ?
C = K+A+B-E
C = 9+5+4-16
C = 2mm
K = Constante = 9mm

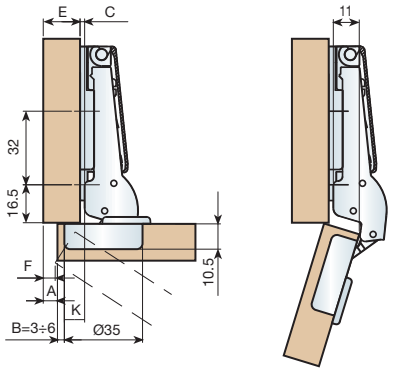

Half overlay

Calculation of the height of the plate
K = 5
B = 3
A = 10
E = 16
C ?
C = K+A+B-E
C = 5+10+3-16
C = 2mm
K = Constant = 5mm

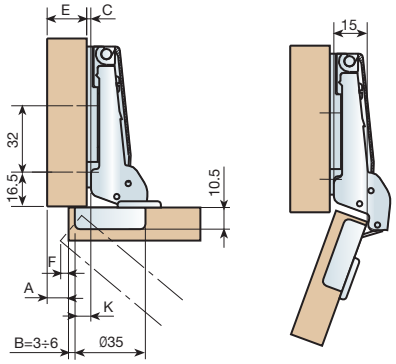

Full inset

Calculation of the height of the plate
K = -2
B = 5
D = 1
C ?
C = D+B+K
C = 1+5-2
C = 4mm
K = Constant = -2mm

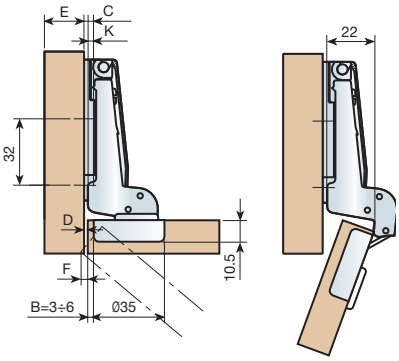

Lateral door displacement (F).

mm	Door thickness								
B	16	17	18	19	20	21	22	23	24
3	0,9	1,2	1,6	2	2,5	3,1	3,8	4,5	5,3
4	0,8	1,1	1,5	1,9	2,4	2,9	3,5	4,2	4,9
5	0,8	1,1	1,4	1,8	2,3	2,8	3,3	3,9	4,6
6	0,7	1	1,4	1,7	2,2	2,6	3,1	3,7	4,4



MESUCO 14 RAPID Opening 110° Glass door hinge

Full overlay

Calculation of the height of the plate
K = 15
B = 3
A = 2
E = 16
C ?
C = K+A+B-E
C = 15+2+3-16
C = 4mm
K = Constant = 15mm

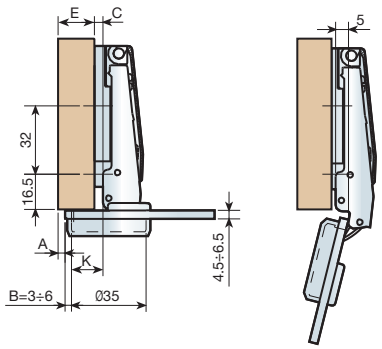

Partial overlay

Calculation of the height of the plate
K = 9
B = 3
A = 6
E = 16
C ?
C = K+A+B-E
C = 9+5+4-16
C = 2mm
K = Constant = 9mm

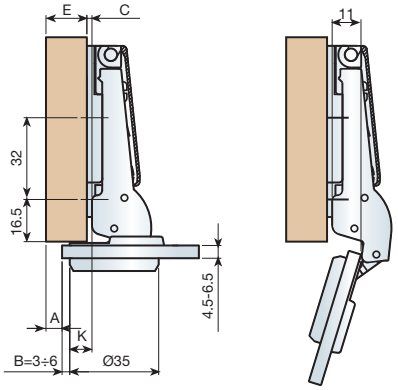

Half overlay

Calculation of the height of the plate
K = 5
B = 3
A = 10
E = 16
C ?
C = K+A+B-E
C = 5+10+3-16
C = 2mm
K = Constant = 5mm

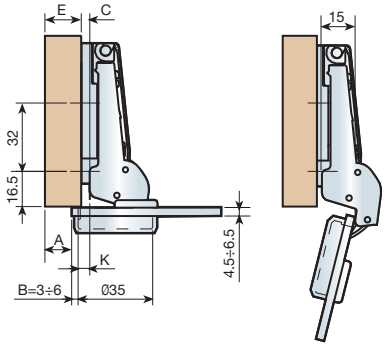

Full inset

Calculation of the height of the plate
K = -2
B = 3
D = 1
C ?
C = D+B+K
C = 1+3-2
C = 2mm
K = Constant = -2mm

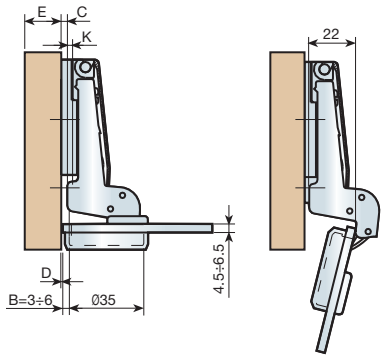



MESUCO 14 RAPID Opening 110° Hinge for aluminium frames

Full overlay

Calculation of the height of the plate
K = 1
B = 19
A = 2
E = 16
C ?
C = A+B-E-K
C = 2+19-16-1
C = 4mm
K = Constant = 1mm

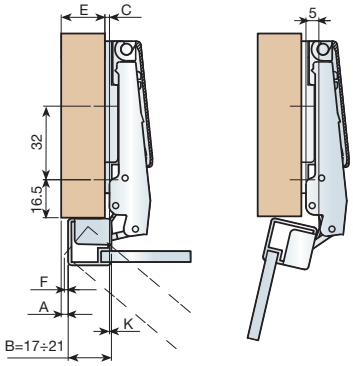

Partial overlay

Calculation of the height of the plate
K = 7
B = 19
A = 8
E = 16
C ?
C = A+B-E-K
C = 8+19-16-7
C = 4mm
K = Constant = 7mm

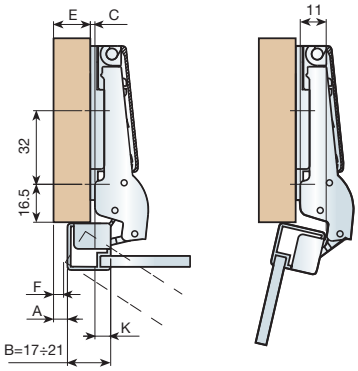

Half overlay

Calculation of the height of the plate
K = 11
B = 20
A = 9
E = 16
C ?
C = A+B-E-K
C = 9+20-16-11
C = 2mm
K = Constant = 11mm

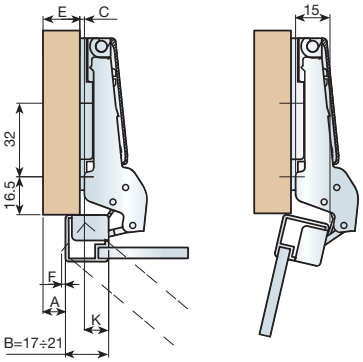

Full inset

Calculation of the height of the plate
K = 18
B = 19
D = 1
C ?
C = D+B-K
C = 1+19-18
C = 2mm
K = Constant = 18mm

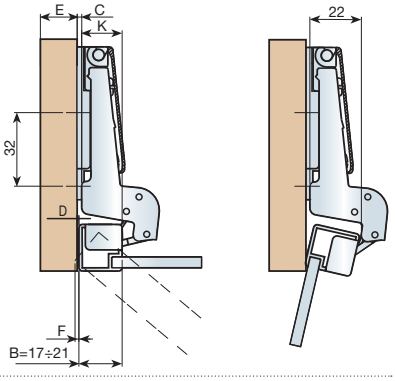

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
17	1,1	1,5	1,9	2,4	3	3,7	4,5	5,3	6,2
18	1,1	1,4	1,8	2,3	2,8	3,4	4,1	4,9	5,7
19	1	1,4	1,7	2,1	2,6	3,2	3,8	4,5	5,3
20	1	1,3	1,6	2	2,5	3	3,6	4,2	5
21	0,9	1,2	1,6	2	2,4	2,9	3,4	4	4,7



Hinges / Door

MESUCO 14 RAPID Opening 95° large displacement

Full overlay

Calculation of the height of the plate
K = 15
B = 3
A = 0
E = 16
C ?
C = K+A+B-E
C = 15+0+3-16
C = 2mm
K = Constant = 15mm

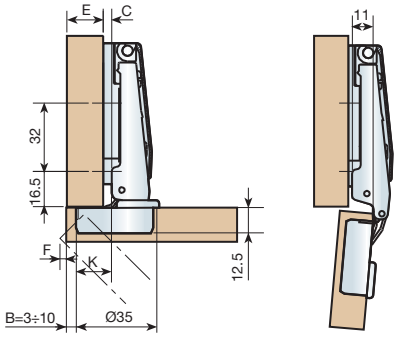

Half overlay

Calculation of the height of the plate
K = 5
B = 4
A = 11
E = 16
C ?
C = K+A+B-E
C = 5+11+4-16
C = 4mm
K = Constant = 5mm

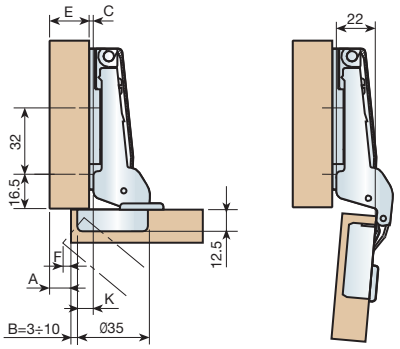

Full inset

Calculation of the height of the plate
K = -2
B = 3
D = 1
C ?
C = D+B+K
C = 1+3-2
C = 2mm
K = Constant = -2mm

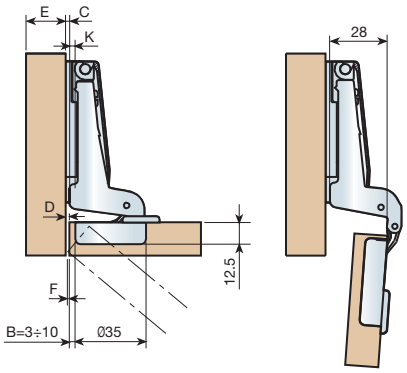

Lateral door displacement (F).

mm	Door thickness								
B	16	18	20	22	25	28	30	32	35
3	0	0	0,2	0,4	0,9	1,5	3	4,5	6,4
4	0	0	0,15	0,35	0,85	1,45	2,5	4,5	5,8
5	0	0	0,1	0,3	0,8	1,4	2	4,2	5,2
6	0	0	0,1	0,25	0,75	1,35	1,9	4	5,1
8	0	0	0	0,2	0,7	1,3	1,8	3,8	5
10	0	0	0	0,2	0,7	1,3	1,8	3,6	5



Hinges / Door

MESUCO 14 RAPID Opening 172°

Full overlay

Calculation of the height of the plate
K = 15
A = 0
B = 3
E = 16
C ?
C = K+A+B-E
C = 15+0+3-16
C = 2mm
K = Constant = 15mm

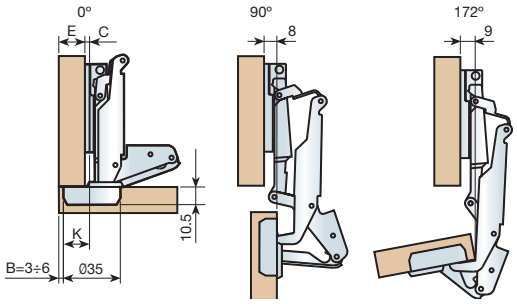

Half overlay

Calculation of the height of the plate
K = 5
A = 9
B = 4
E = 16
C ?
C = K+A+B-E
C = 5+9+4-16
C = 2mm
K = Constant = 5mm

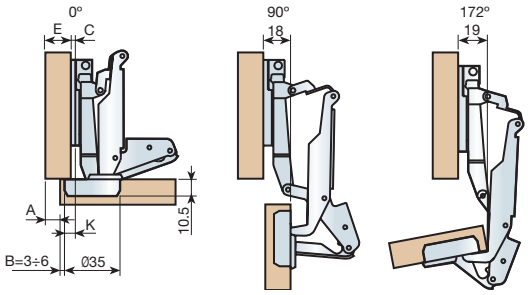



Hinges / Door

MESUCO 14 RAPID Opening 45° ÷ 155°

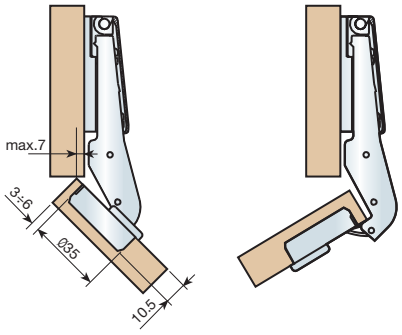

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
3	0,9	1,2	1,6	2	2,5	3,1	3,8	4,5	5,3
4	0,8	1,1	1,5	1,9	2,4	2,9	3,5	4,2	4,9
5	0,8	1,1	1,4	1,8	2,3	2,8	3,3	3,9	4,6
6	0,7	1	1,4	1,7	2,2	2,6	3,1	3,7	4,4



Hinges / Door

MESUCO 14 RAPID Opening 90° ÷ 200°

Full overlay

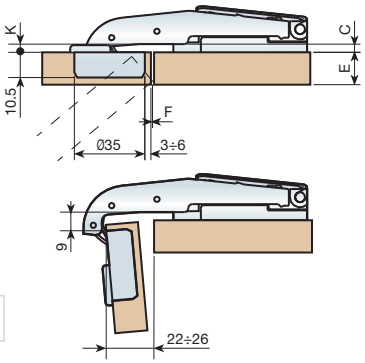

K = Constant = 2mm

Half overlay

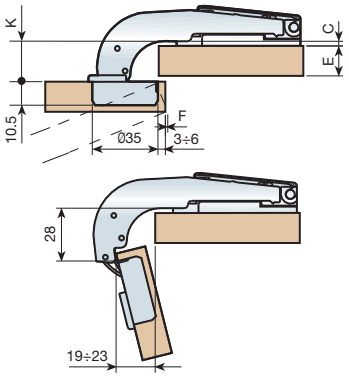

K = Constant = 21,5mm

Lateral door displacement (F).

mm	Door thickness								
B	16	17	18	19	20	21	22	23	24
3	0,9	1,2	1,6	2	2,5	3,1	3,8	4,5	5,3
4	0,8	1,1	1,5	1,9	2,4	2,9	3,5	4,2	4,9
5	0,8	1,1	1,4	1,8	2,3	2,8	3,3	3,9	4,6
6	0,7	1	1,4	1,7	2,2	2,6	3,1	3,7	4,4



Hinges / Door

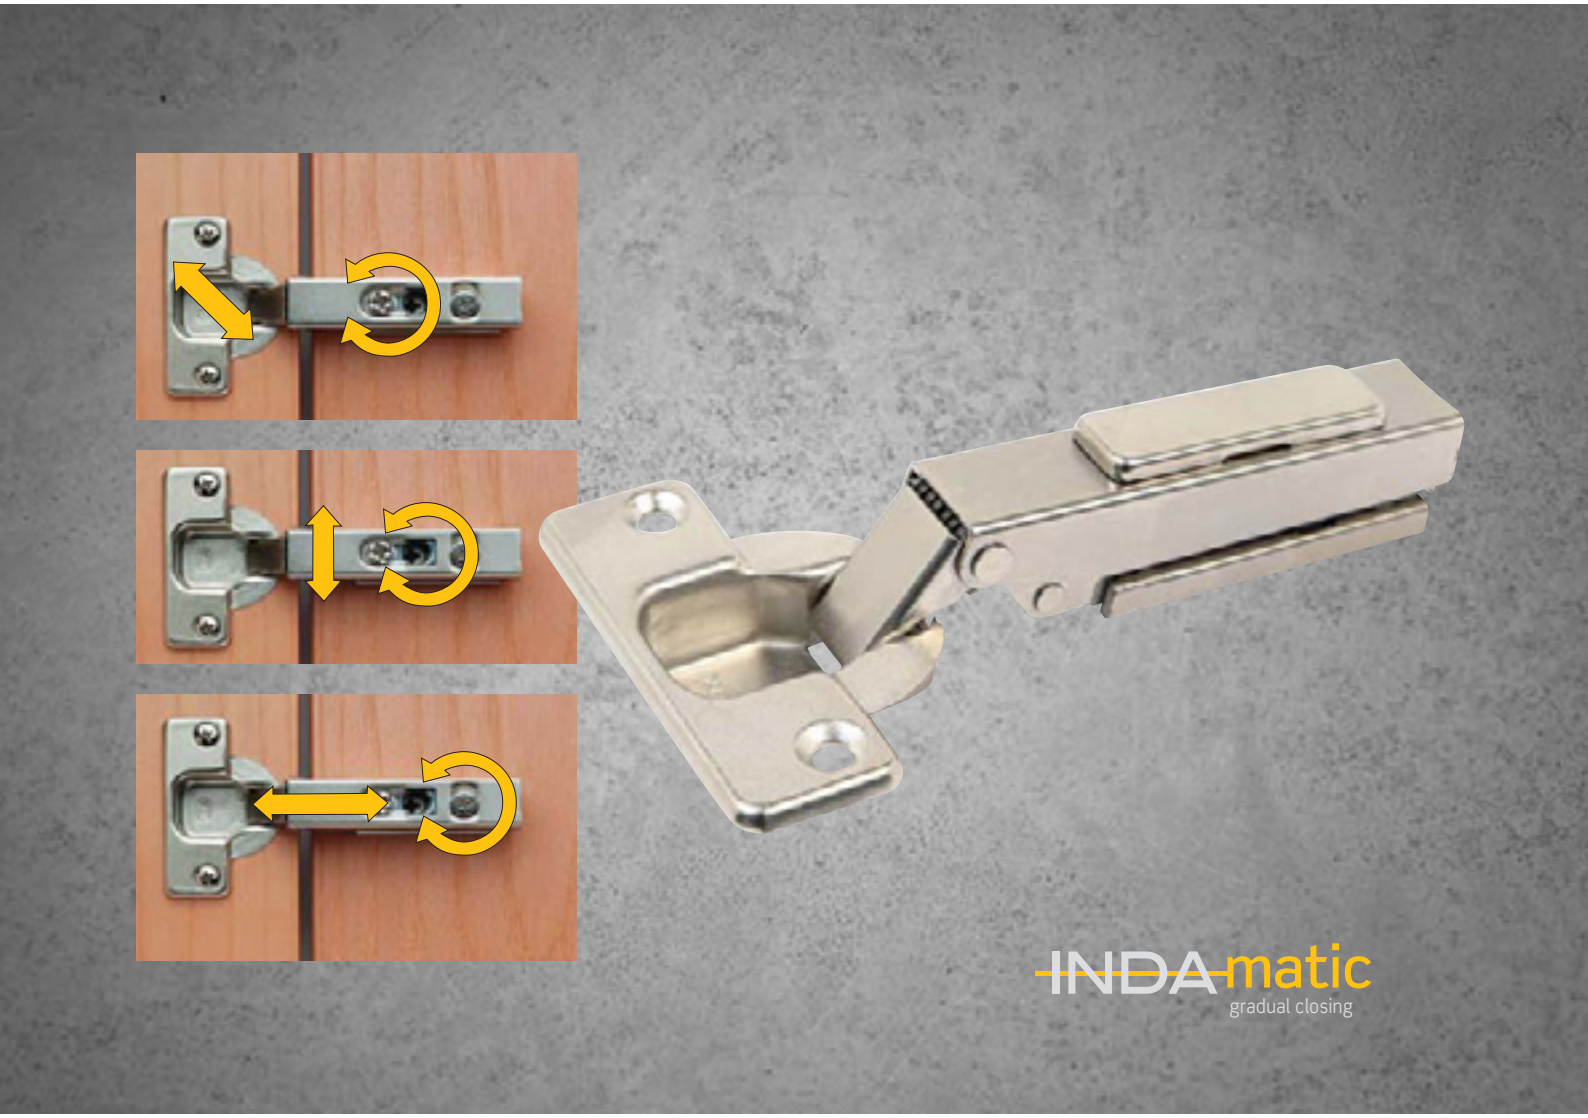

MESUCO 143 rapid

Ø35 cup hinge.
Quick assembly.

Assembly with simple high-end clip complete series.

INDA-matic
gradual closing

MESUCO 143 rapid

Ø35 cup hinge.
Quick assembly.

High-range. Reduced drilling depth: 10.5mm.
3 Independent adjustments
- > Transverse: right-hand screws
- > Vertical: eccentric
- > Longitudinal: eccentric
- > DIN 68857 certified by LGA

pp.

1 HINGE GROUP 54

2 MOUNTING PLATES 56

3 COVERS 57

4 DAMPERS 57

5 TECHNICAL DATA 58

- Opening 110° 58
- Opening 110° glass door hinge 59
- Opening 110° for aluminium frames 60
- Opening 95° large displacement 61
- Opening 172° 62
- Opening 15°÷125° 63
- Opening 30°÷140° 63
- Opening 45°÷155° 63
- Opening 90°÷200° 64
- Opening -45°÷65° 65

1 HINGE GROUP











988.715.066*

* Supplied to order

α = OPENING ANGLE
H = CUP DEPTH (mm.)

				NICKEL					
				A: 48 , B: 6		A: 45 , B: 9.5		A: 52 , B: 5.5	
				Screw-fixed	With dowels c:Ø10	Screw-fixed	With dowels c:Ø8	Screw-fixed	With dowels c:Ø10
	α = 0° ÷ 110° H = 10.5	standard	0mm.	060.040.175	060.041.170	060.060.173	060.069.170	060.070.172	060.071.174
			5mm.	067.140.172	067.141.174	067.160.170	067.169.174	067.170.176	067.171.171
			10mm.	061.140.170	061.141.172	061.160.175	061.169.172	061.170.174	061.171.176
			17mm.	062.140.175	062.141.170	062.160.173	062.169.170	062.170.172	062.171.174
		self-opening	0mm.	060.040.153	060.041.155	060.060.151	060.069.155	060.070.150	060.071.152
			5mm.	067.140.150	067.141.152	067.160.155	067.169.152	067.170.154	067.171.156
			10mm.	061.140.155	061.141.150	061.160.153	061.169.150	061.170.152	061.171.154
			17mm.	062.140.153	062.141.155	062.160.151	062.169.155	062.170.150	062.171.152
	Large displacement α = 0° ÷ 95° H = 10.5		0mm.	060.140.161	060.141.163	060.160.166	060.169.163	060.170.165	060.171.160
			10mm.	061.140.166	061.141.161	061.160.164	061.169.161	061.170.163	061.171.165
			17mm.	062.140.164	062.141.166	062.160.162	062.169.166	062.170.161	062.171.163
	α = 0° ÷ 172° H = 10.5		0mm.	060.040.046	060.041.041	060.060.840	060.069.844	060.070.846	060.071.841
			10mm.	061.040.044	061.041.046	061.060.845	061.069.842	061.070.844	061.071.846
	α = 15° ÷ 125° α = 30° ÷ 140° α = 45° ÷ 155° H = 10.5		0mm.	068.140.170	068.141.172	068.160.175	068.169.172	068.170.174	068.171.176
			0mm.	069.140.175	069.141.170	069.160.173	069.169.170	069.170.172	069.171.174
			0mm.	064.140.171	064.141.173	064.160.176	064.169.173	064.170.175	064.171.170
	α = 90° ÷ 200° H = 10.5		0mm.	063.140.173	063.141.175	063.160.171	063.169.175	063.170.170	063.171.172
			10mm.	066.140.174	066.141.176	066.160.172	066.169.176	066.170.171	066.171.173
	α = -45° ÷ 65° H = 10.5		0mm.	065.140.176	065.141.171	065.160.174	065.169.171	065.170.173	065.171.175



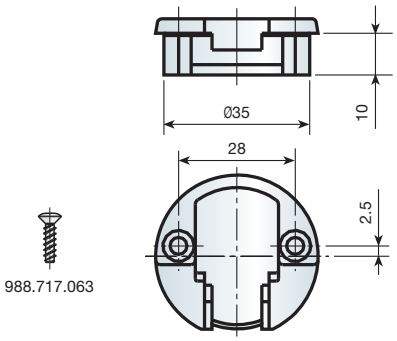

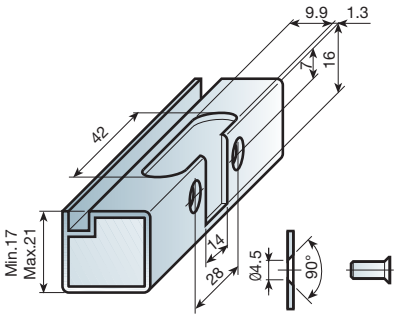

Clamping screw
Ref: 951.610.063

NICKEL

A:48 , B:6	A:45 , B:9.5	A:52 , B:5.5	Glass door hinge Ø35	Hinge for aluminium frames
Expand	Expand	Expand		
060.043.174	060.063.172	060.073.171	060.030.073	090.100.371
067.143.171	067.163.176	067.173.175	067.130.070	090.100.485
061.143.176	061.163.174	061.173.173	061.130.075	090.100.426
062.143.174	062.163.172	062.173.171	062.130.073	090.100.382
060.043.152	060.063.150	060.073.156	060.030.051	306.000.052
067.143.156	067.163.154	067.173.153	067.130.055	306.050.054
061.143.154	061.163.152	061.173.151	061.130.053	306.100.056
062.143.152	062.163.150	062.173.156	062.130.051	306.200.053
060.143.160	060.163.165	060.173.164		
061.143.165	061.163.163	061.173.162		
062.143.163	062.163.161	062.173.160		
060.043.045	060.063.846	060.073.845		
061.043.043	061.063.844	061.073.843		
068.143.176	068.163.174	068.173.173		
069.143.174	069.163.172	069.173.171		
064.143.170	064.163.175	064.173.174		
063.143.172	063.163.170	063.173.176		
066.143.173	066.163.171	066.173.170		
065.143.175	065.163.173	065.173.172		

2 MOUNTING PLATES

				2	4	6	9
		Screw-fixed	Nickel-plated Zamak	083.041.114	083.041.210		
		Knock-in	Nickel-plated Zamak	083.141.111	083.141.214		
		Screw-fixed	Nickel-plated steel	083.243.123	083.243.226		
		Knock-in	Nickel-plated steel	083.343.120	083.343.223		
		Screw-fixed (WITH CENTERER)	Nickel-plated steel	083.743.122	083.743.225		
		Knock-in (WITH CENTERER)	Nickel-plated steel	083.748.125	083.748.221		
		Pre-mounted euroscrew	Nickel-plated steel	083.643.125	083.643.221		
		Screw-fixed	Nickel-plated Zamak	083.241.115	083.241.211	083.241.314	083.241.410
		Knock-in	Nickel-plated Zamak	083.341.112	083.341.215	083.341.311	083.341.414
		Pre-mounted euroscrew	Nickel-plated Zamak	083.641.110	083.641.213	083.641.316	083.641.412

				5°	10°
		5° and 10° spacer wedge for wing plate	White	352.905.000	352.910.003
			Brown	352.905.011	352.910.014
			Black	352.905.022	352.910.025
	EURO-SCREW H = 11 - Ref.: 951.211.063 H = 13 - Ref.: 951.213.060 (STANDARD)				3 Adjustments

3 COVERS

Glass door covers

Cover

Nylon	Silver-polish	351.700.226
Nylon	Gold-polish	351.700.230
Nylon	Black	351.700.252



Adaptor

Nylon	351.710.004

Cover

Nylon	Silver-polish	351.900.220
Nylon	Gold-polish	351.900.231
Nylon	Black	351.900.253



Adaptor

Nylon	351.910.005

O-ring

Nylon	White	351.110.001
Nylon	Brown	351.111.003
Nylon	Black	351.112.005

Hinge arm cover

Steel	Nickel-plated	302.143.715

4 DAMPERS

This solution takes the Indaux high performance **MESUCO 143** hinges as its starting point, and then the damper is fitted into the cup, in order not to occupy any space inside the cabinet. The damper, which fits comfortably into the hinge, adapts to the weight and size of the doors as well as the closing speed.

INDA-matic
gradual closing

Indamatic for **MESUCO 143** hinge cup.

Nickel-plated zamak	197.802.065
Nickel-plated zamak	197.805.064

197.802.065

197.805.064

5 TECHNICAL DATA

MESUCO 143 RAPID Opening 110°

Full overlay

Calculation of the height of the plate
K = 15
B = 3
A = 2
E = 16
C ?
C = K+A+B-E
C = 15+2+3-16
C = 4mm
K = Constant = 15mm

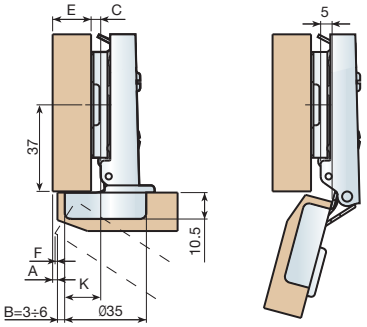

Partial Overlay

Calculation of the height of the plate
K = 10
B = 3
A = 5
E = 16
C ?
C = K+A+B-E
C = 10+5+3-16
C = 2mm
K = Constant = 10mm

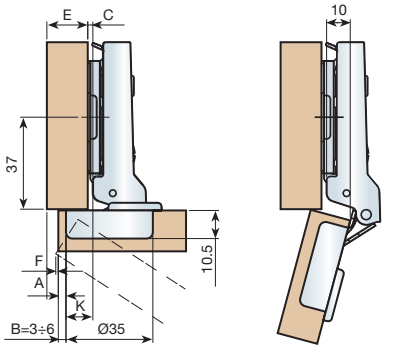

Half overlay

Calculation of the height of the plate
K = 5
B = 3
A = 10
E = 16
C ?
C = K+A+B-E
C = 5+10+3-16
C = 2mm
K = Constant = 5mm

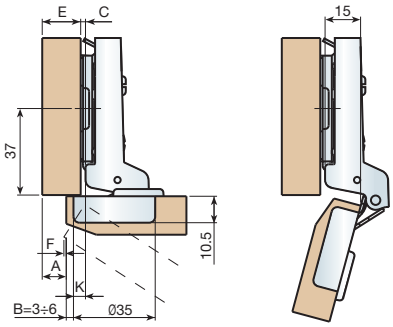

Full inset

Calculation of the height of the plate
K = -2
B = 3
D = 1
C ?
C = D+B+K
C = 1+3-2
C = 2mm
K = Constant = -2mm

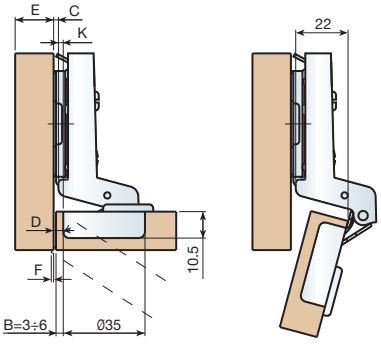

Lateral door displacement (F).

mm	Door thickness								
B	16	17	18	19	20	21	22	23	24
3	0,6	0,8	1,1	1,5	2	2,6	3,3	4	4,9
4	0,6	0,8	1,1	1,4	1,8	2,4	3	3,7	4,5
5	0,6	0,8	1	1,4	1,7	2,2	2,7	3,4	4,1
6	0,5	0,7	1	1,3	1,7	2,1	2,6	3,2	3,8



Hinges / Door

MESUCO 143 RAPID Opening 110° Glass door hinge

Full overlay

Calculation of the height of the plate
K = 15
B = 3
A = 2
E = 16
C ?
C = K+A+B-E
C = 15+2+3-16
C = 4mm
K = Constant = 15mm

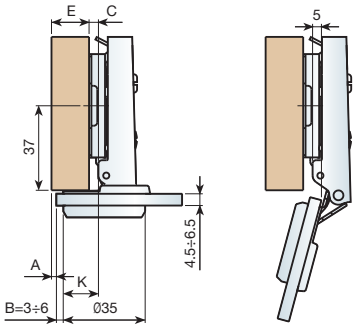

Partial Overlay

Calculation of the height of the plate
K = 10
B = 3
A = 5
E = 16
C ?
C = K+A+B-E
C = 10+5+3-16
C = 2mm
K = Constant = 10mm

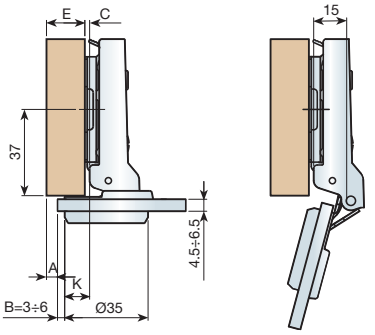

Half overlay

Calculation of the height of the plate
K = 5
B = 3
A = 10
E = 16
C ?
C = K+A+B-E
C = 5+10+3-16
C = 2mm
K = Constant = 5mm

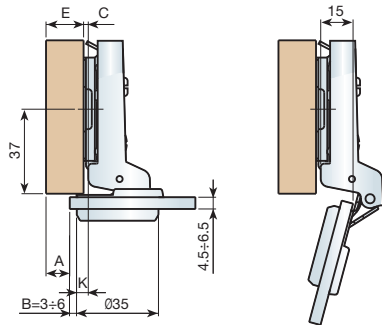

Full inset

Calculation of the height of the plate
K = -2
B = 3
D = 1
C ?
C = D+B+K
C = 1+3-2
C = 2mm
K = Constant = -2mm

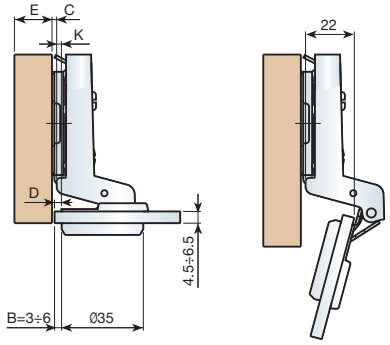



Hinges / Door

MESUCO 143 RAPID Opening 110° for aluminium frames

Full overlay

Calculation of the height of the plate
K = 1
B = 19
A = 2
E = 16
C ?
C = A+B-E-K
C = 2+19-16-1
C = 4mm
K = Constant = 1mm

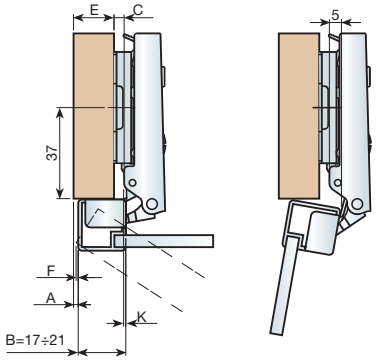

Partial Overlay

Calculation of the height of the plate
K = 6
B = 20
A = 8
E = 16
C ?
C = A+B-E-K
C = 8+20-16-6
C = 4mm
K = Constant = 6mm

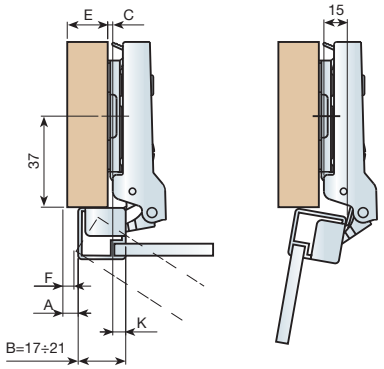

Half overlay

Calculation of the height of the plate
K = 11
B = 20
A = 9
E = 16
C ?
C = A+B-E-K
C = 9+20-16-11
C = 2mm
K = Constant = 11mm

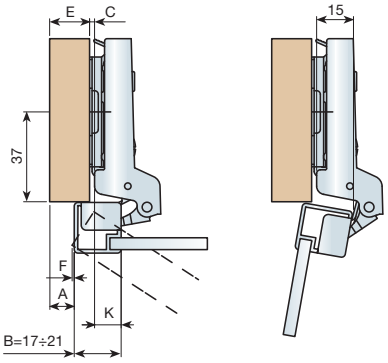

Full inset

Calculation of the height of the plate
K = 18
B = 19
D = 1
C ?
C = D+B-K
C = 1+19-18
C = 2mm
K = Constant = 18mm

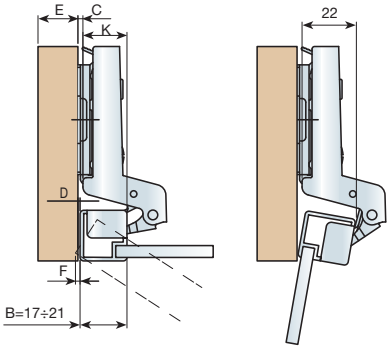

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
17	0,6	0,8	1,1	1,5	2,2	2,9	3,8	4,7	5,6
18	0,5	0,8	1,1	1,4	1,9	2,6	3,3	4,2	5
19	0,5	0,7	1	1,3	1,8	2,3	3	3,7	4,6
20	0,5	0,7	1	1,3	1,7	2,1	2,7	3,4	4,1
21	0,5	0,7	0,9	1,2	1,6	2	2,5	3,1	3,8



Hinges / Door

MESUCO 143 RAPID Opening 95° large displacement

Full overlay

Calculation of the height of the plate
K = 15
B = 6
A = 3
E = 22
C ?
C = K+A+B-E
C = 15+3+6-22
C = 2mm
K = Constant = 15mm

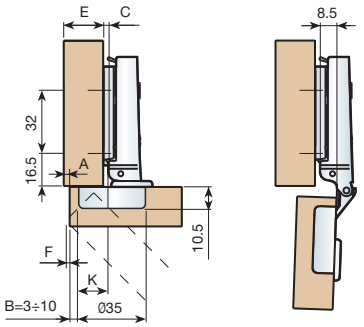

Half overlay

Calculation of the height of the plate
K = 5
B = 6
A = 13
E = 22
C ?
C = K+A+B-E
C = 5+13+6-22
C = 2mm
K = Constant = 5mm

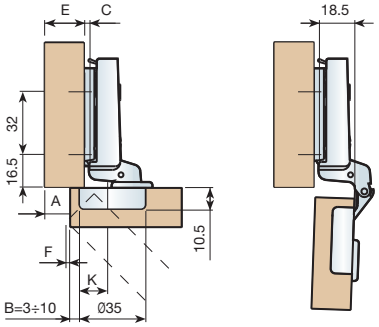

Full inset

Calculation of the height of the plate
K = -2
B = 5
D = 1
C ?
C = D+B-K
C = 5+1-2
C = 4mm
K = Constant = -2mm

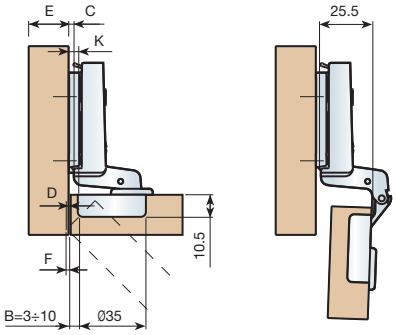

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**18**	**20**	**22**	**25**	**28**	**30**	**32**	**35**
3	0,1	0,3	0,6	0,9	1,5	2,8	4,7	6,6	9,5
4	0,1	0,3	0,6	0,9	1,5	2,3	4	5,9	8,8
5	0,1	0,3	0,6	0,9	1,5	2,2	3,4	5,2	8
6	0,1	0,3	0,6	0,9	1,4	2,2	2,9	4,7	7,4
8	0,1	0,3	0,5	0,8	1,4	2,1	2,7	3,6	6,2
10	0,1	0,3	0,5	0,8	1,3	2	2,6	3,3	5,2



Hinges / Door

MESUCO 143 RAPID Opening 172°

Full overlay

Calculation of the height of the plate
K = 15
B = 3
A = 0
E = 16
C ?
C = K+A+B-E
C = 15+0+3-16
C = 2mm
K = Constant = 15mm

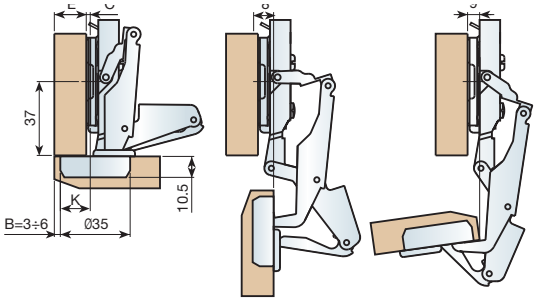

Half overlay

Calculation of the height of the plate
K = 5
B = 6
A = 13
E = 22
C ?
C = K+A+B-E
C = 5+13-6-22
C = 2mm
K = Constant = 5mm

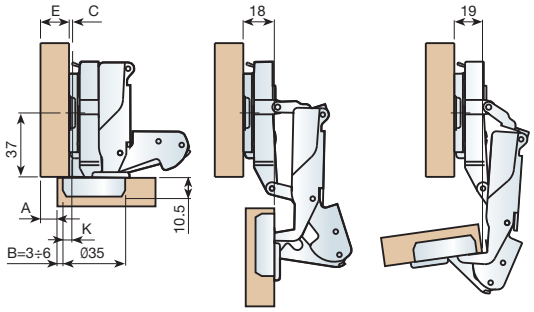



Hinges / Door

MESUCO 143 RAPID Opening 15° ÷ 125°

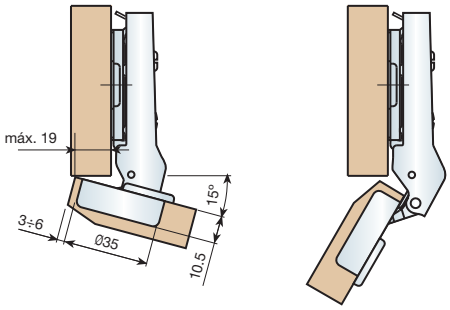

MESUCO 143 RAPID Opening 30° ÷ 140°

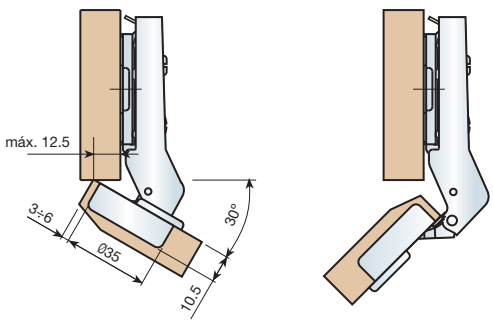

MESUCO 143 RAPID Opening 45° ÷ 155°

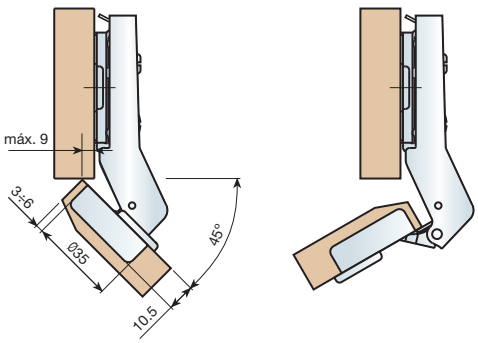

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**18**	**20**	**22**	**25**	**28**	**30**	**32**	**35**
3	0,6	0,8	1,1	1,5	2	2,6	3,3	4	4,9
4	0,6	0,8	1,1	1,4	1,8	2,4	3	3,7	4,5
5	0,3	0,8	1	1,4	1,7	2,2	2,7	3,4	4,1
6	0,5	0,7	1	1,3	1,7	2,1	2,6	3,2	3,8



Hinges / Door

MESUCO 143 RAPID Opening 90° ÷ 200°

Full overlay

K = Constant = 2mm

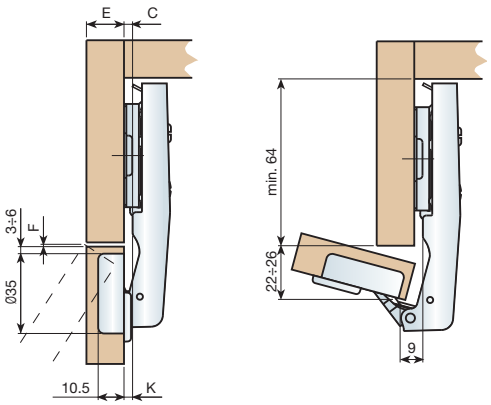

Half overlay

K = Constant = 21,5mm

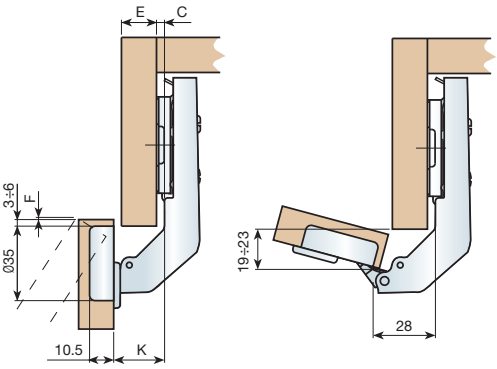

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
3	0,6	0,8	1,1	1,5	2	2,6	3,3	4	4,9
4	0,6	0,8	1,1	1,4	1,8	2,4	3	3,7	4,5
5	0,3	0,8	1	1,4	1,7	2,2	2,7	3,4	4,1
6	0,5	0,7	1	1,3	1,7	2,1	2,6	3,2	3,8



Hinges / Door

MESUCO 143 RAPID Opening -45° ÷ 65°

Full overlay

K = Constant = 2mm

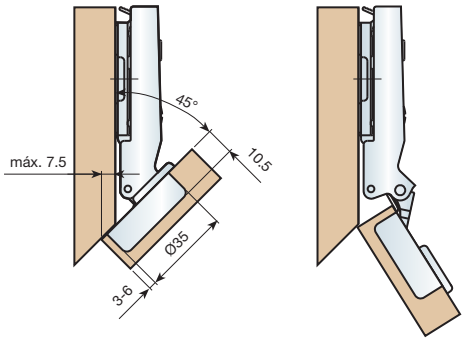



Hinges / Door

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

MESUCO 131X rapid

Ø35 cup hinge. Quick assembly.

Assembly with simple mid-range clip.

INDA matic
gradual closing

MESUCO 131X rapid

Ø35 cup hinge. Quick assembly.

Mid-range.
Clip assembly. 14 mm arm.
For doors with a thickness of 14 ÷ 26 mm.

pp.

1 HINGE GROUP 70

2 MOUNTING PLATES 70

3 COVERS 71

4 DAMPERS 71

5 TECHNICAL DATA 72

- Opening 110° 72
- Opening 110° for aluminium frames 73
- Opening 165° 74

1 HINGE GROUP



988.715.066*

* Supplied to order.



Clamping screw
ref: 951.610.063

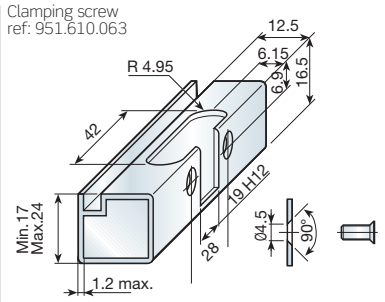

			NICKEL			
			Screw-fixed	With dowels	Expand	Hinge for aluminium frame
	α = 0 ° ÷ 110° H = 11.3	0mm.	318.210.060	318.220.066	344.610.066	323.710.063
		8mm.	318.211.062	318.221.061	344.620.065	323.720.062
		17mm.	318.212.064	318.222.063	344.630.064	323.730.061
	α = 0 ° ÷ 165° H = 11.3	0mm.	323.410.065	323.510.062		
		9mm.	323.420.064	323.520.061		
		18mm.	323.430.063	323.530.060		

2 MOUNTING PLATES

HEIGHT OF THE PLATES IN MM.				0	2	4
		Screw-fixed	Nickel-plated steel	350.210.066	350.212.063	350.214.060
		Knock-in	Nickel-plated steel	350.220.065	350.222.062	350.224.066
		Pre-mounted euroscrew	Nickel-plated steel	350.230.061	350.232.061	350.234.065
		Screw-fixed (WITH CENTERER)	Nickel-plated steel	348.500.062	348.502.066	

3 COVERS

Hinge cover.

Steel	Nickel-plated	302.131.060

4 DAMPERS

This solution takes the Indaux high performance “Mesuco” hinges as its starting point, and then the damper is fitted into the cup, in order not to occupy any space inside the cabinet. The damper, which fits comfortably into the hinge, adapts to the weight and size of the doors as well as the closing speed.

INDAmatic
gradual closing

Indamatic for **MESUCO 131X** hinge cup.

Nickel-plated zamak	197.803.060
Nickel-plated zamak	197.805.064

197.803.060

197.805.064

MESUCO 131X *and* MESUCO 131X *rapid assembly*

1- Place the hinge in the hole for its assembly.
2- Place the damper on the hinge cup and screw them so that the hinge and damper are fixed to the door.

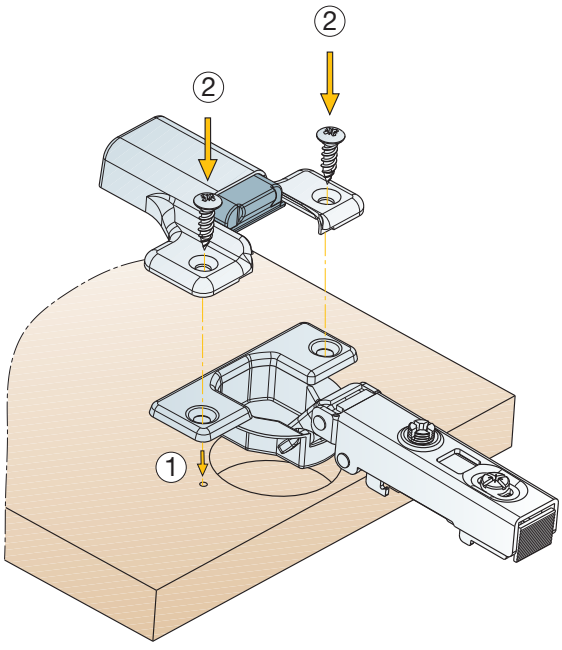

NOTE
It can be assembled on all hinges with steel cups, except 165°.

5 TECHNICAL DATA

Mesuco 131x rapid Opening 110°

Full overlay

Calculation of the height of the plate

K = 12
B = 4
A = 2
E = 16
C ?

C = K+A+B-E
C = 12+2+4-16
C = 2mm

K = Constant = 12mm

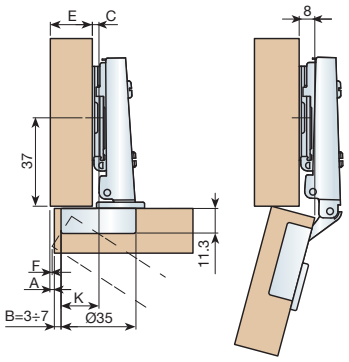

Half overlay

Calculation of the height of the plate

K = 4
B = 4
A = 10
E = 16
C ?

C = K+A+B-E
C = 4+10+4-16
C = 2mm

K = Constant = 4mm

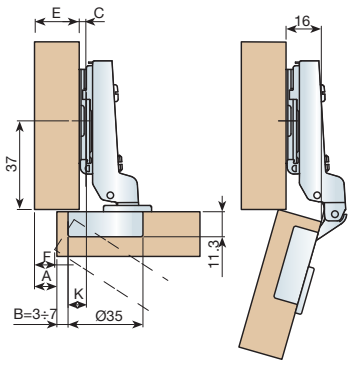

Full inset

Calculation of the height of the plate

K = -3
B = 4
D = 1
C ?

C = D+B+K
C = 1+4-3
C = 2mm

K = Constant = -3mm



Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
3	0,3	0,5	0,8	1	1,5	2	2,7	3,5	4,3
4	0,3	0,5	0,7	1	1,3	1,8	2,4	3,1	3,9
5	0,3	0,5	0,7	1	1,3	1,7	2,2	2,8	3,5
6	0,3	0,5	0,7	0,9	1,2	1,6	2	2,6	3,2
7	0,3	0,4	0,6	0,9	1,2	1,5	1,9	2,4	3



Hinges / Door

Mesuco 131x rapid Opening 110° Hinge for aluminium frames

Full overlay

Calculation of the height of the plate
K = 2
B = 20
A = 2
E = 16
C ?
C = A+B-E-K
C = 2-20-16-2
C = 4mm
K = Constant = 2mm

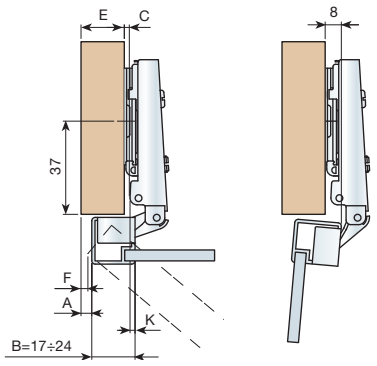

Half overlay

Calculation of the height of the plate
K = 10
B = 20
A = 8
E = 16
C ?
C = K+A-B-E
C = 8+20-16-10
C = 2mm
K = Constant = 10mm

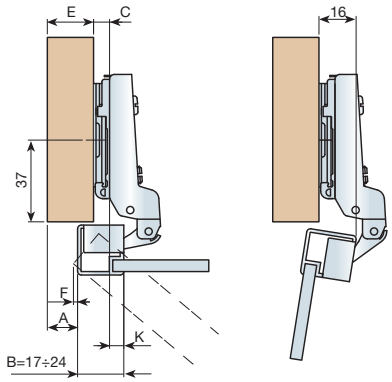

Full inset

Calculation of the height of the plate
K = 17
B = 20
D = 1
C ?
C = D+B-K
C = 1+20-17
C = 4mm
K = Constant = 17mm

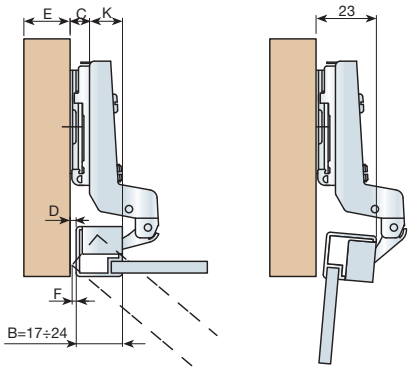



Hinges / Door

MESUCO 131X RAPID Opening 165°

Full overlay

Calculation of the height of the plate
K = 12
A = 2
B = 4
E = 16
C ?
C = K+A+B-E
C = 12+2+4-16
C = 2mm
K = Constant = 12mm

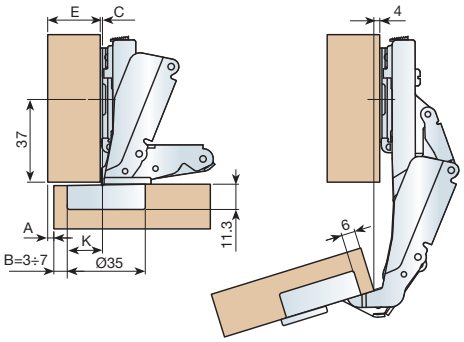

Half overlay

Calculation of the height of the plate
K = 3
A = 11
B = 4
E = 16
C ?
C = K+A+B-E
C = 3+11+4-16
C = 2mm
K = Constant = 3mm

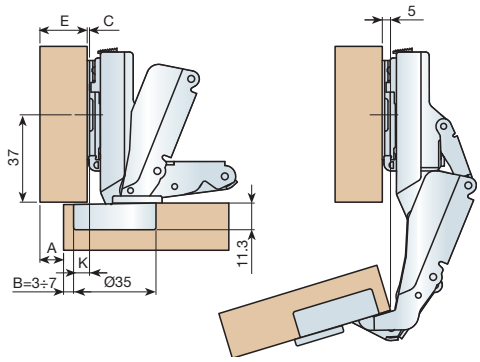

Full inset

Calculation of the height of the plate
K = -5
B = 4
D = 1
C ?
C = D+B+K
C = 1+4-5
C = 0mm
K = Constant = -5mm

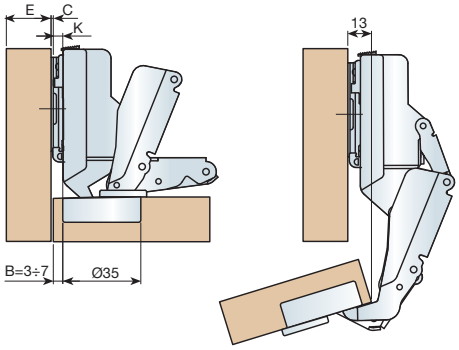



Hinges / Door

INDAUX
FURNITURE FITTINGS MANUFACTURER

MESUCO 14

Ø35 cup hinge.
“Slide on” assembly.

Hinge for heavy-duty use.
Minimum drilling depth: 10.5 mm.

MESUCO 14

Ø35 cup hinge. “Slide-on” assembly

Hinge for heavy-duty use.
Minimum drilling depth: 10.5 mm.

pp.

1 HINGE GROUP 78

2 MOUNTING PLATES 80

3 COVERS 81

4 TECHNICAL DATA 82

- Opening 110° 82
- Opening 110° glass door hinge 83
- Opening 110° for aluminium frames 84
- Opening 95° large displacement 85
- Opening 172° 86
- Opening 45°÷155° 87
- Opening 90°÷200° 88

1 HINGE GROUP









988.715.066*

* Supplied to order



α = OPENING ANGLE
H = CUP DEPTH (mm.)

			NICKEL					
			A: 48 , B: 6		**A: 45 , B: 9.5**		**A: 52 , B: 5.5**	
			Screw-fixed	With dowels c:Ø10	Screw-fixed	With dowels c:Ø8	Screw-fixed	With dowels c:Ø10
	α = 0° ÷ 110° H = 10.5	0mm.	030.040.124	030.041.126	030.060.925	030.069.922	030.070.924	030.071.926
		6mm.	037.140.121	037.141.123	037.160.922	037.169.926	037.170.921	037.171.923
		10mm.	031.040.122	031.041.124	031.060.923	031.069.920	031.070.922	031.071.924
		17mm.	032.140.124	032.141.126	032.160.925	032.169.922	032.170.924	032.171.926
	Large displacement α = 0° ÷ 95° H = 12.5	0mm.	030.020.012	030.021.014	030.060.015	030.069.012	030.070.014	030.071.016
		10mm.	031.020.010	031.021.012	031.060.013	031.069.010	031.070.012	031.071.014
		17mm.	032.120.012	032.121.014	032.160.015	032.169.012	032.170.014	032.171.016
	α = 0° ÷ 172° H = 10.5	0mm.	030.020.045	030.021.040	030.060.041	030.069.045	030.070.040	030.071.042
		10mm.	031.020.043	031.021.045	031.060.046	031.069.043	031.070.045	031.071.040
	α = 45° ÷ 155° H = 10.5	0mm.	034.020.125	034.021.120	034.060.121	034.069.125	034.070.120	034.071.122
	α = 90° ÷ 200° H = 10.5	0mm.	033.020.120	033.021.122	033.060.123	033.069.120	033.070.122	033.071.124
		10mm.	036.120.125	036.121.120	036.160.121	036.169.125	036.170.120	036.171.122



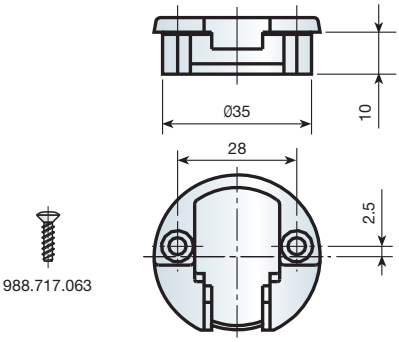

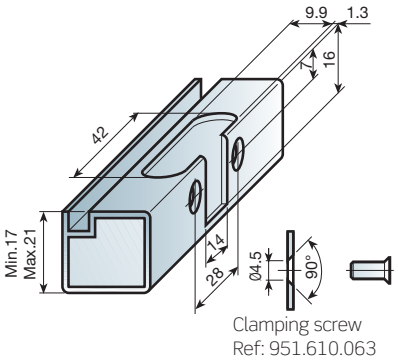

Clamping screw
Ref: 951.610.063

NICKEL			NICKEL	NICKEL
A:48 , B:6	**A:45 , B:9.5**	**A:52 , B:5.5**	Glass door hinge Ø35	Hinge for aluminium frames
Expand	Expand	Expand		
030.043.123	030.063.924	030.073.923	030.030.022	390.848.732
037.143.120	037.163.921	037.173.920	037.130.026	390.855.894
031.043.121	031.063.922	031.073.921	031.030.020	390.855.452
032.143.123	032.163.924	032.173.923	032.130.022	390.855.566
030.023.044	030.063.040	030.073.046		
031.023.042	031.063.045	031.073.044		
034.023.124	034.063.120	034.073.126		
033.023.126	033.063.122	033.073.121		
036.123.124	036.163.120	036.173.126		

2 MOUNTING PLATES

height of the plate in mm.				0	2	4	7
		Screw-fixed	Nickel-plated Zamak		082.000.111		
		Knock-in	Nickel-plated Zamak		082.100.115		
 Eccentric		Screw-fixed	Nickel-plated Zamak	082.001.010	082.001.113	082.001.216	
Eccentric		Knock-in	Nickel-plated Zamak	082.101.014	082.101.110	082.101.213	
 Eccentric		Screw-fixed	Nickel-plated Zamak	082.201.011	082.201.114		082.201.313
Eccentric		Knock-in	Nickel-plated Zamak	082.301.015	082.301.111		082.301.310
 Eccentric		Pre-mounted euroscrew	Nickel-plated Zamak	082.601.013	082.601.116		082.601.315
		Screw-fixed	Nickel-plated Zamak	082.203.015	082.203.111		
		Knock-in	Nickel-plated Zamak	082.303.012	082.303.115		
		Pre-mounted euroscrew	Nickel-plated Zamak	082.603.010	082.603.113		
		Screw-fixed (WITH CENTERER)	Nickel-plated steel		082.553.122	082.553.225	
		Screw-fixed	Nickel-plated steel		082.253.124	082.253.220	
	EURO-SCREW H = 11 - Ref.: 951.211.063 H = 13 - Ref.: 951.213.060 (STANDARD)			3 ADJUSTMENTS			

3 COVERS

Glass door covers

Cover

Nylon	Silver-polish	351.700.226
Nylon	Gold-polish	351.700.230
Nylon	Black	351.700.252



Adaptor

Nylon		351.710.004

Cover

Nylon	Silver-polish	351.900.220
Nylon	Gold-polish	351.900.231
Nylon	Black	351.900.253



Adaptor

Nylon		351.910.005

O-ring

Nylon	White	351.110.001
Nylon	Browin	351.111.003
Nylon	Black	351.112.005

Hinge arm cover

Nylon	White	302.020.003
Nylon	Brown	302.020.014
Nylon	Black	302.020.025

4 TECHNICAL DATA

Mesuco 14 Opening 110°

Full overlay

Calculation of the height of the plate
K = 15
B = 3
A = 2
E = 16
C ?
C = K+A+B-E
C = 15+2+3-16
C = 4mm
K = Constant = 15mm

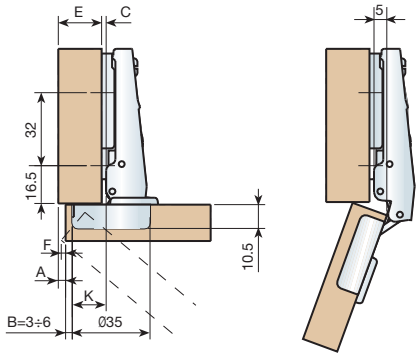

Partial overlay

Calculation of the height of the plate
K = 9
A = 5
B = 4
E = 16
C ?
C = K+A+B-E
C = 9+5+4-16
C = 2mm
K = Constant = 9mm

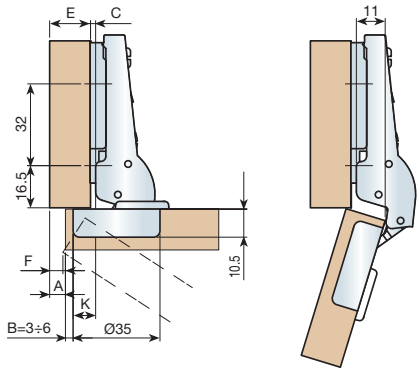

Half overlay

Calculation of the height of the plate
K = 5
B = 3
A = 10
E = 16
C ?
C = K+A+B-E
C = 5+10+3-16
C = 2mm
K = Constant = 5mm

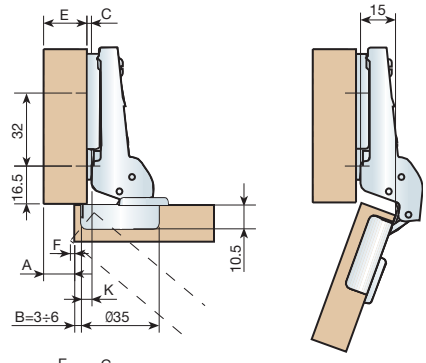

Full inset

Calculation of the height of the plate
K = -2
B = 5
D = 1
C ?
C = D+B+K
C = 1+5-2
C = 4mm
K = Constant = -2mm

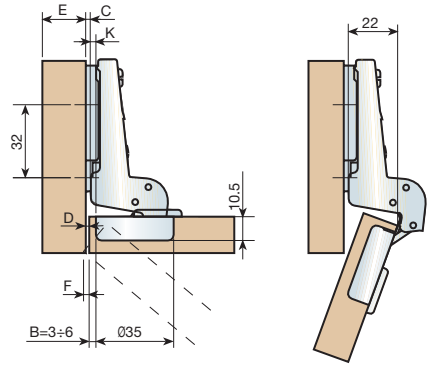

Lateral door displacement (F).

mm	Door thickness								
B	16	17	18	19	20	21	22	23	24
3	0,9	1,2	1,6	2	2,5	3,1	3,8	4,5	5,3
4	0,8	1,1	1,5	1,9	2,4	2,9	3,5	4,2	4,9
5	0,8	1,1	1,4	1,8	2,3	2,8	3,3	3,9	4,6
6	0,7	1	1,4	1,7	2,2	2,6	3,1	3,7	4,4



Mesuco 14 Opening 110° Glass door hinge

Full overlay

Calculation of the height of the plate
K = 15
B = 3
A = 2
E = 16
C ?
C = K+A+B-E
C = 15+2+3-16
C = 4mm
K = Constant = 15mm

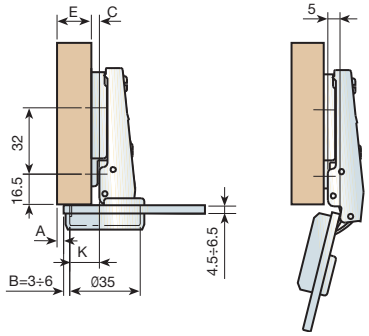

Partial overlay

Calculation of the height of the plate
K = 9
B = 3
A = 6
E = 16
C ?
C = K+A+B-E
C = 9+5+4-16
C = 2mm
K = Constant = 9mm

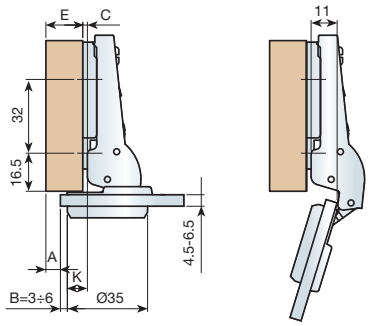

Half overlay

Calculation of the height of the plate
K = 5
B = 3
A = 10
E = 16
C ?
C = K+A+B-E
C = 5+10+3-16
C = 2mm
K = Constant = 5mm

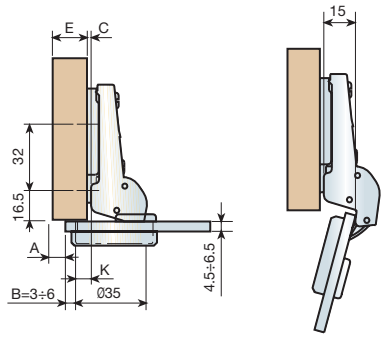

Full inset

Calculation of the height of the plate
K = -2
B = 3
D = 1
C ?
C = D+B+K
C = 1+3-2
C = 2mm
K = Constant = -2mm

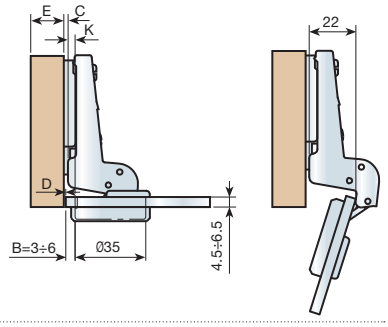



Hinges / Door

Mesuco 14 Opening 110° for aluminium frames

Full overlay

Calculation of the height of the plate
K = 1
B = 19
A = 2
E = 16
C ?
C = A+B-E-K
C = 2+19-16-1
C = 4mm
K = Constant = 1mm

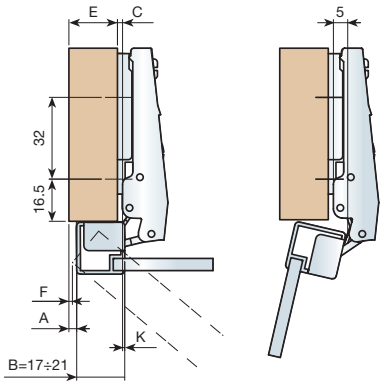

Partial overlay

Calculation of the height of the plate
K = 7
B = 19
A = 8
E = 16
C ?
C = A+B-E-K
C = 8+19-16-7
C = 4mm
K = Constant = 7mm

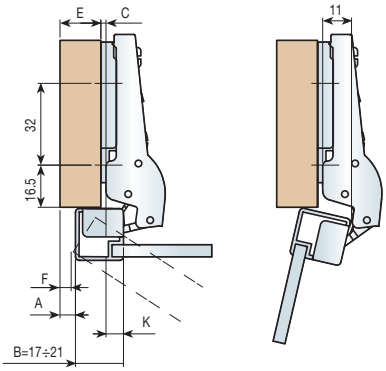

Half overlay

Calculation of the height of the plate
K = 11
B = 20
A = 9
E = 16
C ?
C = K+A-E-K
C = 9+20-16-11
C = 2mm
K = Constant = 11mm

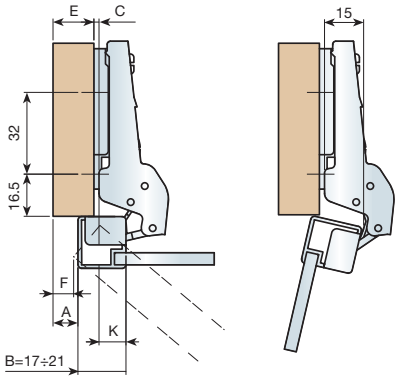

Full inset

Calculation of the height of the plate
K = 18
B = 19
D = 1
C ?
C = D+B-K
C = 1+19-18
C = 4mm
K = Constant = 18mm

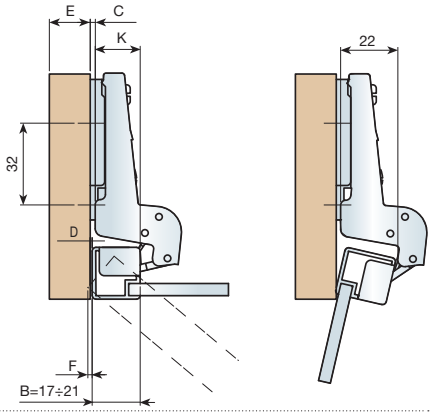

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
17	1,1	1,5	1,9	2,4	3	3,7	4,5	5,3	6,2
18	1,1	1,4	1,8	2,3	2,8	3,4	4,1	4,9	5,7
19	1	1,4	1,7	2,1	2,6	3,2	3,8	4,5	5,3
20	1	1,3	1,6	2	2,5	3	3,6	4,2	5
21	0,9	1,2	1,6	2	2,4	2,9	3,4	4	4,7



Hinges / Door

Mesuco 14 Opening 95° large displacement

Full overlay

Calculation of the height of the plate
K = 15
B = 3
A = 0
E = 16
C ?
C = K+A+B-E
C = 15+0+3-16
C = 2mm
K = Constant = 15mm

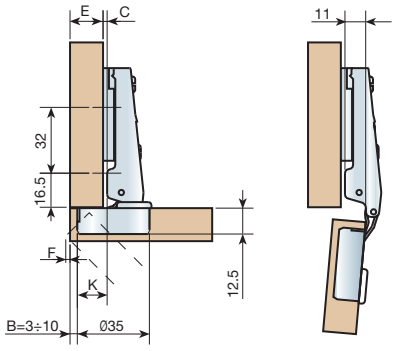

Half overlay

Calculation of the height of the plate
K = 5
B = 4
A = 11
E = 16
C ?
C = A+B-E-K
C = 5+11+4-16
C = 4mm
K = Constant = 5mm

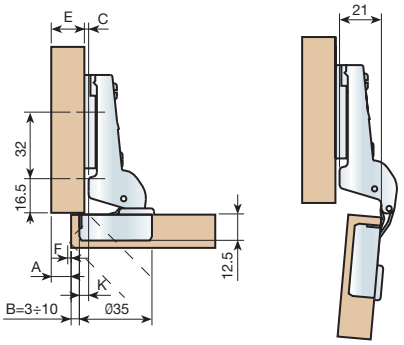

Full inset

Calculation of the height of the plate
K = -2
B = 3
D = 1
C ?
C = D+B+K
C = 1+3-2
C = 2mm
K = Constant = -2mm

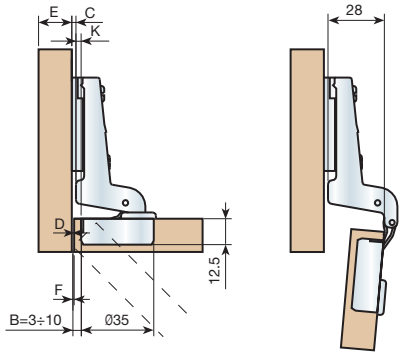

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**18**	**20**	**22**	**25**	**28**	**30**	**32**	**35**
3	0	0	1,2	0,4	0,9	1,5	3	4,5	6,4
4	0	0	1,15	0,35	0,85	1,45	2,5	4,5	5,8
5	0	0	0,1	0,3	0,8	1,4	2	4,2	5,2
6	0	0	0,1	0,25	0,75	1,35	1,9	4	5,1
8	0	0	0	0,2	0,7	1,3	1,8	3,8	5
10	0	0	0	0,2	0,7	1,3	1,8	3,6	5



Hinges / Door

Mesuco 14 Opening 172°

Full overlay

Calculation of the height of the plate
K = 15
A = 0
A = 3
E = 16
C ?
C = K+A+B-E
C = 15+0+3-16
C = 2mm
K = Constant = 15mm

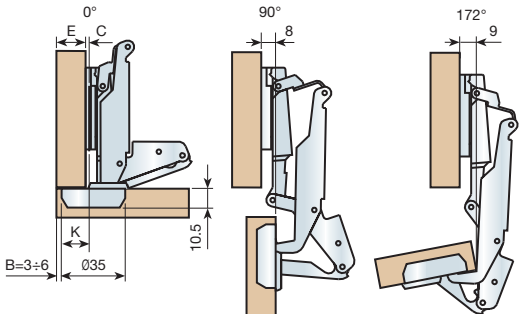

Half overlay

Calculation of the height of the plate
K = 5
A = 9
B = 4
E = 16
C ?
C = K+A+B-E
C = 5+9+4-16
C = 2mm
K = Constant = 5mm

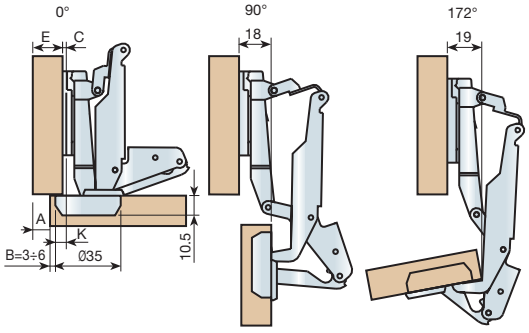



Hinges / Door

Mesuco 14 Opening 45° ÷ 155

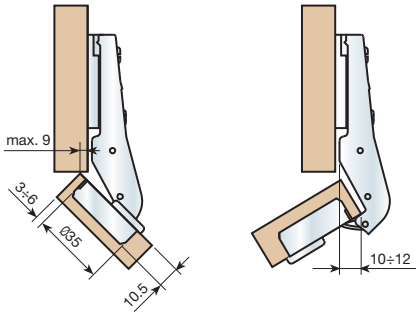

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
3	0,9	1,2	1,6	2	2,5	3,1	3,8	4,5	5,3
4	0,8	1,1	1,5	1,9	2,4	2,9	3,5	4,2	4,9
5	0,8	1,1	1,4	1,8	2,3	2,8	3,3	3,9	4,6
6	0,7	1	1,4	1,7	2,2	2,6	3,1	3,7	4,4



Hinges / Door

Mesuco 14 Opening 90° ÷ 200°

Full overlay

K = Constant = 2mm

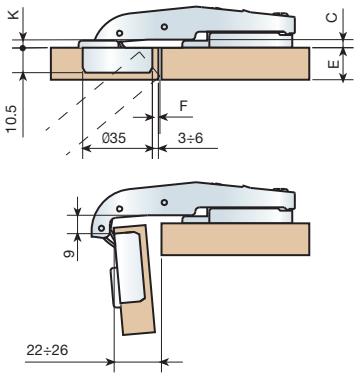

Half overlay

K = Constant = 21,5mm

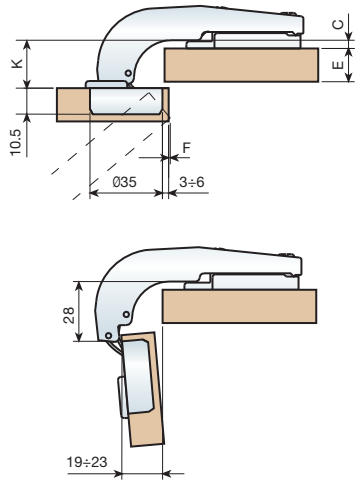

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
3	0,9	1,2	1,6	2	2,5	3,1	3,8	4,5	5,3
4	0,8	1,1	1,5	1,9	2,4	2,9	3,5	4,2	4,9
5	0,8	1,1	1,4	1,8	2,3	2,8	3,3	3,9	4,6
6	0,7	1	1,4	1,7	2,2	2,6	3,1	3,7	4,4



Hinges / Door

INDAUX
FURNITURE FITTINGS MANUFACTURER

MESUCO 121

Ø35 cup hinge
“Slide on” assembly

Wide range of solutions.

MESUCO 121

Ø35 cup hinge. “Slide-on” assembly

Wide range of solutions.
Attractive design.
Drilling depth: 10.5 mm.

pp.

1 HINGE GROUP 92

2 MOUNTING PLATES 94

3 COVERS 95

4 TECHNICAL DATA 96

- Opening 100° 96
- Opening 100° glass door hinge 97
- Opening 100° for aluminium frames 98
- Opening 172° 99
- Opening 15°÷115° 100
- Opening 30°÷130° 100
- Opening 45°÷145° 100
- Opening 90°÷190° 101
- Opening -45°÷55° 102
- Opening 95° large displacement 103
- Opening 15°÷110° large displacement 104
- Opening 30°÷125° large displacement 104
- Opening 45°÷140° large displacement 104
- Opening 90°÷185° large displacement 105
- Opening -45°÷50° large displacement 106

1 HINGE GROUP







988.715.066*

* Supplied to order



α = OPENING ANGLE
H = CUP DEPTH (mm.)

			NICKEL					
			A: 48 , B: 6		A: 45 , B: 9.5		A: 52 , B: 5.5	
			Screw-fixed	With dowels c:Ø10	Screw-fixed	With dowels c:Ø8	Screw-fixed	With dowels c:Ø10
	α = 0° ÷ 100° H = 10.5	0mm.	020.020.173	020.021.175	020.060.176	020.069.173	020.070.175	020.071.170
		10mm.	021.020.171	021.021.173	021.060.174	021.069.171	021.070.173	021.071.175
		17mm.	022.020.176	022.021.171	022.060.172	022.069.176	022.070.171	022.071.173
	α = 0° ÷ 172° H = 10.5	0mm.	020.020.044	020.021.046	020.060.040	020.069.044	020.070.046	020.071.041
		10mm.	021.020.042	021.021.044	021.060.045	021.069.042	021.070.044	021.071.046
	H = 12.5 α = 15° ÷ 115°	0mm.	028.120.116	028.121.111	028.160.112	028.169.116	028.170.111	028.171.113
	α = 30° ÷ 130°	0mm.	029.120.114	029.121.116	029.160.110	029.169.114	029.170.116	029.171.111
	H = 10.5 α = 45° ÷ 145°	0mm.	024.120.176	024.121.171	024.160.172	024.169.176	024.170.171	024.171.173
	α = -45° ÷ 55° H = 10.5	0mm.	025.120.174	025.121.176	025.160.170	025.169.174	025.170.176	025.171.171
	α = 90° ÷ 190° H = 10.5 H = 12.5	0mm.	023.120.171	023.121.173	023.160.174	023.169.171	023.170.173	023.171.175
		10mm.	026.120.113	026.121.115	026.160.116	026.169.113	026.170.115	026.171.110
	Large displacement α = 0° ÷ 95° H = 10.5	0mm.	020.020.162	020.021.164	020.060.166	020.069.162	020.070.164	020.071.166
		10mm.	021.020.160	021.021.162	021.060.163	021.069.160	021.070.162	021.071.164
		17mm.	022.020.165	022.021.160	022.060.161	022.069.165	022.070.160	022.071.162
	Large displacement H = 12.5 α = 15° ÷ 110°	0mm.	028.120.061	028.121.063	028.160.064	028.169.061	028.170.063	028.171.065
	α = 30° ÷ 125°	0mm.	029.120.066	029.121.061	029.160.062	029.169.066	029.170.061	029.171.063
	H = 10.5 α = 45° ÷ 140°	0mm.	024.120.165	024.121.160	024.160.161	024.169.165	024.170.160	024.171.162
	Large displacement α = 90° ÷ 185° H = 10.5	0mm.	023.120.160	023.121.162	023.160.163	023.169.160	023.170.162	023.171.164
	H = 12.5	10mm.	026.120.065	026.121.060	026.160.061	026.169.065	026.170.060	026.171.062
	Large displacement α = -45° ÷ 50° H = 10.5	0mm.	025.120.163	025.121.165	025.160.166	025.169.163	025.170.165	025.171.160



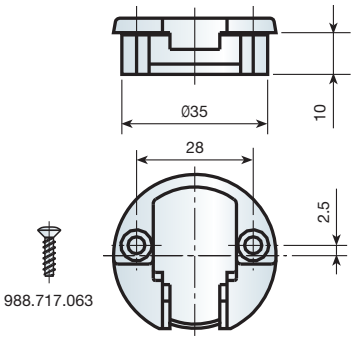

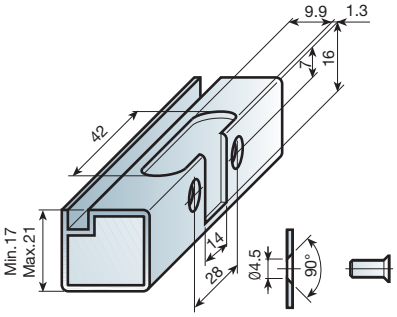

Clamping screw. Ref: 951.610.063

NICKEL			NICKEL	NICKEL
A:48 , B:6	A:45 , B:9.5	A:52 , B:5.5	Glass door hinge Ø35	Hinge for aluminium frames
Expand	Expand	Expand		
020.023.172	020.063.175	020.073.174	020.030.010	390.852.232
021.023.170	021.063.173	021.073.172	021.030.015	390.855.345
022.023.175	022.063.171	022.073.170	022.030.013	390.852.346
020.023.043	020.063.046	020.073.045		
021.023.041	021.063.044	021.073.043		
028.123.115	028.163.111	028.173.110		
029.123.113	029.163.116	029.173.115		
024.123.175	024.163.171	024.173.170		
025.123.173	025.163.176	025.173.175		
023.123.170	023.163.173	023.173.172		
026.123.112	026.163.115	026.173.114		
020.023.161	020.063.164	020.073.163		
021.023.166	021.063.162	021.073.161		
022.023.164	022.063.160	022.073.166		
024.123.164	024.163.160	024.173.166		
023.123.166	023.163.162	023.173.161		
025.123.162	025.163.165	025.173.164		

2 MOUNTING PLATES

HEIGHT mm.				0	2	4	7	10
		Screw-fixed	Nickel-plated Zamak	081.000.006	081.000.102			
		Knock-in	Nickel-plated Zamak	081.100.003	081.100.106			
		Knock-in	Nylon White Brown Black	081.800.036 081.800.040 081.800.051	081.800.132 081.800.143 081.800.154	081.800.235 081.800.246 081.800.250	081.800.331 081.800.342 081.800.353	081.800.434 081.800.445 081.800.456
		Screw-fixed	Nickel-plated steel Nickel-plated Zamak	081.203.021	081.203.124	081.203.220	081.203.312	081.203.415
		Knock-in	Nickel-plated steel Nickel-plated Zamak	081.303.025	081.303.121	081.303.224	081.303.316	081.303.412
		Screw-fixed (With centerer)	Nickel-plated steel Nickel-plated Zamak	081.503.026	081.503.122	081.503.225	081.503.310	081.503.413
		Knock-in (With centerer)	Nickel-plated steel Nickel-plated Zamak	081.803.024	081.803.120	081.803.223	081.803.315	081.803.411
		Pre-mounted euroscrew	Nickel-plated steel Nickel-plated Zamak	081.603.023	081.603.126	081.603.222	081.603.314	081.603.410

5° and 10° spacer wedge for wing plate			5°	10°		H=11	H=13
	white brown black		352.905.000 352.905.011 352.905.022	352.910.003 352.910.014 352.910.025		951.211.063	951.213.060 (Standard)

3 COVERS

Glass door covers

Cover

Nylon	Silver-polish	351.700.226
Nylon	Gold-polish	351.700.230
Nylon	Black	351.700.252



Adaptor

Nylon		351.710.004

Cover

Nylon	Silver-polish	351.900.220
Nylon	Gold-polish	351.900.231
Nylon	Black	351.900.253



Adaptor

Nylon		351.910.005

O-ring

Nylon	White	351.110.001
Nylon	Brown	351.111.003
Nylon	Black	351.112.005

Hinge arm cover

Cover

Nylon	Black	302.080.026
Nylon	White	302.080.004
Nylon	Brown	302.080.015
Zamak	Nickel-plated	302.080.063

4 TECHNICAL DATA

MESUCO 121 Opening 100°

Full overlay

Calculation of the height of the plate
K = 13
B = 3
A = 4
E = 16
C ?
C = K+A+B-E
C = 13+4+3-16
C = 4mm
K = Constant = 13mm

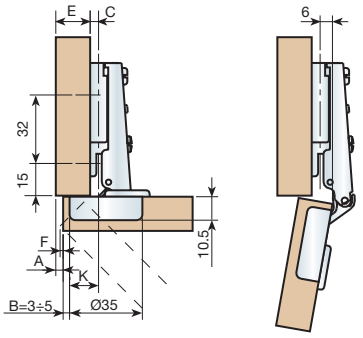

Half overlay

Calculation of the height of the plate
K = 3
B = 5
A = 10
E = 16
C ?
C = K+A+B-E
C = 3+10+5-16
C = 2mm
K = Constant = 3mm

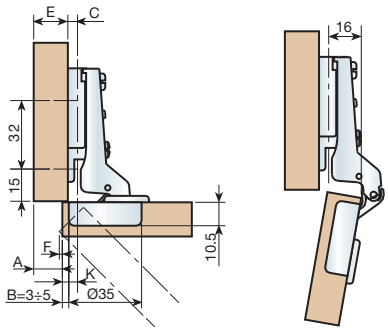

Half overlay

Calculation of the height of the plate
K = -4
B = 5
D = 1
C ?
C = D+B+K
C = 1+5-4
C = 2mm
K = Constant = -4mm

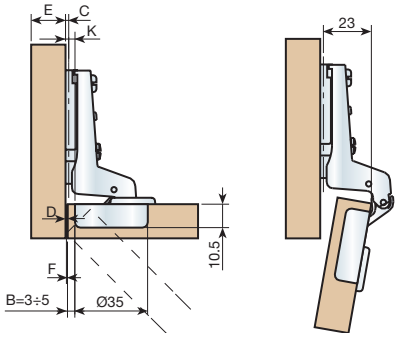

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
3	0.2	0.35	0.5	0.8	1.1	1.7	2.3	3	3.6
4	0.2	0.35	0.45	0.75	1	1.55	2.1	2.8	3.5
5	0.2	0.30	0.40	0.7	0.90	1.30	1.7	2.4	3.2



MESUCO 121 Opening 100° Glass door hinge

Full overlay

Calculation of the height of the plate
K = 13
B = 3
A = 4
E = 16
C ?
C = K+A+B-E
C = 13+4+3-16
C = 4mm
K = Constant = 13mm

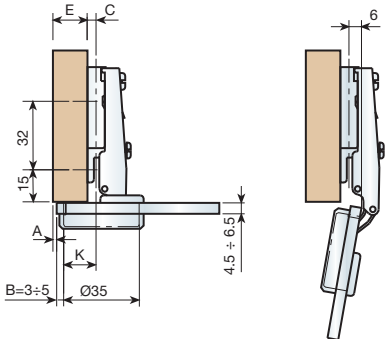

Half overlay

Calculation of the height of the plate
K = 3
B = 5
A = 10
E = 16
C ?
C = K+A+B-E
C = 3+10+5-16
C = 2mm
K = Constant = 3mm

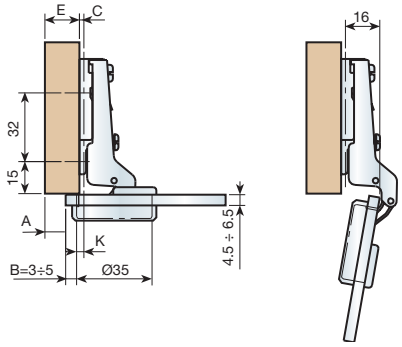

Full inset

Calculation of the height of the plate
K = -4
B = 5
D = 1
C ?
C = D+B+K
C = 1+5-4
C = 2mm
K = Constant = -4mm

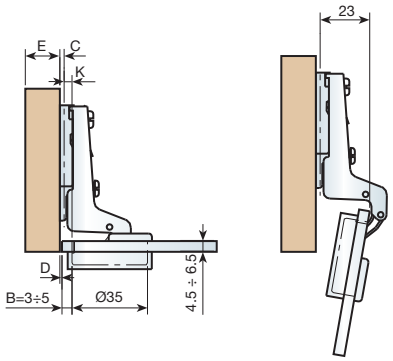



MESUCO 121 Opening 100° for aluminium frames

Full overlay

Calculation of the height of the plate
K = 3
B = 19
A = 2
E = 16
C ?
C = A+B-E-K
C = 2+19-16-3
C = 2mm
K = Constant = 3mm

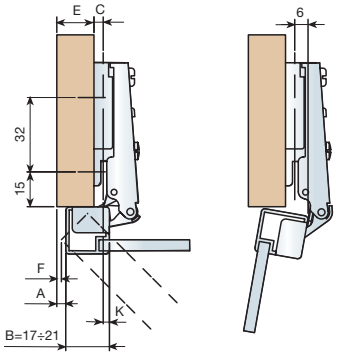

Half overlay

Calculation of the height of the plate
K = 13
B = 19
A = 12
E = 16
C ?
C = A+B-E-K
C = 12+19-16-13
C = 2mm
K = Constant = 13mm

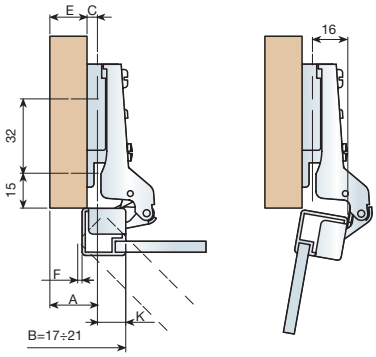

Full inset

Calculation of the height of the plate
K = 20
B = 21
D = 1
C ?
C = D+B-K
C = 1+21-20
C = 2mm
K = Constant = 20mm

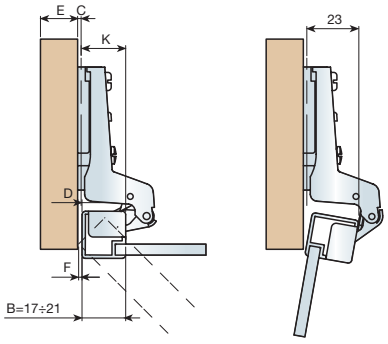

Lateral door displacement.

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
17	0.2	0.3	0.5	0,9	1.7	2.6	3.6	4.5	5.4
18	0.2	0.3	0.5	0.8	1.3	2.1	3	3.9	4.8
19	0.2	0.3	0.5	0.7	1	1.7	2.5	3.3	4.2
20	0.2	0.3	0.5	0.7	1	1.4	2.1	2.9	3.7
21	0.2	0.3	0.4	0.7	0.9	1.2	1.8	2.5	3.3

MESUCO 121 Opening 172°

Full overlay

Calculation of the height of the plate
K = 13
A = 2
B = 3
E = 16
C ?
C = K+A+B-E
C = 13+2+3-16
C = 2mm
K = Constant = 13mm

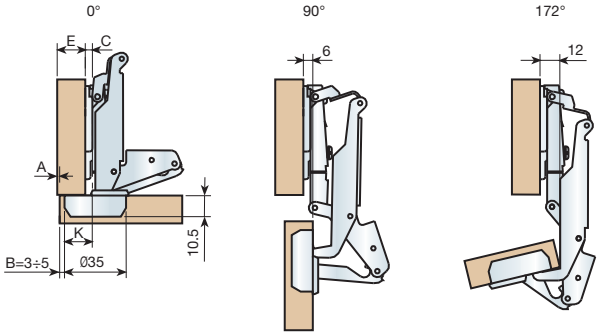

Half overlay

Calculation of the height of the plate
K = 3
B = 12
A = 3
E = 16
C ?
C = K+A+B-E
C = 3+12+3-16
C = 2mm
K = Constant = 3mm

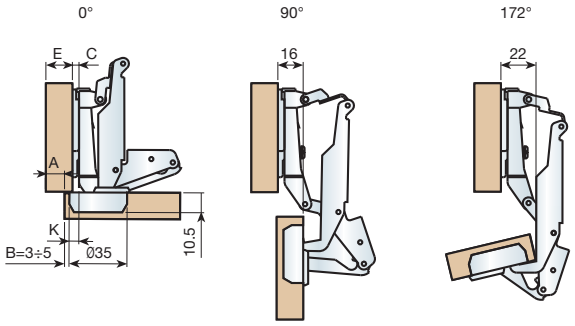



MESUCO 121 Opening 15° ÷ 115°

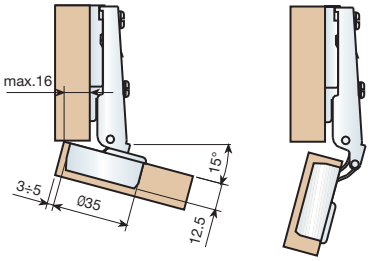

MESUCO 121 Opening 30° ÷ 130°

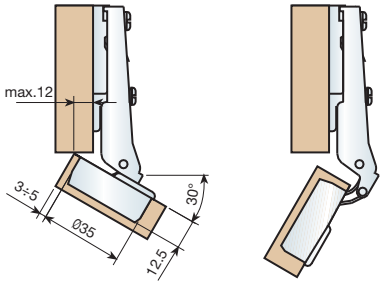

MESUCO 121 Opening 45° ÷ 145°

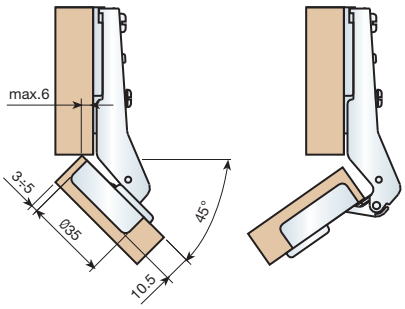

Lateral door displacement (F).

mm	Door thickness								
B	16	17	18	19	20	21	22	23	24
3	0.2	0.35	0.5	0,8	1.1	1,7	2.3	3	3.6
4	0.2	0.35	0.45	0.75	1	1.55	2.1	2.8	3.5
5	0.2	0.35	0.40	0.7	0.90	1.30	1.7	2.4	3.2



Hinges / Door

MESUCO 121 Opening 90° ÷ 190°

Full overlay

K = Constant = 2mm

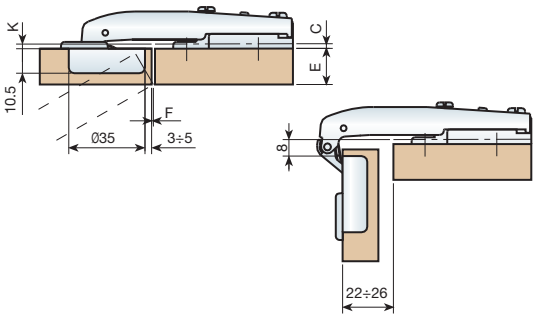

Half overlay

K = Constant = 19,5mm

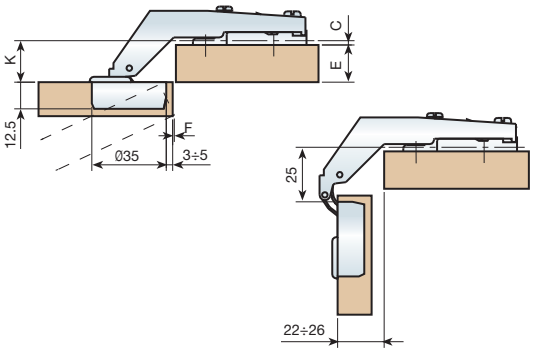

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
3	0.2	0.35	0.5	0,8	1.1	1,7	2.3	3	3.6
4	0.2	0.35	0.45	0.75	1	1.55	2.1	2.8	3.5
5	0.2	0.35	0.40	0.7	0.90	1.30	1.7	2.4	3.2



Hinges / Door

MESUCO 121 Opening -45° ÷ 55°

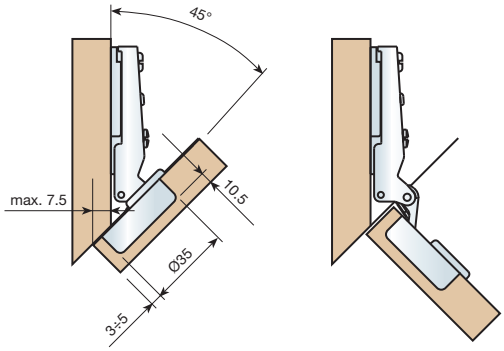



MESUCO 121 Opening 95° large displacement

Full overlay

Calculation of the height of the plate
K = 17
B = 6
A = 3
E = 22
C ?
C = K+A+B-E
C = 17+3+6-22
C = 4mm
K = Constant = 17mm

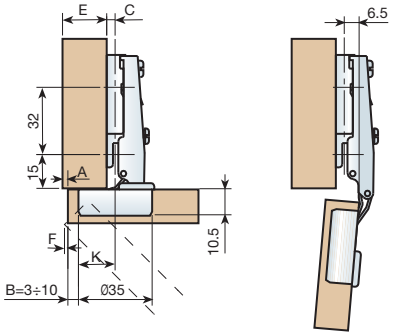

Half overlay

Calculation of the height of the plate
K = 7
B = 6
A = 11
E = 22
C ?
C = K+A+B-E
C = 7+11+6-22
C = 2mm
K = Constant = 7mm

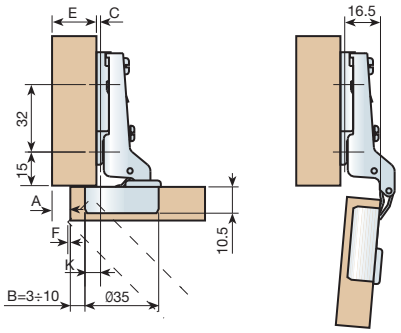

Full inset

Calculation of the height of the plate
K = 0
B = 6
D = 1
C ?
C = D+B+K
C = 6+1+0
C = 7mm
K = Constant = 0mm

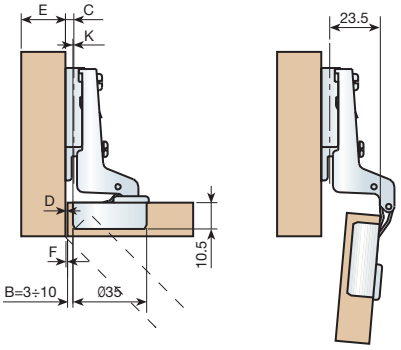

Lateral door displacement (F).

mm	Door thickness								
B	16	18	20	22	25	28	30	32	35
3	0	0	0,2	0,4	0,9	1,5	3	4,5	6,4
4	0	0	0,15	0,35	0,85	1,45	2,5	4,5	5,8
5	0	0	0,1	0,3	0,8	1,4	2	4,2	5,2
6	0	0	0,1	0,25	0,75	1,35	1,9	4	5,1
8	0	0	0	0,2	0,7	1,3	1,8	3,8	5
10	0	0	0	0,2	0,7	1,3	1,8	3,6	5



MESUCO 121 Opening 15° ÷ 110° large displacement

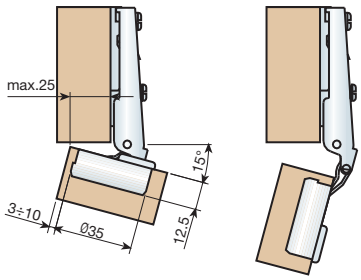

MESUCO 121 Opening 30° ÷ 125° large displacement

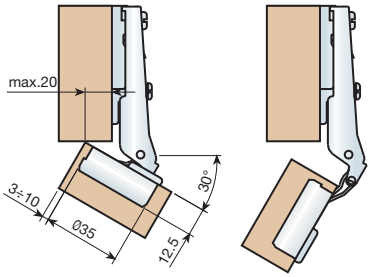

MESUCO 121 Opening 45° ÷ 140° large displacement

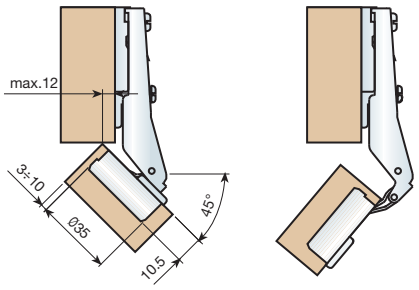

Lateral door displacement.

mm	Door thickness								
B	16	18	20	22	25	28	30	32	35
3	0	0	0,2	0,4	0,9	1,5	3	4,5	6,4
4	0	0	0,15	0,35	0,85	1,45	2,5	4,5	5,8
5	0	0	0,1	0,3	0,8	1,4	2	4,2	5,2
6	0	0	0,1	0,25	0,75	1,35	1,9	4	5,1
8	0	0	0	0,2	0,7	1,3	1,8	3,8	5
10	0	0	0	0,2	0,7	1,3	1,8	3,6	5



MESUCO 121 Opening 90° ÷ 185° large displacement

Full overlay

K = Constant = 2mm

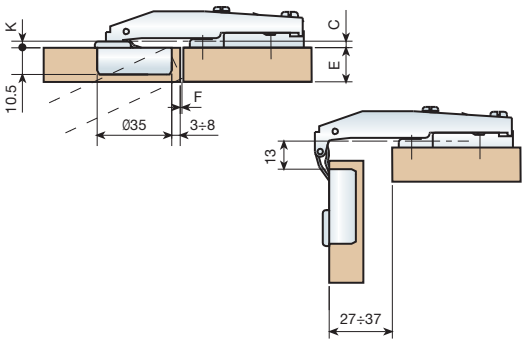

Half overlay

K = Constant = 19,5mm

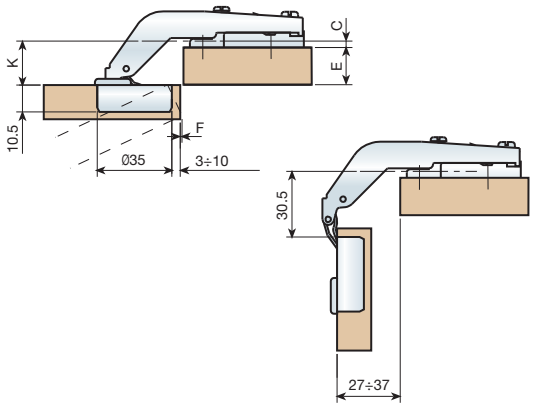

Lateral door displacement.

mm	Door thickness								
B	16	18	20	22	25	28	30	32	35
3	0	0	0,2	0,4	0,9	1,5	3	4,5	6,4
4	0	0	0,15	0,35	0,85	1,45	2,5	4,5	5,8
5	0	0	0,1	0,3	0,8	1,4	2	4,2	5,2
6	0	0	0,1	0,25	0,75	1,35	1,9	4	5,1
8	0	0	0	0,2	0,7	1,3	1,8	3,8	5
10	0	0	0	0,2	0,7	1,3	1,8	3,6	5



Hinges / Door

MESUCO 121 Opening -45° ÷ 50° large displacement

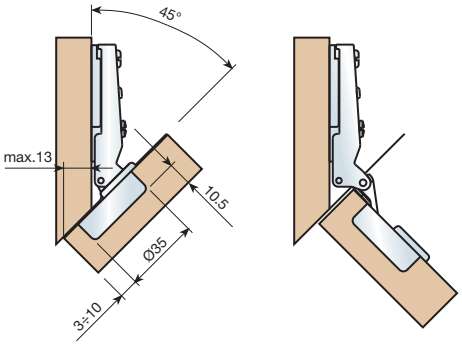



INDAUX
FURNITURE FITTINGS MANUFACTURER

MESUCO 131X

Ø35 cup hinge
“Slide on” assembly

Mid-range.

INDA matic
gradual closing

MESUCO 131X

Ø35 cup hinge. “Slide-on” assembly

Mid-range hinge.
14 mm arm for doors
with a thickness of 14 ÷ 26mm.

pp.

1 HINGE GROUP 109

2 MOUNTING PLATES 109

3 COVERS 110

4 DAMPERS 110

5 TECHNICAL DATA 111

- Opening 110° 111
- Opening 110° for aluminium frames 112
- Opening 165° 113

1 HINGE GROUP



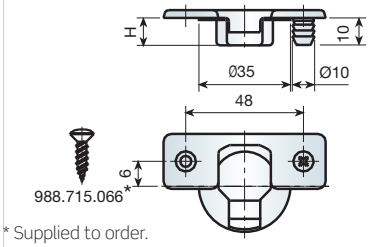

* Supplied to order.

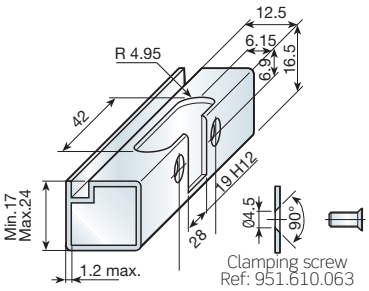

α = OPENING ANGLE
H = CUP DEPTH (mm.)

			NICKEL		
		Screw-fixed	With dowels	Expand	Hinge for aluminium frame
	α = 0 ° ÷ 110 ° H = 11.3				
	0mm.	318.110.063	318.120.062	344.510.062	323.610.066
	8mm.	318.111.065	318.121.064	344.520.061	323.620.065
	17mm.	318.112.060	318.122.066	344.530.060	323.630.064
	α = 0 ° ÷ 165 ° H = 11.3				
	0mm.	323.210.064	323.310.061		
	9mm.	323.220.063	323.320.060		
	18mm.	323.230.062	323.330.066		

2 MOUNTING PLATES

HEIGHT OF THE PLATE in mm.				0	2	4
		Screw-fixed	Nickel-plated steel	350.110.062	350.112.066	350.114.063
		Knock-in	Nickel-plated steel	350.120.061	350.122.065	350.124.062
		Pre-mounted euroscrew	Nickel-plated steel	350.130.060	350.132.064	350.134.061
		Plate with centerer	Nickel-plated steel	348.700.060	348.702.060	

3 COVERS

Hinge cover.

Steel	Nickel-plated	302.131.060

4 DAMPERS

This solution takes the Indaux high performance “Mesuco” hinges as its starting point, and then the damper is fitted into the cup, in order not to occupy any space inside the cabinet. The damper, which fits comfortably into the hinge, adapts to the weight and size of the doors as well as the closing speed.

INDA-matic gradual closing

Indamatic for **MESUCO 131X** hinge cup.

Nickel-plated zamak	197.803.060
Nickel-plated zamak	197.805.064

197.803.060

197.805.064

MESUCO 131X *and* MESUCO 131X *rapid assembly*

1- Place the hinge in the hole for its assembly.
2- Place the damper on the hinge cup and screw them so that the hinge and damper are fixed to the door.

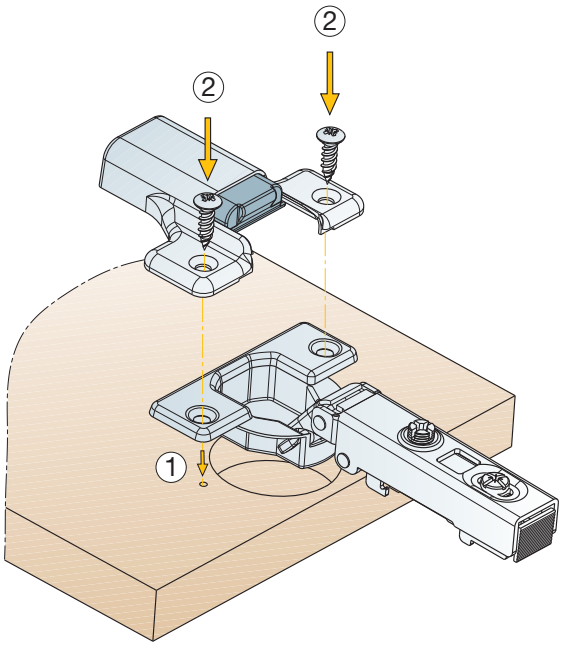

NOTE: It can be assembled on all hinges with steel cups, except 165°.

5 TECHNICAL DATA

MESUCO 131X Opening 110°

Full overlay

Calculation of the height of the plate
K = 13
B = 3
A = 2
E = 16
C ?
C = K+A+B-E
C = 13+2+3-16
C = 2mm
K = Constant = 13mm

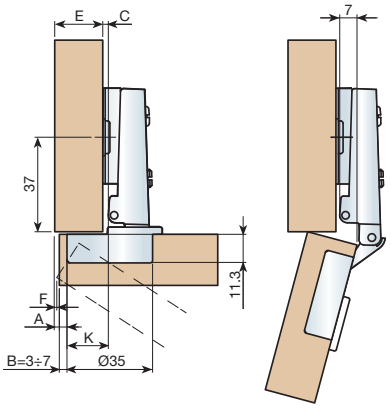

Half overlay

Calculation of the height of the plate
K = 5
B = 4
A = 11
E = 16
C ?
C = K+A+B-E
C = 5+11+4-16
C = 4mm
K = Constant = 5mm

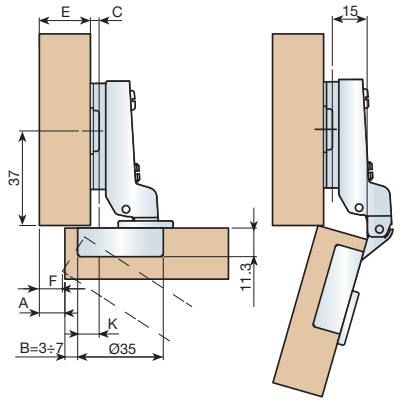

Half overlay

Calculation of the height of the plate
K = -2
B = 3
D = 1
C ?
C = D+B+K
C = 1+3-2
C = 2mm
K = Constant = -2mm

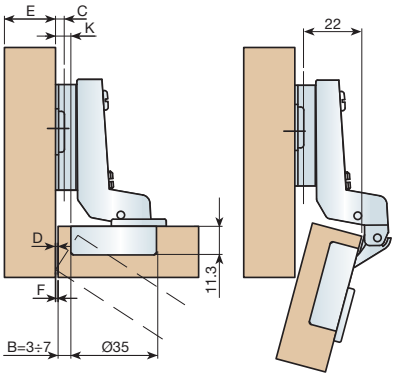

Lateral door displacement (F).

mm	Door thickness								
B	16	17	18	19	20	21	22	23	24
3	0,3	0,5	0,8	1	1,5	2	2,7	3,5	4,3
4	0,3	0,5	0,7	1	1,3	1,8	2,4	3,1	3,9
5	0,3	0,5	0,7	1	1,3	1,7	2,2	2,8	3,5
6	0,3	0,5	0,7	0,9	1,2	1,6	2	2,6	3,2
7	0,3	0,4	0,6	0,9	1,2	1,5	1,9	2,4	3



MESUCO 131X Opening 110° Glass door hinge

Full overlay

Calculation of the height of the plate
K = 2
B = 20
A = 2
E = 16
C ?
C = A+B-E-K
C = 2-20-16-2
C = 4mm
K = Constant = 2mm

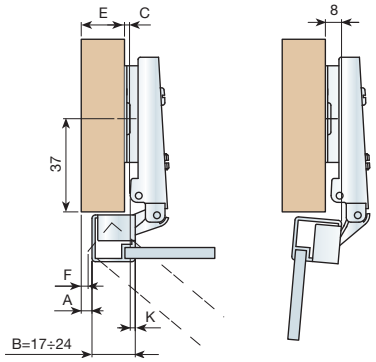

Half overlay

Calculation of the height of the plate
K = 10
B = 20
A = 8
E = 16
C ?
C = K+A-B-E
C = 8+20-16-10
C = 2mm
K = Constant = 10mm

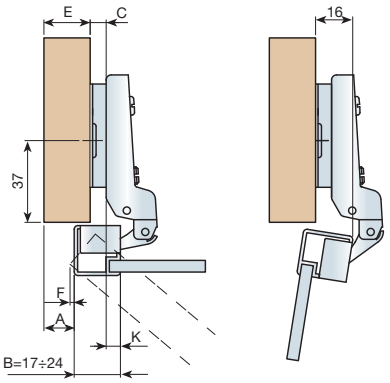

Full inset

Calculation of the height of the plate
K = 17
B = 20
D = 1
C ?
C = D+B-K
C = 1+20-17
C = 4mm
K = Constant = 17mm

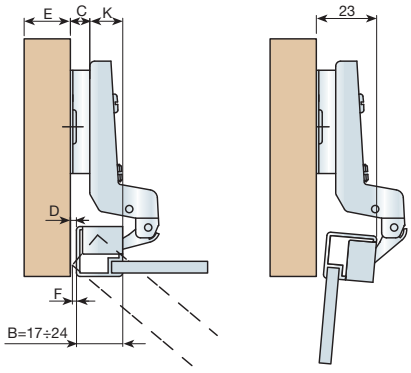



Hinges / Door

MESUCO 131X Opening 165°

Full overlay

Calculation of the height of the plate
K = 12
A = 2
B = 4
E = 16
C ?
C = K+A+B-E
C = 12+2+4-16
C = 2mm
K = Constant = 12mm

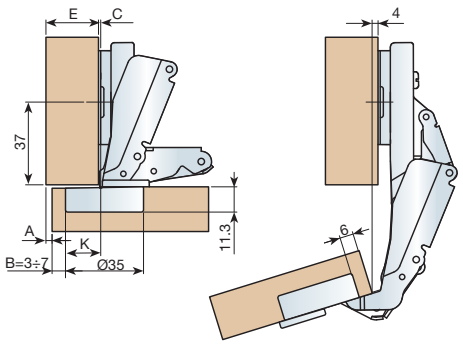

Half overlay

Calculation of the height of the plate
K = 3
A = 11
B = 4
E = 16
C ?
C = K+A+B-E
C = 3+11+4-16
C = 2mm
K = Constant = 3mm

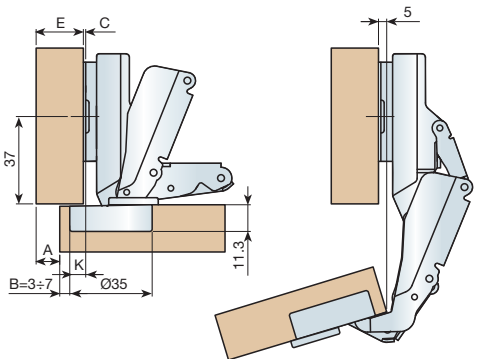

Full inset

Calculation of the height of the plate
K = -5
B = 4
D = 1
C ?
C = D+B+K
C = 1+4-5
C = 0mm
K = Constant = -5mm

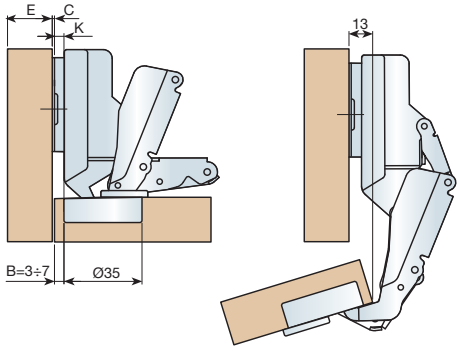



Hinges / Door

NOTES

MESUCO 8

Ø26 cup hinge.
“Slide on” assembly.

Top of the range.

MESUCO 8

Ø26 cup hinge. “Slide-on” assembly

High-range hinge.
Independent adjustment.
Twin screw for greater security and duration.

pp.

1 HINGE GROUP 117

2 COVERS 117

3 MOUNTING PLATES 118

4 TECHNICAL DATA 119

- Opening 95° 119
- Opening 95° Glass door hinge 120

1 HINGE GROUP



988.715.066*
* Supplied to order.



987.312.064

		Screw-fixed	With dowels	Glass door hinge		
		Steel	Steel	Nylon		
		Nickel	Nickel	White	Brown	Black
 0 mm.	Opening angle 95°	010.000.115	010.009.112	010.050.213	010.050.316	010.050.412
 10 mm.	Opening angle 95°	011.000.113	011.009.110	011.050.211	011.050.314	011.050.410
 17 mm.	Opening angle 95°	012.000.111	012.009.115	012.050.216	012.050.312	012.050.415

2 COVERS

Cover

Nylon	Silver-polish	351.600.222
Nylon	Gold-polish	351.600.233
Nylon	Black	351.600.255



Adaptor

Nylon		351.610.000

Cover

Nylon	Silver-polish	351.800.223
Nylon	Gold-polish	351.800.234
Nylon	Black	351.800.256

Adaptor

Nylon		351.810.001

3 MOUNTING PLATES

HEIGHT mm.			0	2	4	7	10
	Screw-fixed	Zamak natural	080.000.001	080.000.104			
	Knock-in	Nylon White Brown Black	080.100.031 080.100.042 080.100.053	080.100.134 080.100.145 080.100.156	080.100.230 080.100.241 080.100.252	080.100.333 080.100.344 080.100.355	080.100.436 080.100.440 080.100.451
	Screw-fixed	Nickel-plated steel Nickel-plated Zamak		080.203.126	080.203.222	080.203.314	080.203.410
	Knock-in	Nickel-plated Steel Nickel-plated Zamak		080.303.123	080.303.226	080.303.311	080.303.414
	Screw-fixed (With centerer)	Nickel-plated Steel		080.503.124	080.503.220		
	Knock-in (With centerer)	Nickel-plated Steel		080.803.122	080.803.225		
	Pre-mounted euroscrew	Nickel-plated steel Nickel-plated Zamak		080.603.121	080.603.224	080.603.316	080.603.412
	EURO-SCREW H = 11 - Ref.: 951.211.063 H = 13 - Ref.: 951.213.060 (STANDARD)		3 ADJUSTMENTS				

4 TECHNICAL DATA

MESUCO 8: Opening 95°

Full overlay

Calculation of the height of the plate
K = 13
B = 3
A = 4
E = 16
C ?
C = K+A+B-E
C = 13+4+3-16
C = 4mm
K = Constant = 13mm

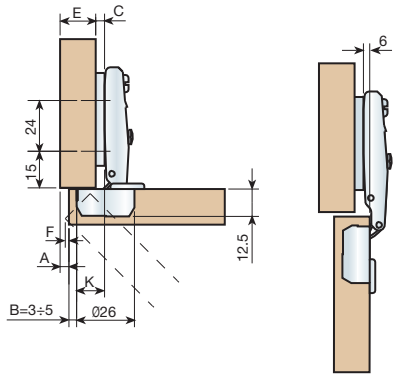

Half overlay

Calculation of the height of the plate
K = 3
B = 3
A = 12
E = 16
C ?
C = K+A+B-E
C = 3+12+3-16
C = 2mm
K = Constant = 3mm

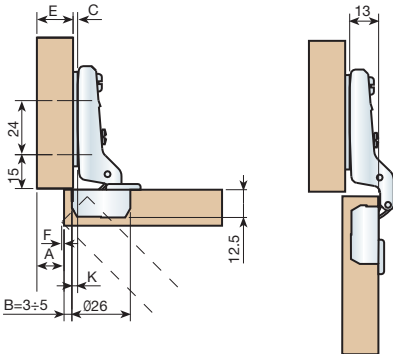

Full inset

Calculation of the height of the plate
K = -4
B = 5
D = 1
C ?
C = D+B+K
C = 1+5-4
C = 2mm
K = Constant = -4mm

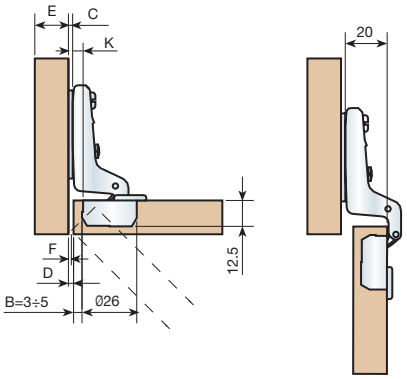

Lateral door displacement (F).

mm	Door thickness								
B	**16**	**17**	**18**	**19**	**20**	**21**	**22**	**23**	**24**
3	0,8	1,1	1,6	2,3	3,2	4	4,8	5,6	6,5
4	0,75	1,1	1,4	2	2,8	3,5	4,3	5,1	5,8
5	0,7	1	1,3	1,8	2,5	3,2	4	5	5,4



Hinges / Door

MESUCO 8: Opening 95° Glass door hinge

Full overlay

Calculation of the height of the plate
K = 13
B = 4
A = 1
E = 16
C ?
C = K+A+B-E
C = 13+1+4-16
C = 2mm
K = Constant = 13mm

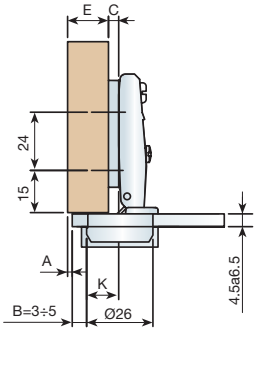

Half overlay

Calculation of the height of the plate
K = 3
B = 5
A = 10
E = 16
C ?
C = K+A+B-E
C = 3+10+5-16
C = 2mm
K = Constant = 3mm

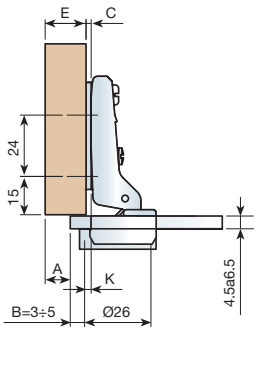

Full inset

Calculation of the height of the plate
K = -4
B = 5
D = 1
C ?
C = D+B+K
C = 1+5+4
C = 2mm
K = Constant = -4mm

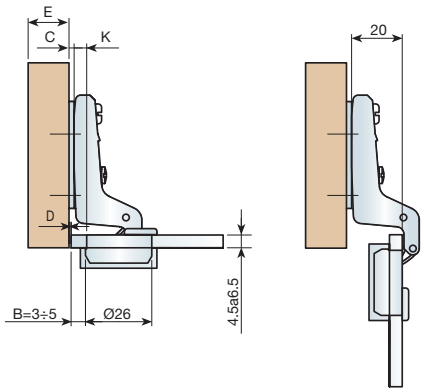

MESUCO 8X

Ø26 cup hinge.
“Slide on” assembly.

Mid-range

MESUCO 8X

Ø26 cup hinge. “Slide-on” assembly

Mid-range hinge.
Twin screw for greater security and duration.
For doors with a thickness of 12 ÷ 22mm.

pp.

1 HINGE GROUP 123

2 MOUNTING PLATES 124

3 TECHNICAL DATA 125
- Opening 95° 125

1 HINGE GROUP

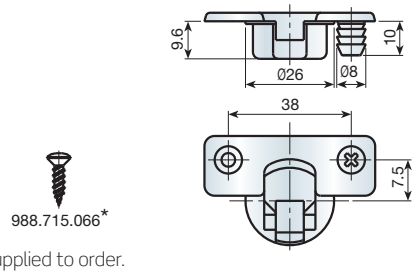

988.715.066*

* Supplied to order.



		NICKEL	
	STEEL	STEEL	STEEL
	Screw-fixed	**With dowels**	**Pre-mounted euroscrew**
 0 mm. OPENING ANGLE 95°	318.010.066	318.020.065	318.030.064
 10 mm. OPENING ANGLE 95°	318.011.061	318.021.060	318.031.066
 16 mm. OPENING ANGLE 95°	318.012.063	318.022.062	318.032.061

2 MOUNTING PLATES

HEIGHT OF THE PLATE in mm.				0	2	4
		Screw-fixed	Nickel-plated steel	350.010.065	350.012.062	350.014.066
		Knock-in	Nickel-plated steel	350.020.064	350.022.061	350.024.065
		Pre-mounted euroscrew	Nickel-plated steel	350.030.063	350.032.060	350.034.064

3 TECHNICAL DATA

MESUCO 8X Opening 95°

Full overlay

Calculation of the height of the plate
K = 11
B = 5
A = 2
E = 16
C ?
C = K+A+B-E
C = 11+2+5-16
C = 2mm
K = Constante = 11mm

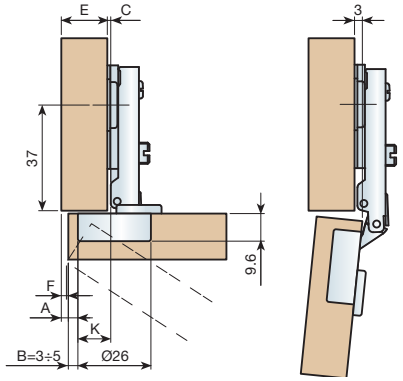

Half overlay

Calculation of the height of the plate
K = 1
B = 5
A = 12
E = 16
C ?
C = K+A+B-E
C = 1+12+5-16
C = 2mm
K = Constante = 1mm

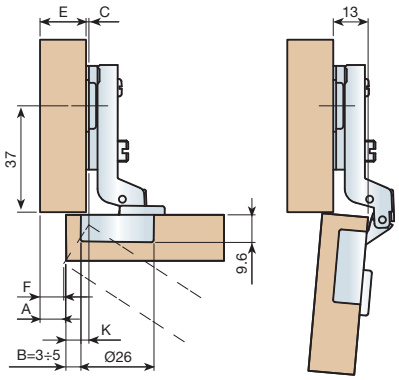

Full inset

Calculation of the height of the plate
K = -5
B = 4
D = 1
C ?
C = D+B+K
C = 1+4-5
C = 0mm
K = Constante = -5mm

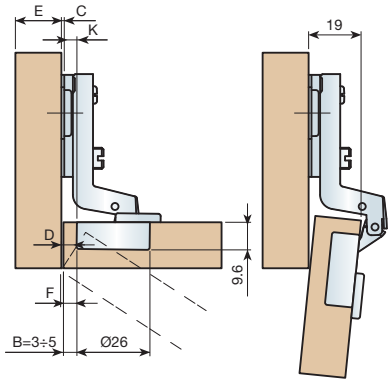

Lateral door displacement (F).

mm	Door thickness								
B	16	17	18	19	20	21	22	23	24
3	1,6	2,4	3,2	4	4,9	5,8	6,7	7,6	8,5
4	1,4	2	2,8	3,6	4,4	5,3	6,1	7	7,9
5	1,3	1,8	2,4	3,2	4	4,8	5,6	6,5	7,3



Hinges / Door

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

SPECIAL HINGES

SPECIAL HINGES

pp.

1 CORNER HINGE 130

■ **MESUCO** corner hinge 130

Corner hinge with three adjustments, for doors with a thickness of 14 to 24mm.
For thicker doors, the mounting plate will be placed closer to the end (according to thickness). It can be mounted on any mesuco 14 rapid, or mesuco 14 mounting plate, depending on the hinge. This hinge can be used with a 172° hinge.

---

2 CONCEALED HINGES 131

■ Cylindrical 131

Full metal with plastic housing.
Specially designed for folding tables. Can be used in doors, windows, etc.

Solid brass, 180 opening angle, unhanded hinges. Specially designed for folding tables. Can be used in doors, windows, etc.

■ Oval 133

Eight connecting rods per set, obtaining a heavy duty fitting.

pp.

3 HINGES FOR DESKS 134

■ Plastic 134

Specially designed to be used with thin chipboard. The decorative flange covers
Most of the chipboard breakouts.
There are three available adaptors for different configurations.

■ Zamak hinge for top flap doors 135

This hinge has three adjustments and can be dismantled. Both cups to be mounted into 35 mm. diameter drill-holes. The decorative flange covers most of the chipboard breakouts.

4 HINGES FOR FOLDING TABLES 136

■ CHAMPI 136

5 SINGLE SHAFT HINGES 137

■ For wooden doors 137

■ For glass doors 138

This type of hinge comes with a decorative aluminium cover,
Which is protected by adhesive paper, to keep it in perfect condition. The glass is held tight by screws, and the glass is supported between plastic and aluminium.

1 CORNER HINGE

MESUCO corner hinge

Corner hinge with three adjustments, for doors with a thickness of 14 to 24mm. For thicker doors, the mounting plate will be placed closer to the end (according to thickness). It can be mounted on any mesuco 14 rapid, or mesuco 14 mounting plate, depending on the hinge. This hinge can be used with a 172° hinge.

Mesuco 14 rapid.

Nickel-plated	090.100.172	125

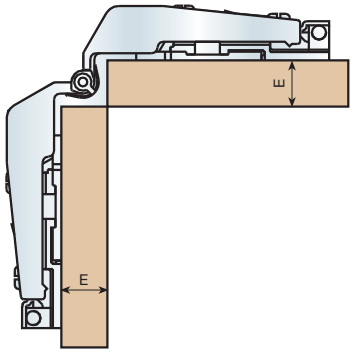

Mesuco 14.

Nickel-plated	090.100.161	125

HINGE	E (mm)	14	16	18	20	22	24
090.100.172	height	4	2	2	2	2	-
090.100.161	height	4	2	0	0	0	0

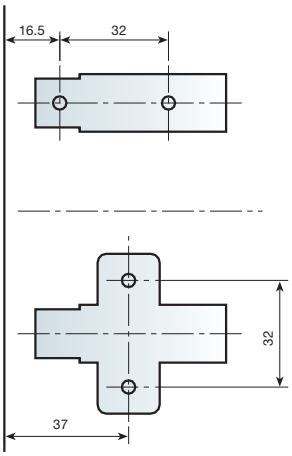

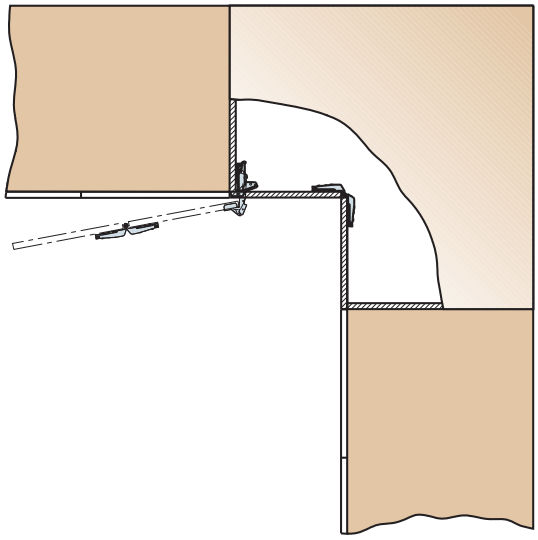

2 CONCEALED HINGES

Plastic cylindrical hinges

Full metal with plastic housing.
Specially designed for folding tables. Can be used in doors, windows, etc.

Ø12 mm. concealed hinge, knock-in mounting.

Oak	305.112.194	500



Ø14 mm. concealed hinge, knock-in mounting.

Oak	300.814.194	500



Easy mounting. Place each cylinder in front of the holes made following the drawing. Knock-in with a hammer.

Brass cylindrical hinges

Solid brass, 180 opening angle, unhanded hinges. Specially designed for folding tables. Can be used in doors, windows, etc.

Ø10 mm. concealed hinge

Brass	300.510.103	250

Ø2,5 mm. flathead screw required.



Ø12 mm. concealed hinge

Brass	300.512.100	250

Ø3 mm. flathead screw required.



Ø14 mm. concealed hinge

Brass	300.514.104	250

Ø3,5 mm. flathead screw required.



Ø16 mm concealed hinge

Brass	300.516.101	250

Ø3,5 mm. flathead screw required.



Oval concealed hinges

Eight connecting rods per set, obtaining a heavy duty fitting.

12 mm. concealed hinge, oval housing

Solid brass	300.012.101	250
Brass-plated Zamak	300.012.112	

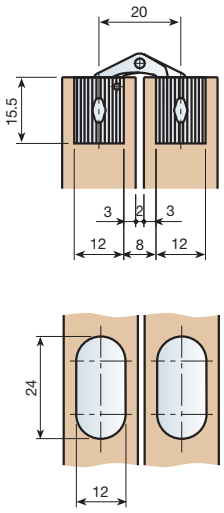

13 mm. concealed hinge, oval housing

Brass	300.013.103	250

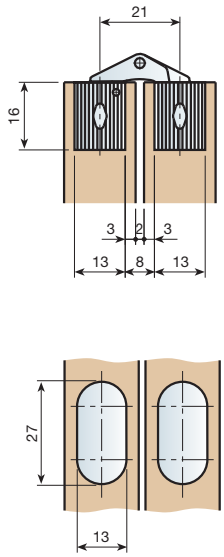

Drill a slightly smaller hole than the diameter of the hinge. Knock it in smoothly with a hammer and tighten it with two screws.

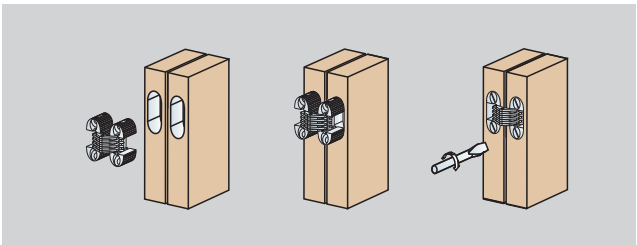

3 HINGES FOR DESKS

Plastic

Nylon hinge 8 x Ø30 mm.

Brown	303.008.016	50
Black	303.008.020	

Screws supplied with the product.

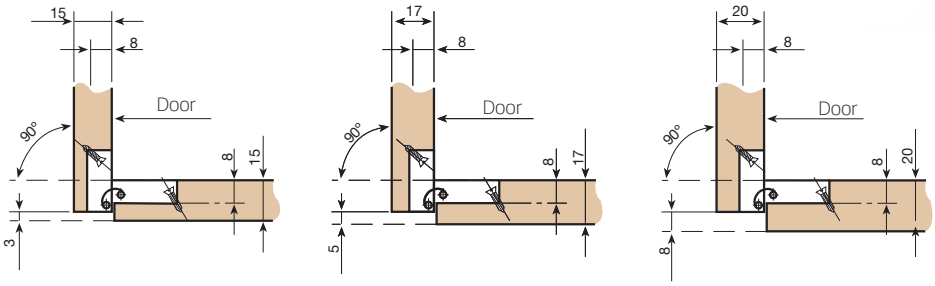

Nylon hinge 11 x Ø30 mm.

Brown	303.011.015	50
Black	303.011.026	

Screws supplied with the product.

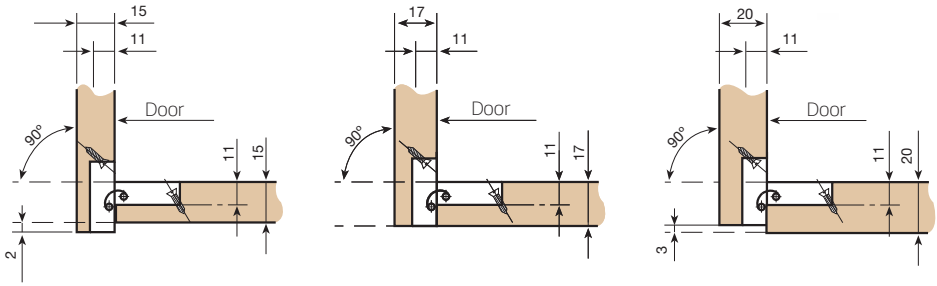

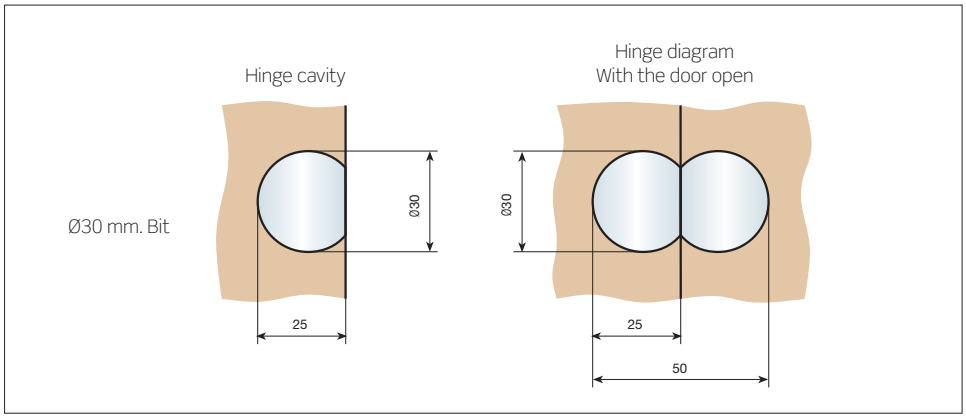

Plastic for top flap doors

Specially designed to be used with thin chipboard. The decorative flange covers most of the chipboard breakouts.
There are three available adaptors for different configurations.

Adaptable hinge for top flap doors

Metal grey	314.230.092	1000





Adaptors for different configurations

	6mm.	8,5mm.	10mm.	
Metal grey	314.306.090	314.308.094	314.310.091	250



A	B
6	11
8,5	8,5
10	7

Zamak hinge for top flap doors

This hinge has three adjustments and can be dismantled. Both cups to be mounted into 35 mm. diameter drill-holes. The decorative flange covers most of the chipboard breakouts.

Adjustable hinge for top flap doors

Nickel-plated	313.012.066	250

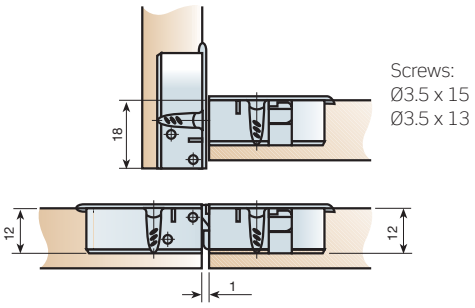

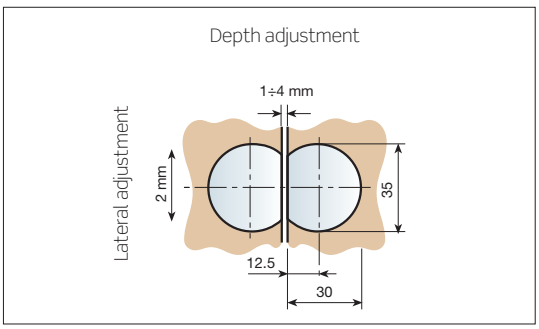

4 HINGES FOR FOLDING TABLES

CHAMPI

Metal hinge 20-35.

Nickel-plated	300.935.062	250

Screws supplied with the product.

How to place: The cavity is made in one operation with a two-diameter bit. Next, insert the hinge and secure in place with the screws.

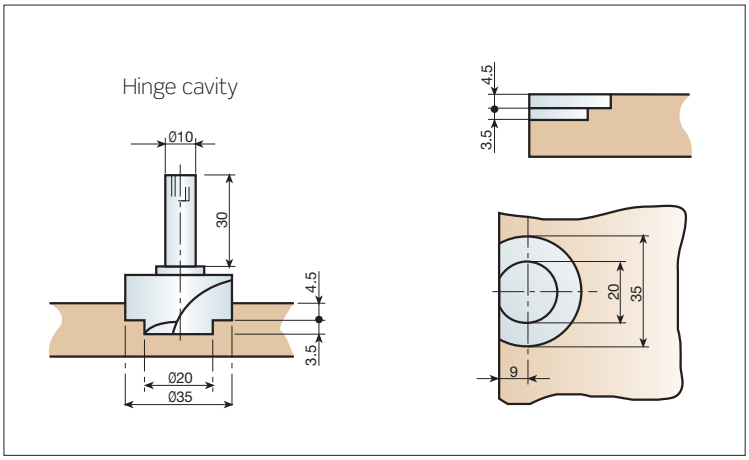



Table in closed position

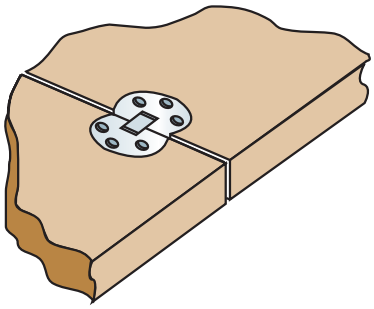

Table in open position

5 SINGLE-SHAFT HINGES

For wooden doors

Bushing.

Steel	Brass-plated	919.500.116	250

Nickel-plated hinge.

A	B	Door thickness	Code	
12,2	9,7	12mm. a 16mm.	314.006.066	
15,2	12,7	16mm. a 25mm.	314.106.063	500
25,2	22,7	26mm. a 30mm.	314.116.062	

Mounting plate.

Steel	Brass-plated	390.820.065	1000

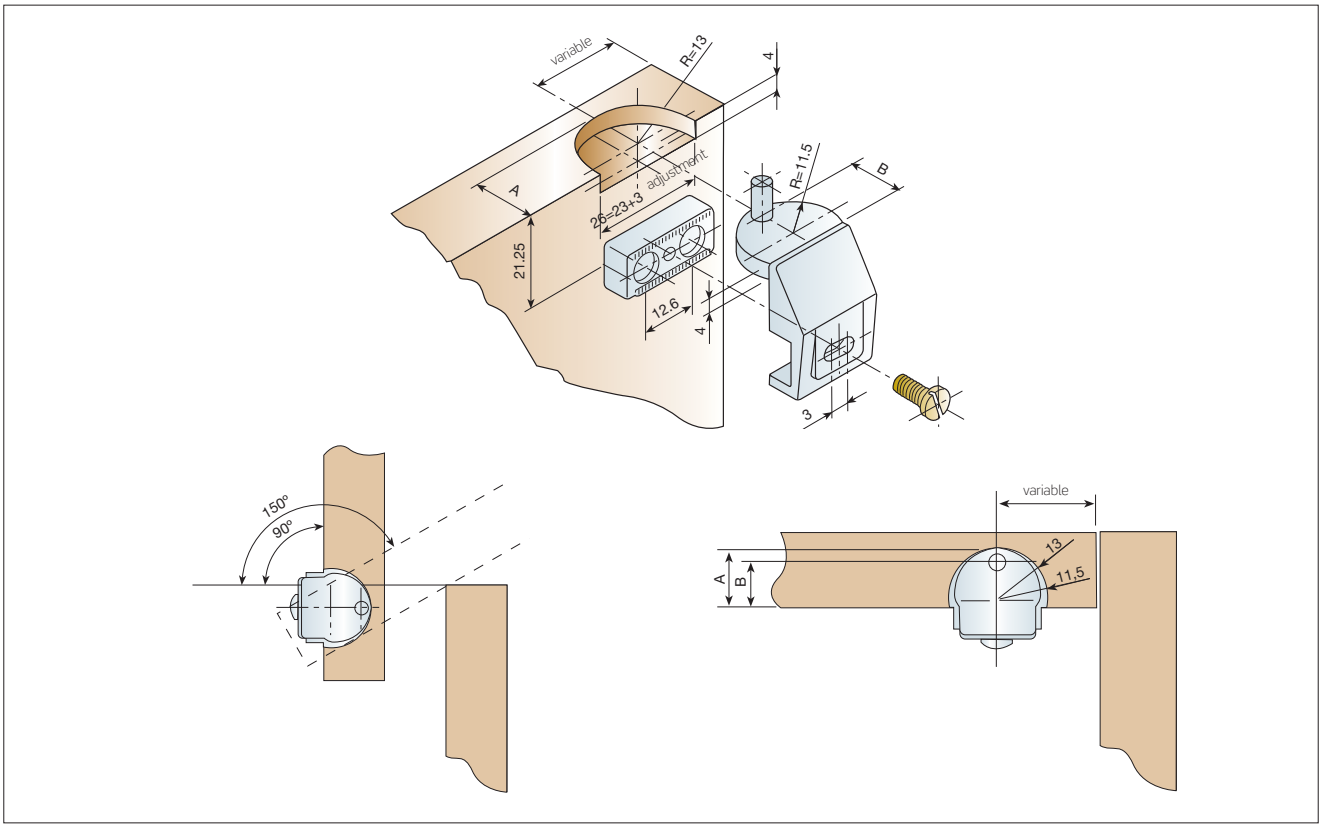

For glass doors

This type of hinge comes with a decorative aluminium cover, which Is protected by adhesive paper, to keep it in perfect condition. The glass is held tight by screws, and the glass is supported between plastic and aluminium.

Upper or lower hinge.

Scratched silver	301.521.205	500
Scratched gold	301.521.216	
Polished silver	301.521.220	
Polished gold	301.521.231	

The bushings and steel guide are supplied with the product.





For glass doors: with optional catch

This type of hinge comes with a decorative aluminium or plastic cover, which is protected by adhesive paper, to keep it in perfect condition. The glass is held tight by screws, and the glass is supported between plastic and aluminium.



Upper hinge right-hand or lower hinge left-hand door.

Nylon black	301.850.021	
Scratched silver	301.550.200	
Scratched gold	301.550.211	250
Polished silver	301.550.222	
Polished gold	301.550.233	

The bushings and steel guide are supplied with the product.

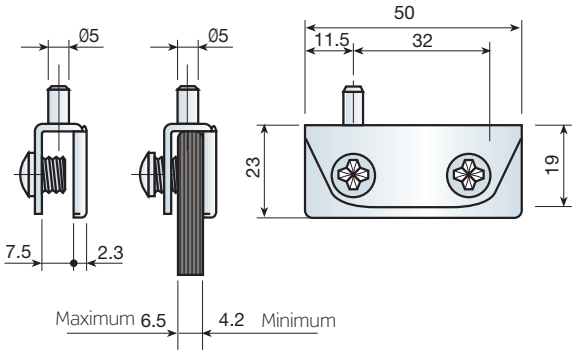

Lower hinge right-hand or upper hinge left-hand door.

Nylon black	301.950.025	
Scratched silver	301.650.204	
Scratched gold	301.650.215	250
Polished silver	301.650.226	
Polished gold	301.650.230	

The bushings and steel guide are supplied with the product.

Brass catch.

	919.000.106	1000

The bushings and steel guide are supplied with the product.



For glass doors: with optional catch

Upper hinge right-hand or lower hinge left-hand door.

Nylon black	314.842.021	
Scratched silver	314.842.205	
Scratched gold	314.842.216	250
Polished silver	314.842.220	
Polished gold	314.842.231	

The bushings and steel guide are supplied with the product.

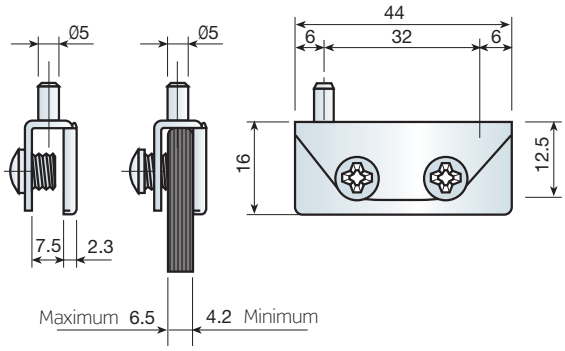



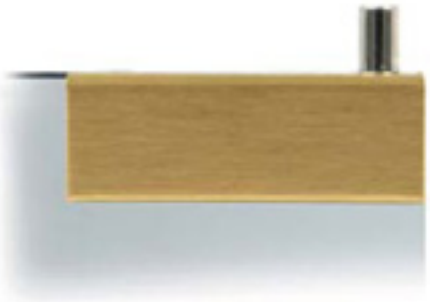

Lower hinge right-hand or upper hinge left-hand door.

Nylon black	314.942.025	
Scratched silver	314.942.202	
Scratched gold	314.942.213	250
Polished silver	314.942.224	
Polished gold	314.942.235	

The bushings and steel guide are supplied with the product.

Brass catch.

	919.000.106	1000



PIVOT ARMS FOR DROP-DOWN DOORS

1 PIVOT ARM WITH ADJUSTABLE BRAKE AND AUTOMATIC CLOSING ..... *pp.* 142

2 PIVOT ARM WITH AUTOMATIC BRAKE 143

3 **2-HAND** PIVOT ARM 144

4 4 PIVOT ARM WITH TWIN-ADJUSTMENT BRAKE 145

1 PIVOT ARM WITH ADJUSTABLE BRAKE AND AUTOMATIC CLOSING

Pivot arm that can be used with both hands. It has an elegant design, Screw-on assembly, self-closing system and manual opening speed adjustment.

Aluminium carcass

Silver anodized	813.035.510	100

Carcass in aluminium, body and brackets in steel.

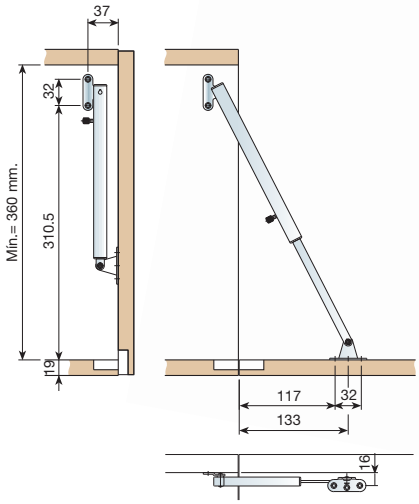

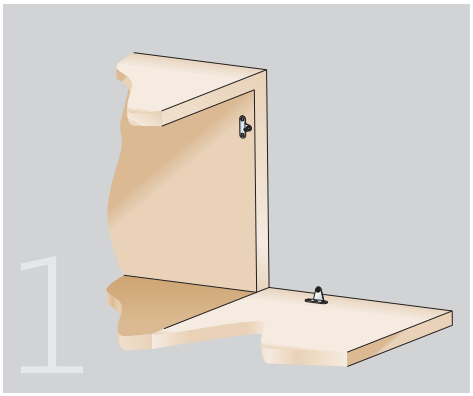

Screw brackets to the cabinet side
Brackets can be used for the right or the left.

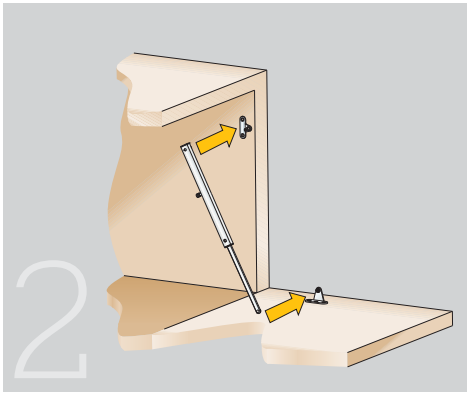

Clip on the pivot arm to the brackets.

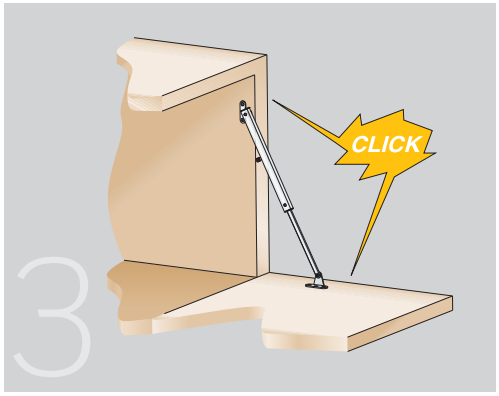

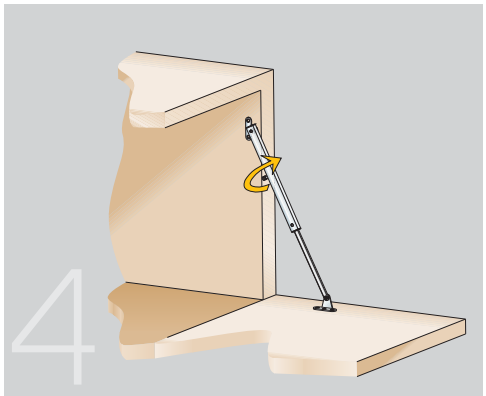

It can be manually adjusted just by turning the screw.

2 PIVOT ARM WITH AUTOMATIC BRAKE

Pivot arm with metal structure.

		Left	Right	
Nickel-plated	300	823.530.061	823.130.066	100
Nickel-plated	370	823.537.061	823.137.066	

The clamping supports and the brake adjusters are made of black nylon.

Pivot arm with nylon structure.

			Left	Right	
Brown	Ral 8016	300	813.530.012	813.130.010	100
Brown	Ral 8016	370	813.537.012	813.137.010	
Black	Ral 9005	300	813.530.023	813.130.021	
Black	Ral 9005	370	813.537.023	813.137.021	

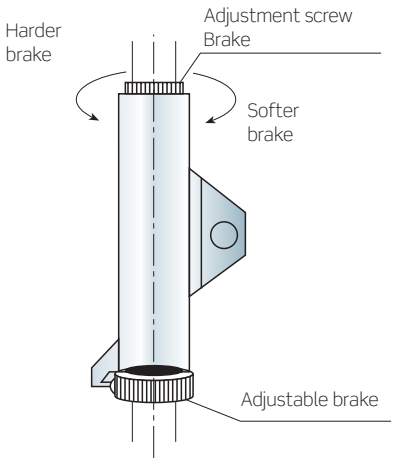

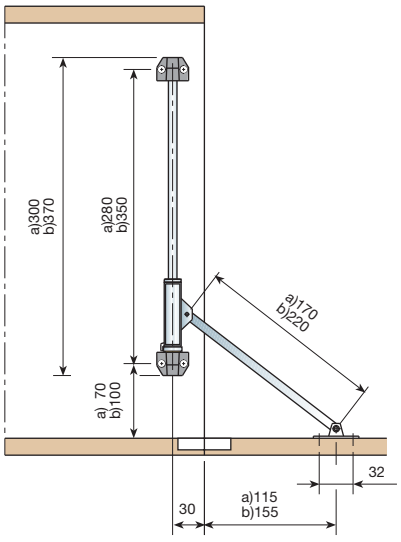

3 2-HAND PIVOT ARM

2-Hand pivot arm that can be used both for the right and left sides.

Pivot arm.

			D	
White	Ral 9003	256	813.925.000	
White	Ral 9003	288	813.928.006	
White	Ral 9003	320	813.932.000	
Brown	Ral 8016	256	813.925.011	
Brown	Ral 8016	288	813.928.010	100
Brown	Ral 8016	320	813.932.011	
Black	Ral 9005	256	813.925.022	
Black	Ral 9005	288	813.928.021	
Black	Ral 9005	320	813.932.022	

The clamping supports and the brake adjusters are made of nylon.

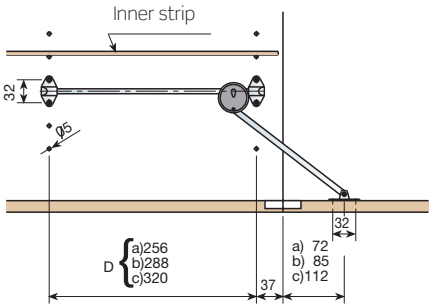

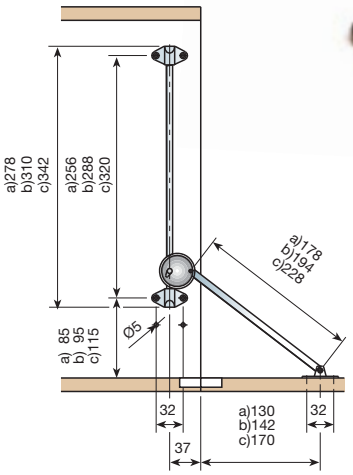

Nylon headless nut.

Natural	949.500.101	200



4 PIVOT ARM WITH TWIN-ADJUSTMENT BRAKE

Pivot arm with automatic brake. Quick adjustment using the lateral screw. Tighten that screw to achieve maximum braking.

Pivot arm with twin-adjustment brake.

White	Ral 9003	819.900.001	
Brown	Ral 8016	819.900.012	100
Black	Ral 9005	819.900.023	

A brake adjustment screw

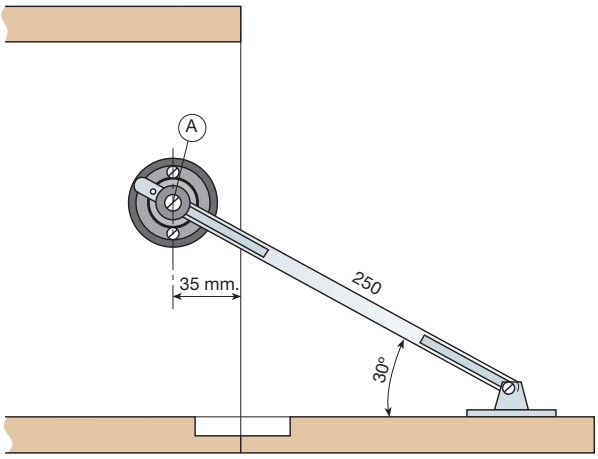

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

DELTA

Multi-purpose fitting

Pivot arms and fittings for lift-up doors.

DELTA multi-purpose fitting for lift-up, drop-down hinged doors and lids. It holds the door open and, depending on its adjustment, brakes the door as it drops or holds it in intermediate positions. The fitting itself may be fitted on the right or on the left. The unusual design gives the element stylish lines, reduced size, and makes it extremely hard-wearing.

DELTA

Multi-purpose fitting

Pivot arms and fittings for lift-up doors.

pp.

1 MULTI-PURPOSE FITTING **DELTA** 151

- Configuration of fitting 152
- Assembly 153
- Technical data 155

1 MULTI-PURPOSE FITTING DELTA

Fitting for hinged doors and lids.

Nickel plated zamak	810.000.063	100

Bracket for fixing to the side panel.

Drilling distance			
Hinged doors	Lids		
28mm.	50mm.	810.328.061	200

Bracket for fixing to the side panel.

Drilling distance			
Hinged doors	Lids		
37mm.	59mm.	810.237.062	200

Bracket for fixing to the door.

Type of door		
Timber	810.400.065	
Aluminium frame	810.500.062	200

Bag of fittings.

1 fitting +1 bracket for side +1 bracket for door	810.100.060

Supplied in boxes of 50 bags each containing one fitting for hinged doors and lids, one bracket for fixing to the side panel 37 mm from the edge and one bracket for timber doors.

It is also adaptable to glass doors with aluminium frames.

Configuration of fitting

Depending on the force adjustment, a variety of positions can be achieved with the 4 mm allen screw (b), from simply braking the door when dropping to the intermediate positioning of the door.

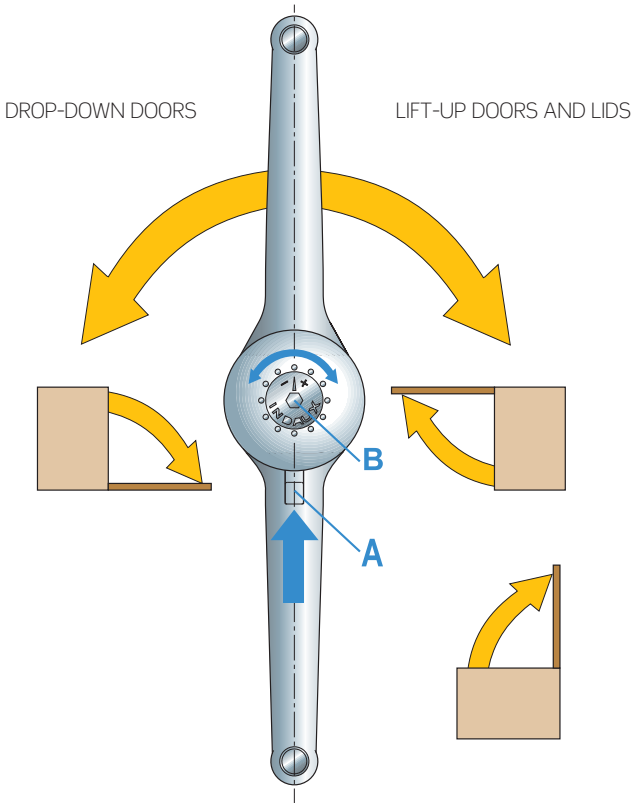

Simply pressing the actuator (a) permits the upper arm to be passed to one side or the other, changing the braking action from braking when closing to braking when opening. In this way the functioning for lift-up doors and lids is changed to functioning for drop-down doors.

Assembly

The fitting is very easy to assemble. When the brackets have been screwed in place independently, the fitting can be fitted into them manually, and it can therefore be supplied separately.

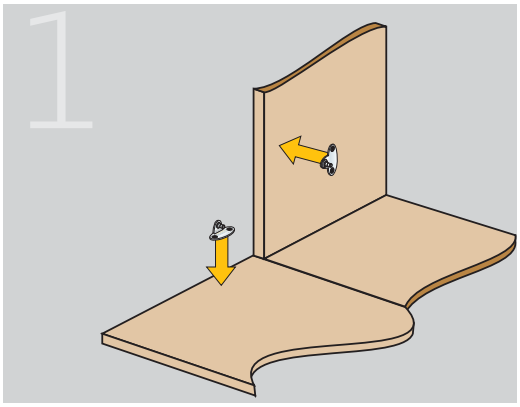

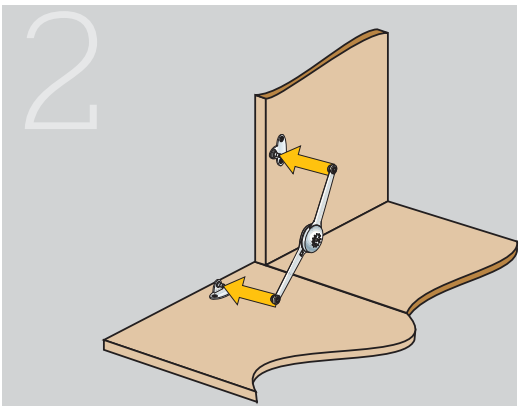

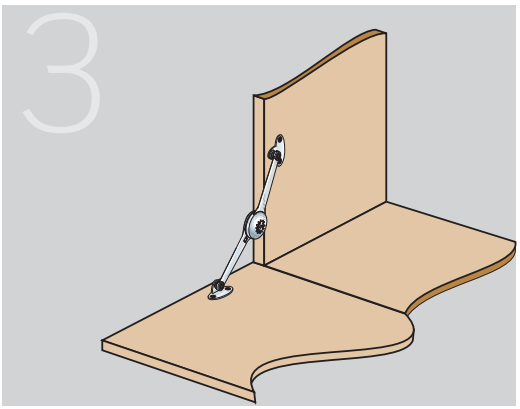

Technical data

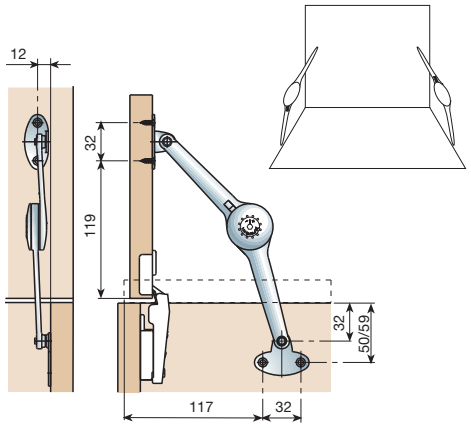

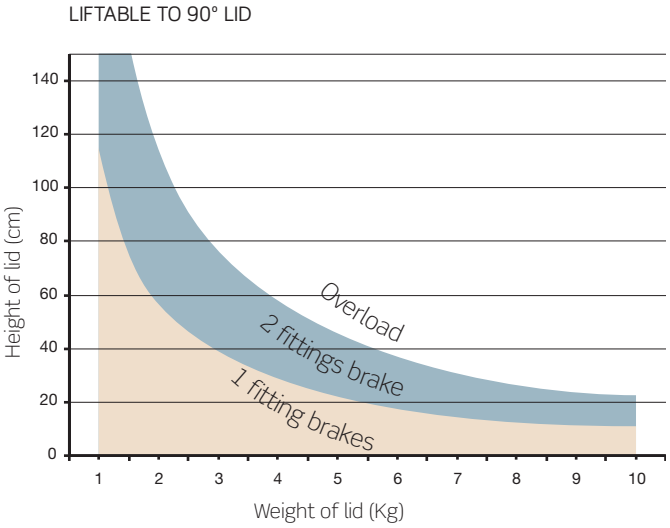

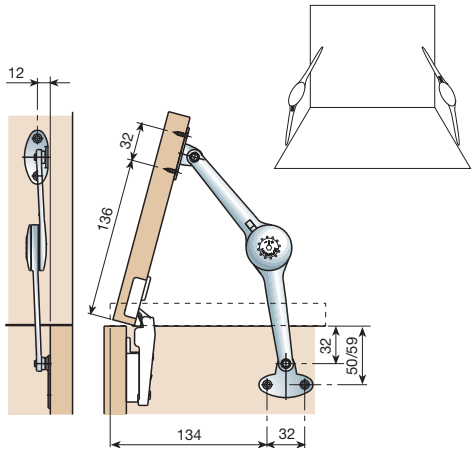

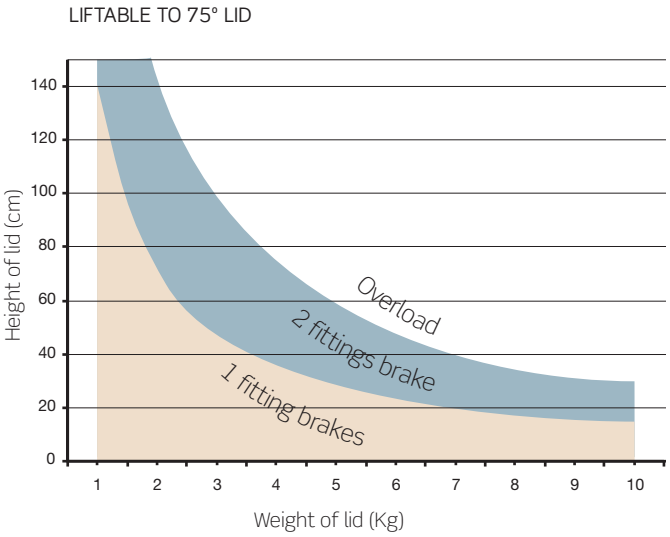

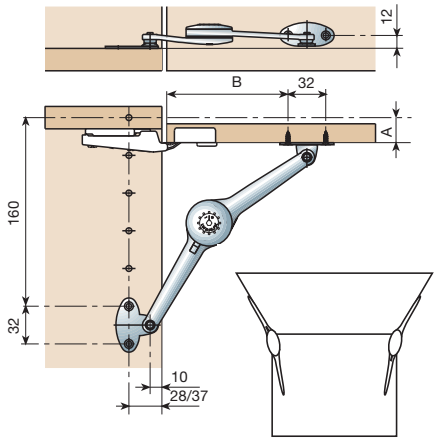

LIFTABLE TO 90° DOOR

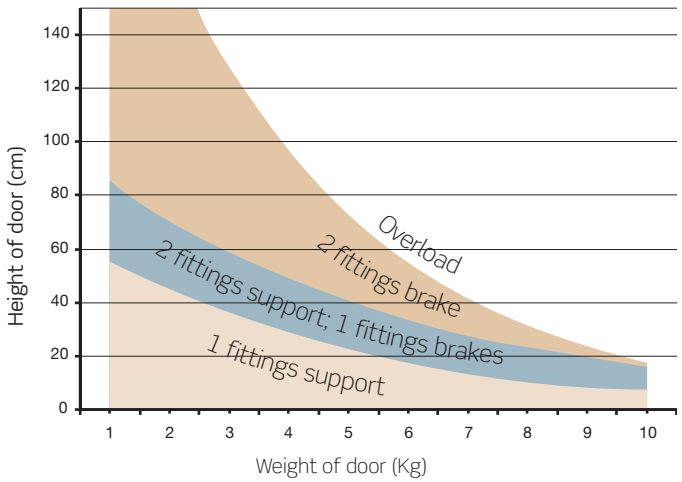

A	B
8	90
9	91
10	92
11	93
12	95
13	96
14	97
15	98
16	99
17	100
18	101
19	102
20	103
21	103
22	104
23	105
24	105
25	106

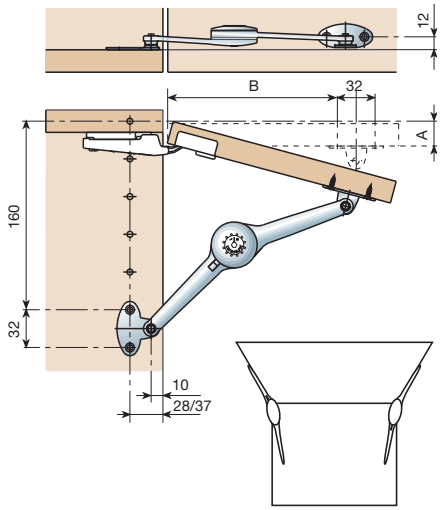

LIFTABLE TO 75° DOOR

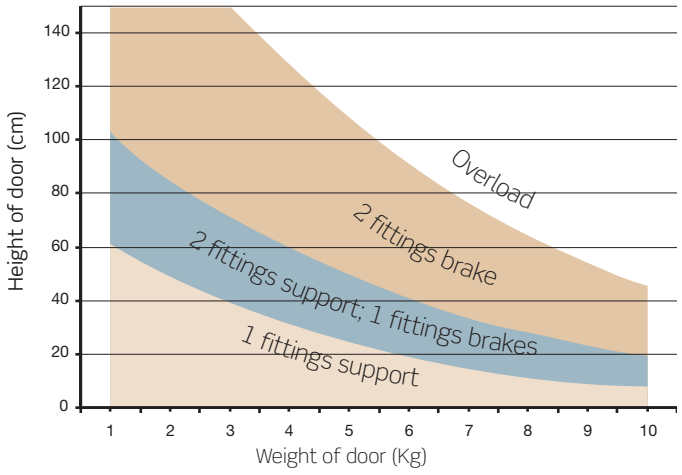

A	B
8	132
9	133
10	134
11	135
12	137
13	138
14	139
15	140
16	141
17	142
18	143
19	143
20	144
21	144
22	145
23	146
24	146
25	147

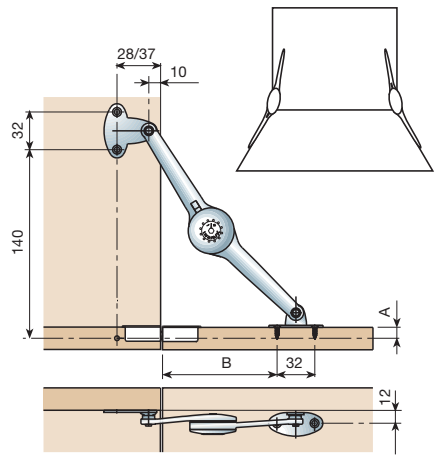

DROP-DOWN DOOR

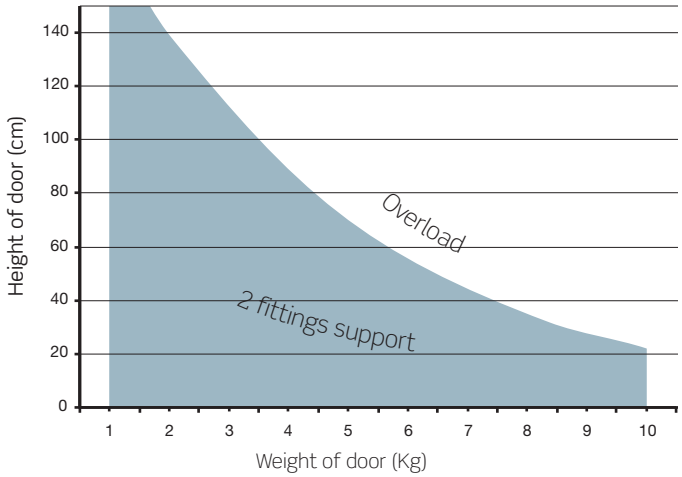

A	B
8	98
9	99
10	100
11	101
12	103
13	104
14	105
15	106
16	107
17	108
18	109
19	110
20	111
21	111
22	112
23	113
24	113
25	114

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

PNEUMATIC PIVOT ARMS

and Lifting devices 2

Pneumatic pivot arms and lifting devices for lift-up and drop-down doors.

1 PNEUMATIC LIFTING DEVICES 2

Pneumatic lifting devices for wooden and aluminium doors.

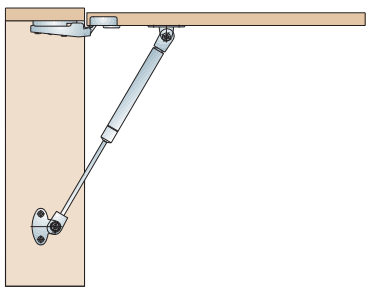

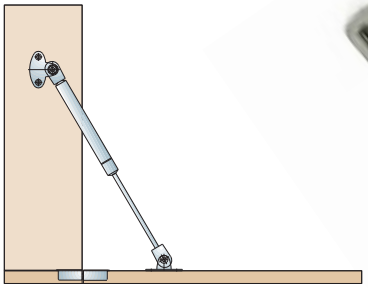

Upward doors lifting device.

Force (Kg)	Metallic grey	
6 kg.	804.206.141	
8 kg.	804.208.145	
10 kg.	804.210.142	50
12 kg.	804.212.146	
15 kg	804.215.145	

Bag of fittings.

Force (Kg)	Per unit	
6 kg.	804.306.101	
8 kg.	804.308.105	
10 kg.	804.310.102	20
12 kg.	804.312.106	
15 kg	804.315.105	

Each bag contains a lifting device, a side-fixing bracket, a bracket for wooden doors, a bracket for aluminium frames and 5 3x12mm screws

Downward doors

	Metallic grey	
Lifting device only	804.800.146	50
Complete set	804.900.143	20

Each bag contains lifting device, a side-fixing bracket, a bracket for wooden doors and a bracket for aluminium frames.

Select the lifting devices with a Nominal Force immediately above the calculated push force (x). If two lifting devices are used, it is enough for each one to have half the push force (x/2). 2 Stays: divide X/2

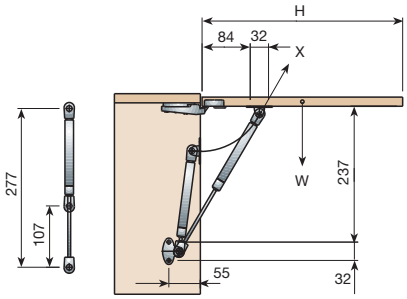

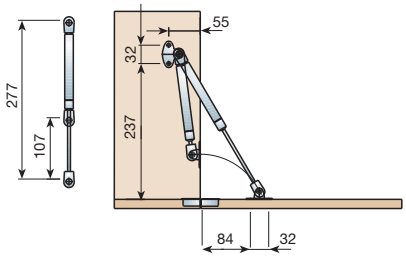

To calculate the required lifting forces use:

H = Door height (mm).
W = Door weight (kg).
X = Push force (kg).

$$X = \frac{6 \times W \times H}{1000}$$

Side bracket

Nickel-plated	812.000.066	100



Door bracket (wood)

Nickel-plated	812.100.063	100

Door bracket (aluminium)

Nickel-plated	812.200.060	100



Assembly

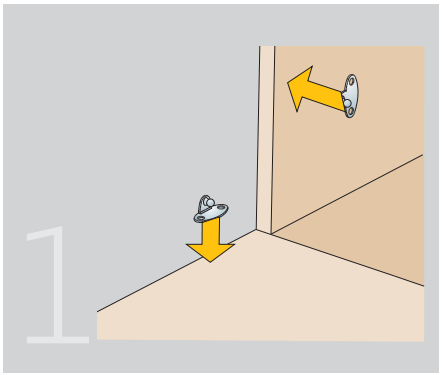

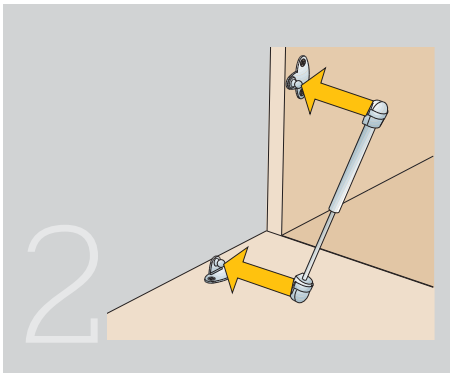

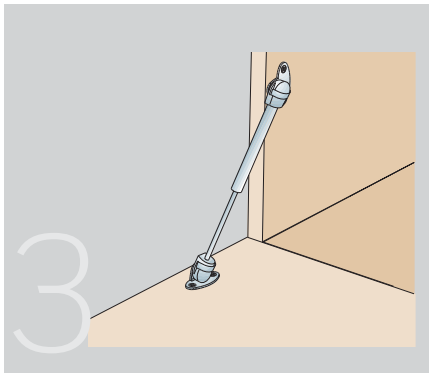

NOTES

FITTINGS FOR LIFT-UP DOORS

pp.

2 PIVOT ARMS FOR LIFT-UP DOORS 162

3 PIVOT ARM FOR LIFT-UP LIDS 163

4 HINGE FOR LIFT-UP DOORS 163

5 LIFTING DEVICE WITH SPRING 164

6 2-DOOR LIFTING DEVICE 165

2 PIVOT ARMS FOR UP-AND-OVER DOORS

The body and arm may be assembled separately, as the ensemble may be dismantled.

This pivot arm comes in nickel-plated zamak or in plastic, and can be used for right or left-hand doors.

250 mm pivot arm, with detachable arm.

Nickel-plated	826.900.060	100

Screws supplied with the item.

Assembly

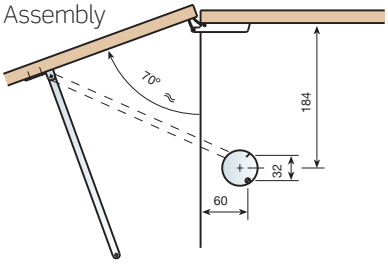

Pivot arm for lift-up doors, particularly for kitchen cupboards.
It can be used for right or left-hand doors.

250 mm pivot arm.

White	Ral 9003	816.900.000	100
Browin	Ral 8016	816.900.011	

Screws supplied with the item.

Assembly

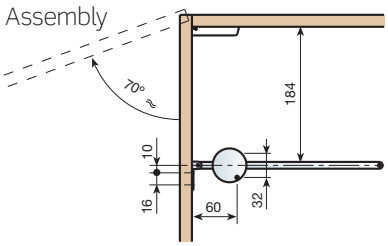

How to use

To open, lift the door to the top; let it fall and it will remain in a fully-fitted open position, with maximum safety. To close, slightly lift the door and it will automatically be released from its fixture, and continue its course a few centimetres before closing. It has a brake system to prevent knocks and thus ensure the door remains fully closed.

3 PIVOT ARM FOR LIFT-UP LIDS



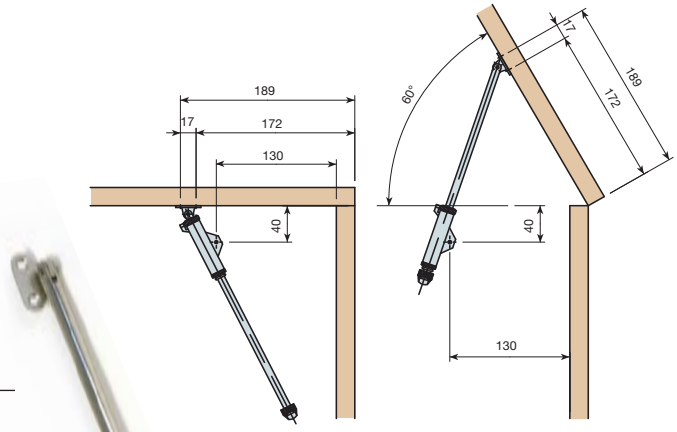

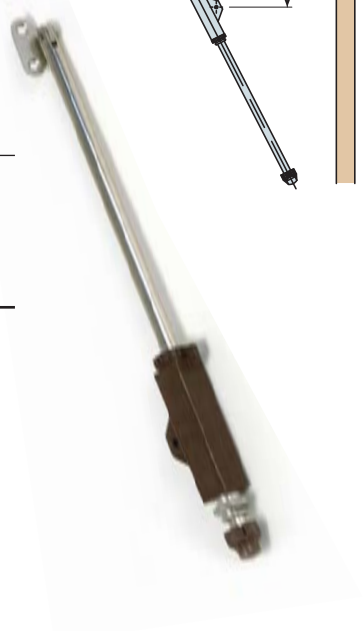

Pivot arm for lift-up lids. Length 250mm.

White	Ral 9003	814.900.004	100
Brown	Ral 8016	814.900.015	
Black	Ral 9005	814.900.026	

Screw and cap are supplied.

4 HINGES FOR UP-AND-OVER DOORS

A hinge with endless advantages:

- The door opens upwards and leaves access free. The inside is clearly visible and the door system works smoothly.
- The door lifts up automatically and is safely retained. Opening angle: 76°.
- Easy assembly both on the door and the cabinet side. Greater comfort.
- Top quality steel springs ensuring a high stabililty level and perfect closing.
- Anti-corrosion protection.
- Approved by the independent institute for furniture control.

Hinge for lift-up doors de 180 n.

	Left	Right	
White	800.101.805	800.102.800	20
Nickel-plated	800.101.061	800.102.063	

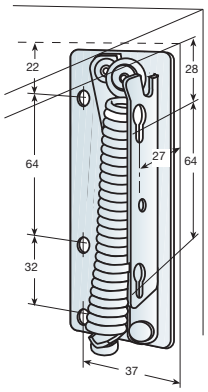

Hinge for lift-up doors up to 220 n with adjustment.

	Left	Right	
White	800.201.802	800.202.804	20

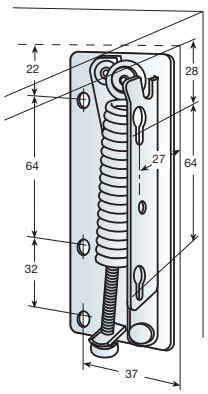

5 LIFTING DEVICE WITH SPRING

Lifting device with spring.

White	806.400.000	1

Every reference contains 1 right-hand lifting device, 1 left-hand lifting device, of white plastic covers. 1 set

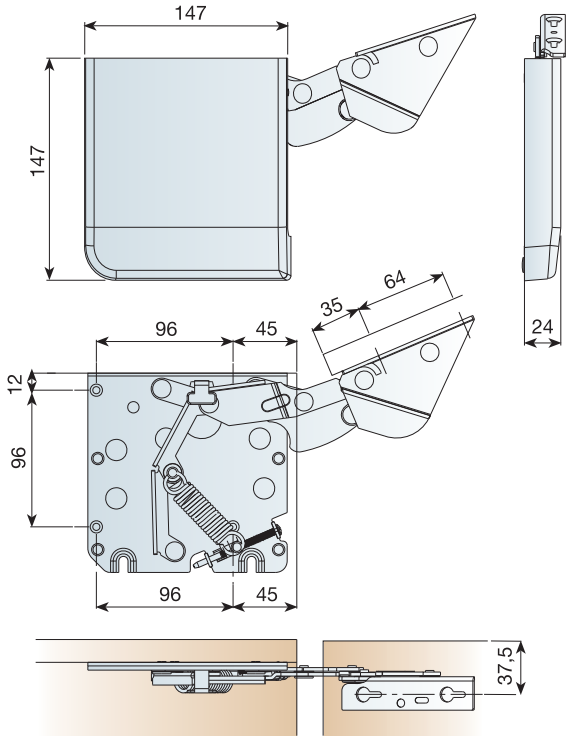

6 2-DOOR LIFTING DEVICE

2-Door lifting device

Grey	806.200.312	10

Every reference has 1 right-hand lifting device, 1 left-hand lifting device, 18 assembly screws, 2 rubber stops, 1 allen key.

Assembly table

Door height	A	B	C	D
340	116	232-S	225	50
350	104	242-S	230	45
360	91	253-S	235	35

For doors up to 900 mm wide. The total weight of the two doors must not exceed 7 kgs.

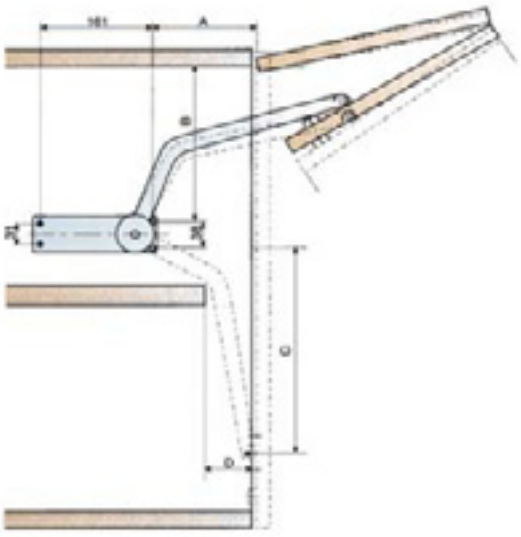

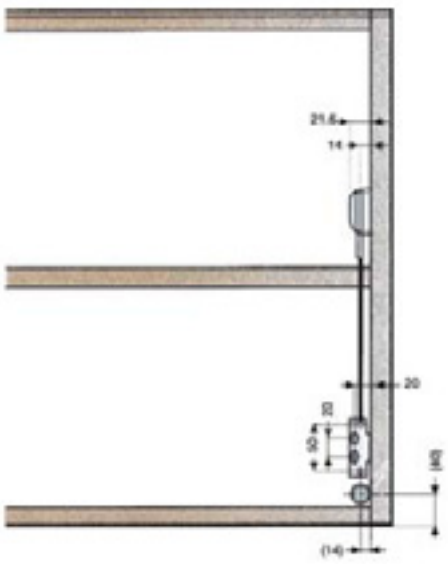

INDAUX
FURNITURE FITTINGS MANUFACTURER

03

KITCHEN EQUIPMENT AND SUPPORT ELEMENTS

Legs ... 168

1. Supporting leg for sides 1 ... 169
2. Supporting leg for sides 2 ... 171
3. Legs for units ... 173
4. **SANDY** Leg ... 184
5. Legs for tables ... 185
6. Supporting legs ... 185

Accessories for skirting boards ... 187

1. Plastic pin and supports ... 188
2. Steel pin and supports ... 189
3. **FLEXY** skirting board hook support ... 190
4. Skirting board joint and terminal ... 191

Equipment for inside the cabinet ... 192

1. Storage frames ... 194
2. Extension fittings ... 198
3. Bottle rack ... 200
4. Basket ... 202
5. Swivel trays ... 210
6. Waste bins ... 214
7. Pull-out hangers ... 214
8. Plate racks ... 213

Kitchen accessories ... 217

1. Work surface accessories ... 218
2. Kitchen accessories ... 222
3. Ventilation grille ... 223

LEGS

Stabilizer leg for sideboards.
Easy assembly and regulation.

pp.

1 ADJUSTABLE LEG FOR SIDEBOARDS 1 169

2 ADJUSTABLE LEG FOR SIDEBOARDS 2 171

3 CABINET LEGS 173

- **INTEX** leg 173
- **MAMUT-1** leg 173
- **MAMUT-5** leg 175
- **MAMUT-6** leg 177

4 **SANDY** LEG 182

5 LEGS FOR TABLES 185

6 SUPPORTING LEGS 185

- Supporting screw 185
- Supporting leg 185
- Nuts 186
- Levelling wedge 186

INDAUX
FURNITURE FITTINGS MANUFACTURER

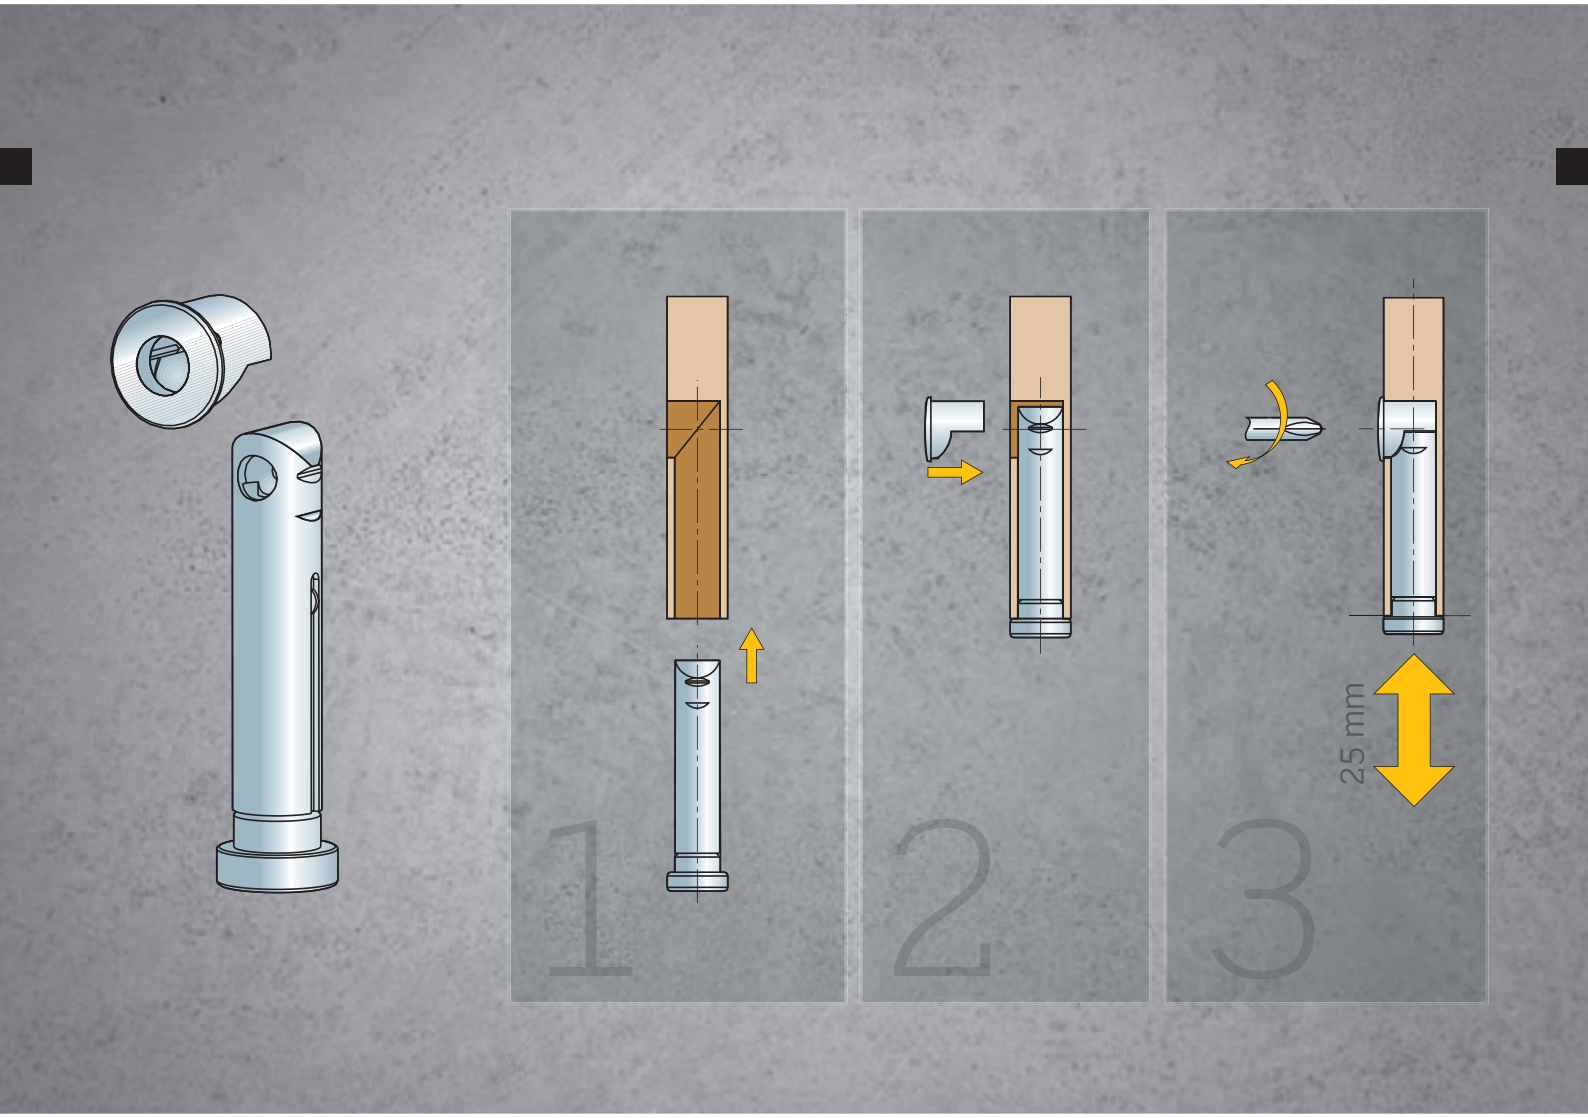

ADJUSTABLE LEG 1

For sideboards

1 ADJUSTABLE LEG FOR SIDEBOARDS 1

Stabilizer leg for sideboards from 16mm.
Easy assembly and adjustment up to 25mm.

Stabilizer leg, Ø12mm., and support cover.

	Sideboard thickness	Sideboard thickness	Sideboard thickness	
	e= 16-19	e= 20-25	e= 30-40	
C center	L = 14	L = 17	L = 24	
50	414.905.024	417.905.025	424.905.025	
70	414.907.021	417.907.022	424.907.022	
90	414.909.025	417.909.026	424.909.026	100
120	414.912.024	417.912.025	424.912.025	
140	414.914.021	417.914.022	424.914.022	

DRILLING IN SIDEBOARD

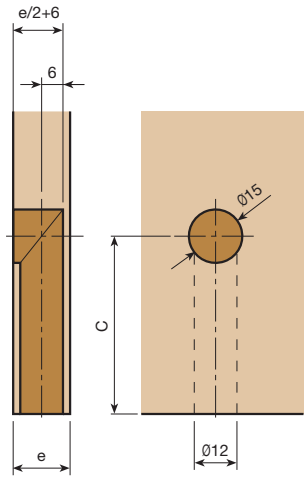

ASSEMBLY

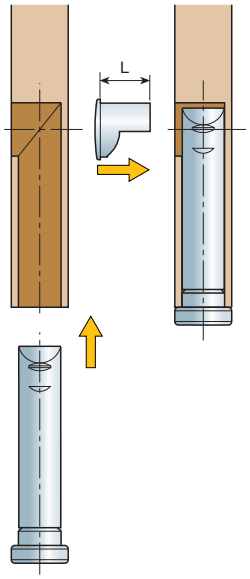

ADJUSTMENT

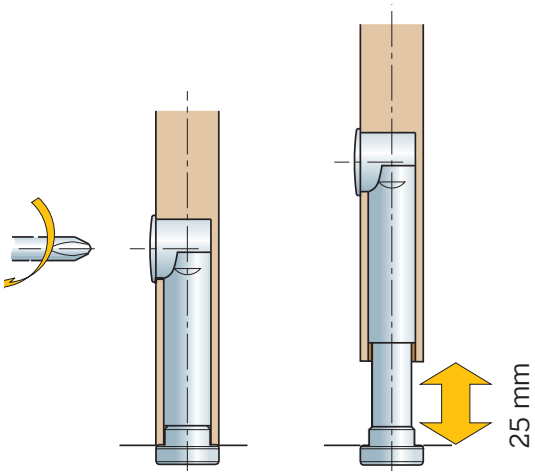

INDAUX
FURNITURE FITTINGS MANUFACTURER

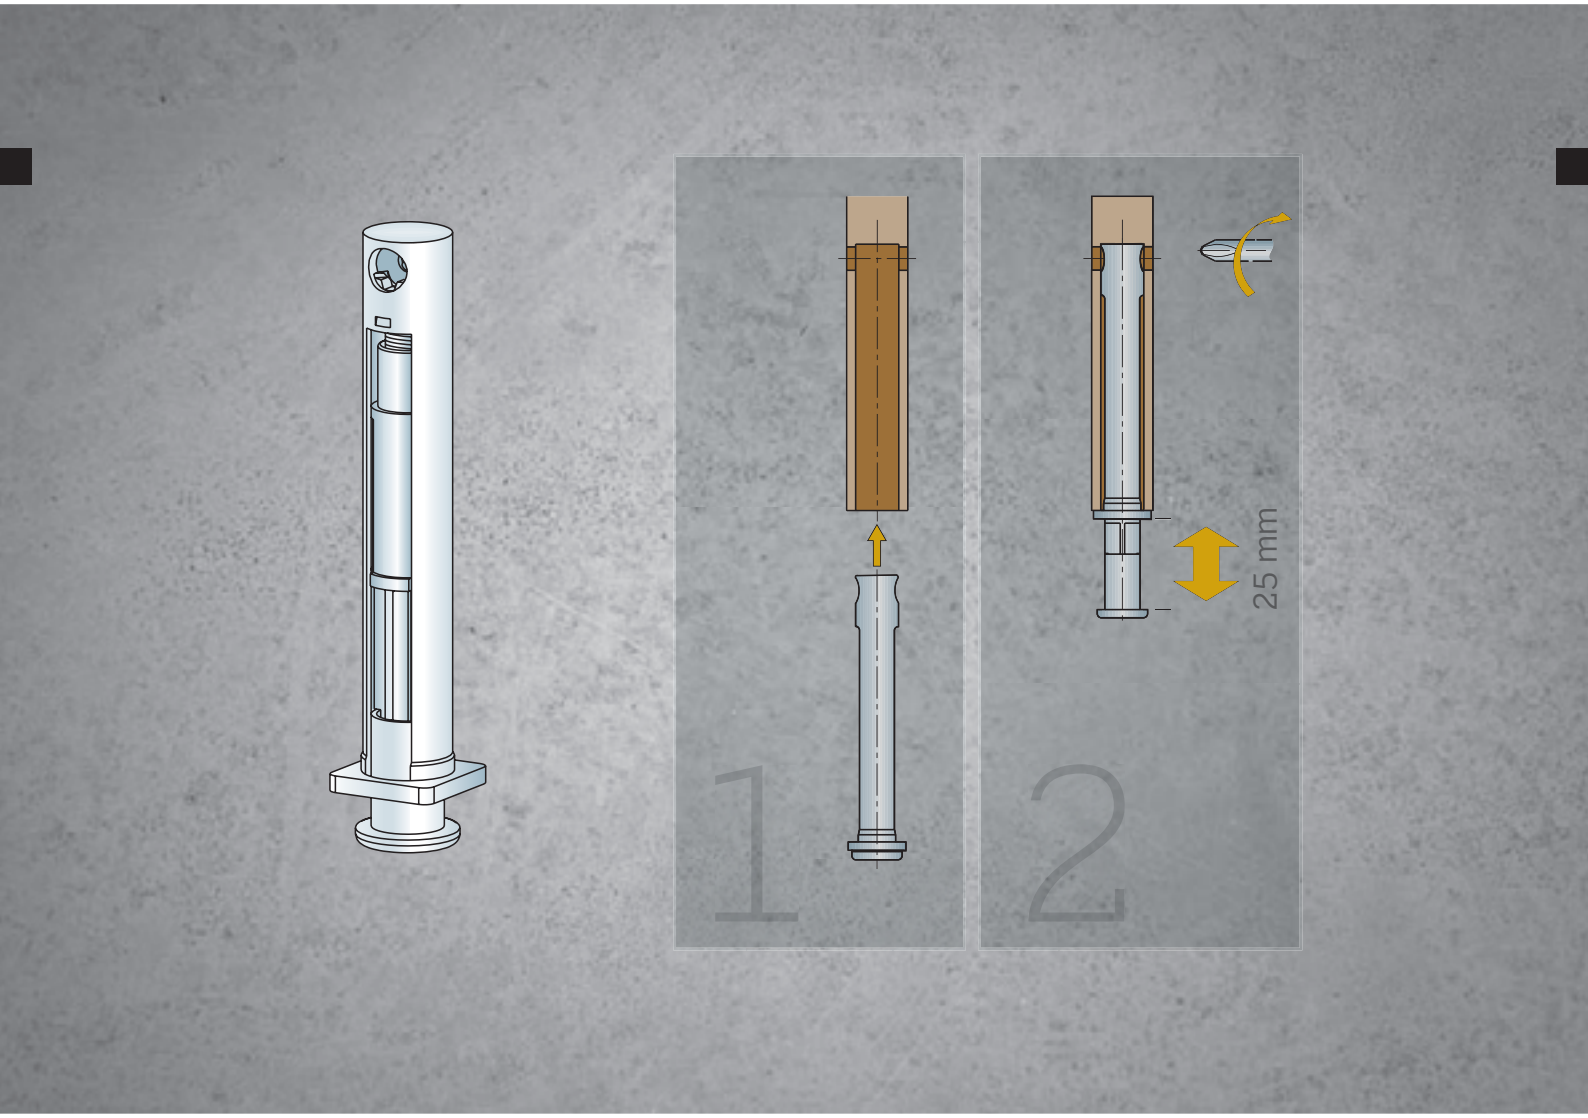

ADJUSTABLE LEG 2

For sideboards

2 ADJUSTABLE LEG FOR SIDEBOARDS 2

Stabilizer leg for sideboards from 16 mm.
Easy assembly and adjustment up to 25 mm.

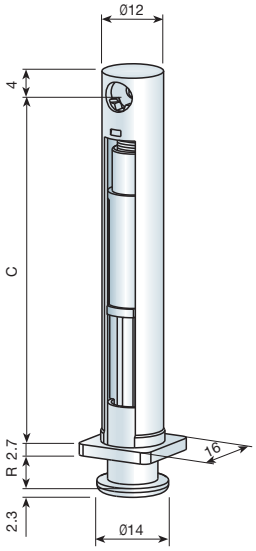

Stabilizer leg, Ø12 mm.

Length			
C (mm)	Adjustment (mm)	Natural	
24	15	416.024.022	400
32	15	416.032.024	300
52	25	416.052.022	200
70	25	416.070.023	150
100	25	416.100.020	100
120	25	416.120.025	100

DRILLING IN SIDEBOARD

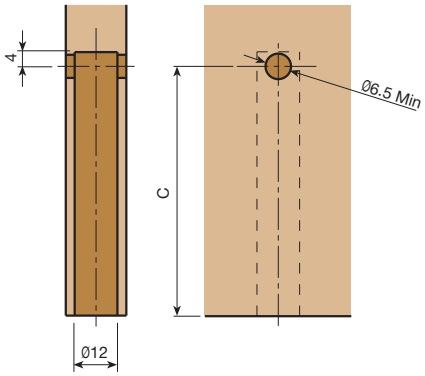

ASSEMBLY



ADJUSTMENT

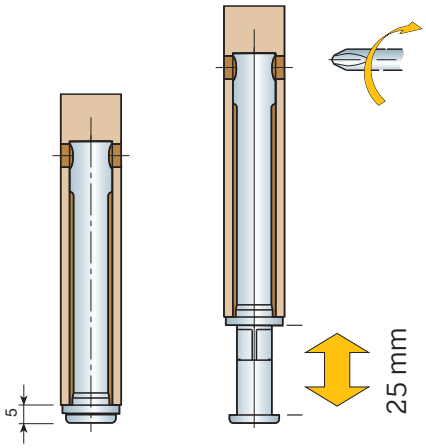

3 CABINET LEGS

INTEX kitchen cabinet leg

Three possible heights:
> INTEX-160 adjustable from 100mm to 160mm.
> INTEX-190 adjustable from 130mm to 190mm.
> INTEX-220 adjustable from 130mm to 220mm.

Cover for INTEX and MAMUT-1.

White	Ral 9003	425.000.004	1.000 or 5.000
Brown	Ral 8016	425.000.015	
Oak	Ral 1002	425.000.192	

INTEX leg, screw-fix.

Length	White	Brown	Oak	
INTEX 160	409.416.000	409.416.475	409.016.020	
INTEX 190	409.019.004	409.019.012	409.019.026	50
INTEX 220	409.422.005	409.422.473	409.022.025	

Four legs and four bolts per reference.

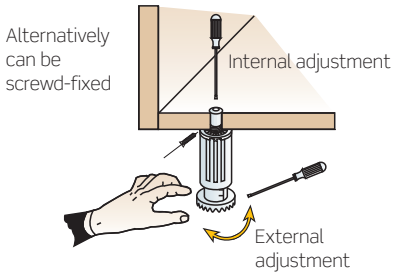

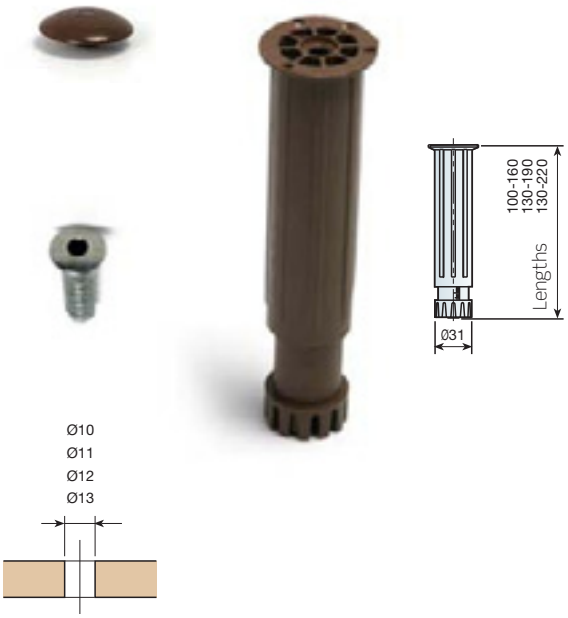

MAMUT-1 leg

This leg has a large diameter and is highly adjustable, offering the following advantages:
> Internal adjustment with a screwdriver.
> External adjustment manually or with a screwdriver.
> Visible measurement scale.
> Screw-fix option.
> Fixing screw for several holes.
> Full skirting board support.
> Adjustable from 140 to 220mm.

MAMUT-1 cabinet leg, screwscrew-fix.

Length	White	Black	
MAMUT-220	409.222.004	409.222.026	25

Four legs and four bolts per reference.

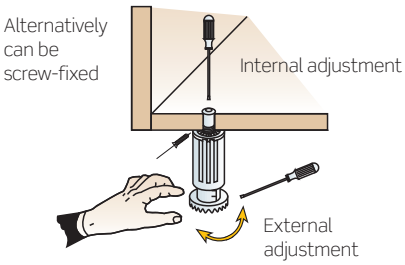

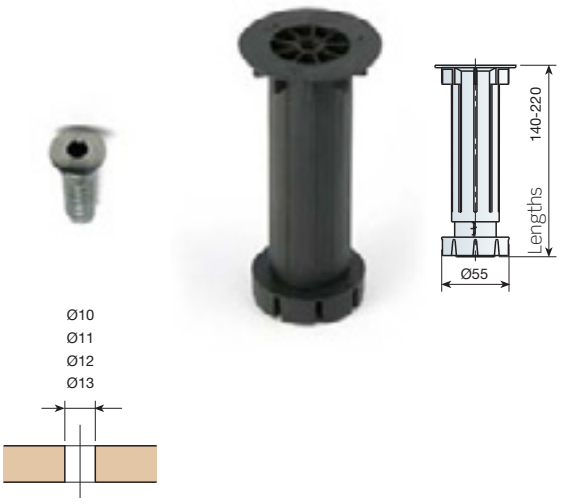

MAMUT-5 cabinet leg

Screw-fix mounting base.

Black	411.400.021	200

Bag of legs with base.

Reg. 100-160	410.214.022	25
Reg. 140-220	410.222.024	

Each bag containing 4 bases and 4 adjustable legs.

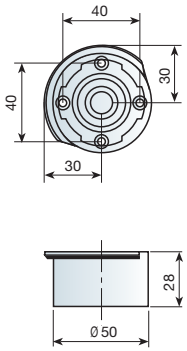

Single dowel-fix / screw-fix mounting base.

Ø	Black	
13	411.513.023	200
15	411.515.020	

Bag of legs with bases for Ø13 mm drilling.

Reg. 100-160	410.314.026	25
Reg. 140-220	410.322.021	

Each bag contains 4 bases and 4 adjustable legs.

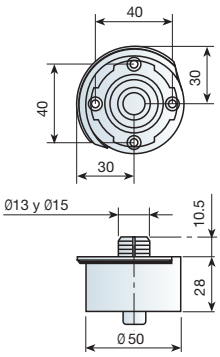

Bag of legs with bases for Ø15 mm drilling.

Reg. 100-160	410.514.020	25
Reg. 140-220	410.522.022	

Each bag contains 4 bases and 4 adjustable legs.

Triple dowel-fix / screw-fix mounting bases.

Balck	411.620.020	200

Bag of legs with bases.

Reg. 100-160	410.614.024	25
Reg. 140-220	410.622.026	

Each bag contains 4 bases and 4 adjustable legs.

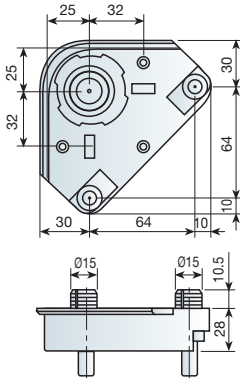

Screw-fix mounting bases.

Black	411.200.020	200

Bag of legs.

Reg. 100-160	410.114.025	25
Reg. 140-220	410.122.020	

Each bag contains 4 bases and 4 adjustable legs.



MAMUT-5 cabinet leg

Bag of adjustable legs, 78 mm.

Black	414.808.026	50

Each bag contains 4 adjustable legs.



Bag of adjustable legs, 118 mm.

Black	414.812.020	50

Each bag contains 4 adjustable legs.



Technical data - Adjustments

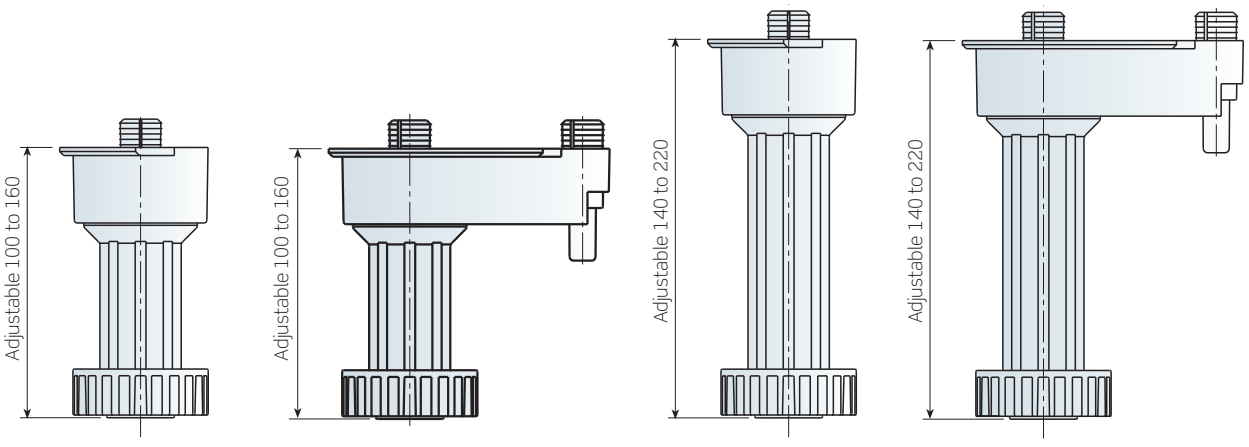

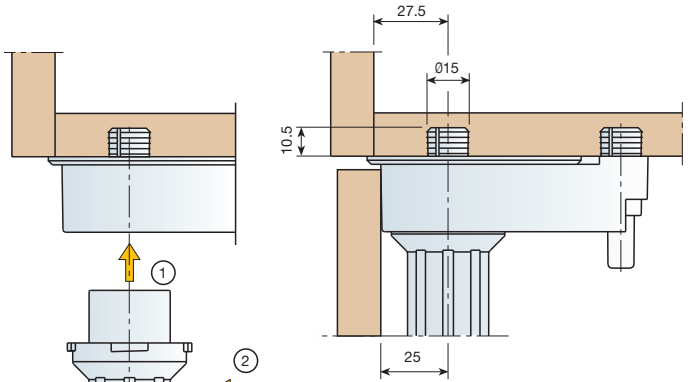

① Put the leg in the base

② Turn the leg 45° to the right

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

MAMUT 6

Cabinet legs

Strong and easy assembly.

MAMUT 6
Cabinet legs

Highly resistant industrial leg. Delivered assembled. Easy installation and acts as protection to furniture during transport. Quick skirting board coupling assembly.

pp.

1 MOUNTING BASES 179

2 BAG OF SUPPORTS 180

3 SKIRTING BOARD COUPLING 180

4 BAGS OF ASSEMBLED LEGS 181

5 TECHNICAL DATA 182

1 MOUNTING BASES

Screw-fix mounting base.



Black	411.900.020	200

Bag of legs with base.

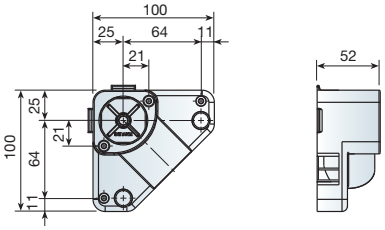

Length		
110	410.911.023	25
140	410.914.022	
170	410.917.021	
200	410.920.020	

Each bag contains 4 bases and 4 adjustable legs.

Screw-fix/dowel-fix 3 Ø12 pivot mounting base.



Black	411.812.026	200

Bag of legs with base.

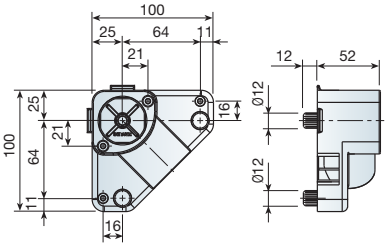

Length		
110	410.811.026	25
140	410.814.025	
170	410.817.024	
200	410.820.023	

Each bag contains 4 bases and 4 adjustable legs.

Screw-fix/dowel-fix 1 Ø12 pivot pin mounting base.



Black	411.712.022	200

Bag of legs with base.

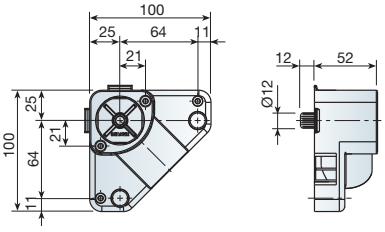

Length		
110	410.711.022	25
140	410.714.021	
170	410.717.020	
200	410.720.026	

Each bag contains 4 bases and 4 adjustable legs.

2 BAG OF SUPPORTS

Bag of adjustable legs.

Leg length	Black	
110	417.111.026	50
140	417.114.025	
170	417.117.024	
200	417.120.023	

Each bag contains 4 adjustable legs.



Leg length	L
110	108
140	138
170	168
200	198



3 SKIRTING BOARD COUPLING

Skirting board coupling.

Zinc-plated	415.600.032	500



Technical data - Adjustments

Leg length	Adjustable
110	105-140
140	130-170
170	160-200
200	190-230



Cutting the support

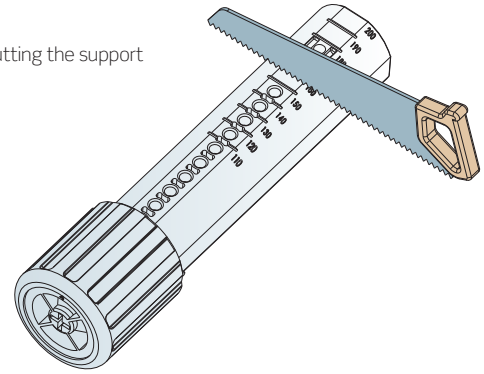

Skirting board coupling assembly

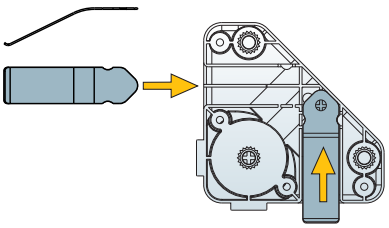

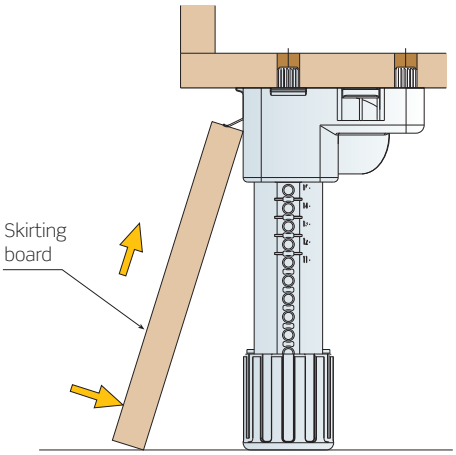

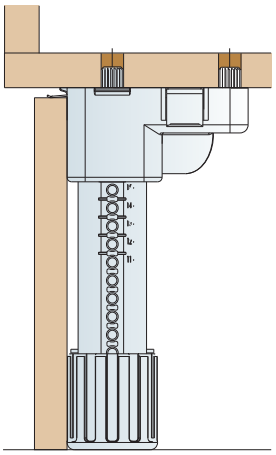

4 BAGS OF ASSEMBLED LEGS

Bag of screw-fix assembled legs.

Length		
110	409.911.025	25
140	409.914.024	
170	409.917.023	
200	409.920.022	

Each bag contains 4 legs.

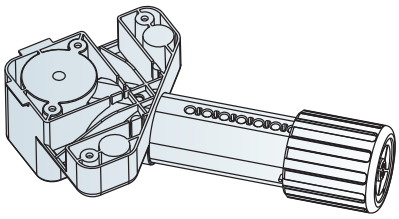

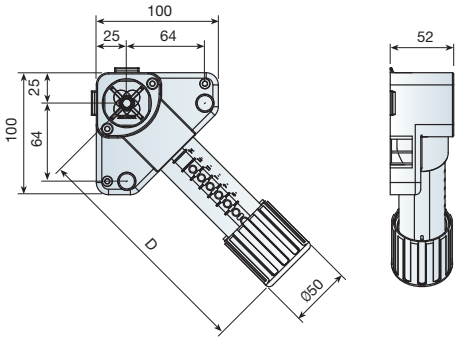

Bag of screw-fix/dowel-fix assembled legs.

Length		
110	409.811.021	25
140	409.814.020	
170	409.817.026	
200	409.820.025	

Each bag contains 4 legs.

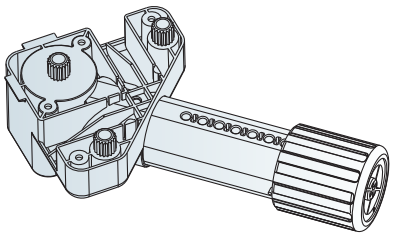

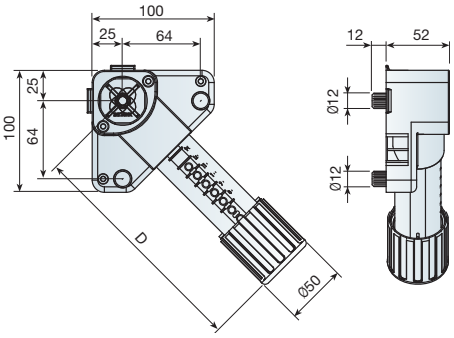

Length	D
110	130
140	160
170	190
200	220

Bag of screw-fix/dowel-fix 1 Ø12 pivot pin assembled legs.

Length		
110	409.711.024	25
140	409.714.023	
170	409.717.022	
200	409.720.021	

Each bag contains 4 legs.

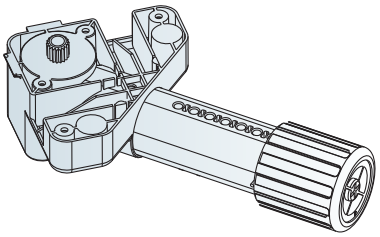

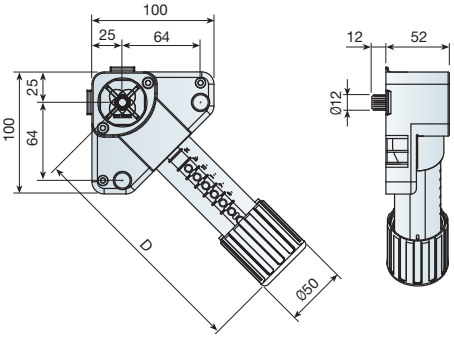

5 TECHNICAL DATA

Assembly and adjustments

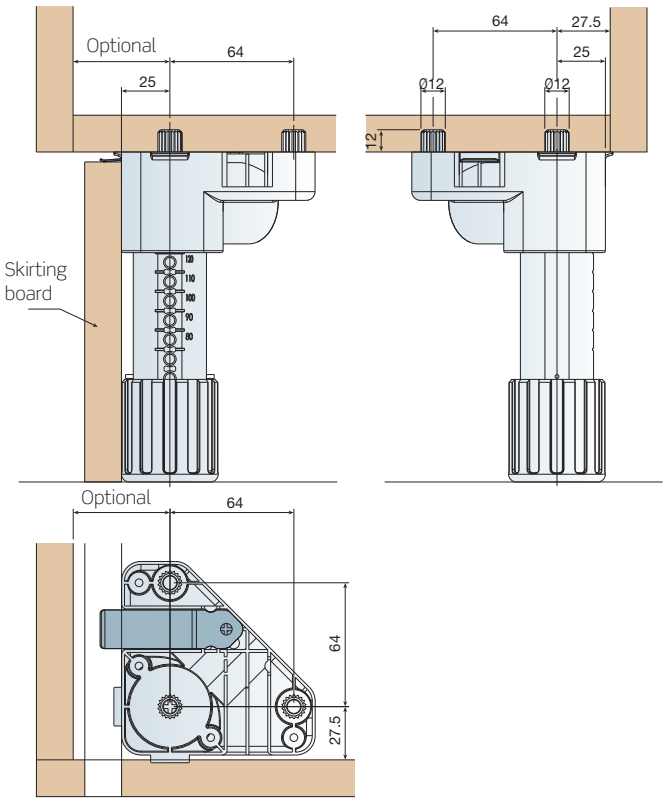

Manual or screwdriver adjustment

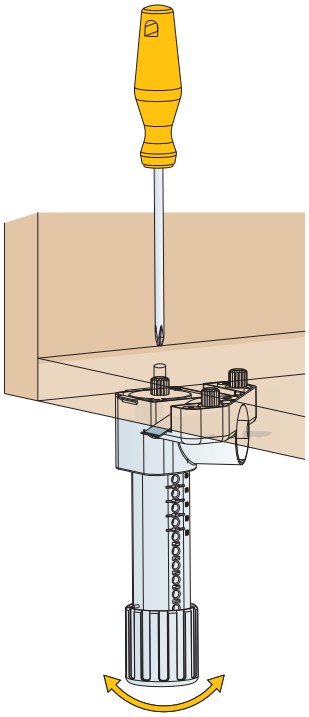

Cabinet assembly

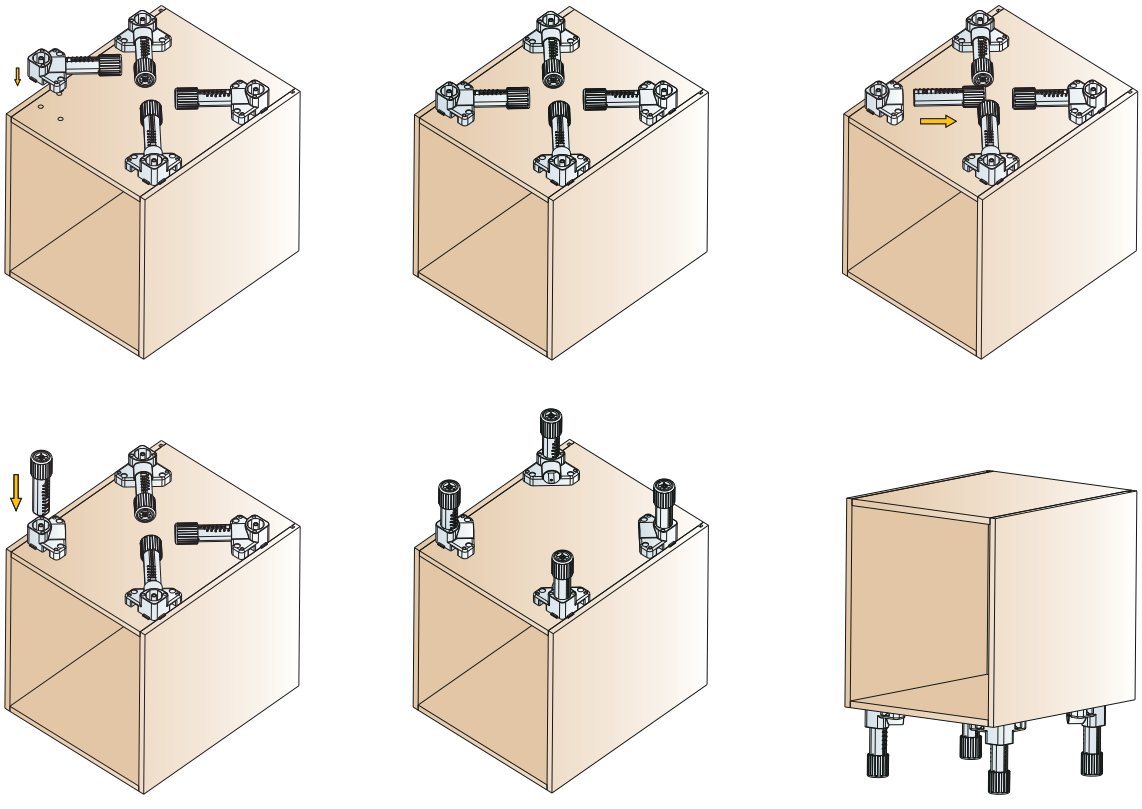

Assembled legs: leg arrangement according to cabinet

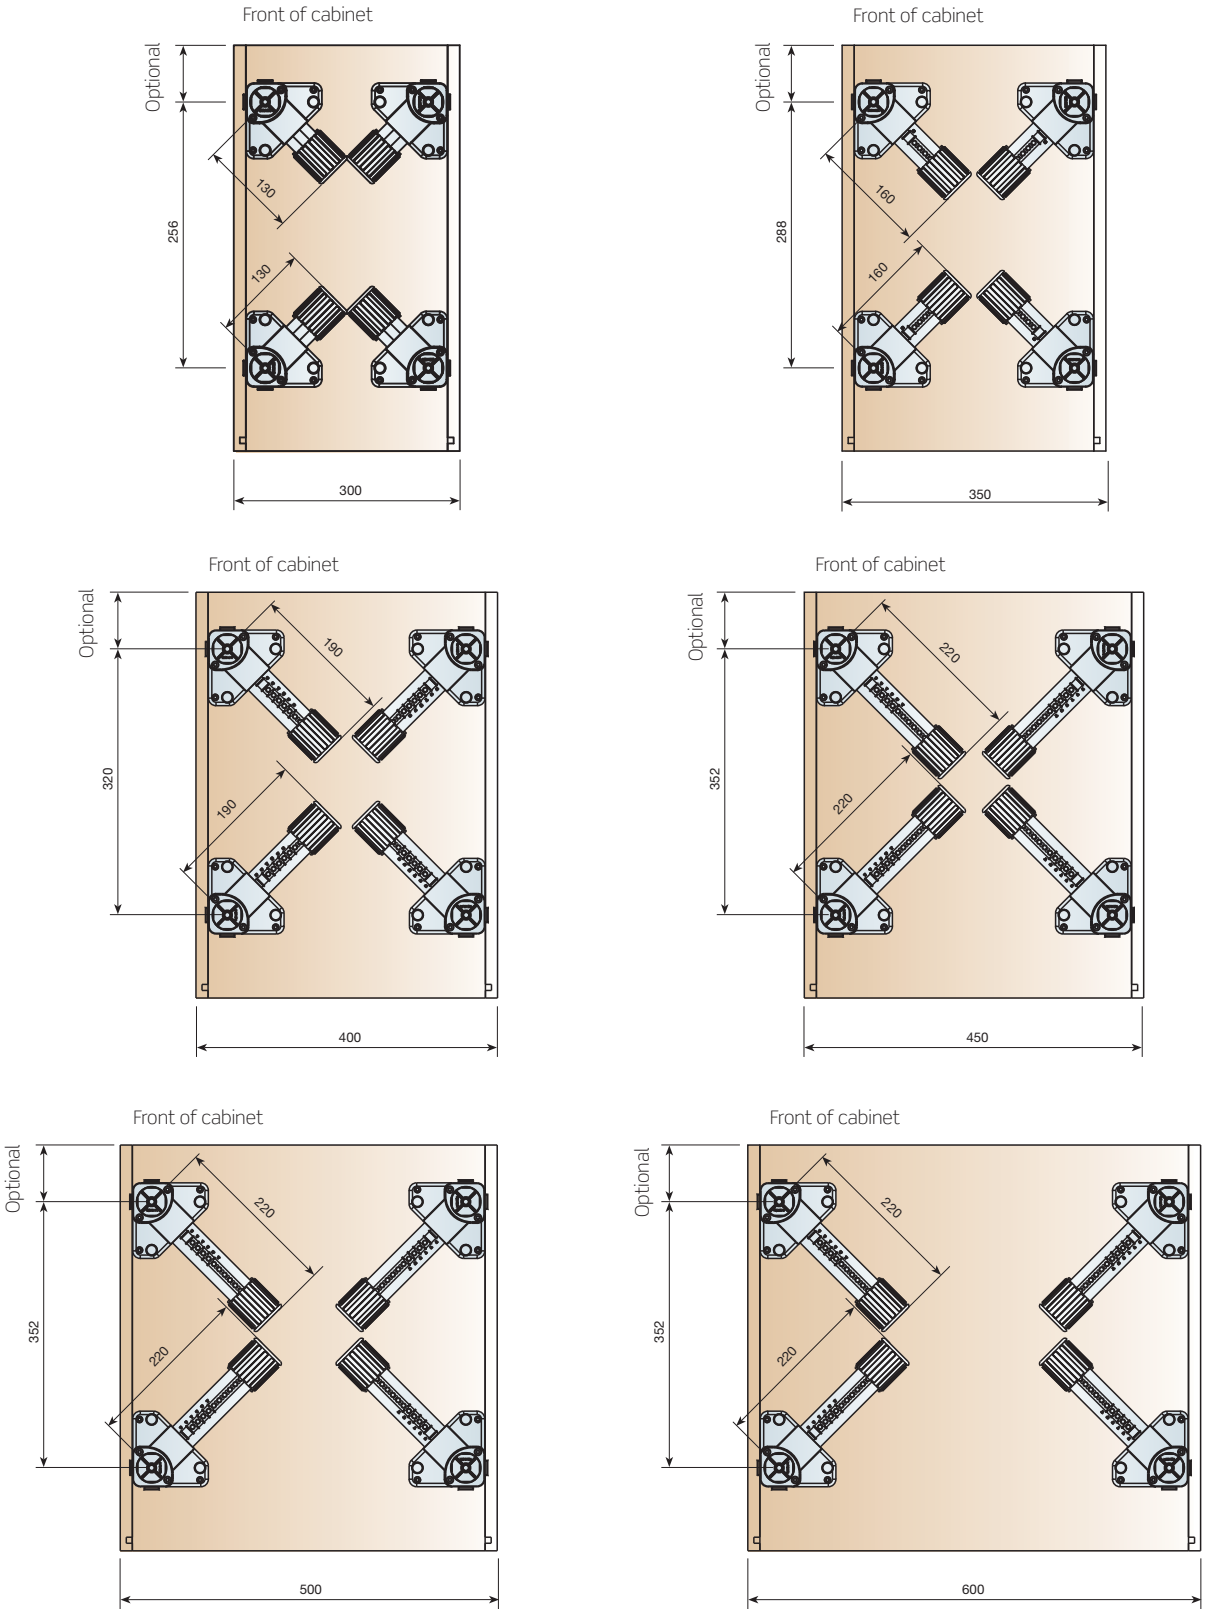

4 SANDY ADJUSTABLE PLASTIC LEG

Heavy duty leg with a steel adjustment bolt.

Externally adjustable leg **SANDY**.

Length	White	Black	
35 to 50	408.034.001	408.034.023	200
45 to 70	408.045.002	408.045.024	100
65 to 100	408.065.000	408.065.022	100



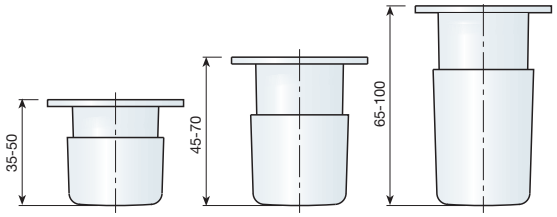

SANDY leg internal adjustment.

Length	White	Black	
35 to 50	408.134.005	408.134.020	200
45 to 70	408.145.006	408.145.021	100
65 to 100	408.165.004	408.165.026	100



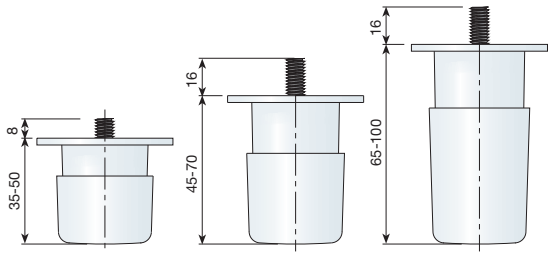

5 LEGS FOR TABLES

Table leg Ø60 x 710mm and Ø60 x 870mm height.

Length	Chrome-plated	Black	Ral 9006	
710	466.171.123	466.171.823	466.171.812	4
870	466.187.120	466.187.820	466.187.816	1

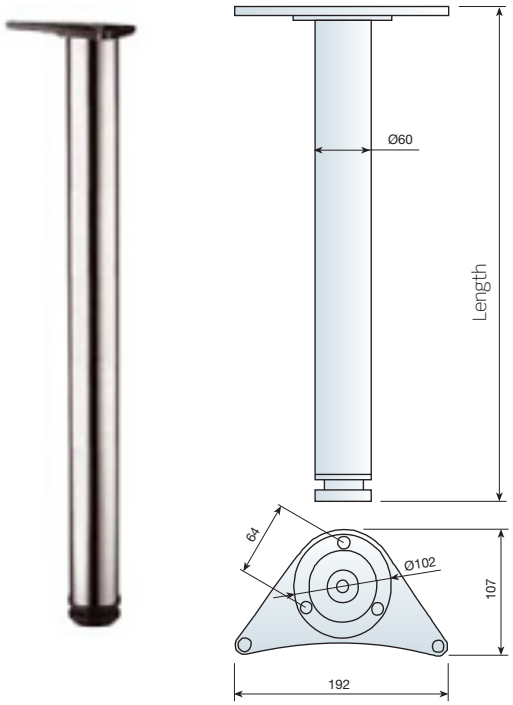

6 STABILIZERS

The skirting board can be stabilised by adjusting the screw and nut from inside the cabinet.

Stabilising screw

Skirting board stabilising screw.

L	Zinc-plated	
40	950.040.033	1.000
50	950.050.032	1.000
80	950.080.036	500

Stabilising leg

Stabilising leg for sides.

Galvanised thread finish leg		
M6	406.027.020	500 or 2.000
M8	406.138.025	200 or 2.000

This leg is easily adjusted from the outside , using the nuts shown on this page or any others in this catalogue with the same dimensions.

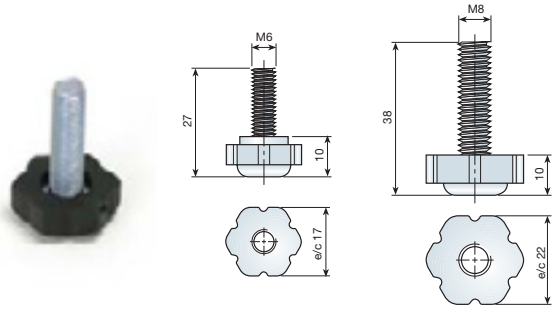

Nuts

Slotted nut for m8 screw.

Natural	450.008.101	1.000





Knock-in nut for m6 and m8 screws.

	Zinc-plated	
M6	938.106.035	2.500
M8	938.208.036	1.500





Levelling wedge

Levelling wedge.

Brown	Ral 8016	460.000.015	1.000
Beige	Ral 1015	460.000.461	

Essential for all cabinets to prevent uneven floorproblems levelling from 1mm. to 8mm.



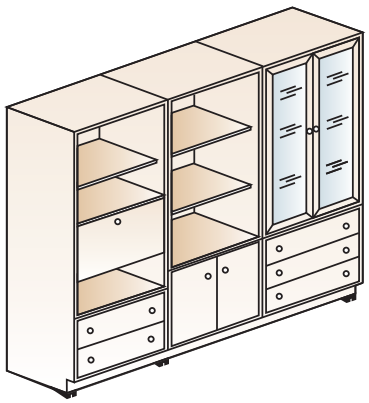

ACCESSORIES FOR SKIRTING BOARDS

pp.

1 PLASTIC PIN AND SUPPORTS 188
- Pin 188
- Supports 188

2 STEEL PIN AND SUPPORTS 189
- Pins 189
- Supports 189

3 FLEXY SKIRTING BOARD HOLDER 190
- Skirting board holder 190

4 JOINT AND TERMINAL FOR SKIRTING BOARD 191
- Joint 191
- Terminal 191

1 PLASTIC PIN AND SUPPORTS

Pin

Plastic pin.

For Ø31 leg	413.032.104	500
For Ø40 leg	413.040.106	

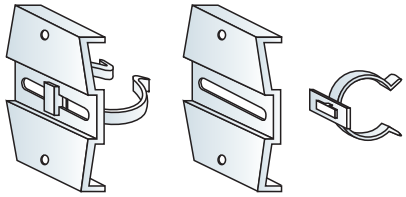

Supports

Long bracket.

Zinc-plated	414.000.031	250

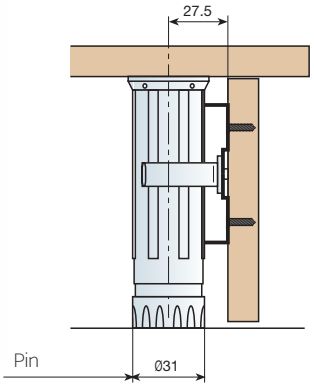



Short bracket.

Zinc-plated	414.100.035	1.000

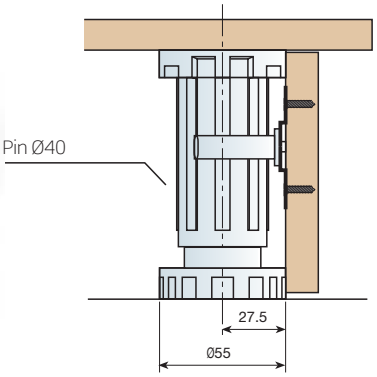



2 STEEL PIN AND SUPPORTS

Pins

Pin for Ø31 leg.

Zinc-plated	413.315.033	1000

For INTEX Ø31 legs.

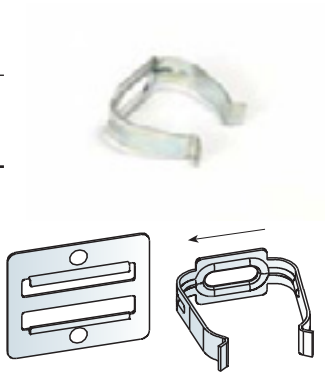

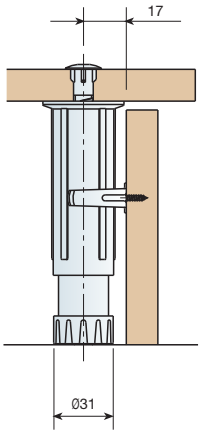

Pin for Ø50 leg.

Zinc-plated	413.325.032	1000

For mamut-5 Ø50 legs.

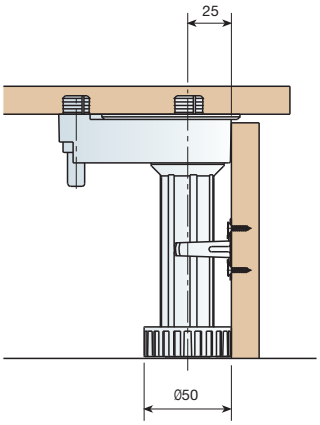

Support

Plate.

Zinc-plated	414.700.031	1.000





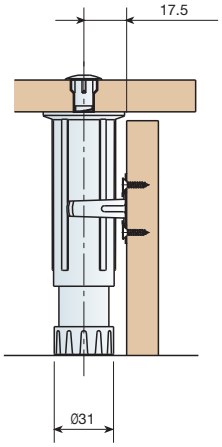

3 FLEXY SKIRTING BOARD HOLDER

This quick mounting holder acts pushing the skirting board downwards. A height tolerance of 16 mm is allowed.

Skirting board holder

FLEXY-1 skirting board holder for 16 mm.

Width		15	
White	Ral 9001	414.516.804	500

It can be placed by manual pressure.

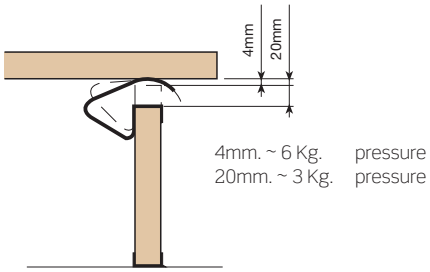



FLEXY-4 knock-in mounting skirting board holder.

Width	15	
Zinc-plated	414.615.036	500

To be nailed with hammer.

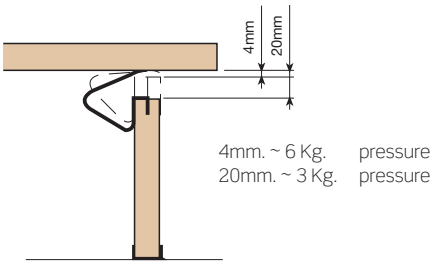

Skirting board holder for 12 ÷ 19 mm. **FLEXY-5.**

Width		20	
White	Ral 9001	415.500.805	500

It can be placed by manual pressure.

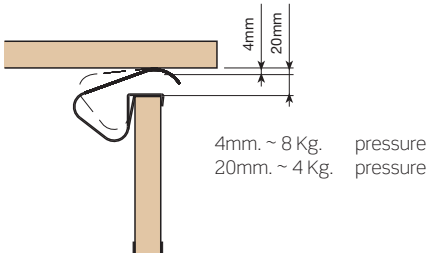



4 JOINT AND TERMINAL FOR SKIRTING BOARDS

Joint for the lower part of the skirting board. It has a flexible tab to keep out water and dust. Front and side skirting board terminal.

Joint

Skirting board joint.

Width		16mm	19mm	
White	Ral 9003	415.200.004	-	
Brown	Ral 8014	415.200.015	-	100
Oak	Ral 1002	415.200.192	-	
Transparent		415.200.693	415.219.696	

Each box contains 100 strips of 3.60 Metres.



Terminal

Skirting board terminal.

Width		16mm	
White	Ral 9003	415.300.001	
Brown	Ral 8014	415.300.012	100
Oak	Ral 1002	415.300.196	

Each box contains 100 strips of 2 metres.



EQUIPMENT FOR INSIDE THE CABINET

pp.

1 STORAGE FRAMES 194
- Miscellaneous elements 195
- Baskets 197
- Tray and rails 197

2 EXTENSION FITTINGS 198

3 BOTTLE RACK 200

4 BASKETS 202
- Pull-out baskets 202
- Baskets 204
- Cleaning rack 206
- Wire laundry basket 206
- Bottle racks 207

pp.

5 SWIVEL TRAYS 208

6 WASTE BINS 210
- Metal cylindrical waste bin 210
- Plastic cylindrical waste bin 210
- Rectangular waste bin 211
- Eco-bin 211

7 PULL-OUT HANGERS 212
- Towel rail 212
- Tea-towel hanger 212



8 PLATE RACK 213
- Plate rack in stainless steel 213

1 STORAGE FRAMES

Low central storage frame.

Height "Y" with the runner		White	Metallic grey	
Partial extension	900 to 1.340mm	483.012.003	483.012.316	1
Full extension	960 to 1.400mm	483.012.003	483.012.316	

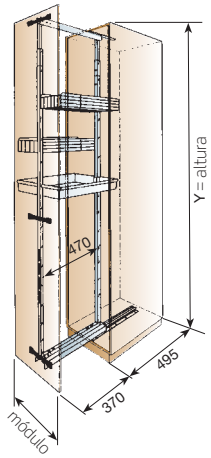

Low central storage frame.

Height "Y" with the runner		White	Metallic grey	
Partial extension	1.600 to 2.040mm	483.118.005	483.118.311	1
Full extension	1.660 to 2.100mm	483.118.005	483.118.311	

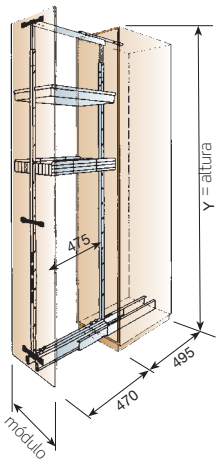

Miscellaneous elements for the frame

Runner with partial extension.

White	482.350.002	1
Metallic grey	482.350.315	

Partial extension runner with pull-out-front 380 mm.
It has an upper and lower runner.

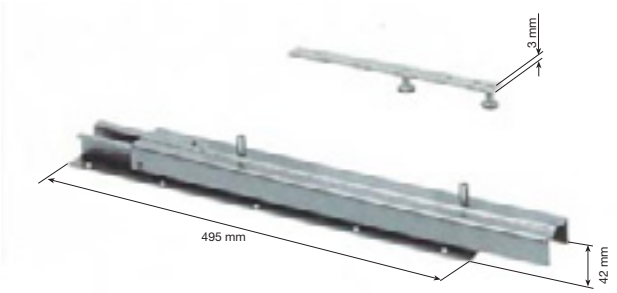

Runner with full extension.

White	482.250.005	1
Metallic grey	482.250.311	

Partial extension runner with pull-out-front 480 mm.
It has an upper and lower runner.

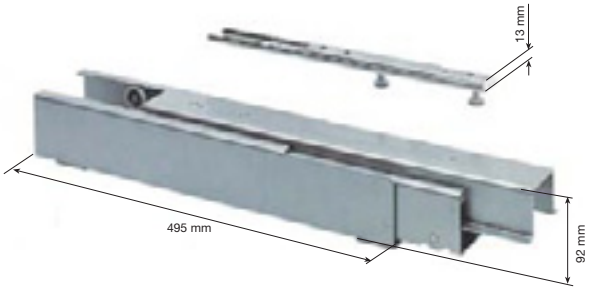

Supplement with extended frame.

White	482.510.000	1
Metallic grey	482.510.313	

Every reference has 2 units.
Used in storage units, low from 1.000 mm. And high from 1.700 mm.



Miscellaneous elements for the frame

Support for fronts.

Model	White	Metallic grey	
300	483.430.006	483.430.312	1
400	483.440.005	483.440.311	

Every reference has 2 units. One set is used per frame.

Guides for split fronts.

Adjustment	White	Metallic grey	
960-1.400	482.612.001	482.612.314	1
1.660-2.100	482.618.006	482.618.312	

Every reference has 2 units. Used when the front has several doors.

Front stabiliser.

Model	White	Metallic grey	
300	482.730.006	482.730.312	2
400	482.740.005	482.740.311	

Every reference has 2 units. Used when the front has several doors.

Baskets

Basket for the central storage unit.

Model		White	
300	(250x470x70)	470.630.005	5
400	(350x470x70)	470.640.004	

Basket for the central storage unit.

Model		Chrome-plated	
300	(250x470x90/110)	482.830.121	5
400	(350x470x90/110)	482.840.120	

Tray and rails

Tray for the central storage unit.

Model		White	
300	(250x460x70)	470.730.002	5
400	(350x460x70)	470.740.001	

Additional rail for tray.

Model	Chrome-plated	
300	470.830.124	2 or 10
400	470.840.123	

Bottle divider.

Model	Chrome-plated	
300	470.927.122	1 or 5
400	470.940.120	



2 EXTENSION FITTINGS

Once pulled out, the element can be pivoted to one side. Then the corner element automatically occupies the empty space. Easy to assemble on all conventional corner elements. It may be installed with a normal door. Optimum use of space. Separately adjustable basket.

NOTE
to complete the order, please specify the references for the extension fitting and the basket.

Pivoted extension fitting for corner unit 900mm.

Finish	Left	Right	
White	472.901.004	472.902.006	1
Metallic grey	472.901.310	472.902.312	

Basket for the extension fitting.

White	473.300.004	1
Chrome-plated	472.800.123	

Every reference has 4 baskets:
White (2 of 310 x 470 x 70 and 2 of 370 x 470 x 70) or
Chrome-plated (2 of 305 x 470 x 85 and 2 of 390 x 470 x 85).

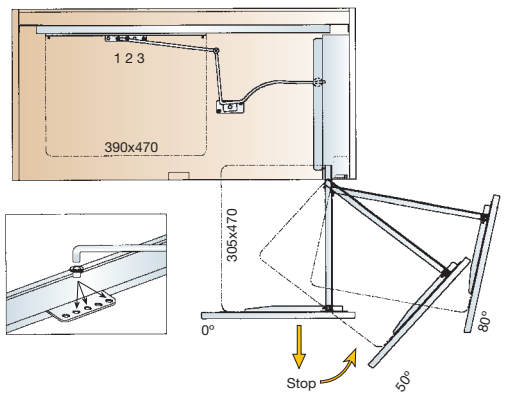

To suit different types of basket

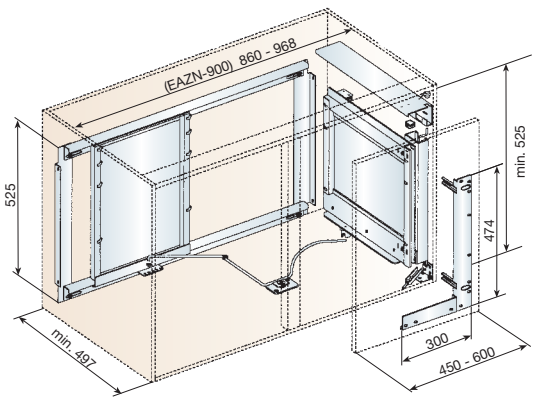

Right-hand opening

Corner fitting unit.

Left	Chrome-plated	484.110.126	1
Right	Chrome-plated	484.120.125	

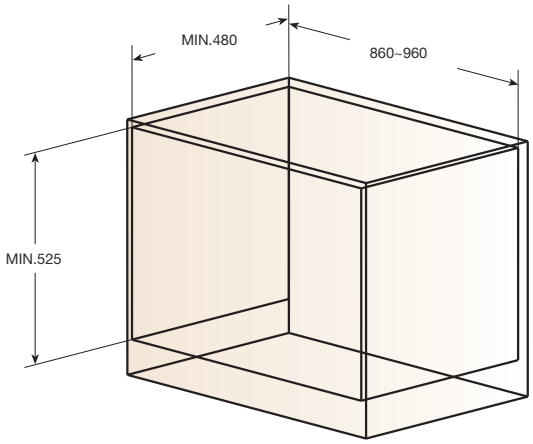

Technical details

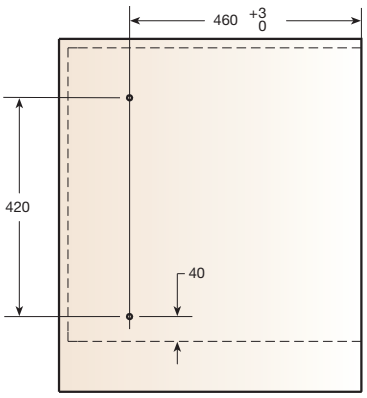

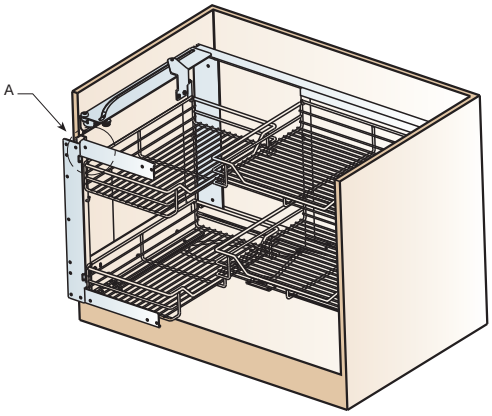

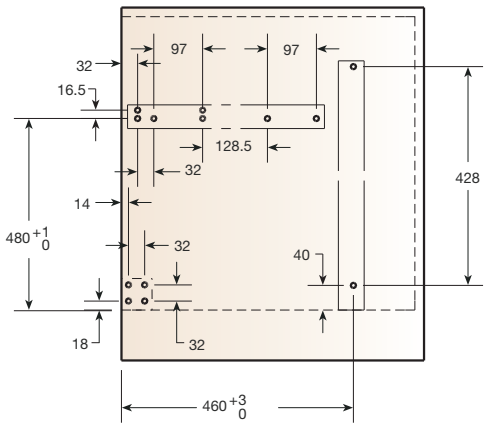

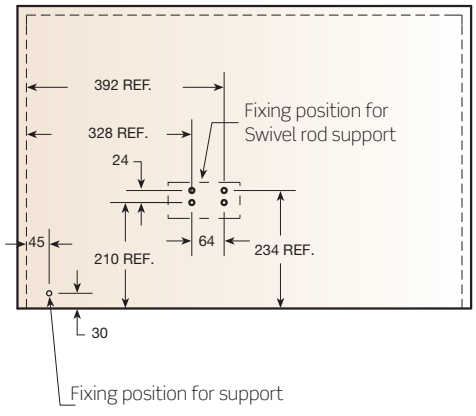

3 BOTTLE RACK

For wide cabinet interiors, min. 118 mm. May be used for different cabinet widths, assembled on one side. Simple assembly on the cabinet side.
The front may be screwed directly onto the frame.

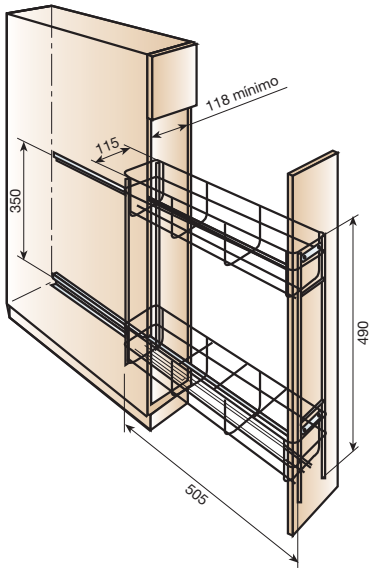

Bottle storage rack fitting.

	Left	Right	
White	472.011.002	472.111.006	2

Multi-purpose basket system.

Model (mm.)	Chrome-plated	
250	484.820.125	2

Every reference has a complete system with 1 bottle basket, 1 complete set of runners and their front adaptors. Depth = 450mm, width = 175mm, height = 475mm.

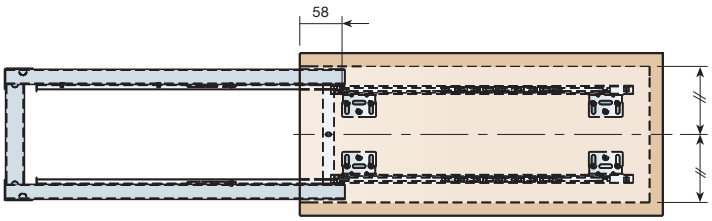

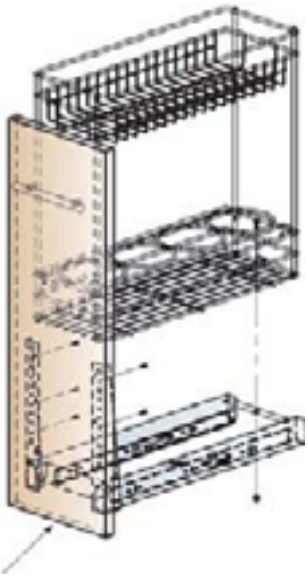

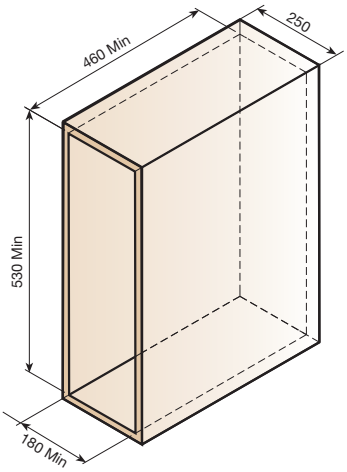

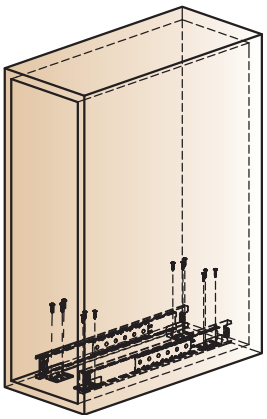

4 BASKETS

Plastic-coated wire basket. Ideal for making the most of your cabinets' interior space. It fits on the gacela runner with parallel guides and self-closing system.

Pull-out baskets

Pull-out frame.

		Left	Right	
Grey	(40x470x600)	471.360875	471.460.872	1

Front bracket 90°.

Grey		468.600.871	2

Hanging basket.

Model	Measurements	Chrome-plated	
200	(110x470x75)	469.111.123	
300	(210x470x75)	469.121.122	3
400	(320x470x75)	469.132.123	

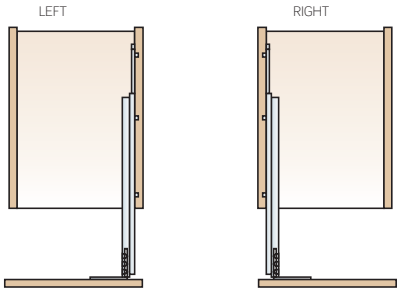

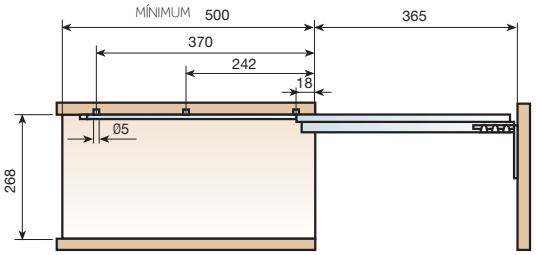

Front bracket 55°.

Grey		468.700.875	2

Hanging basket. Model 300.

Finish	Measurements	Left	Right	
Chrome-plated	(215x470x75)	469.201.121	469.202.123	3

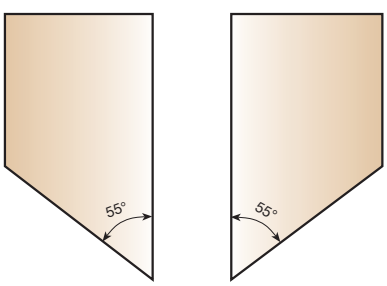

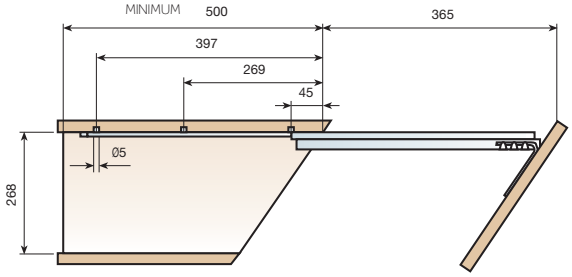

Pull-out baskets

Extension set, left hanging basket 55°.

Model	Chrome-plated	
300	484.310.120	1

Every reference has a complete system with 2 hanging baskets, 1 frame and 1 set of full extension ball bearing runners.



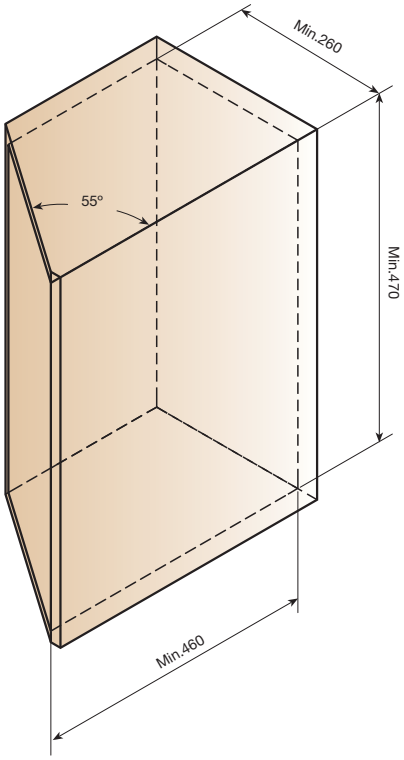

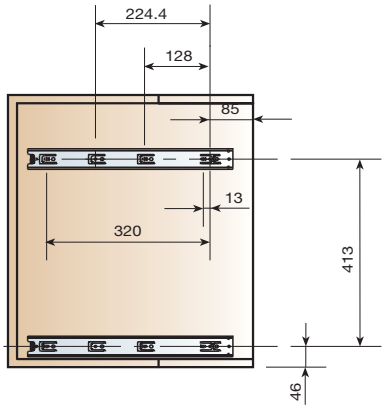

Extension set, right hanging basket 55°.

Model	Chrome-plated	
300	484.320.126	1

Every reference has a complete system with 2 hanging baskets, 1 frame and 1 set of full extension ball bearing runners.



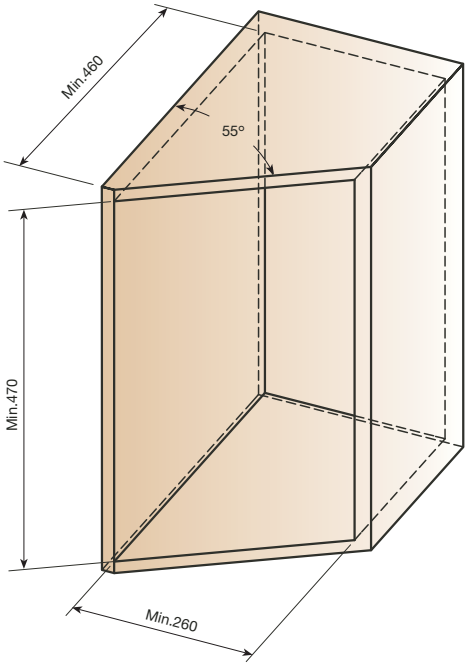

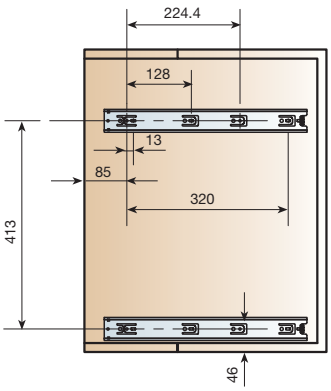

Baskets

Basket for front fixture.

Model	Measurements	Chrome-plated	
400	(345x480x140)	469.340.126	
450	(345x480x140)	469.345.122	2
600	(545x480x140)	469.360.124	

Basket with handle.

Model	Measurements	Chrome-plated	
400	(345x476x120)	469.440.123	
450	(395x476x120)	469.445.126	2
600	(545x476x120)	469.460.121	
450	(370x476x120)	469.437.124	
600	(520x476x120)	469.452.126	

Spacer 25mm.

White	468.925.004	6

Guide for baskets.

Zinc-coated	468.400.030	3

Front fixture.

Zinc-coated	468.500.034	4

Baskets

Basket with handle.

Model	Chrome-plated	
400	484.540.125	
450	484.545.121	2
600	484.560.123	

Every reference has a complete system with 1 basket with handles Depth=425mm, height=140mm) and 1 set of full extension ball bearing runners.

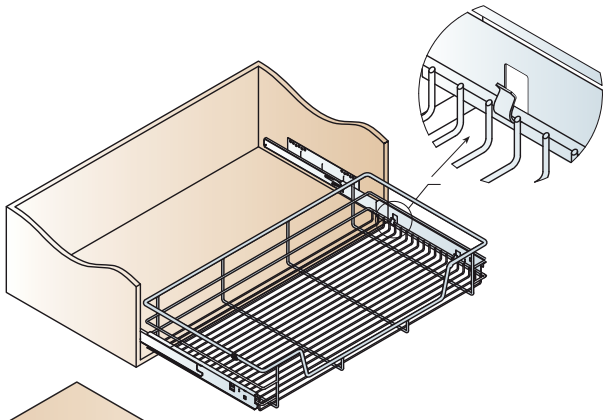

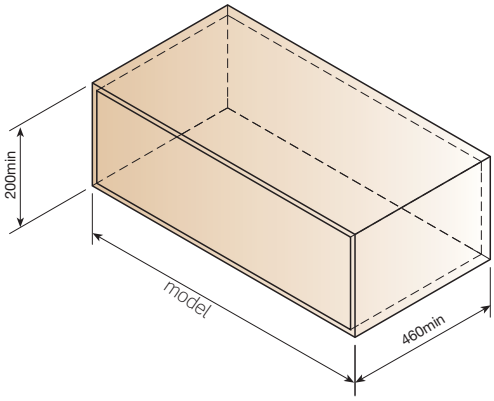

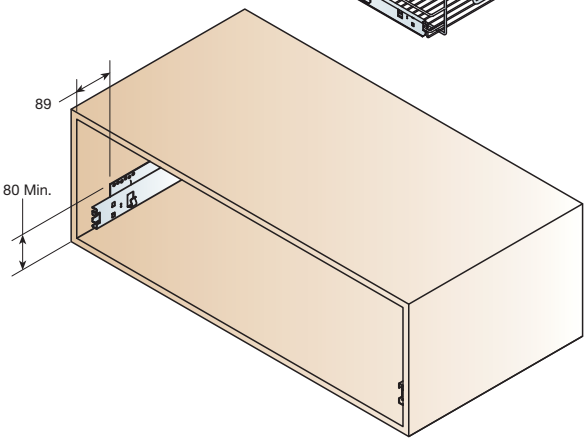

Basket front fixture.

Model	A	Chrome-plated	
400	273,5	484.640.122	
450	323,5	484.645.125	4
600	473,5	484.660.120	

Every reference has one complete system with 1 basket for front fixture (Depth=425mm, height=140mm) and 1 set of full extension ball bearing runners.

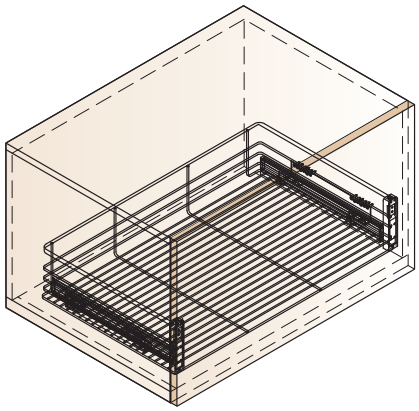

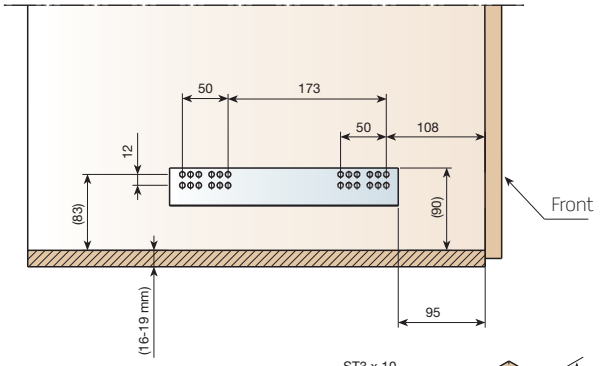

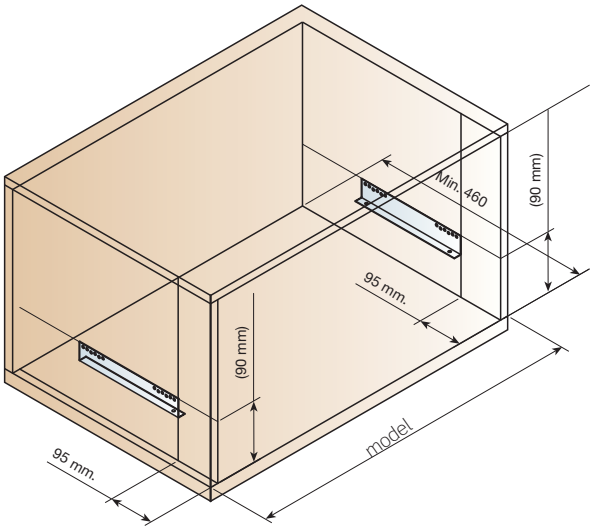

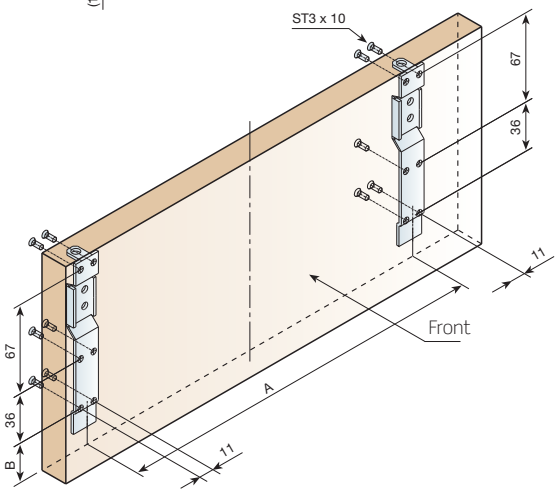

Cleaning product rack

Cleaning product rack.

Model-measurements	Chrome-plated	
Chrome-plated (215x470x420)	468.200.121	1

Wire laundry basket

Easy-to-assemble basket for storing laundry and linen, which may also be easily dismantled if necessary. The door for this basket should be used with the mesuco 14 hinge.

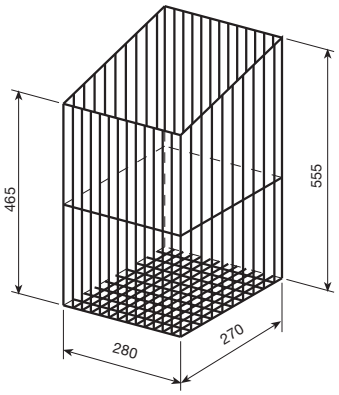

Wire laundry basket.

Model	White	
350	481.135.001	1

Every box contains 1 basket, 2 retaining pivot arms and 4 fixing supports.

Bottle racks

Bottle rack fittings with several compartments to keep your kitchen neat and tidy. Easily assembled onto a wooden shelf.

Bottle rack for model 200.

White (110x485x490)	481.215.000	2

Every box contains 2 bottle racks, 2 sets of runners and 8 fixing supports.

Bread bag-bottle rack for model 300.

White (210x485x490)	481.330.006	1

Every box contains 1 bread bag-bottle rack, 1 set of runners and 4 fixing supports.

Bottle rack unit.

Model	A	Chrome-plated	
200	Min. 145	484.420.123	1
300	Min. 225	484.430.122	

Every reference has a complete system with 3 hanging baskets, 1 frame and 1 set of full extension ball bearing runners.

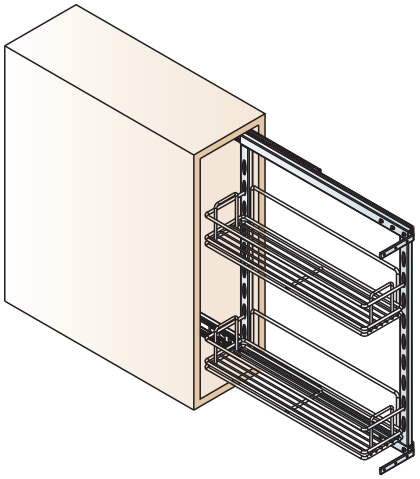

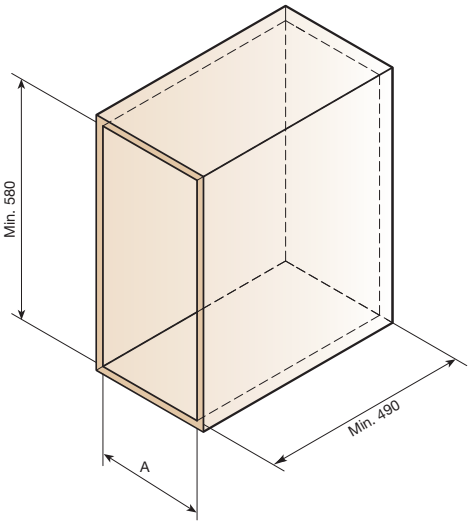

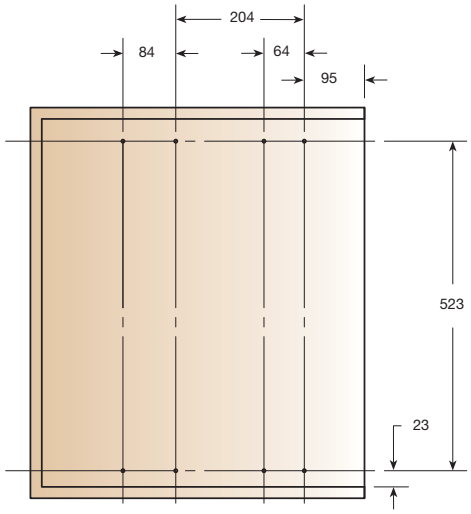

5 SWIVEL TRAYS

Swivel tray: 90° angle . System 1.

Model		
CT.500.1	441.050.002	
CT.720.1	441.172.001	5
CT.820.1	441.382.001	

System 1: fixing and braking device with blocking click, adjustable from side to side. Door assembly with 180° hinge. Supplied in boxes of 5 sets. Each set contains 2 trays and 1 complete fitting system.



CT 500.1
R=250
x=220
a=35

CT 720.1
R=360
x=310
a=50

CT 820.1
R=410
x=325
a=85

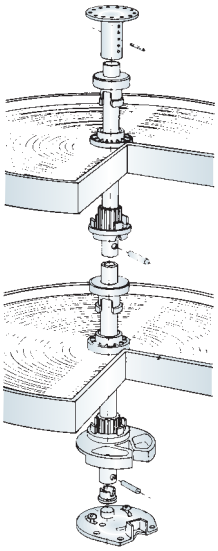

Round swivel tray. System 4.

Model		
CT.500.4	441.750.002	
CT.720.4	441.872.001	5
CT.820.4	441.982.004	

System 4: assembly device for round trays. Door assembly with 45° hinge. Supplied in boxes of 5 sets. Each set contains 2 trays and 1 complete fitting system.



CT 500.4
R=250

CT 720.4
R=360

CT 820.4
R=410

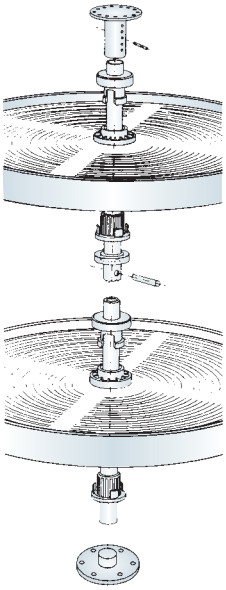

Swivel tray: 180° angle. System 5.

Model		
ST.650.0	442.070.005	
ST.750.0	442.175.005	5
ST.850.0	442.285.001	

System 5: assembly device for semi-circular trays, with separate rotation. Door assembly with 90°-95° hinge. Supplied in boxes of 5 sets. Each set contains 2 trays and 1 complete fitting system.



ST 650.0
R=325
x=355
a=45
b=30
<=200°
(180+10+10)

ST 750.0
R=375
x=405
a=50
b=30
<=200°
(180+10+10)

ST 850.0
R=425
x=455
a=50
b=30
<=200°
(180+10+10)

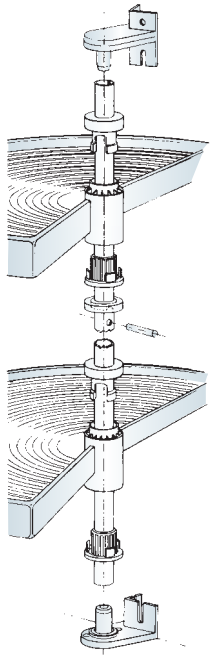

Swivel tray: 270° angle.

Width	Chrome-plated	
700	484.270.124	1
750	484.275.120	

Every reference has a complete system with two baskets with height adjustment from 400mm. To 800mm.

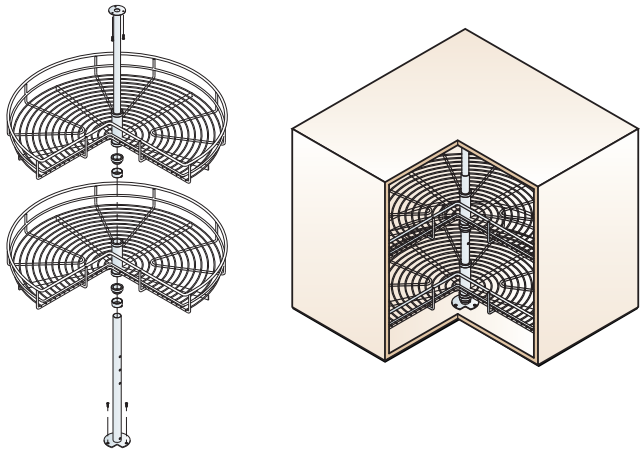

700 Swivel tray

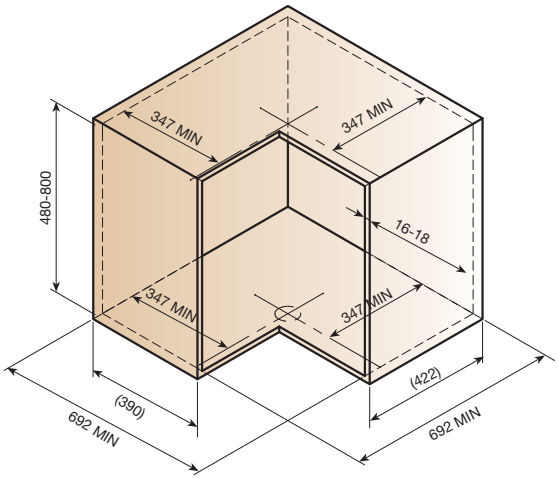

750 Swivel tray

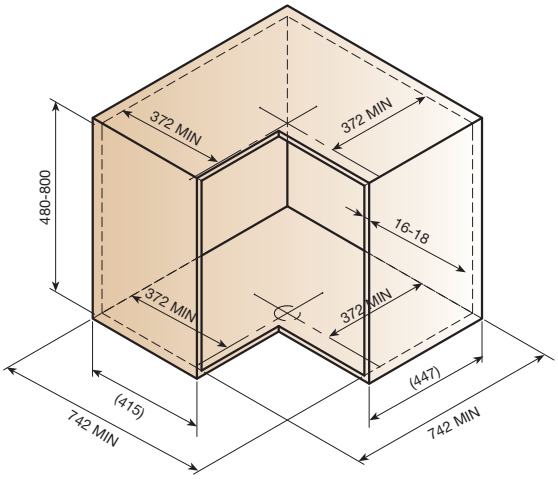

6 WASTE BINS

Metal cylindrical waste bin

Round metal waste bin: 13 litres.

White lacquer	445.413.006	1

Very simple assembly on the right and left side of the cabinet. Automatic lid opening, which remains inside the cabinet. For cabinet widths of min. 400mm. The body is made of steel and the lid and bin are made of plastic.

Plastic cylindrical waste bin

Round waste bin:13 litres.

White	445.213.005	1

Very simple assembly on the right and left side of the cabinet. Automatic lid opening, which remains inside the cabinet. For cabinet widths of min. 400mm. All parts made of plastic.

Polypropylene PP
Polyethylene PE
Polyamide PA

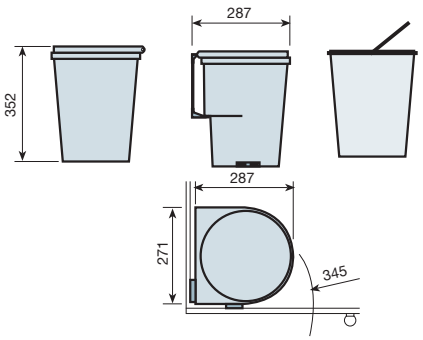

Rectangular waste bin

Rectangular waste bin: 20 litres.

White	445.120.001	1

Large, high quality rectangular waste bin, with a solid finish and easy assembly. For cabinet widths of min. 300mm. Assembled to the right, left or centre of the cabinet base. Manual opening by means of ball bearing runners. The lid is fixed to the structure and is easy to release for cleaning. Colours: white.

Plastic-coated support
Polypropylene PP
Polyethylene PE
Polyamide PA

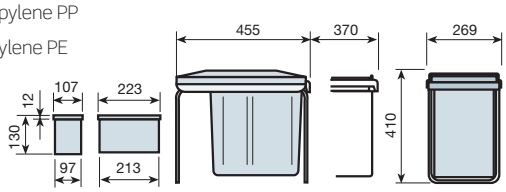

Eco-bin

Eco-bin: 2x14 litres.

Brown	445.028.010	1

Rectangular bin with two sections to separate rubbish.
For cabinet widths of min. 300mm. Assembled to the right, left or centre of the cabinet base. Manual opening by means of ball bearing runners. The lid is fixed to the structure. Colours: green, brown.

Plastic-coated support
Polypropylene PP
Polyethylene PE
Polyamide PA



7 PULL-OUT HANGERS

Towel rail

Towel rail hanger.

Length (mm.)	White ral 9003	
300	889.030.800	20
370	889.037.800	

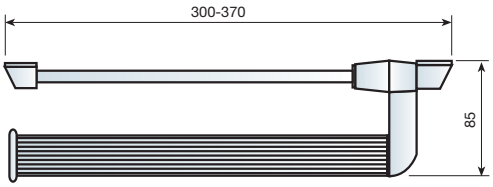

Tea-towel hanger

Tea-towel hanger. Mod. Trap.

Length (mm.)	White	
315	650.431.806	20
430	650.443.802	

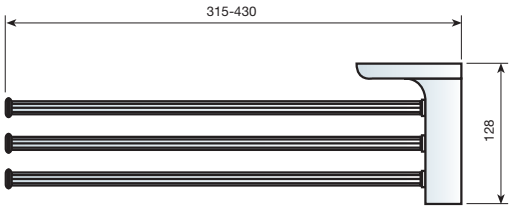

INDAUX
FURNITURE FITTINGS MANUFACTURER

PLATE-RACK

In stainless steel

Plate-rack in stainless steel with glass-rack, and drip tray.

PLATE-RACK
In stainless steel

Plate-rack in stainless steel with glass-rack, and drip tray.

Introducing the new high quality plate -rack in 18.8 Stainless steel to store and drain plates, glasses and other kitchen utensils. As well as assuring long durability, it boasts a practical and useful design. The plate-rack comprises of a drip tray to collect the excess water, and is able to fit into any module or onto any surface, it does not have to be placed over the sink drainer. Different sizes are available to accommodate any kitchen module. This simple and convenient plate-rack is supplied individually boxed.

Plate-rack + glass-rack + drip tray set.

Module		
400	434.040.106	
450	434.045.102	
500	434.050.105	
600	434.060.104	10
700	434.070.103	
800	434.080.102	
900	434.090.101	

An assembly sheet is included.

Technical data

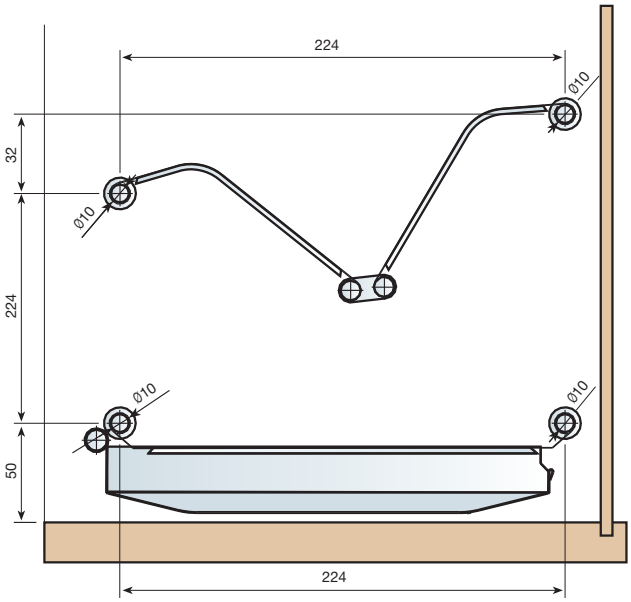

Drilling to be carried out in the module ø 10mm, depth 10mm.

Assembly

Quick and easy to assemble, a template of instructions is included on how it can be fitted. The plate-rack does not need screws and is automatically placed into the pre-drilled holes as you can see in the picture below.

Place the template at the bottom and back of the unit.

Mark with a punch tool as indicated on the template. Various options are available, depending on the desired angle of the plate-rack. Carry out steps 1 and 2 on both sides of the unit.

Drill the 8 holes needed to fit the plate-rack onto the points marked out with the punch tool.

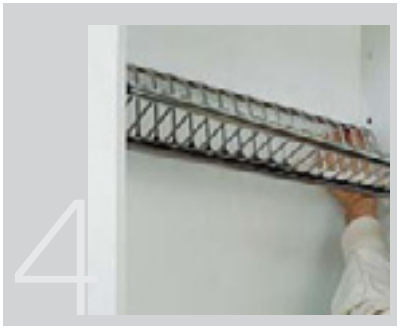

Proceed to fitting the plate-rack. Pressing the locking lugs, these will be retracted and easily fitted in the module drillings.



Lastly the assembly, insert the tray onto the plate-rack support.

NOTES

KITCHEN ACCESSORIES

pp.

1 WORK SURFACE ACCESSORIES 218
- Aluminium end-strips 218
- Aluminium joining strips 219
- Assemblies for work surfaces 220



2 KITCHEN ACCESSORIES 222
- Sink base protector 222
- Side extractor hood protector 222
- Extractor hood adjustment pivot 222

3 VENTILATION GRILLE 223
- Ventilation grille 65 mm. 223
- Ventilation grille 130 mm. 223

1 WORK SURFACE ACCESSORIES

Work surface accessories

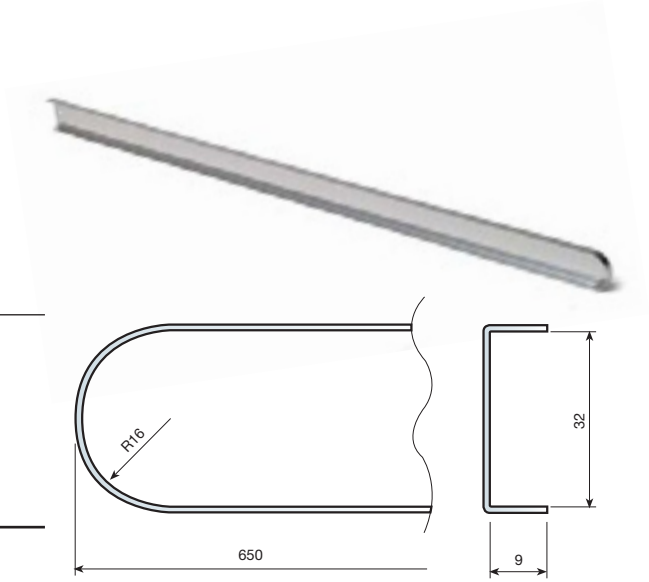

End-strip 30 - 1 radius.

Lacquered white	134.630.801	
Aluminium gloss	134.630.506	
Brass	134.630.786	50
Gold	134.630.775	
Black	134.630.893	

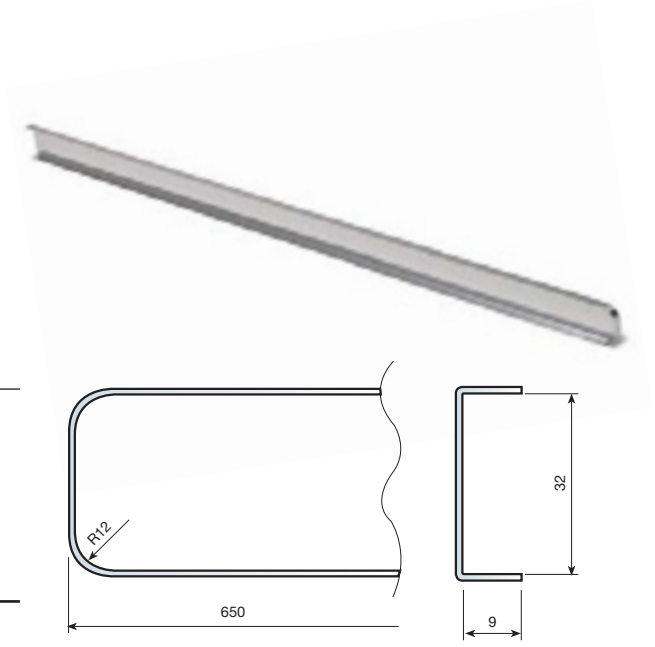

End-strip 30 - 2 radii.

Lacquered white	134.730.805	
Aluminium gloss	134.730.503	
Brass	134.730.783	50
Gold	134.730.772	
Black	134.730.890	

Aluminium joining strips

Joining strip 30 straight “T” - 1 radius.

Lacquered white	134.030.805	
Aluminium gloss	134.030.503	
Brass	134.030.783	50
Gold	134.030.772	
Black	134.030.890	

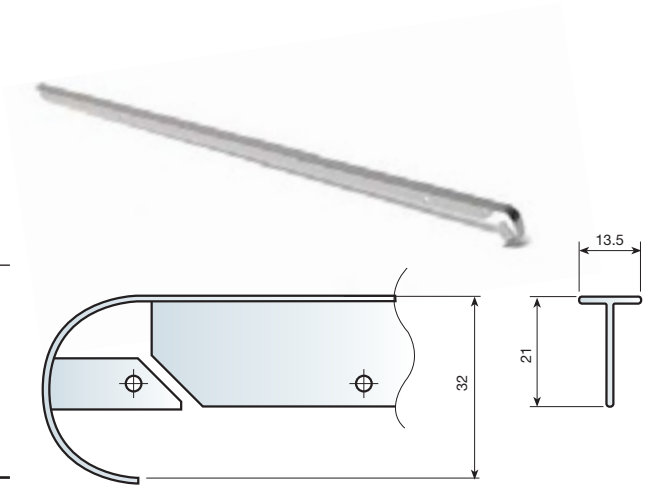

Joining strip 30 straight.

Lacquered white	134.130.802	
Aluminium gloss	134.130.500	
Brass	134.130.780	50
Gold	134.130.776	
Black	134.130.894	

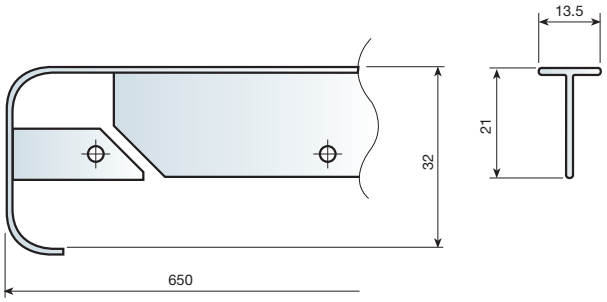

Joining strip 30 shifted “T” - 1 radius.

Lacquered white	134.330.803	
Aluminium gloss	134.330.501	
Brass	134.330.781	50
Gold	134.330.770	
Black	134.330.895	

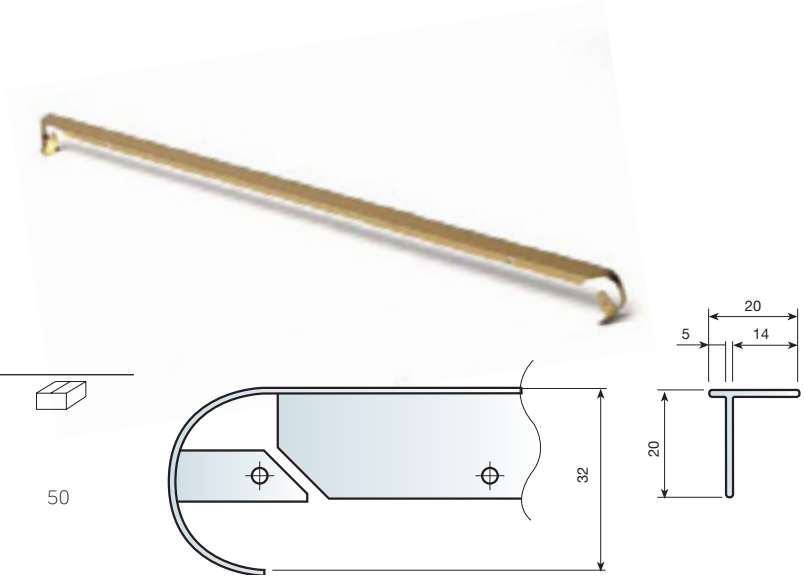

Joining strip 30 shifted “T” - 2 radii.

Lacquered white	134.430.800	
Aluminium gloss	134.430.505	
Brass	134.430.785	50
Gold	134.430.774	
Black	134.430.892	

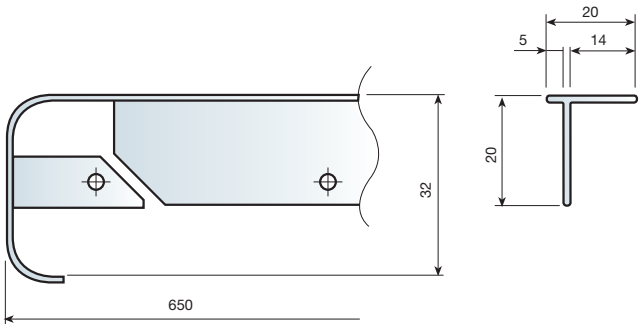

Work surface assemblies

This concealed assembly will enable you to quickly and safely join work surfaces, boards and mitre joints.



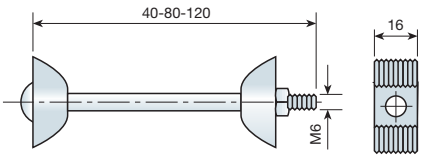

Assembly to join work surfaces.

L (mm.)		
40	521.604.031	
80	521.608.032	250
120	521.612.033	

Every assembly has 2 bodies, 1 screw and 1 nut.

Assembly

Drill a hole ø 35 mm. By 20 mm. Deep at distance a from each end to be joined. In line with the holes' axis, join it all with a channel 15 mm. Wide by 15 mm. Deep. When the nut is tightened, the half-moon-shaped joining parts will be tightened against the walls of the drill holes.

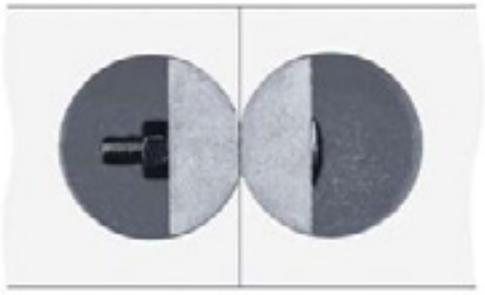

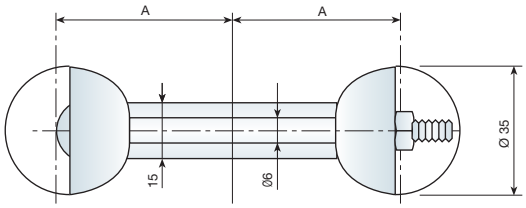

Length of screw	Distance from drill hole "a"
40mm.	From 17 to 20 mm.
80mm.	From 33 to 40 mm.
120mm.	From 53 to 60 mm.



The channel is not required with the centre at 17mm.

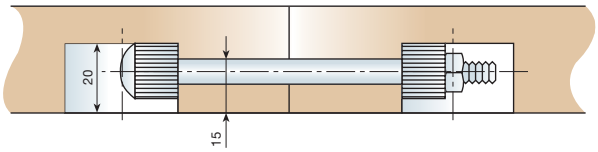

Assembly to join work surfaces.

L (mm.)	Zinc-coated	
65	519.306.034	
100	519.310.035	200
150	519.315.031	

Every reference is supplied pre-assembled.

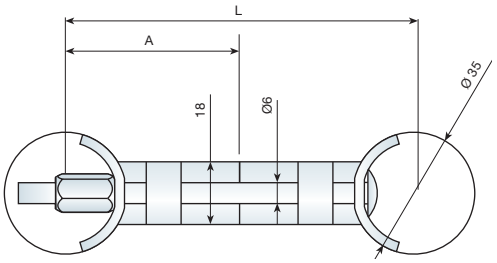

Measurements.

L (mm.)	A (min.)	A (max.)
65	32	42
100	50	60
150	75	85

Assembly

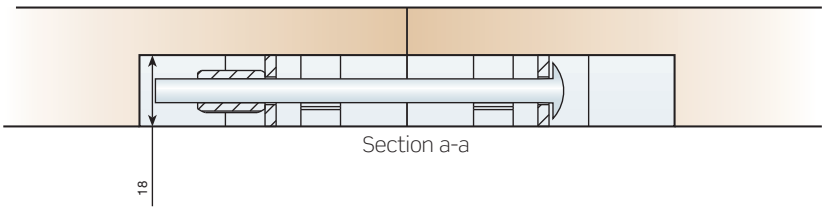

2 KITCHEN ACCESSORIES

Sink base protector

Sink base protector.

Model	A	F	Embossed aluminium	
-		498	465.049.502	
400	365	518	465.051.506	
-		558	465.055.500	
-		498	465.149.506	
450	415	518	465.151.503	
-		558	465.155.504	
-		498	465.249.503	
500	465	518	465.251.500	
-		558	465.255.501	
-		498	465.349.500	
600	565	518	465.351.504	5
-		558	465.355.505	
-		498	465.449.504	
700	665	518	465.451.501	
-		558	465.455.502	
-		498	465.549.501	
800	765	518	465.551.505	
-		558	465.555.506	
-		498	465.649.505	
900	865	518	465.651.502	
-		558	465.655.503	

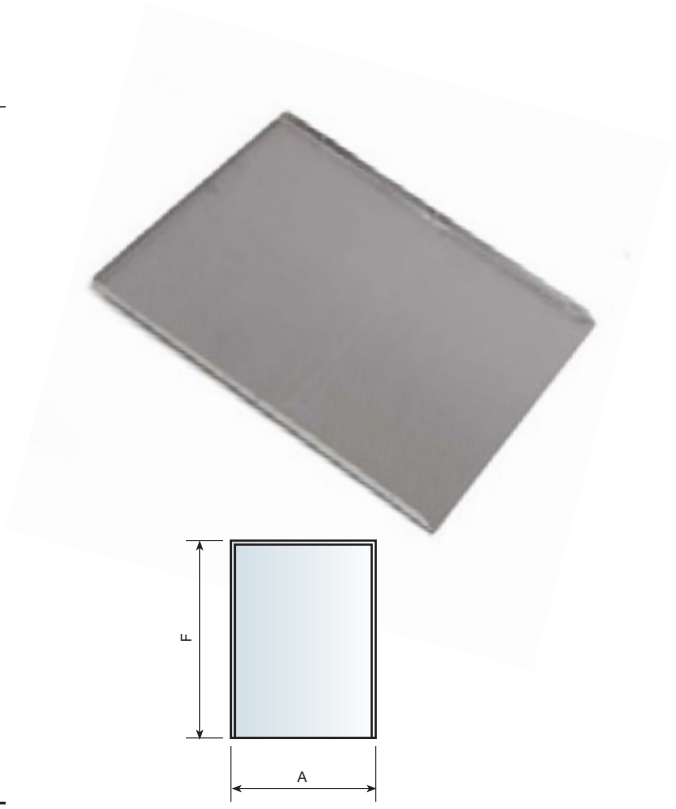

Side extractor hood protector

Side extractor hood protector.

A	White alacquered aluminium	
290	466.629.800	
300	466.630.802	10
330	466.633.801	

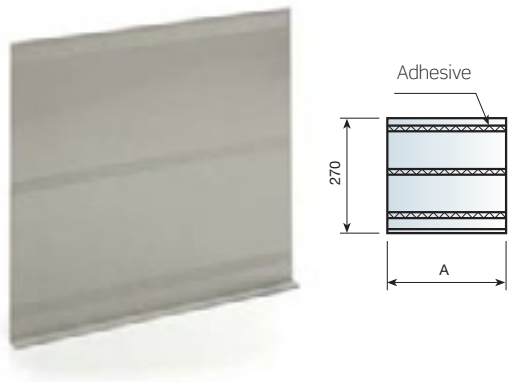

Extractor hood adjustment pivot

Extractor hood adjustment pivot.

White	Ral 9001	610.000.005	500
Brown	Ral 8016	610.000.016	

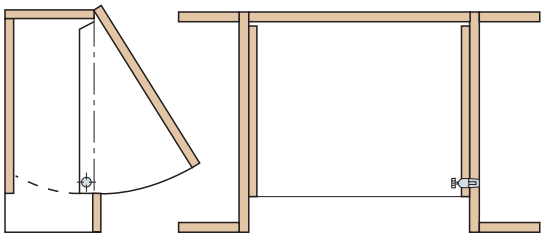

3 VENTILATION GRILLE

Ventilation grille: 65 mm.

Ventilation grille: 65 mm.

Matt anodised aluminium	478.065.501	10
Brass anodised aluminium	478.065.781	
White lacquered aluminium	478.065.803	
Black lacquered aluminium	478.065.895	

In box of 10 bags.
Every bag contains 4 loose strips and 2 supports for assembly.

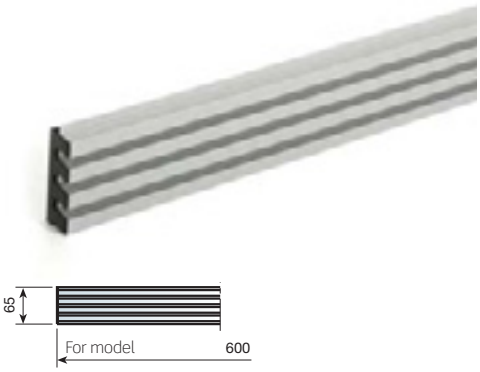

Ventilation grille: 130 mm.

Ventilation grille: 130 mm.

Matt anodised aluminium	478.113.506	10
Brass anodised aluminium	478.113.786	
White lacquered aluminium	478.113.801	
Black lacquered aluminium	478.113.893	

In box of 10 bags.
Every bag contains 8 loose strips and 2 supports for assembly.

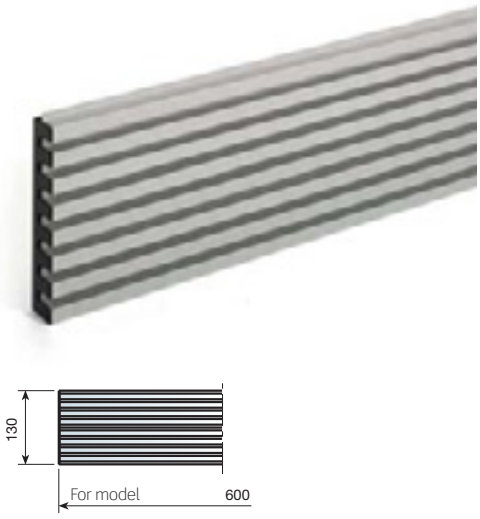

INDAUX
FURNITURE FITTINGS MANUFACTURER

04

ASSEMBLIES

CAMS

Ø15 Cam 227

Ø25 Cam 237

Ø25 Snail cam 243

Ø25 Spiral cam 249

Ø35 Spiral cam 257

JOINING ASSEMBLIES

Joining assemblies 263

Tightening bolt 271

Right-hand screws 275

Brackets 277

Screws and nuts 279

Assemblies for work surfaces 283

Bed side rails support 285

Accessories 287

SHELF SUPPORTS

CLOCK shelf assemblies 293

Shelf supports 299

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

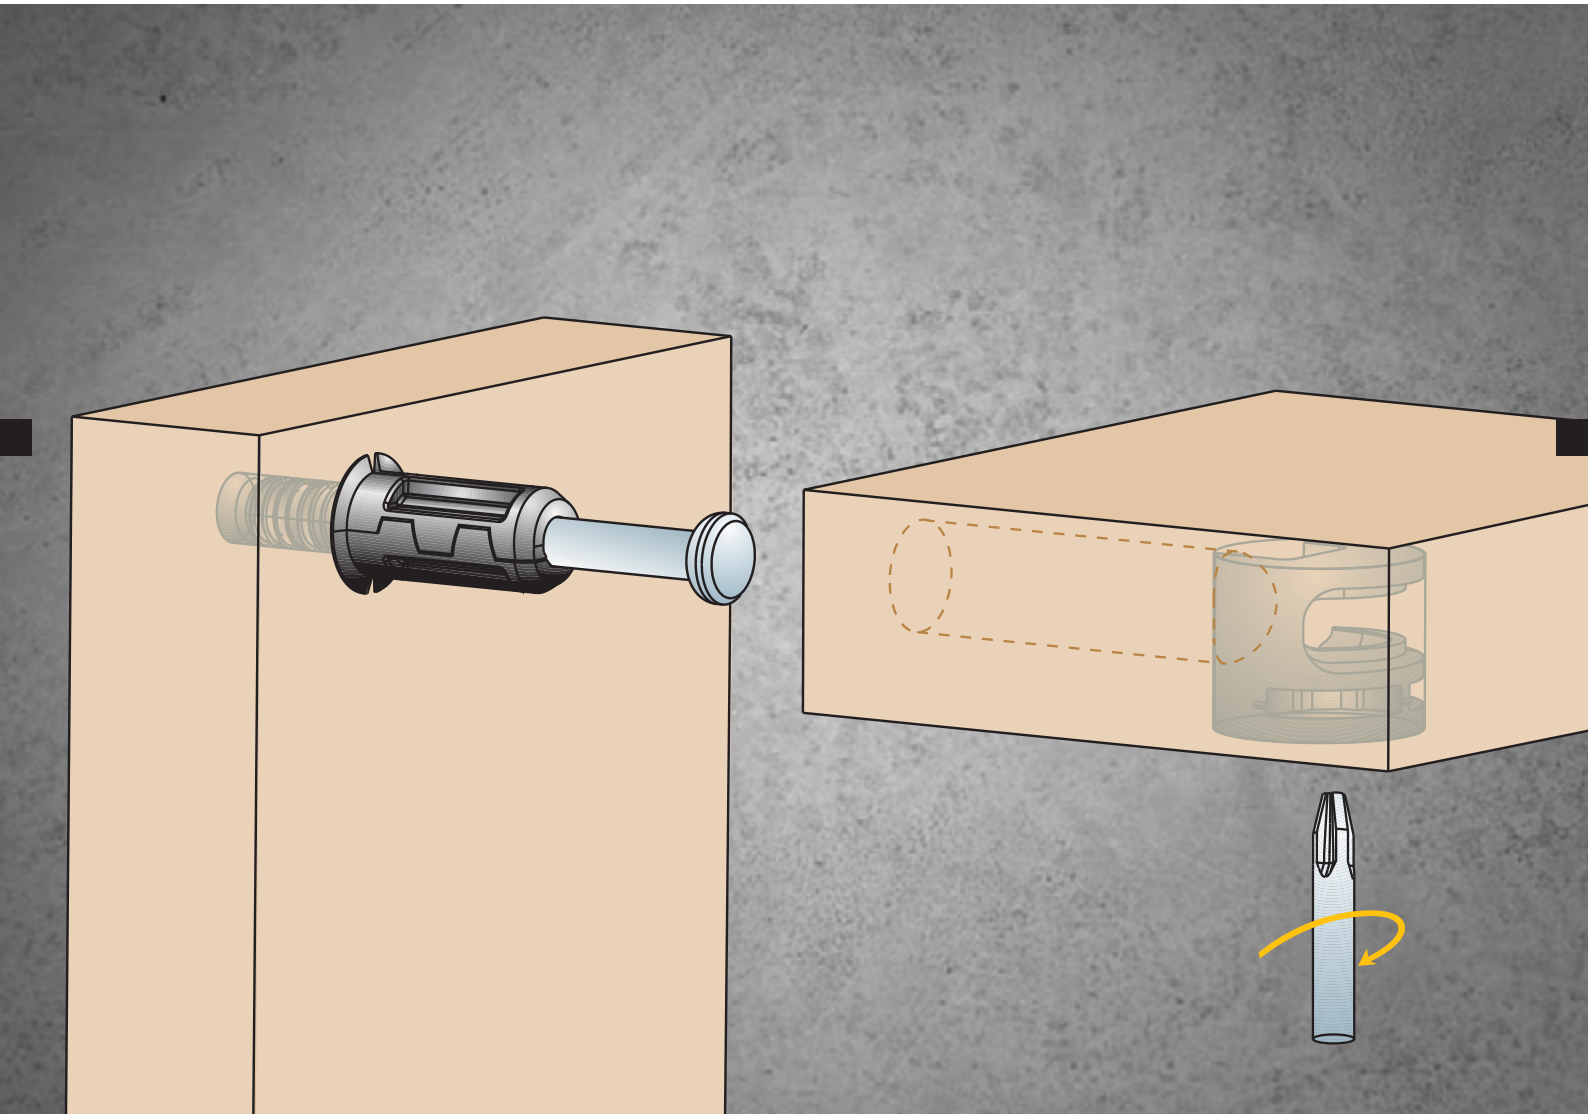

Ø15 CAM

Universal assembly

Ø15 CAM

Universal assembly

Universal Ø15mm cam assembly for all our bolt models.

pp.

1 CAMS AND COVERS 229

2 BOLTS 230

- Single bolts  230
- Articulated and twin bolts  231
- Expanding bolts  232

3 NUTS 234

1 CAMS AND COVERS

Ø4 mm. cover cap.

White	Ral 9003	531.217.002	2.000 or 10.000
Brown	Ral 8016	531.217.013	
Black	Ral 9005	531.217.024	
Nickel-plated		531.217.061	

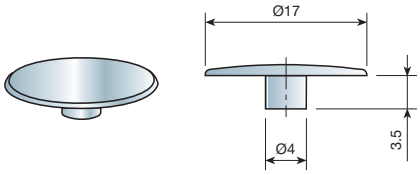

Ø15 mm. Cam.

Panel thickness	16mm.	19mm.	
C	8mm.	9,5mm.	
Natural	511.108.102	511.195.101	2.000
Black zinc-plated	511.108.043	511.195.042	
Bichromated	511.108.054	511.195.053	
Nickel-plated	511.108.065	511.195.064	





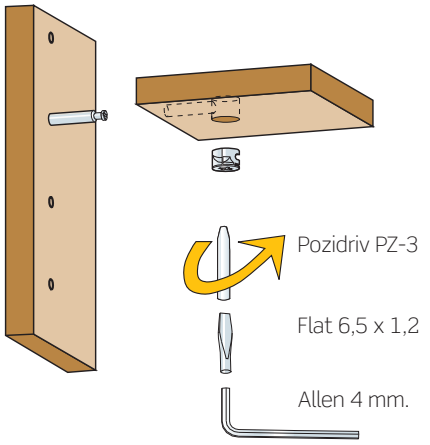

The Ø15 mm. cam can be used with any of our connecting bolts.

	Wood threaded steel-connecting bolt
	M6 steel connecting bolt
	Self-expanding bolt
	Connecting bolt with safety washer
	Connecting bolt
	Articulated connecting bolt
	90° angle connecting bolt

2 BOLTS

Single bolts

Wood threated connecting bolt.

	D= 34mm.	
Zinc-plated steel	523.834.032	2.500



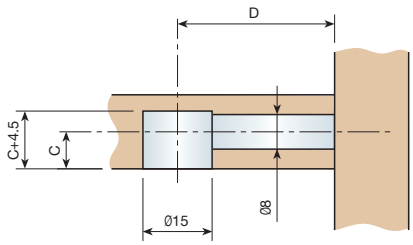

M6 connecting bolt.

	D= 34mm.	
Zinc-plated steel	523.934.036	2.500



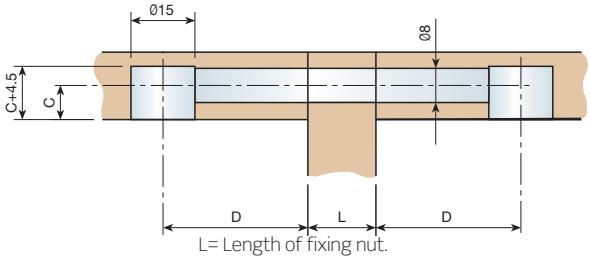

L= Length of fixing nut.

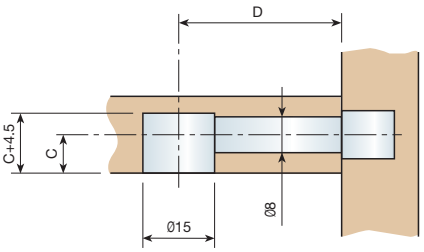

Articulated and twin bolts

Articulated bolt.

Zinc-plated	524.144.036	1.000





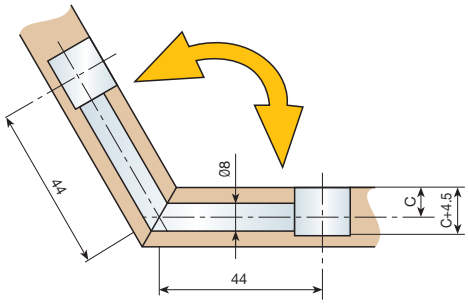

Angle connecting-bolt.

	D= 34mm.	
Zinc-plated	524.634.036	1.000





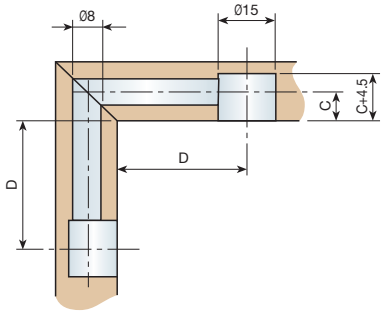

Double-ended connecting bolt.

	D= 34mm.	
Zinc-plated	524.834.030	1.000





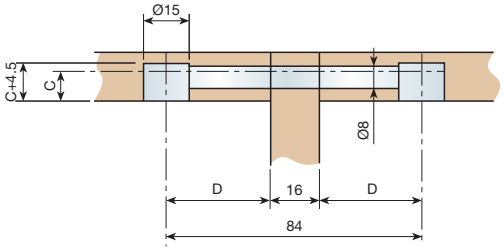

Double-ended connecting bolt with washer.

	Zinc-plated	
D= 24mm	524.724.034	1.000
D= 34mm	524.734.033	





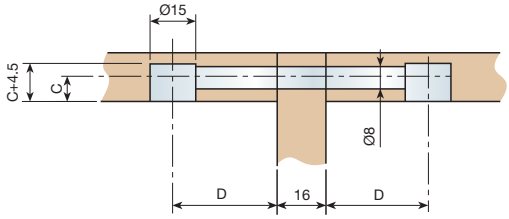

Self-expanding bolts

This bolt gives saves substantial assembly time, for either production Assembly, or for kd furniture. Available for 24 and 34 drilling centres. For 5, 8 or 10mm drilling on the gable end.

Self-expanding bolt.

Natural	Ø5mm.	Ø8mm.	Ø10mm.	
D= 24 mm.	525.224.103	525.324.100	525.424.104	2.000
D= 34 mm.	525.234.102	525.334.106	525.434.103	







It can be fitted or removed from its housing by hand, tool-free.





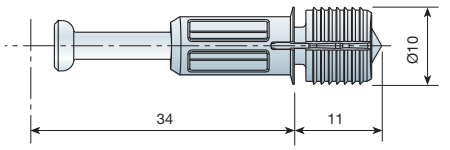

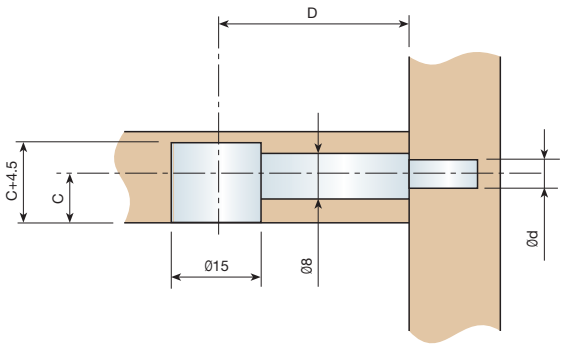

Assembly

When turning the cam the rod is moved and the portion housed in the gable end is simultaneously expanded, so strong and efficient interlocking is achieved.

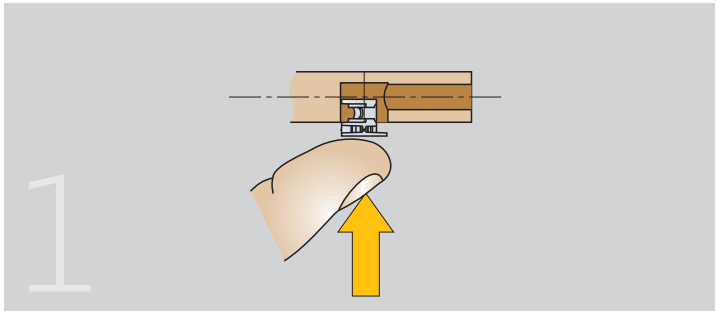

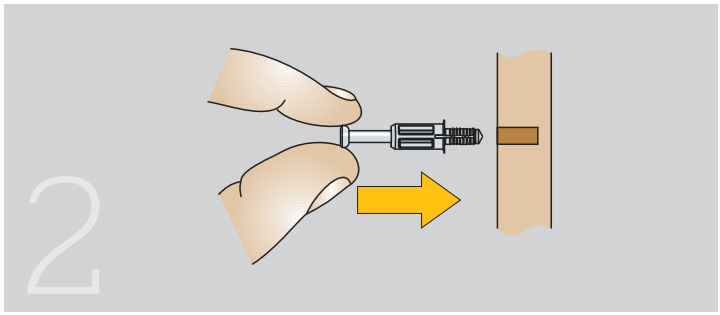

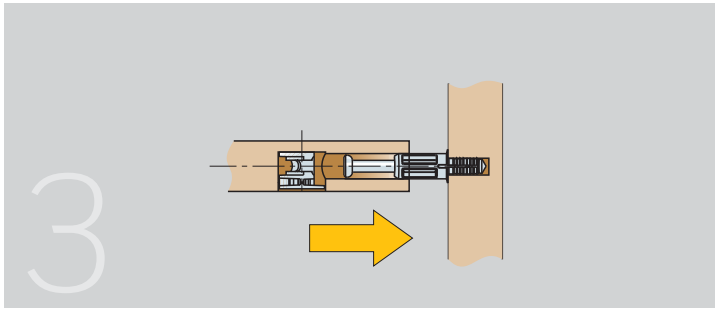

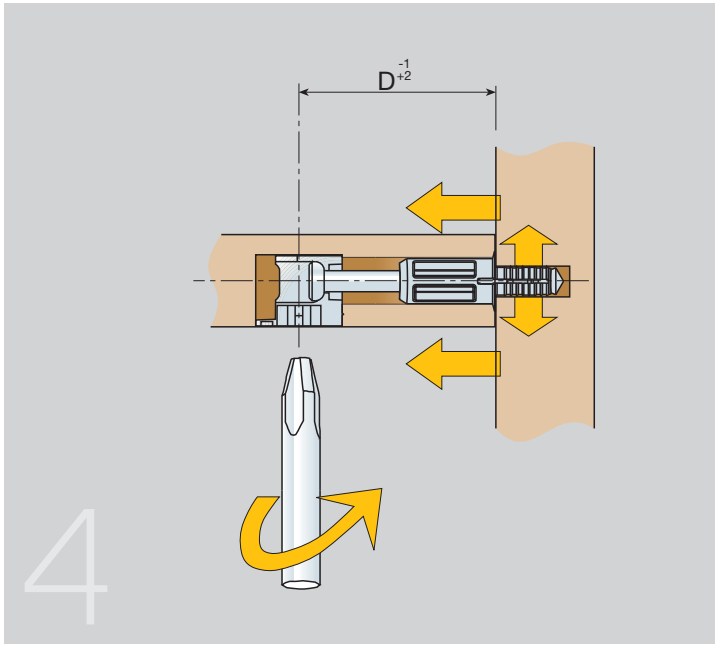

3 NUTS

Steel wood-threaded nut without head.

			Bichromated		
L (mm.)	Ød(mm.)	ØD (mm.)	1/4"	M6	
10	8	10	947.510.056	947.810.054	2.500
12	8	10	947.512.053	947.812.051	2.000
14	8	10	947.514.050	947.814.055	2.000
18	8	10	947.518.051	947.818.056	2.000
22	8	10	947.522.052	947.822.050	2.000
10	9	12	947.610.053	947.910.051	2.000
12	9	12	947.612.050	947.912.055	2.000
14	9	12	947.614.054	947.914.052	2.000
16	9	12	947.616.051	947.616.051	2.000
18	9	12	947.618.055	947.918.053	2.000

L (mm.)	Ød(mm.)	ØD (mm.)	M8	
22	11	14	948.222.052	1.500



Expanding brass nut.

	M4	
	944.805.105	2.000 or 10.000



M6 self-expanding.

	M6	
Ø8 x 12mm.	944.112.105	5.000



Wing nut.

	1/4"	M6	
Bichromated		948.913.055	2.000
Zinc-plated	948.813.036		



Wing nut with head.

	1/4"	M6	M8	
Bichromated		948.713.054		2.000
Zinc-plated	948.613.035		948.515.035	









M4 nylon knock-in nut for Ø8.

Natural		937.004.106	2.000 or 10.000
Brown	Ral 8016	937.004.014	



Nylon knock-in nut for Ø10.

R		M6	1/4"	
Natural		937.006.103	937.014.105	
Brown	Ral 8016	937.006.011	937.014.013	2.000 or 10.000
Black	Ral 9005	937.006.022	937.014.024	



Nylong knock-in nut for Ø11.

R		M6	1/4"	
Natural		937.106.100	937.114.102	4.000
Brown	Ral 8016	937.106.015	937.114.010	



M6 nylon knock-in nut for Ø10, in strips.

Natural		937.406.105	
Brown	Ral 8016	937.406.013	4.800
Black	Ral 9005	937.014.024	

Every box contains 200 strips.
The strips come with 24 units, and they may be placed manually or by means of a pneumatic gun with a charger.



M6 Steel ribbed nut.

L	16mm.	18mm.	
Zinc-plated	938.716.100	938.718.104	1.000 or 5.000



NOTES

Ø25 CAM

pp.

1 CAMS AND COVERS 238

2 BOLTS 239

3 NUTS 240

1 CAMS AND COVERS

Cover Ø25 mm.

White	Ral 9003	530.400.006	
Brown	Ral 8016	530.400.010	2.000
Black	Ral 9005	530.400.021	
Nickel-plated		530.400.065	1.000



Cover with lugs Ø25 mm.

White	Ral 9003	530.100.001	
Brown	Ral 8016	530.100.012	2.000
Black	Ral 9005	530.100.023	



Cam Ø25 mm.

Natural	510.011.106	2.000

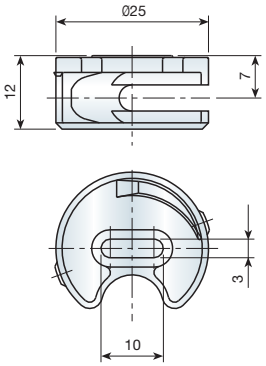

2 BOLTS

Wood threaded bolt.

Drilling distance 33mm.

Zinc-coated	520.839.034	2.000

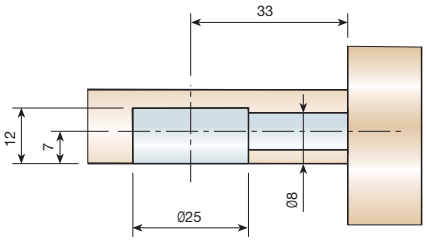



Bolt M6.

Drilling distance 33mm.

Zinc-coated	520.735.036	2.000

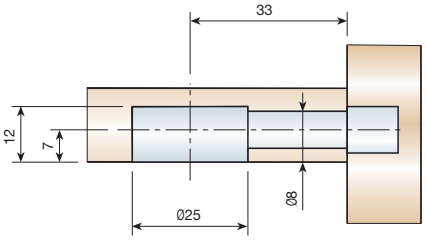



Twin bolt.

Zinc-coated	522.077.032	1.000

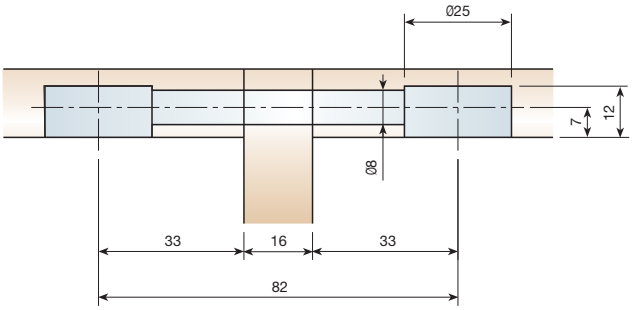

Twin angle bolt.

Zinc-coated	522.100.036	1.000

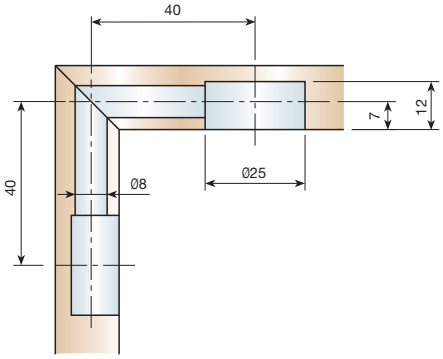



3 NUTS

Steel wood-threaded nut, without head.

L (mm.)	Ød(mm.)	ØD (mm.)	Bichromated 1/4"	Bichromated M6	
10	8	10	947.510.056	947.810.054	2.500
12	8	10	947.512.053	947.812.051	2.000
14	8	10	947.514.050	947.814.055	2.000
18	8	10	947.518.051	947.818.056	2.000
22	8	10	947.522.052	947.822.050	2.000
10	9	12	947.610.053	947.910.051	2.000
12	9	12	947.612.050	947.912.055	2.000
14	9	12	947.614.054	947.914.052	2.000
16	9	12	947.616.051	947.616.051	2.000
18	9	12	947.618.055	947.918.053	2.000

L (mm.)	Ød(mm.)	ØD (mm.)	M8	
22	11	14	948.222.052	1.500



Expanding brass nut.

M4	
944.805.105	2.000 or 10.000



M6 self-expanding brass nut.

M6	
Ø8 x 12mm. 944.112.105	5.000



Wing nut

1/4"	M6	
Bichromated	948.913.055	2.000
Zinc-coated 948.813.036		



Wing nut with head.

1/4"	M6	M8	
Bichromated	948.713.054		2.000
Zinc-coated 948.613.035		948.515.035	









M4 nylon Knock-in nut for Ø8.

Natural		937.004.106	2.000 or 10.000
Brown	Ral 8016	937.004.014	



Nylon Knock-in nut for Ø10

R		M6	1/4"	
Natural		937.006.103	937.014.105	2.000 or 10.000
Brown	Ral 8016	937.006.011	937.014.013	
Black	Ral 9005	937.006.022	937.014.024	



Nylon Knock-in nut for Ø11

R		M6	1/4"	
Natural		937.106.100	937.114.102	4.000
Brown	Ral 8016	937.106.015	937.114.010	



M6 nylon Knock-in nut for Ø10, in strips.

Natural		937.406.105	4.800
Brown	Ral 8016	937.406.013	
Black	Ral 9005	937.014.024	

Every box contains 200 strips.
The strips come with 24 units, and they may be placed manually or by means of a neumatic gun with a charger.



M6 steel ribbed Knock-in nut.

L	16mm.	18mm.	
Zinc-coated	938.716.100	938.718.104	1.000 or 5.000



NOTES

Ø25 SNAIL CAM

pp.

1 CAMS AND COVERS 244

2 BOLTS 245

3 NUTS 246

1 CAMS AND COVERS

Cover Ø25 mm.

R			
White	Ral 9003	530.400.006	
Brown	Ral 8016	530.400.010	2.000
Black	Ral 9005	530.400.021	
Nickel-plated		530.400.065	1.000



Narrow snail cam Ø25 mm.

R		
Zinc-coated	510.308.035	2.000

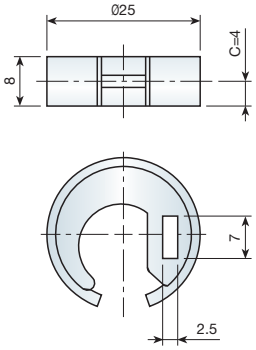

Widesnail cam Ø25 mm.

R		
Zinc-coated	510.211.030	1.000

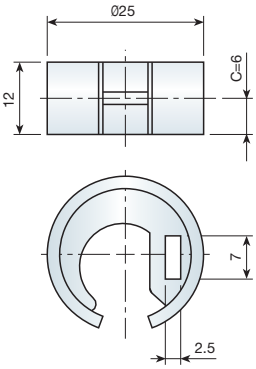

2 BOLTS

M6 eye bolt.

Drilling distance 33mm.

Zinc-coated	520.937.034	2.000

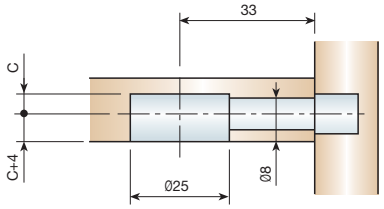



Double eye bolt.

Zinc-coated	521.079.031	1.000

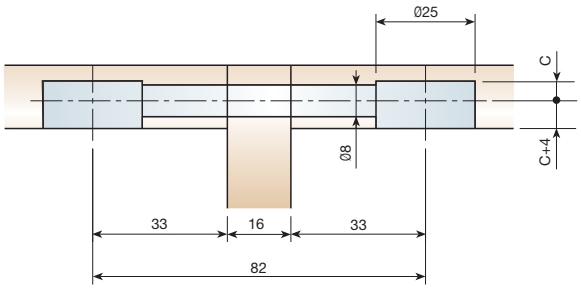



Angle double eye bolt.

Zinc-coated	521.100.031	1.000

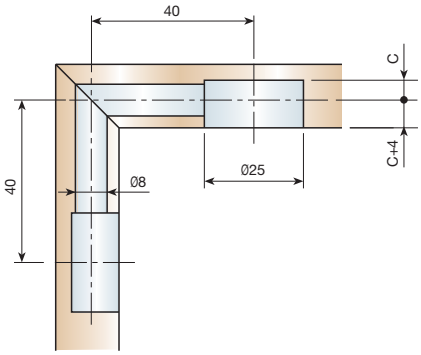



3 NUTS

Steel wood-threaded nut, without head.

			Bichromated		
L (mm.)	Ød(mm.)	ØD (mm.)	1/4"	M6	
10	8	10	947.510.056	947.810.054	2.500
12	8	10	947.512.053	947.812.051	2.000
14	8	10	947.514.050	947.814.055	2.000
18	8	10	947.518.051	947.818.056	2.000
22	8	10	947.522.052	947.822.050	2.000
10	9	12	947.610.053	947.910.051	2.000
12	9	12	947.612.050	947.912.055	2.000
14	9	12	947.614.054	947.914.052	2.000
16	9	12	947.616.051	947.616.051	2.000
18	9	12	947.618.055	947.918.053	2.000

L (mm.)	Ød(mm.)	ØD (mm.)	M8	
22	11	14	948.222.052	1.500



Expanding brass nut.

	M4	
	944.805.105	2.000 or 10.000



M6 self-expanding brass nut.

	M6	
Ø8 x 12mm.	944.112.105	5.000



Wing nut.

	1/4"	M6	
Bichromated		948.913.055	2.000
Zinc-coated	948.813.036		



Wing nut with head.

	1/4"	M6	M8	
Bichromated		948.713.054		2.000
Zinc-coated	948.613.035		948.515.035	









M4 nylon knock-in nut for Ø8.

Natural		937.004.106	2.000 or 10.000
Brown	Ral 8016	937.004.014	



Nylon knock-in nut for Ø10.

		M6	1/4"	
Natural		937.006.103	937.014.105	2.000 or 10.000
Brown	Ral 8016	937.006.011	937.014.013	
Black	Ral 9005	937.006.022	937.014.024	



Nylon knock-in nut for Ø11

		M6	1/4"	
Natural		937.106.100	937.114.102	4.000
Brown	Ral 8016	937.106.015	937.114.010	



M6 nylon knock-in nut for Ø10, in strips.

Natural		937.406.105	4.800
Brown	Ral 8016	937.406.013	
Black	Ral 9005	937.014.024	

Every box contains 200 strips.
The strips come with 24 units, and they may be placed manually or by means of a neumatic gun with a charger.



M6 steel ribbed knock-in nut.

	16mm.	18mm.	
Zinc-coated	938.716.100	938.718.104	1.000 or 5.000



NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

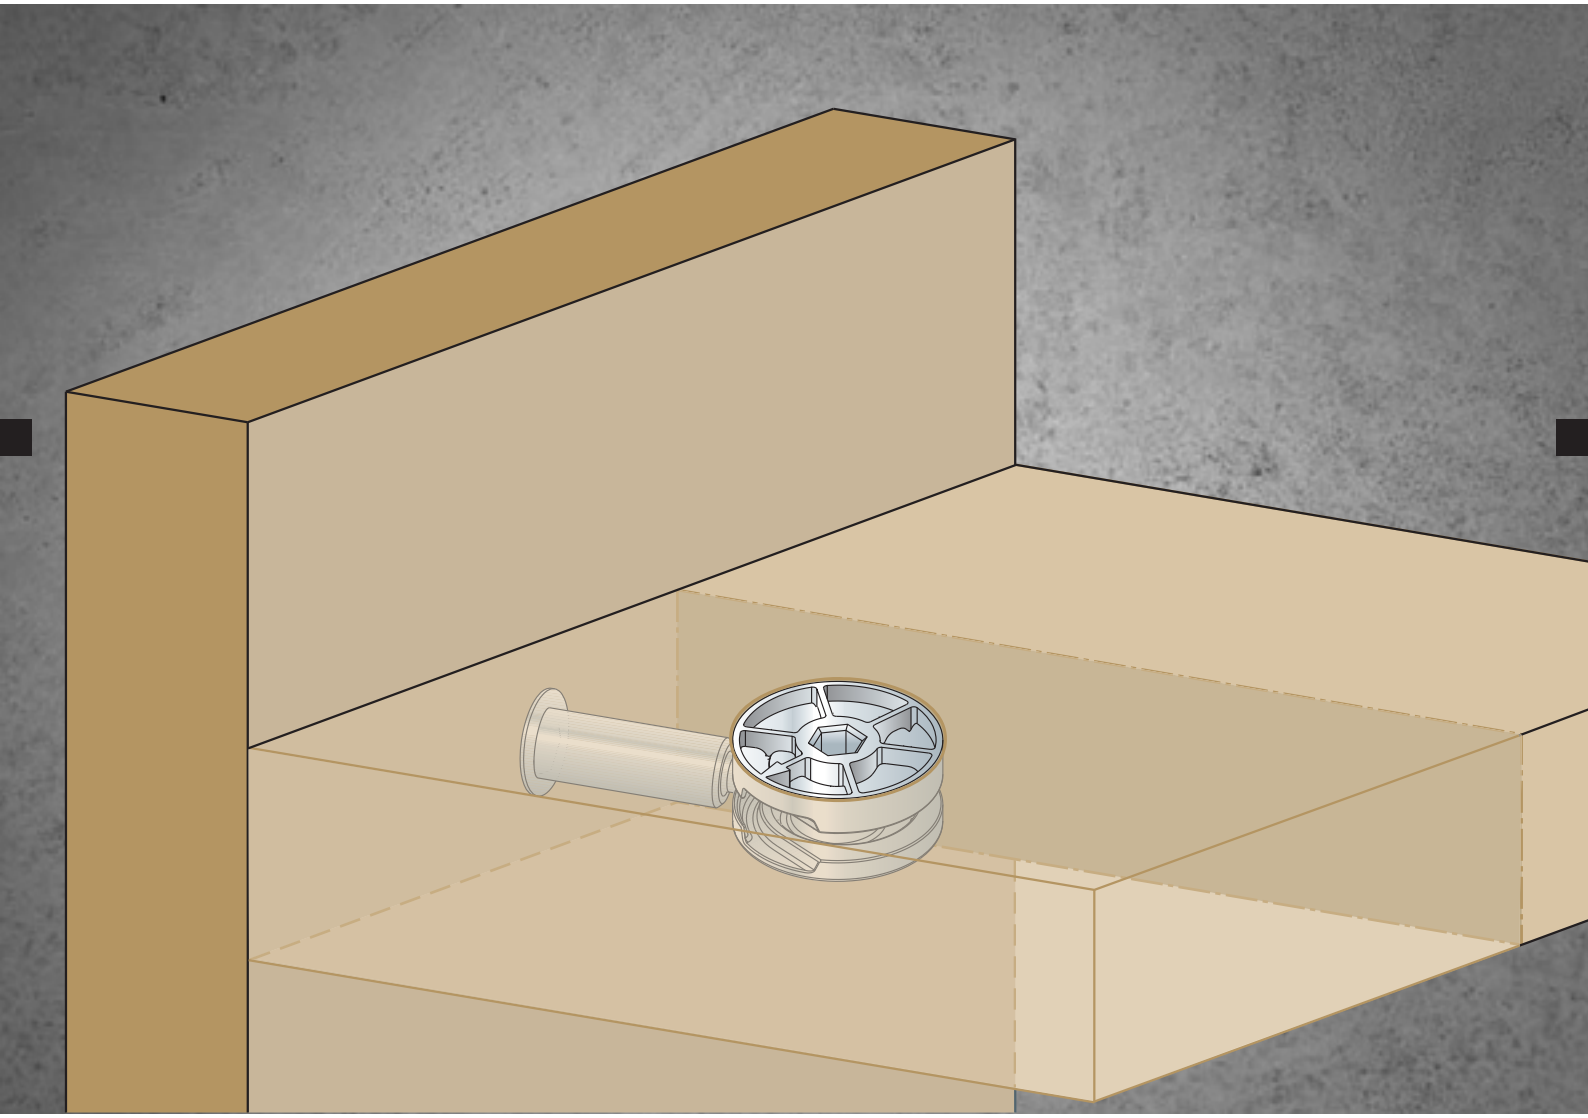

Ø25 SPIRAL CAM

Ø25 SPIRAL CAM

A solution for heavy loads but with minimum drilling requirements. The Ø25 spiral cam eliminates any possible loosening due to vibration. For 15 mm.-Thick boards and upwards.

pp.

1 CAMS AND COVERS 251

2 BOLTS .....  252

3 NUTS 253

4 ASSEMBLY 255

1 CAMS AND COVERS

Ø25 mm. Spiral cam.

Nickel	511.525.066	
Zinc-plated	511.525.033	500





Cover cap.

		Board thickness	Cover		
Nickel		14 To 20mm	a	530.225.065	
White	Ral 9003	>20mm	b	530.400.006	500
Brown	Ral 8016	>20mm	b	530.400.010	or
Black	Ral 9005	>20mm	b	530.400.021	1.000
Nickel		>20mm	b	530.400.065	



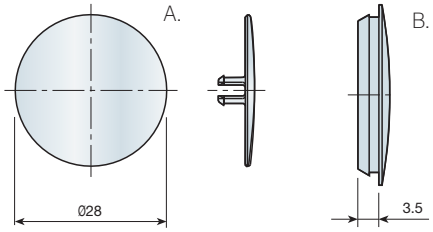

2 BOLTS

Connecting rod

Zinc-plated	520.133.036	500 or 1.000

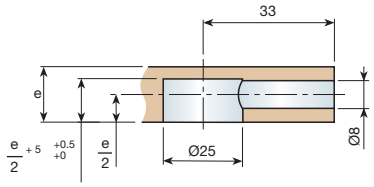





Double connecting rod

Zinc-plated	528.133.034	500

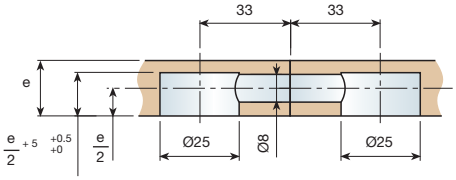





Double connecting rod for middle panel

Zinc-plated	528.233.031	500

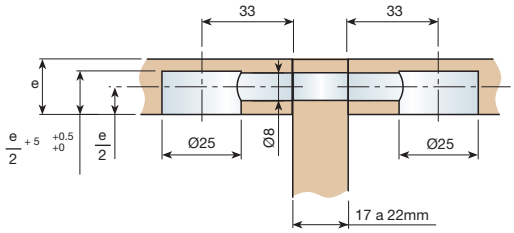





90° connecting rod

Zinc-plated	528.333.035	500

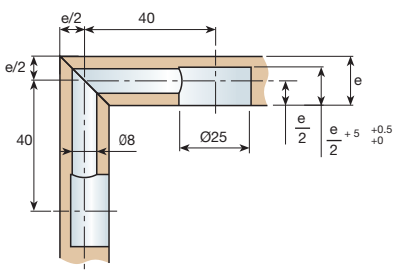





3 NUTS

Steel wood threaded nut without head.

			Bichromated		
L (mm.)	Ød(mm.)	ØD (mm.)	1/4"	M6	
10	8	10	947.510.056	947.810.054	2.500
12	8	10	947.512.053	947.812.051	2.000
14	8	10	947.514.050	947.814.055	2.000
18	8	10	947.518.051	947.818.056	2.000
22	8	10	947.522.052	947.822.050	2.000
10	9	12	947.610.053	947.910.051	2.000
12	9	12	947.612.050	947.912.055	2.000
14	9	12	947.614.054	947.914.052	2.000
16	9	12	947.616.051	947.616.051	2.000
18	9	12	947.618.055	947.918.053	2.000

L (mm.)	Ød(mm.)	ØD (mm.)	M8	
22	11	14	948.222.052	1.500



Expanding brass nut

	M4	
	944.805.105	2.000 or 10.000



M6 self-expanding brass nut.

	M6	
8Ø x 12mm.	944.112.105	5.000



Wing nut.

	1/4"	M6	
Bichromated		948.913.055	2.000
Zinc-plated	948.813.036		



Wing nut with head.

	1/4"	M6	M8	
Bichromated		948.713.054		2.000
Zinc-plated	948.613.035		948.515.035	









3 NUTS

M4 nylon knock-in nut for Ø8.

Natural		937.004.106	2.000 or 10.000
Brown	Ral 8016	937.004.014	



Nylon knock-in nut for Ø10.

R		M6	1/4"	
Natural		937.006.103	937.014.105	
Brown	Ral 8016	937.006.011	937.014.013	2.000 or 10.000
Black	Ral 9005	937.006.022	937.014.024	



Nylon knock-in nut for Ø11.

R		M6	1/4"	
Natural		937.106.100	937.114.102	4.000
Brown	Ral 8016	937.106.015	937.114.010	



M6 nylon knock-in nut for Ø10, in strips.

Natural		937.406.105	4.800
Brown	Ral 8016	937.406.013	
Black	Ral 9005	937.014.024	

Every box contains 200 strips.
The strips come with 24 units, and they may be placed manually or by means of a pneumatic gun with a charger.

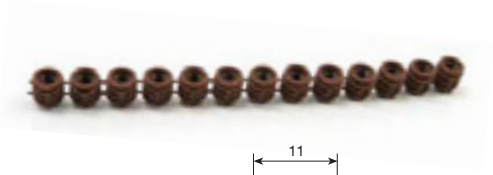



M6 steel ribbed knock-in nut.

L	16mm.	18mm.	
Zinc-plated	938.716.100	938.718.104	1.000 or 5.000



4 ASSEMBLY

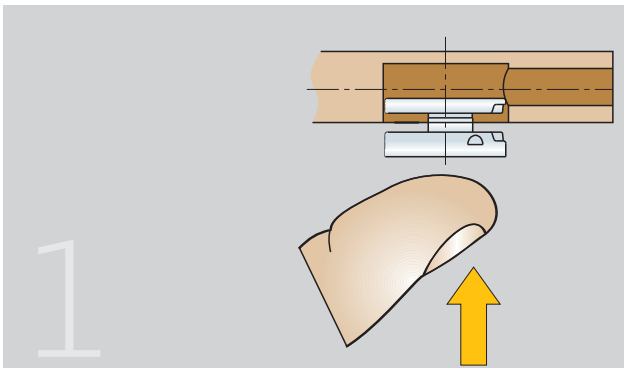

Manually insert the **spiral cam** in the cavity in the shelf or board.

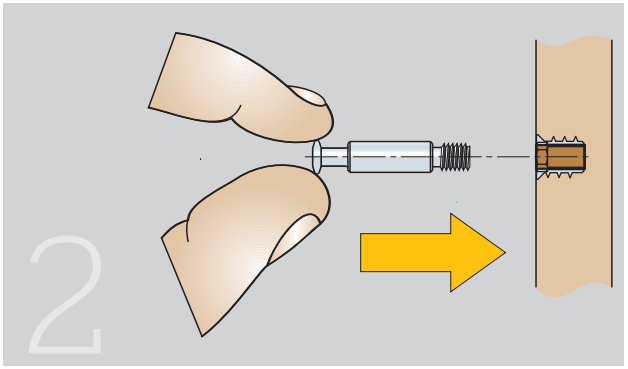

Insert the nut in the side cavity and then screw the bolt into the nut.

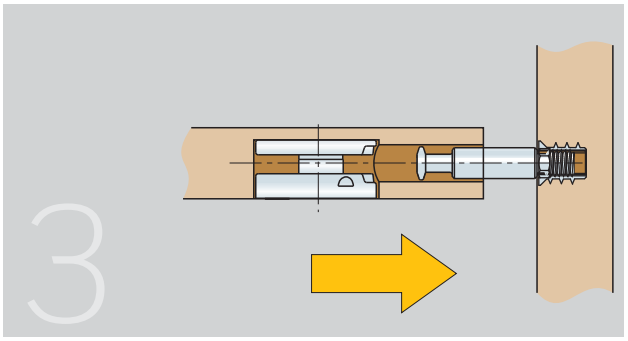

Align the **spiral cam** with the bolt.

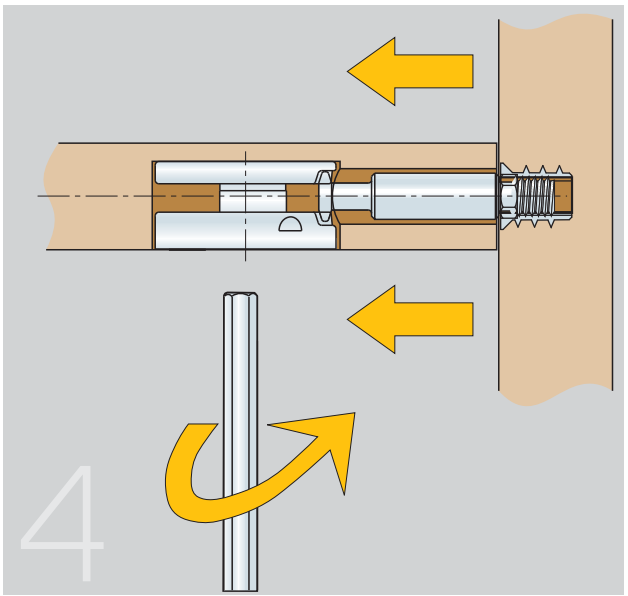

When the cam is turned, the bolt will move towards the cam and the side and the cam will be joined, thus obtaining a strong and effective connection.

To dismantle the shelf, follow the same steps backwards.

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

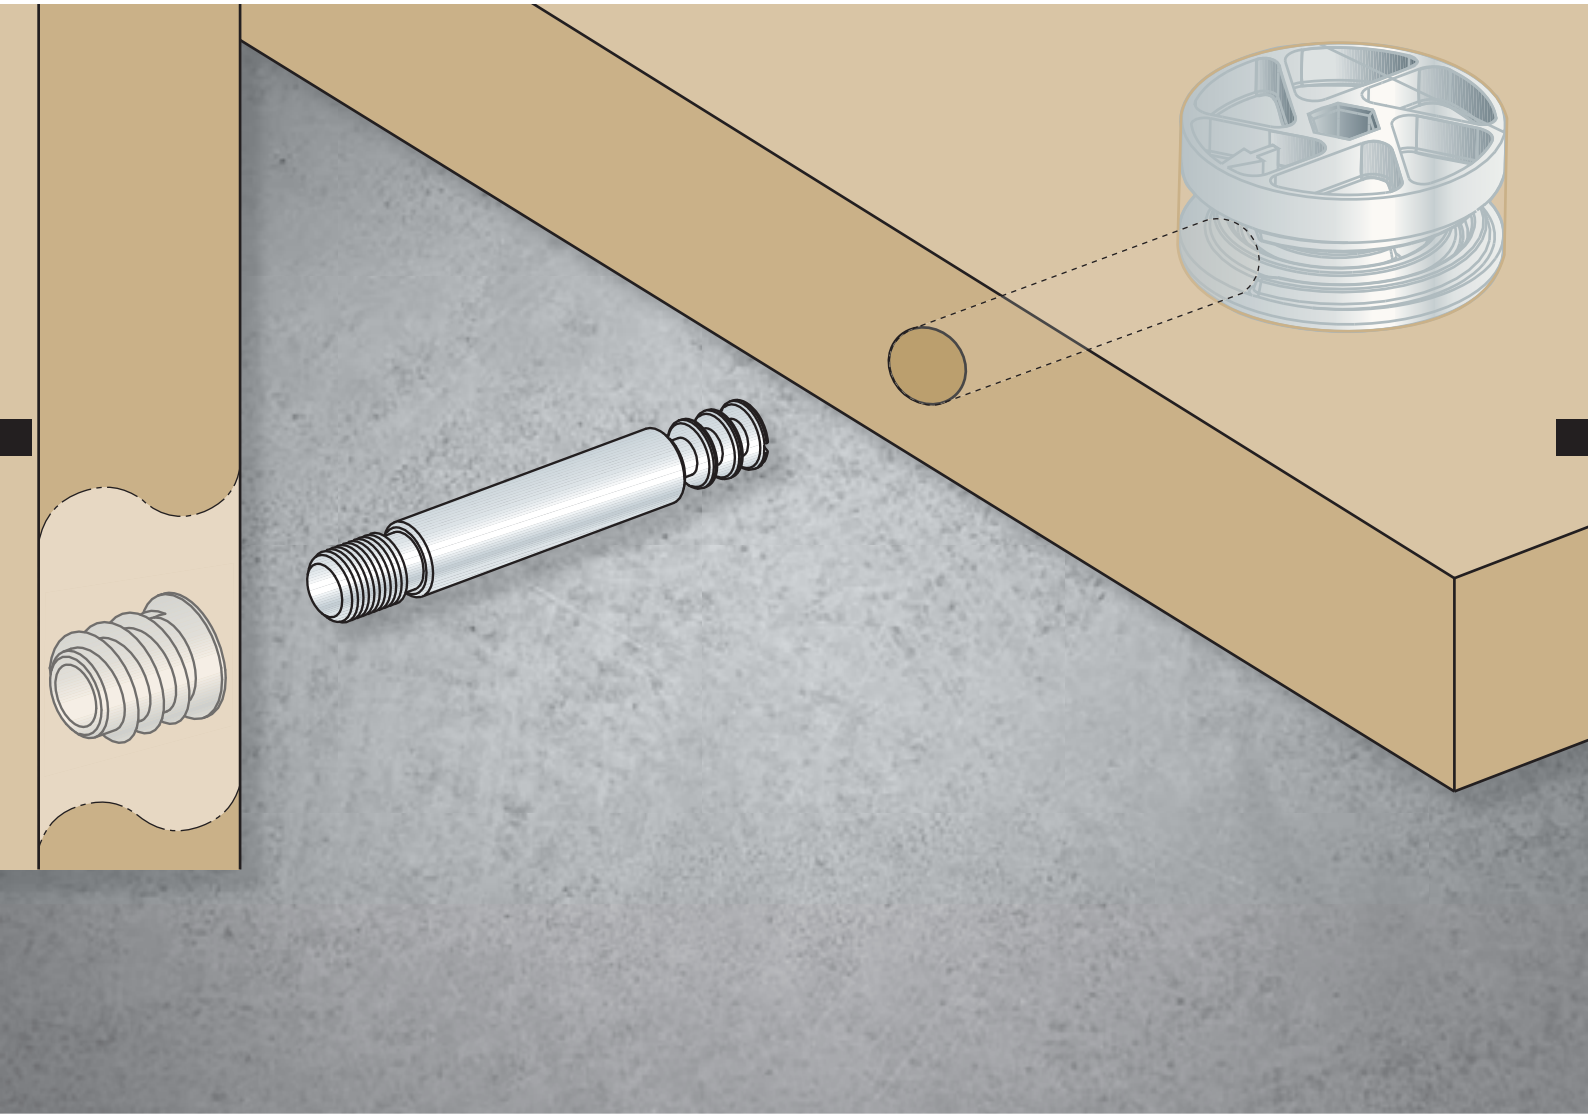

Ø35 SPIRAL CAM

A new solution for heavy loads.

Ø35 SPIRAL CAM

A new solution to heavy loads. The Ø35 spiral cam eliminates any possible loosening due to vibration. M6, M8 and twin holding bolts. For boards with thickness of 19 to 34mm.

pp.

1 CAM AND COVER 259

2 BOLTS  260

3 NUTS 261

1 CAMS

No loosening risk for 19 ÷ 34 mm panels.

Ø35 mm. spiral cam.

Nickel	510.835.065
Zinc-plated	510.835.032

250





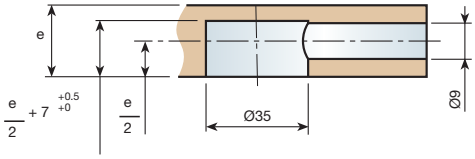

Cover cap.

		Board thickness	cap	
Nickel		19-34	A	531.335.066
White	Ral 9003	>26mm	B	530.500.003
Brown	Ral 8016	>26mm	B	530.500.014
Black	Ral 9005	>26mm	B	530.500.025

1.000





2 BOLTS

Holding bolt.

Drilling distance D		M6	M8	
35mm.	Zinc-plated	521.735.034	521.835.031	500
55mm.	Zinc-plated	521.755.032	521.855.036	

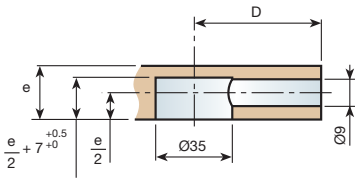

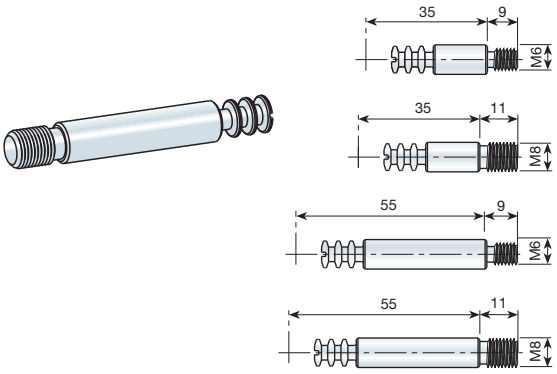

Twin holding bolt.

Zinc-plated	522.470.034	500

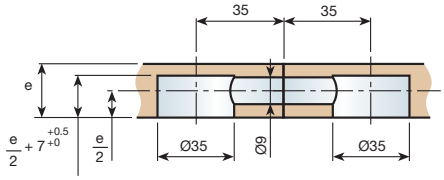



Twin holding bolt for middle panel.

Zinc-plated	522.489.030	500

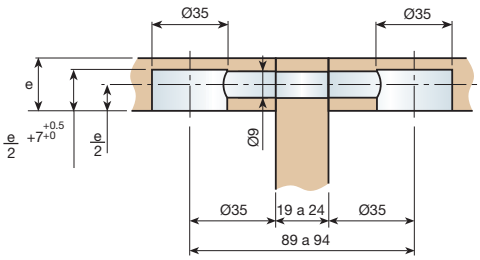



90° holding bolt.

Zinc-plated	522.950.035	500

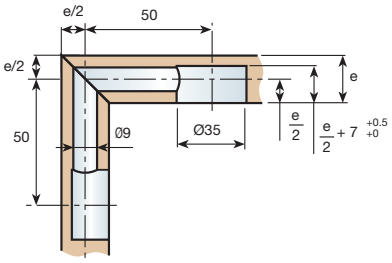

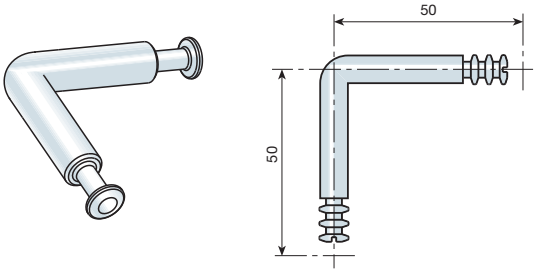

3 NUTS

Steel wood threaded nut without head.

			Bichromated		
L (mm.)	Ød(mm.)	ØD (mm.)	1/4"	M6	
10	8	10	947.510.056	947.810.054	2.500
12	8	10	947.512.053	947.812.051	2.000
14	8	10	947.514.050	947.814.055	2.000
18	8	10	947.518.051	947.818.056	2.000
22	8	10	947.522.052	947.822.050	2.000
10	9	12	947.610.053	947.910.051	2.000
12	9	12	947.612.050	947.912.055	2.000
14	9	12	947.614.054	947.914.052	2.000
16	9	12	947.616.051	947.616.051	2.000
18	9	12	947.618.055	947.918.053	2.000

L (mm.)	Ød(mm.)	ØD (mm.)	M8	
22	11	14	948.222.052	1.500



Expanding brass nut.

	M4	
	944.805.105	2.000 or 10.000



M6 expanding brass nut.

	M6	
Ø8 x 12mm.	944.112.105	5.000



Wing nut.

	1/4"	M6	
Bichromated		948.913.055	2.000
Zinc-plated	948.813.036		



Wing nut with head.

	1/4"	M6	M8	
Bichromated		948.713.054		2.000
Zinc-plated	948.613.035		948.515.035	









3 NUTS

M4 nylon knock-in nut for Ø8.

Natural		937.004.106	2.000 or 10.000
Brown	Ral 8016	937.004.014	



Nylon knock-in nut for Ø10.

R		M6	1/4"	
Natural		937.006.103	937.014.105	2.000 or 10.000
Brown	Ral 8016	937.006.011	937.014.013	
Black	Ral 9005	937.006.022	937.014.024	



Nylon knock-in nut for Ø11.

R		M6	1/4"	
Natural		937.106.100	937.114.102	4.000
Brown	Ral 8016	937.106.015	937.114.010	



M6 nylon knock-in nut for Ø10, in strips.

Natural		937.406.105	4.800
Brown	Ral 8016	937.406.013	
Black	Ral 9005	937.014.024	

Every box contains 200 strips.
Strips may have 24 units; they may be placed manually or using a pneumatic gun with charger.



M6 Steel ribbed nut.

L	16mm.	18mm.	
Zinc-plated	938.716.100	938.718.104	1.000 or 5.000



JOINING ASSEMBLIES

pp.

1 ASSEMBLY SCREWS 264
- Covers 264
- Screws 264

2 JOINING ASSEMBLIES 265

3 KNOCK-IN BODIES 266

4 SCREWS 267

5 NUTS 268

1 ASSEMBLY SCREWS

Covers

Short cover Ø35mm.

Nickel-plated		530.500.062	
White	Ral 9003	530.500.003	1.000
Browin	Ral 8016	530.500.014	
Black	Ral 9005	530.500.025	



Cover with coupling pins Ø35mm.

White	Ral 9003	530.700.004	
Browin	Ral 8016	530.700.015	1.000
Black	Ral 9005	530.700.026	



Screws

Assembly screw with crenellated head 1/4".

Zinc-coated	581.532.033	1.000



Wood-threaded nut without head 1/4".

Bichromated	947.614.054	2.000



Assembly screw with crenellated head.

Length	1/4"	
32	581.432.106	2.000

Special wing washer.

Natural	570.000.104	2.000



Directly tightened
with screwdriver

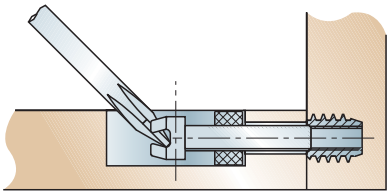

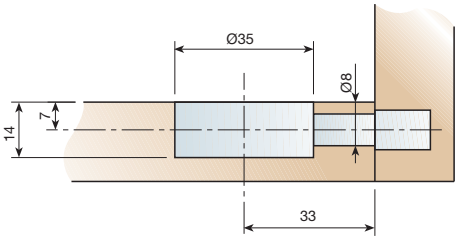

2 JOINING ASSEMBLIES

Assembly cover.

White	Ral 9003	530.300.002	1.000
Brown	Ral 8016	530.300.013	
Black	Ral 9005	530.300.024	



Fixing screw 3/16".

Zinc-coated	952.518.033	500 or 2.000

Single thread assembly body.

Natural	550.100.106	1.000



Single-thread assembly body with points.

Zinc-coated	550.200.033	1.000



Assembly body set.

White	550.500.005	1000

The set has 1 cover, 1 metal body and 1 fixing screw. The set is supplied fully assembled.



3 KNOCK-IN BODIES

Assembly screw with tip M6.

L (mm.)	22	25	
Zinc-coated	581.322.033	581.325.032	2.000

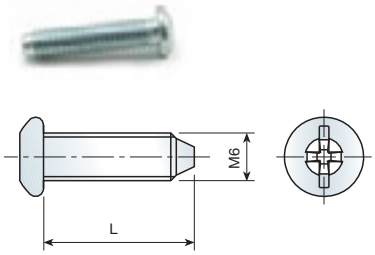

Knock-in body.

White	Ral 9003	550.000.006	
Browin	Ral 8016	550.000.010	2.000
Black	Ral 9005	550.000.021	

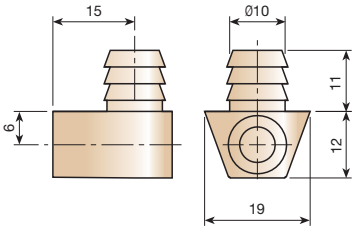

M6 nylon knock-in nut.

Natural		937.006.103	
Browin	Ral 8016	937.006.011	2.000 or 10.000
Black	Ral 9005	937.006.022	



M6 steel ribbed knock-in nut.

L (mm.)	Zinc-coated	
14	938.714.103	
16	938.716.100	1.000 or 5.000
18	938.718.104	
20	938.720.101	



Knock-in body set.

White	550.600.002	2500

The set has 1 knock-in body, 1 knock-in nut and 1 screw, and it comes fully assembled.



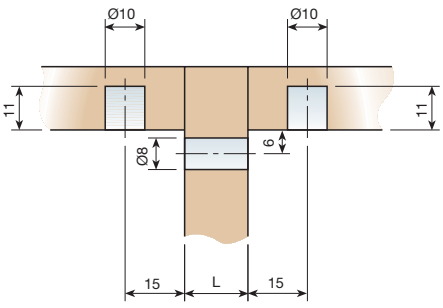

4 SCREWS

Allen head fixing screw 5mm.

L (mm.)	M6	
30	950.730.045	2.000
35	950.735.041	2.000
40	950.740.044	2.000
45	950.745.040	1.000
50	950.750.043	1.000
55	950.755.046	1.000
60	950.760.042	1.000

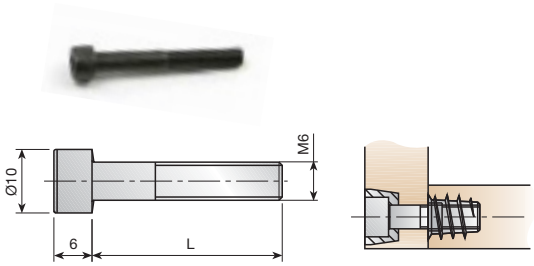

Screw cap.

Brass	580.200.106	500 or 5.000
Black zinc-coated steel	580.200.040	

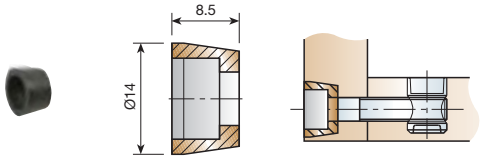

Capped fixing screw 1/4".

L (mm.)	Bihcromated	Zinc-coated black	
30	953.130.054	953.130.043	2.000
35	953.135.050	953.135.046	2.000
40	953.140.053	953.140.042	2.000
45	953.145.056	953.145.045	1.000
50	953.150.052	953.150.041	1.000
55	953.155.055	953.155.044	1.000
60	953.160.051	953.160.040	1.000
65	953.165.054	953.165.043	1.000

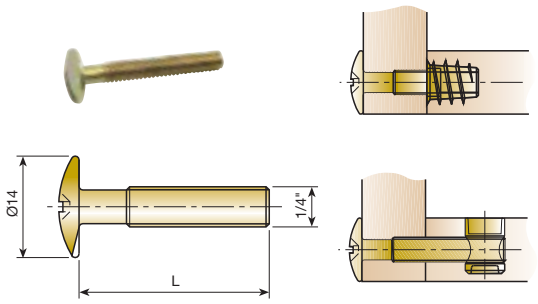

Cap for allen screw 4mm.

White	Ral 9003	540.500.004	2.000 or 10.000
Black	Ral 9005	540.500.026	
Oak	Ral 1002	540.500.192	



Assembly screw 1/4".

L (mm.)	Blue	Bichromated	
40	581.940.251	581.940.052	2.000
45	581.945.254	581.945.055	2.000
50	581.950.250	581.950.051	2.000
55	581.955.253	581.955.054	1.000

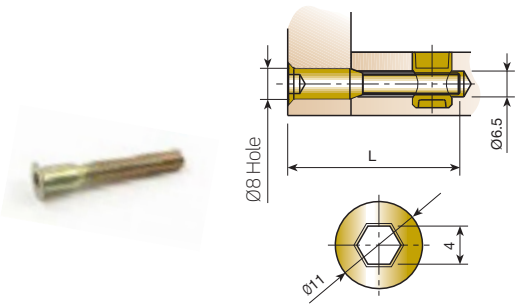

5 NUTS

Cylindrical zamak knock-in nut 1/4".

D (mm.)	Ø10		Ø12		
L (mm.)	13 (c=5mm.)	15 (c=6mm.)	13 (c=5mm.)	15 (c=6mm.)	
	940.614.032	940.615.034	940.714.036	940.715.031	2.000



Knurled nut M8.

Natural	450.008.101	1.000



Steel wood-threaded nut without head.

			Bichromated		
L (mm.)	Ød(mm.)	ØD (mm.)	1/4"	M6	
10	8	10	947.510.056	947.810.054	2.500
12	8	10	947.512.053	947.812.051	2.000
14	8	10	947.514.050	947.814.055	2.000
18	8	10	947.518.051	947.818.056	2.000
22	8	10	947.522.052	947.822.050	2.000
10	9	12	947.610.053	947.910.051	2.000
12	9	12	947.612.050	947.912.055	2.000
14	9	12	947.614.054	947.914.052	2.000
16	9	12	947.616.051	947.616.051	2.000
18	9	12	947.618.055	947.918.053	2.000



L (mm.)	Ød(mm.)	ØD (mm.)	M8	
22	11	14	948.222.052	1.500

Expanding brass nut.

	M4	
	944.805.105	2.000 or 10.000



M6 self-expanding brass nut.

	M6	
8Ø x 12mm.	944.112.105	5.000



Wing nut

	1/4"	M6	
Bichromated		948.913.055	2.000
Zinc-coated	948.813.036		



Wing nut with head.

	1/4"	M6	M8	
Bichromated		948.713.054		2.000
Zinc-coated	948.613.035		948.515.035	









M4 nylon knock-in nut for Ø8.

Natural		937.004.106	2.000 or 10.000
Brown	Ral 8016	937.004.014	



Nylon knock-in nut for Ø10.

R		M6	1/4"	
Natural		937.006.103	937.014.105	2.000 or 10.000
Brown	Ral 8016	937.006.011	937.014.013	
Black	Ral 9005	937.006.022	937.014.024	



Nylon knock-in nut for Ø11.

R		M6	1/4"	
Natural		937.106.100	937.114.102	4.000
Brown	Ral 8016	937.106.015	937.114.010	



M6 nylon knock-in nut for Ø10, in strips.

Natural		937.406.105	4.800
Brown	Ral 8016	937.406.013	
Black	Ral 9005	937.014.024	

Every box contains 200 strips.
The strips come with 24 units, and they may be placed manually or by means of a pneumatic gun with charger.



M6 steel ribbed knock-in nut.

L	16mm.	18mm.	
Zinc-coated	938.716.100	938.718.104	1.000 or 5.000



NOTES

TIGHTENING BOLT

pp.

1 TIGHTENING BOLT 272

- Bolt nuts 272
- Bolts 272
- Nuts 273

1 TIGHTENING BOLT

Bolt nuts

Tightening screw M6.

Blued	583.008.252	5.000



Bolt nut Ø10mm.

C (mm.)	8	9
Blued	524.214.250	524.215.252



Bolt nut Ø12mm. With head.

C (mm.)	9.5
Zinc-coated black	947.009.044



Bolts

M6 coupling screw with grooves.

Zinc-coated	522.727.030



Articulated coupling with grooves.

Zinc-coated	523.437.036

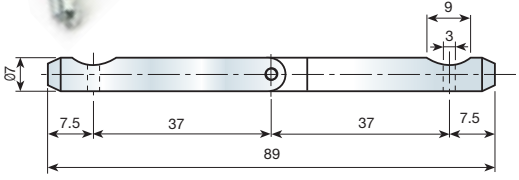

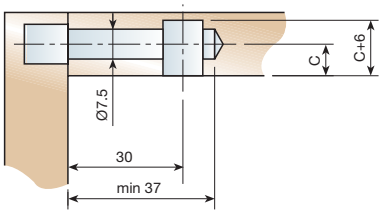

Nuts

Steel wood-threaded nut without head.

			Bichromated		
L (mm.)	Ød(mm.)	ØD (mm.)	1/4"	M6	
10	8	10	947.510.056	947.810.054	2.500
12	8	10	947.512.053	947.812.051	2.000
14	8	10	947.514.050	947.814.055	2.000
18	8	10	947.518.051	947.818.056	2.000
22	8	10	947.522.052	947.822.050	2.000
10	9	12	947.610.053	947.910.051	2.000
12	9	12	947.612.050	947.912.055	2.000
14	9	12	947.614.054	947.914.052	2.000
16	9	12	947.616.051	947.616.051	2.000
18	9	12	947.618.055	947.918.053	2.000

L (mm.)	Ød(mm.)	ØD (mm.)	M8	
22	11	14	948.222.052	1.500



Expanding brass nut.

	M4	
	944.805.105	2.000 or 10.000



M6 self-expanding brass nut.

	M6	
Ø8 x 12mm.	944.112.105	5.000



Wing nut.

	1/4"	M6	
Bichromated		948.913.055	2.000
Zinc-coated	948.813.036		



Wing nut with head.

	1/4"	M6	M8	
Bichromated		948.713.054		2.000
Zinc-coated	948.613.035		948.515.035	









Nuts

M4 nylon knock-in nut for Ø8.

Natural		937.004.106	2.000 or 10.000
Brown	Ral 8016	937.004.014	



Nylon knock-in nut for Ø10.

R		M6	1/4"	
Natural		937.006.103	937.014.105	2.000 or 10.000
Brown	Ral 8016	937.006.011	937.014.013	
Black	Ral 9005	937.006.022	937.014.024	



Nylon knock-in nut for Ø11.

R		M6	1/4"	
Natural		937.106.100	937.114.102	4.000
Brown	Ral 8016	937.106.015	937.114.010	



M6 nylon knock-in nut for Ø10, in strips.

Natural		937.406.105	4.800
Brown	Ral 8016	937.406.013	
Black	Ral 9005	937.014.024	

Every box contains 200 strips.
Strips may have 24 units; they may be placed manually or using a pneumatic gun with charger.



M6 steel ribbed knock-in nut.

L	16mm.	18mm.	
Zinc-coated	938.716.100	938.718.104	1.000 or 5.000



RIGHT-HAND SCREWS

pp.

1 RIGHT-HAND SCREWS 276

- Screws 276
- Cover 276
- Allen key 276



1 RIGHT-HAND SCREWS

Screws

Ø5mm. Wood threaded screw. Allen head

Length (mm.)	50	
Zinc-plated	583.150.035	
Blued	583.150.256	2.000
Bichromated	583.150.050	

Ø5mm. Wood threaded screw Pozidrive head.

Length (mm.)	50	
Zinc-plated	582.150.030	
Blued	582.150.251	2.000
Bichromated	582.150.052	

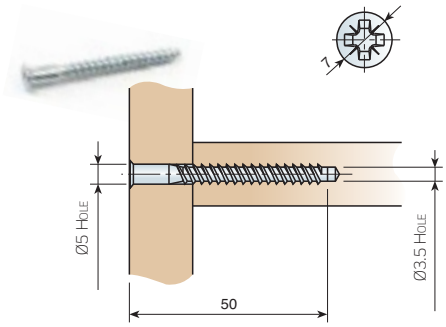

Ø7mm. Wood threaded screw, countersunk

Length (mm.)	47	
Zinc-plated	583.547.031	
Blued	583.547.252	1.000
Bichromated	583.547.053	

Ø8mm. Wood threaded screw

Length (mm.)	38	45	50	
Zinc-plated	583.238.036	583.245.036	583.250.032	
Blued	583.238.250	583.245.250	583.250.253	1.000
Bichromated	583.238.051	583.245.051	583.250.054	

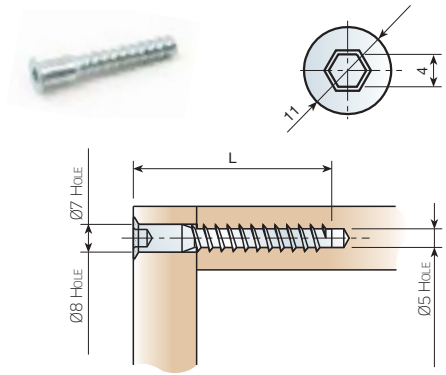

Cover

Cover for Allen head screw.

White	Ral 9003	540.403.006	540.500.004	
Black	Ral 9005	540.403.021	540.500.026	2.000 or 10.000
Oak	Ral 1002	540.403.194	540.500.192	



	ALLEN 3	ALLEN 4
d	3	4
D	10	13
H	2.3	2.5

Allen key

Allen key.

⬡	3mm.	4mm.	
Zinc-plated	187.003.036	187.004.031	100 or 1.000

BRACKETS

Bracket 20x16.

Zinc-coated	432.916.035	1.000



Bracket 28x16.

Zinc-coated	432.817.033	1.000



Bracket 36x18.

Zinc-coated	432.718.031	500

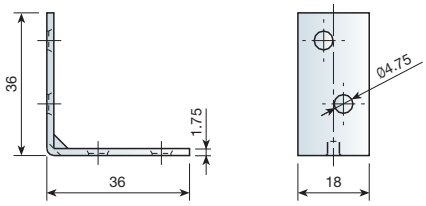

Bracket 44x18.

Zinc-coated	432.619.036	500

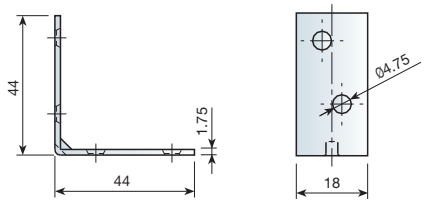

NOTES

SCREWS AND NUTS

pp.

1 SCREWS 280

2 SCREWS AND NUTS 281

- m6 Nylon head 281
- m4 Steel 281
- m6 Zamak 282
- 1/4” Steel 282

1 SCREWS

Fixing screw with allen head 5mm.

L (mm.)	M6	
30	950.730.045	2.000
35	950.735.041	2.000
40	950.740.044	2.000
45	950.745.040	1.000
50	950.750.043	1.000
55	950.755.046	1.000
60	950.760.042	1.000

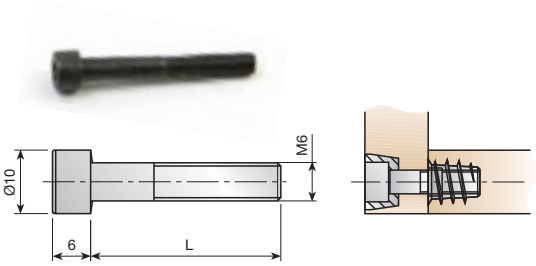

Screw cap.

Brass	580.200.106	500 or 5.000
Black zinc-coated steel	580.200.040	

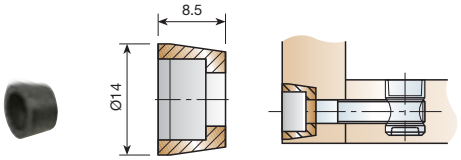

Fixing screw with cap 1/4".

L (mm.)	Bichromated	Zinc-coated black	
30	953.130.054	953.130.043	2.000
35	953.135.050	953.135.046	2.000
40	953.140.053	953.140.042	2.000
45	953.145.056	953.145.045	1.000
50	953.150.052	953.150.041	1.000
55	953.155.055	953.155.044	1.000
60	953.160.051	953.160.040	1.000
65	953.165.054	953.165.043	1.000

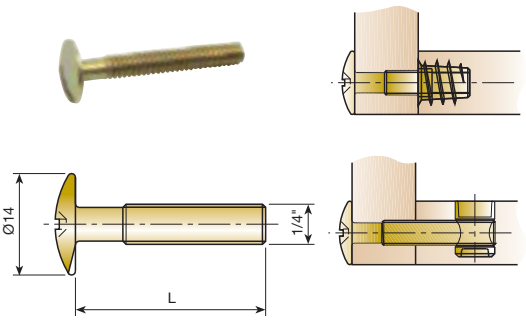

Cover cap for allen screw 4mm.

White	Ral 9003	540.500.004	2.000 or 10.000
Black	Ral 9005	540.500.026	
Oak	Ral 1002	540.500.192	



Assembly screw 1/4".

L (mm.)	Blued	Bichromated	
40	581.940.251	581.940.052	2.000
45	581.945.254	581.945.055	2.000
50	581.950.250	581.950.051	2.000
55	581.955.253	581.955.054	1.000

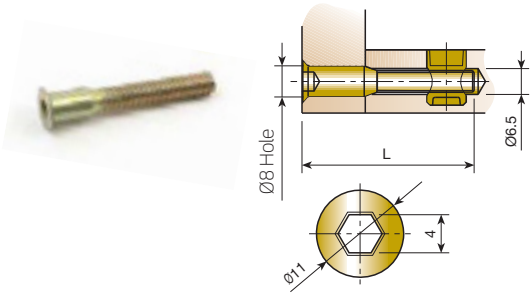

Wing nut with head.

	1/4"	M6	
Bichromated		948.713.054	2.000
Zinc-coated	948.613.035		



Cylindrical Zamak knock-in nut 1/4".

D (mm.)	Ø10		Ø12		
L (mm.)	13 (c=5mm.)	15 (c=6mm.)	13 (c=5mm.)	15 (c=6mm.)	
Zinc-coated	940.614.032	940.615.034	940.714.036	940.715.031	2.000

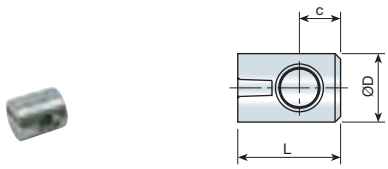

2 SCREWS AND NUTS

M6 Nylon head

M6 assembly screw with nylon head and groove.

L (mm.)	White Ral 9003	Brown Ral 8016	Black Ral 9005	
28	581.028.000	581.028.011	581.028.022	2.000
30	581.030.004	581.030.015	581.030.026	2.000
34	581.034.005	581.034.016	581.034.020	1.000

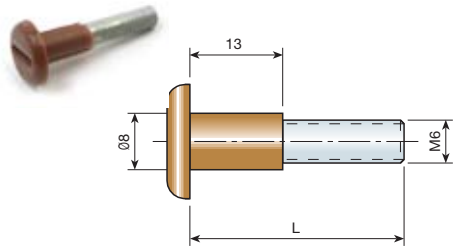

M6 assembly screw with groove.

White	Ral 9003	943.000.004	
Brown	Ral 8016	943.000.015	1.000 or 4.000
Black	Ral 9005	943.000.026	

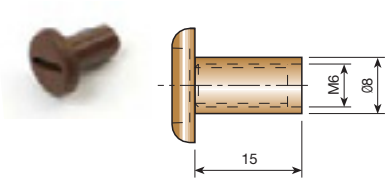



M4 Steel

M4 steel assembly screw.

L (mm.)	Nickel-plated	
15	941.915.063	3.000
20	941.920.066	2.500
25	941.925.062	2.000
30	941.930.065	2.000
35	941.935.061	2.000
40	941.940.064	2.000
45	941.945.060	1.000

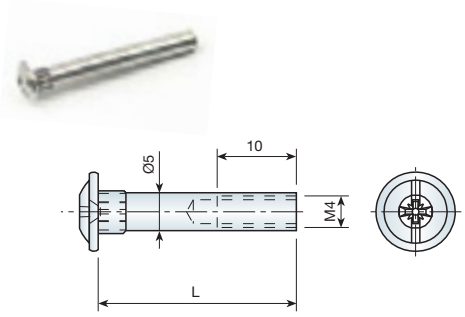

M4 assembly screw with ridged head.

Nickel-plated	730.510.060	1.000 or 4.000





M6 Zamak

M6 stud bolt assembly nut.

Nickel-plated	942.300.063	1.000 or 5.000



M6 stud bolt.

L (mm.)		
30	934.230.102	2.000
35	934.235.105	
45	934.245.104	
50	934.250.100	
60	934.260.106	

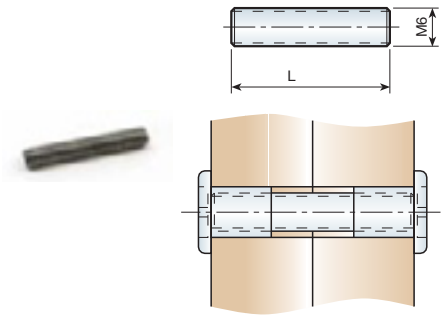

1/4" Steel

Assembly screw with ridged head 1/4".

Nickel-plated	581.200.060	500 or 4.000



Steel assembly screw 1/4.

L (mm.)	Zinc-coated	
20	941.620.035	2.000
25	941.625.031	2.000
30	941.630.034	2.000
35	941.635.030	2.000
40	941.640.033	2.000
45	941.645.036	1.000
50	941.650.032	1.000
55	941.655.035	1.000
60	941.660.031	1.000
65	941.665.034	1.000
70	941.670.030	1.000
75	941.675.033	500
80	941.680.036	500
85	941.685.032	500
90	941.690.035	500

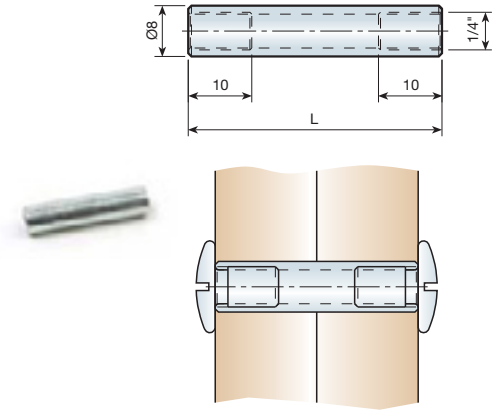

ASSEMBLIES FOR WORK SURFACES

1 HALF MOON JOINING BOLT

This invisible joining bolt allows the union of worktops, panels and mitred profiles in a quick and safe manner.



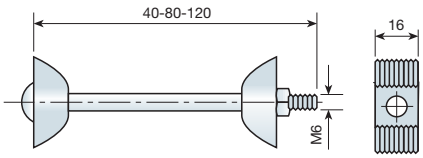

Half Moon Joining Bolt.

L (mm.)		
40	521.604.031	
80	521.608.032	250
120	521.612.033	

Each assembly fitting consist of 2 bodies, 1 bolt and 1 nut.

Assembly method

Drill a Ø35mm by 20mm deep hole a distance equivalent to A from each edge to be joined together. In line with the centre of the drill holes, join together via a 15mm deep x 15mm wide groove. By tightening the nut, the half moon bodies force the 2 joint edges together.

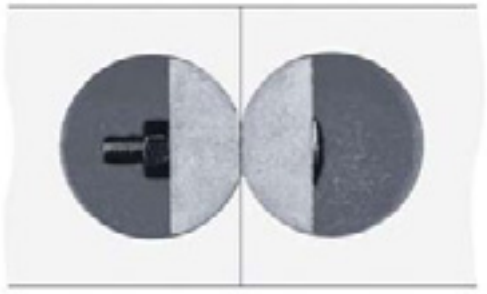

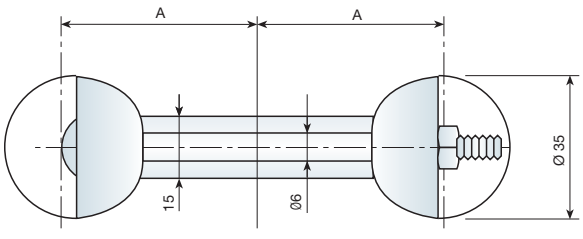

Screw	Drilling distance "A"
40mm.	de 17 a 20mm.
80mm.	de 33 a 40mm.
120mm.	de 53 a 60mm.

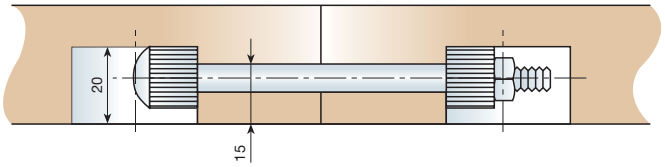



With the centre at 17mm there is no need for the groove.

2 ASSEMBLIES FOR WORK SURFACES

Assembly to join work surfaces.

L (mm.)	Zinc-plated	
65	519.306.034	
100	519.310.035	200
150	519.315.031	

Each reference is delivered pre-mounted.

Measurements.

L (mm.)	A (min.)	A (máx.)
65	32	42
100	50	60
150	75	85

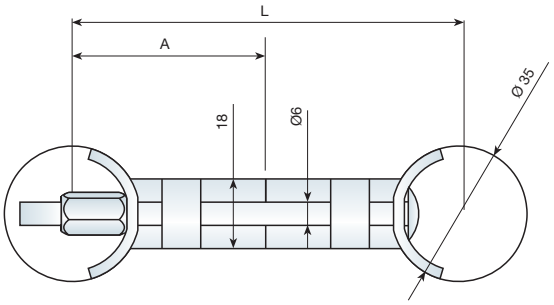

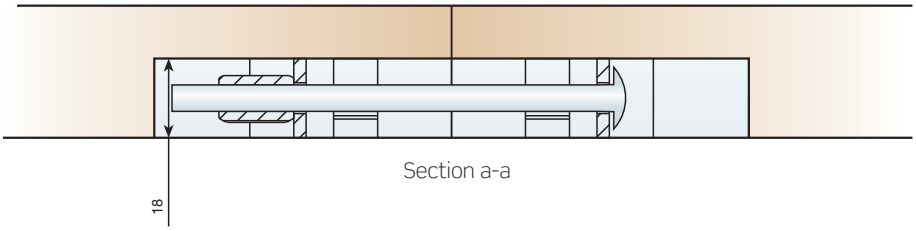

Section a-a

BED SIDE RAILS SUPPORTS

Steel bed support;
Can be used for both the right and left side.

80mm. Bed side rail support.

Bichromated	430.800.053	50

Every set has 4 male couplers with corresponding screw and 4 female couplers.

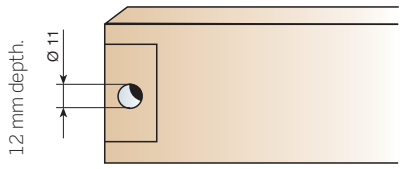

100mm. bed side rail support.

Zinc-coated	432.000.030	50

Every set has 4 right-hand parts and 4 left-hand parts.

NOTES

ACCESSORIES

pp.

1 ACCESSORIES 288

- Stops 288
- Cushioning stop 289
- Caps 289
- Case and pivot 291
- Stud bolts 291
- Knock-in nut and staple 291

1 ACCESSORIES

Stops

Stop.

White	Ral 9003	919.900.004	
Brown	Ral 8016	919.900.015	10.000
Black	Ral 9005	919.900.026	



Support stop for legs.

Black	Ral 9005	420.000.022	5.000



Chair stop with nail Ø16.

White	Ral 9003	420.100.004	
Brown	Ral 8016	420.100.015	5.000
Black	Ral 9005	420.100.026	



Chair stop with nail, large.

White	Ral 9003	420.200.001	
Brown	Ral 8016	420.200.012	5.000
Black	Ral 9005	420.200.023	



Stop with two nails, small.

White	Ral 9003	420.300.005	
Brown	Ral 8016	420.300.016	5.000
Black	Ral 9005	420.300.020	



Stop with two nails, large.

White	Ral 9003	420.400.002	
Brown	Ral 8016	420.400.013	5.000
Black	Ral 9005	420.400.024	



Cushioning stop

Cushioning stop **BALÍN**.

White	Ral 9003	930.100.006	
Brown	Ral 8016	930.100.010	5.000
Oak	Ral 1002	930.100.194	

It comes in strips of 50 stops, to be fixed using a pneumatic gun with charger.



Pneumatic gun.

	900.000.102	1

Technical features:
- Weight: 1kg.
- Pressure: 5 to 6 atms.
- **Charging capacity:** 50 stops of Ø10mm.

Rubber cushioning stop.

Transparent	930.505.100	5.000

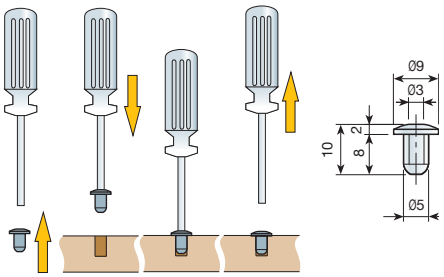

Caps

Cap Ø4.

Head Ø13.		
White	Ral 9003	540.500.004
Brown	Ral 8016	540.500.015 5.000
Black	Ral 9005	540.500.026



Cap Ø5.

Head Ø12.		
White	Ral 9003	960.000.005
Brown	Ral 8016	960.000.016 5.000
Black	Ral 9005	960.000.020



Caps

Cap Ø8.

Nickel-plated		Head Ø10	960.300.062	3.000
White	Ral 9003	Head Ø12	960.300.003	
Brown	Ral 8016	Head Ø12	960.300.014	10.000
Black	Ral 9005	Head Ø12	960.300.025	



Cap Ø10.

Head Ø12.			
Nickel-plated		960.700.064	3.000
White	Ral 9003	960.700.005	
Brown	Ral 8016	960.700.016	10.000
Black	Ral 9005	960.700.020	



Cap Ø12.

Head Ø15.			
White	Ral 9003	961.000.003	10.000
Brown	Ral 8016	961.000.014	
Black	Ral 9005	961.000.025	



Cap Ø15.

Head Ø17.			
Nickel-plated		961.200.063	3.000
White	Ral 9003	961.200.004	
Brown	Ral 8016	961.200.015	10.000
Black	Ral 9005	961.200.026	



Cap Ø25.

Head Ø28,5.			
White	Ral 9003	530.400.006	500 or 2.000
Brown	Ral 8016	530.400.010	
Black	Ral 9005	530.400.021	



Cap Ø35.

Head Ø39.			
Nickel-plated		530.500.062	1.000
White	Ral 9003	530.500.003	
Brown	Ral 8016	530.500.014	
Black	Ral 9005	530.500.025	



Case and pivot

Knock-in centering case.

Brown	Ral 8016	918.000.016	5.000
Black	Ral 9005	918.000.020	



Knock-in centering pivot.

Brown	Ral 8016	918.000.013	5.000
Black	Ral 9005	918.000.024	



Stud bolts

Twin-thread stud bolt.

Length	1/4"	M6	
50	934.450.031	934.550.035	1.000
60	934.460.030	934.560.034	
80	934.480.035	934.580.032	

Length	5/16"	M8	
50	934.650.032	934.750.036	1.000
60	934.660.031	934.760.035	1.000
80	934.680.036	934.780.033	500



Knock-in staple and nut

Staple.

Zinc-coated	914.000.032	10.000

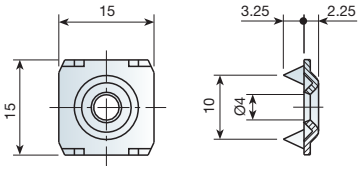

Knock-in forked nut.

Length	Thread		
7	M4	938.004.034	4.000
7	M5	938.005.036	2.500
8,5	M6	938.106.035	2.500
11	M8	938.208.036	1.500
12	M10	938.410.034	1.000



R	ØD	Ød	L	C
M4	15	5	7	1
M5	16	6,5	7	1
M6	18	8	8,5	1,5
M8	22	9,5	11	1,75
M10	26	12	12	1,75

NOTES

CLOCK
Shelf assemblies

Shelf supports

pp.

1 CLOCK SHELF ASSEMBLIES 294

- Clock assemblies Ø20 294
- Screws 295
- Clock-6 assemblies Ø20 296
- Clock assemblies Ø15 and Ø19 297
- Clock assemblies Ø18 and Ø20 298

1 CLOCK ASSEMBLIES

Clock assemblies Ø20

CLOCK-1: Easy assembly and dismantling, simply knock down.
CLOCK-2: Turning the cam the screw gets locked and the shelfwill be fixed to the sideboard.
CLOCK-3: When turning the cam, the strip will tighten thescrew and the shelf will be fixed.
CLOCK-5: Knock down fixing; with metal cover.
CLOCK-6: When turning the screw, the dowel will be expandedand the board pulled.



Case Ø20mm. CLOCK-1.

C (mm.)	A(mm.)	White Ral9003	Brown Ral8016	Black Ral9005	Oak Ral1002	
2	7	913.002.005	913.002.016	913.002.020	913.002.193	
8	13	913.008.003	913.008.014	913.008.025	913.008.191	
9	14	913.009.005	913.009.016	913.009.020	913.009.193	2.000
10	15	913.010.000	913.010.011	913.010.022	913.010.195	
12.5	17.5	913.012.004	913.012.015	913.012.026	913.012.192	
15.5	20,5	913.015.003	913.015.014	913.015.025	913.015.191	



Case Ø20mm. CLOCK-2.

C (mm.)	A(mm.)	White Ral9003	Brown Ral8016	Black Ral9005	Oak Ral1002	
8	13	913.108.000	913.108.011	913.108.022	913.108.195	
9	14	913.109.002	913.109.013	913.109.024	913.109.190	2.000
10	15	913.110.004	913.110.015	913.110.026	913.110.192	



Pozidriv PZ-3
Flat 6.5 X 1.2

Case Ø20mm. CLOCK-3.

C (mm.)	A (mm.)	Black Zinc-plated	Nickel-plated	
8	13	913.208.041	913.208.063	
9	14	913.209.043	913.209.065	
10	15	913.210.045	913.210.060	500
12,5	17.5	913.212.042	913.212.064	
15,5	20.5	913.215.041	913.215.063	



Pozidriv PZ-3
Flat 6.5 X 1.2

Case Ø20mm. CLOCK-5.

C (mm.)	A (mm.)	Nickel-plated	
8	13	913.408.064	
9	14	913.409.066	
10	15	913.410.061	2.000
12,5	17.5	913.412.065	
15,5	20.5	913.415.064	



Screws

Wood threaded screw for Ø3mm drilling.

L (mm.)	Zinc-plated	
9	923.309.030	500 or 5.000
11	923.311.034	
14	923.314.033	



Wood threaded screw for Ø4mm drilling.

L (mm.)	Zinc-plated	
9	923.409.034	500 or 5.000
11	923.411.031	
14	923.414.030	



Wood threaded screw for Ø5mm drilling.

L (mm.)	Zinc-plated	
7,5	923.507.034	500 or 5.000
10	923.510.033	
13	923.513.032	



M4 Screw.

Zinc-plated	923.708.030	500 or 5.000



Expanding screw.

		Ø5mm.	
Black	Ral 9005	922.905.023	500 or 5.000



M4 Brass expanding nut.

Natural	944.805.105	2.000 or 10.000



M4 Nylon nut.

Natural		937.004.106	2.000 or 10.000
Brown	Ral 8016	937.004.014	



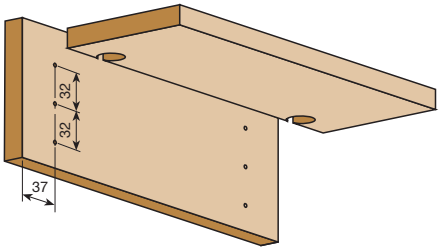

Clock-6 assemblies Ø20

Short **CLOCK-6** Ø20 mm case.

C (mm.)	A (mm.)	Nickel-plated	
8	13	526.108.063	
9	14	526.109.065	
10	15	526.110.060	500
12.5	17.5	526.112.064	
15.5	26.5	526.115.063	

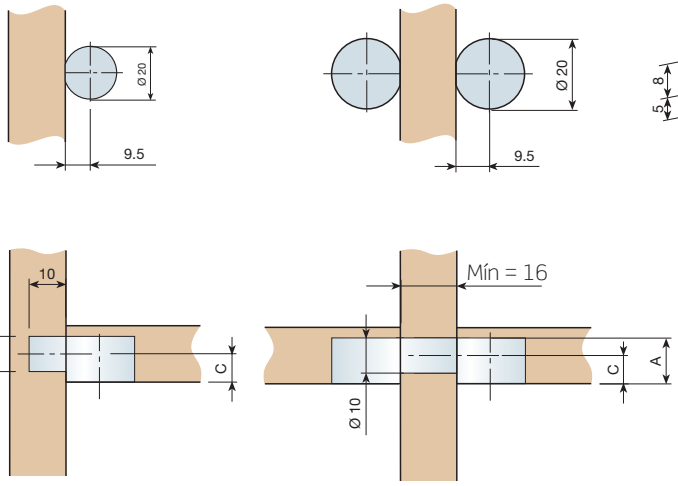

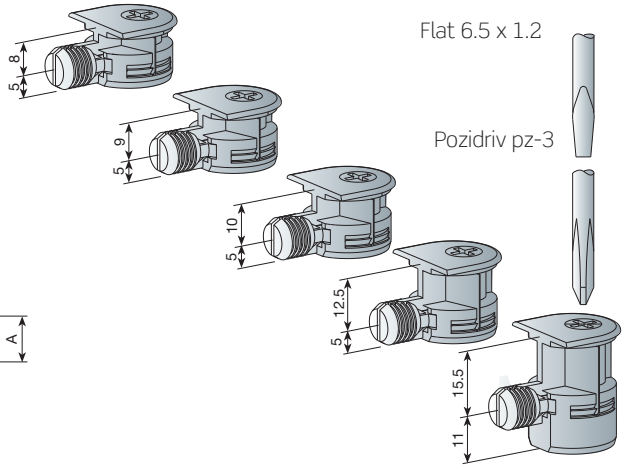

Long **CLOCK-6** Ø20 mm case.

C (mm.)	A (mm.)	Nickel-plated	
8	13	526.008.066	
9	14	526.009.061	
10	15	526.010.063	500
12.5	17.5	526.012.060	
15.5	26.5	526.015.066	

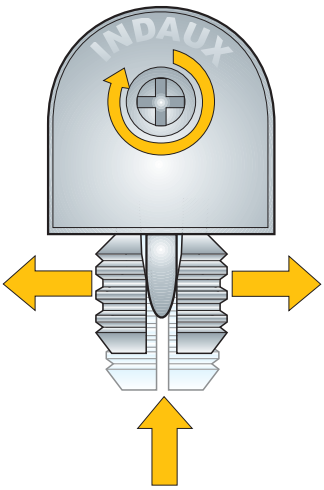

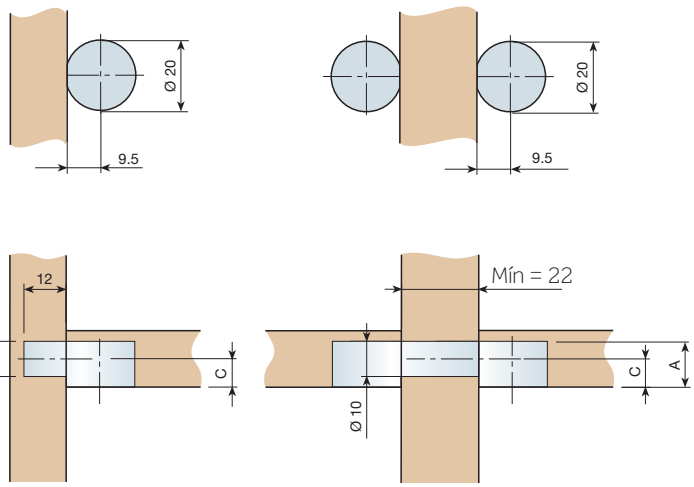

Clock assemblies Ø15, Ø19

Clock Ø15 case.

Nickel-plated	915.008.065	1.000

This reference includes a coupling screw.













Clock Ø19 rectangular case.

Nickel-plated	915.100.060	5000

This reference has 1 zamak body, 1 plastic wall plug and 1 coupling screw.















Clock assemblies Ø18, Ø20

Square Clock Ø18 case.

Nickel-plated	915.208.066	5000

Threaded screw references	
L = 12	922.812.030
L = 13	922.813.032

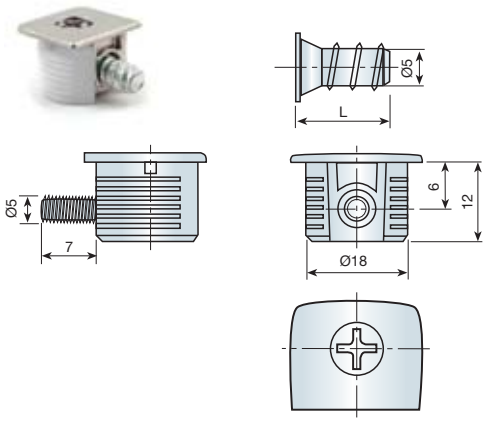

Clock Ø20 case with nickel-plated cover.

Nickel-plated	915.308.063	5000

This reference includes a coupling screw.

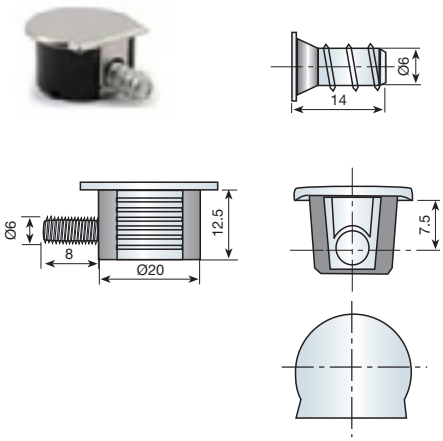

Clock Ø20 case with nickel-plated zamak body.

Nickel-plated	915.408.060	2500

This reference includes a coupling screw.

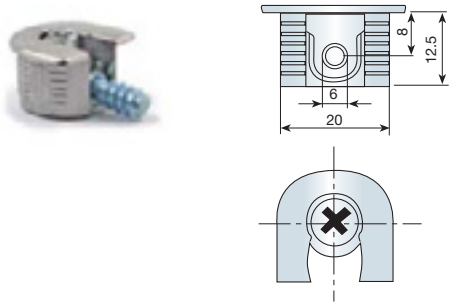

Clock Ø20 case with nickel-plated zamak body S/32.

Nickel-plated	915.508.064	2500

This reference includes a coupling screw.

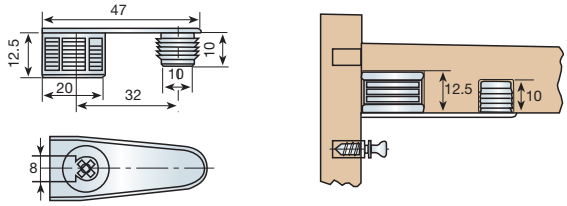

SHELF SUPPORTS

Shelf support Ø3.

White	Ral 9003	921.503.004	
Brown	Ral 8016	921.503.015	3.000
Black	Ral 9005	921.503.026	
Transparent		921.503.693	

With zinc-coated steel pin.



Shelf support Ø5.

White	Ral 9003	922.405.002	
Brown	Ral 8016	922.405.013	3.000
Black	Ral 9005	922.405.024	
Transparent		922.405.691	

With zinc-coated steel pin.



Shelf support Ø5 mm.

Zinc-coated	920.805.034	
Zinc-coated black	920.805.045	5.000
Bichromated	920.805.056	



Shelf support with bracket Ø5.

White	Ral 9003	920.405.006	
Brown	Ral 8016	920.405.010	5.000
Black	Ral 9005	920.405.021	
Oak	Ral 1002	920.405.194	



Nylon guide case.

White	918.300.003	2.000
Brown	918.300.014	or
Black	918.300.025	10.000



Shelf support 13 mm.

White	Ral 9003	920.715.003	5.000
Brown	Ral 8016	920.715.014	

Shelf support 16 mm.

White	Ral 9003	920.700.001	5.000
Brown	Ral 8016	920.700.012	



Shelf support with nail.

White	Ral 9003	920.919.005	
Brown	Ral 8016	920.919.016	5.000
Black	Ral 9005	920.919.020	



Shelf support for glass Ø3.

Natural	921.203.102	5.000



Shelf support for glass Ø5.

Natural	921.105.102	5.000



Shelf support for glass Ø3.

Nickel-plated	921.303.062	5.000



Flat shelf support Ø5.

Nickel-plated	921.405.063	5.000



Cylindrical shelf support Ø3.

	L=12	
Nickel-plated	912.320.065	5.000



Cylindrical shelf support Ø5.

Nickel-plated	912.020.060	5.000



Shelf support with inserted screw.

White	Ral 9003	920.111.006	5.000
Brown	Ral 8016	920.111.010	
Black	Ral 9005	920.111.021	



Knock-in nylon nut for Ø10.

R		M6	1/4"	
Natural		937.006.103	937.014.105	2.000 or 10.000
Brown	Ral 8016	937.006.011	937.014.013	
Black	Ral 9005	937.006.022	937.014.024	



M6 self-expanding brass nut.

Ø8 x 12mm.	944.112.105	5.000



Brass shelf support.

	M6	
M6	920.200.105	1.000 or 5.000

See section on nuts in chapter 4 assembly, cam Ø15.



Knock-in ribbed case for shelf.

		M6	
White	Ral 9003	922.100.001	10.000
Brown	Ral 8016	922.100.012	
Black	Ral 9005	922.100.023	
Oak	Ral 1002	922.100.196	



Plastic support with tab for shelf.

White	Ral 9003	920.300.006	5.000
Brown	Ral 8016	920.300.010	
Black	Ral 9005	920.300.021	
Oak	Ral 1002	920.300.194	



Plastic support without tab for shelf.

White	Ral 9003	920.406.001	5.000
Brown	Ral 8016	920.406.012	
Black	Ral 9005	920.406.023	
Oak	Ral 1002	920.406.196	



Plain metal shelf support.

Nickel-plated		920.505.062	2.500



Metal shelf support with pivot.

Nickel-plated		920.515.061	2.500



Metal shelf support for glass.

Nickel-plated		920.525.060	2.500



Safety coupler for 16mm shelf.

White	Ral 9003	923.016.006	5.000



Safety coupler for 19mm shelf.

White	Ral 9003	923.019.005	5.000



Shelf support Ø3 mm.

Zinc-coated		921.903.032	5.000



Shelf support Ø5 mm.

Zinc-coated		920.805.034	
Zinc-coated black		920.805.045	5.000
Bichromated		920.805.056	

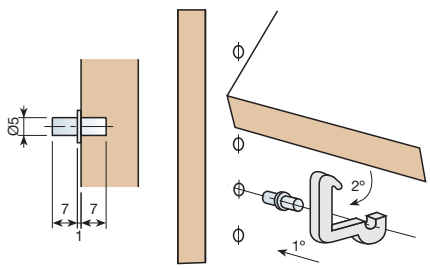

INDAUX
FURNITURE FITTINGS MANUFACTURER

05

HANGING SUPPORTS

SUPPORTS FOR LOW SUSPENDED MODULES

ATLAS 307

SCARPI CABINET HANGERS

SCARPI-4 315

SCARPI-5 319



TRASER CONCEALED HANGERS

TRASER-6 323

TRASER-8 331

TRASER-7 339

MISCELLANEOUS HANGERS

Miscellaneous hangers 343

TENTI SHELF SUPPORTS

TENTI-3 347

TENTI-4 348

TENTI-4C 349

TENTI-5 350

TENTI-7 351

TENTI 8 352

TENTI 9 353

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

ATLAS SYSTEM

The perfect solution for heavy loads in suspended kitchens and bathroom cabinets.

ATLAS is the safest and most suitable solution both for bathroom furniture and large suspended low kitchen furniture. INDAUX has developed ATLAS fitting device for low hanging furniture, as an answer to the technical challenges that the new suspended kitchens present, as traditional hangers designed for modules with little depth and no drawers do not work.

MAIN ADVANTAGES OF THE PRODUCT

- Unique product on the market, developed, patented and manufactured by INDAUX.
- Hidden wall fixing system which adjusts perfectly to the module.
- The effective and secure solution to fix low kitchen and Easy industrial installation, can be preassembled to ease transport
- Simple adjustment of up to 16mm.
- “ATLAS” system does not interfere in the smooth running of the drawers.

ATLAS SYSTEM

A new fitting system for suspended kitchens and bathroom cabinets.

1 ATLAS

Back support fitting

Zinc-plated	625.700.036	100

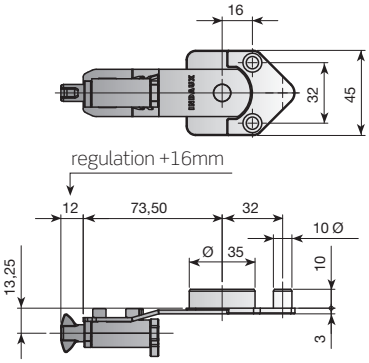

Wall plate

Zinc-plated	620.860.030	100



Large wall plate

Zinc-plated	620.913.031	50

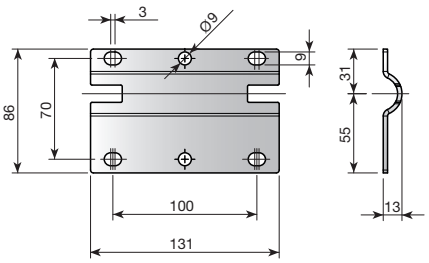

Lower support fitting

Zinc-plated	625.800.033	25

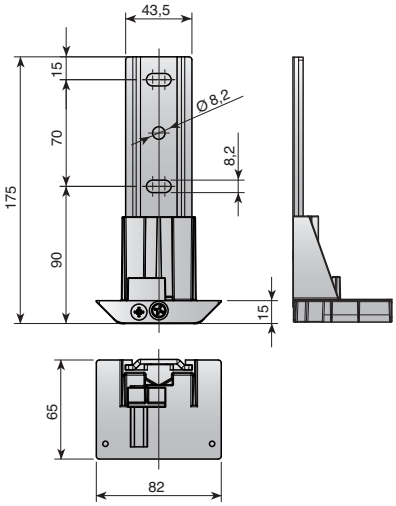

2 TECHNICAL DATA

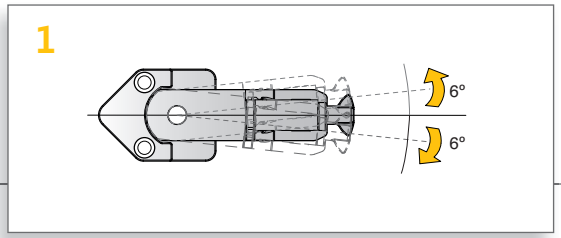

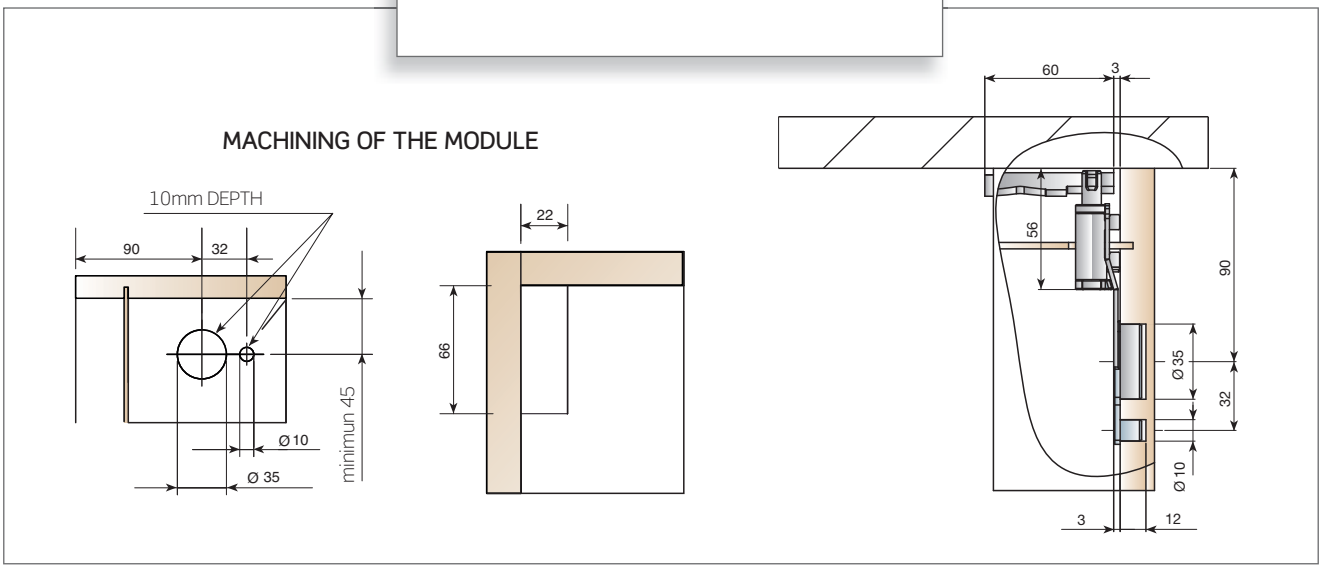

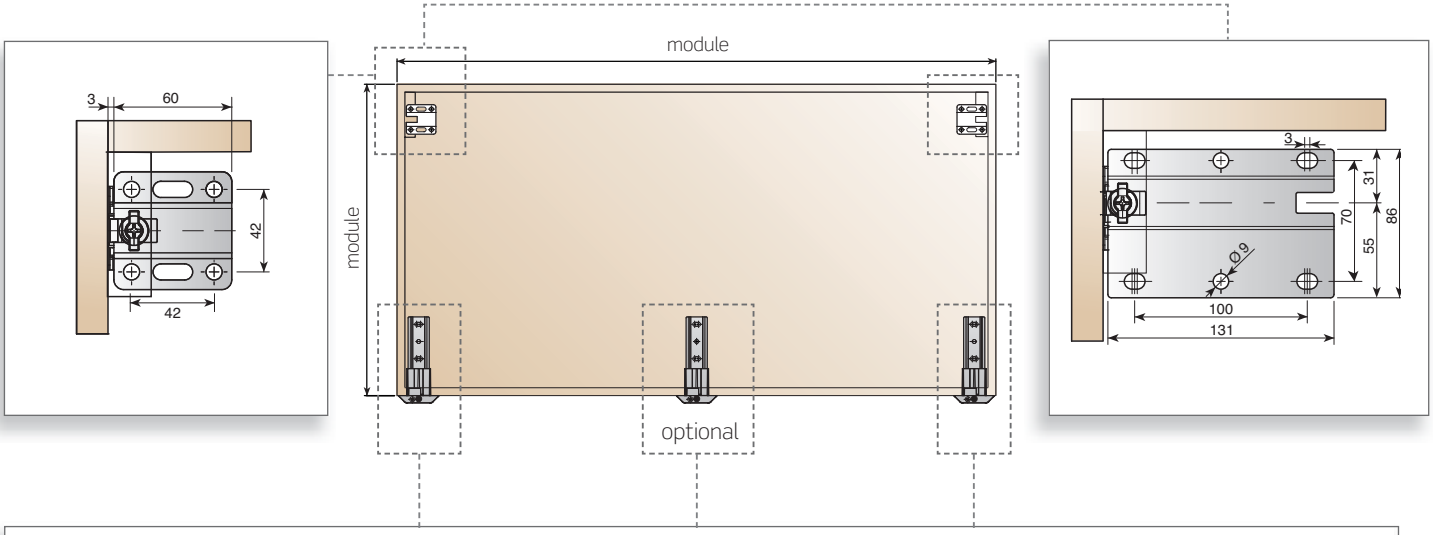

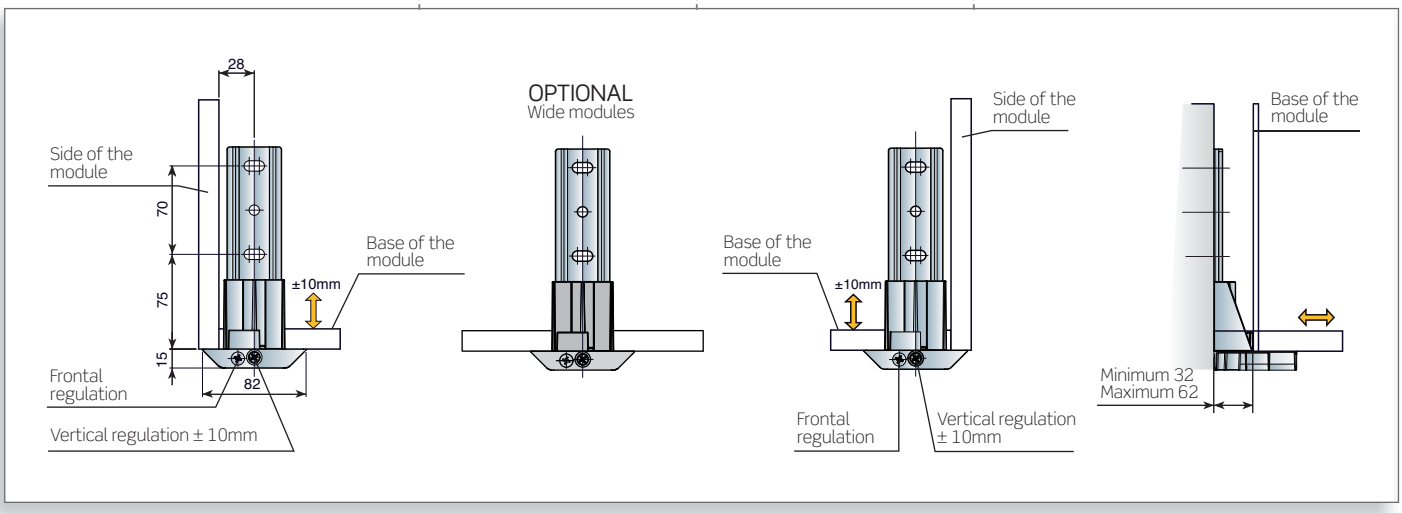

2 ASSEMBLY AND REGULATION

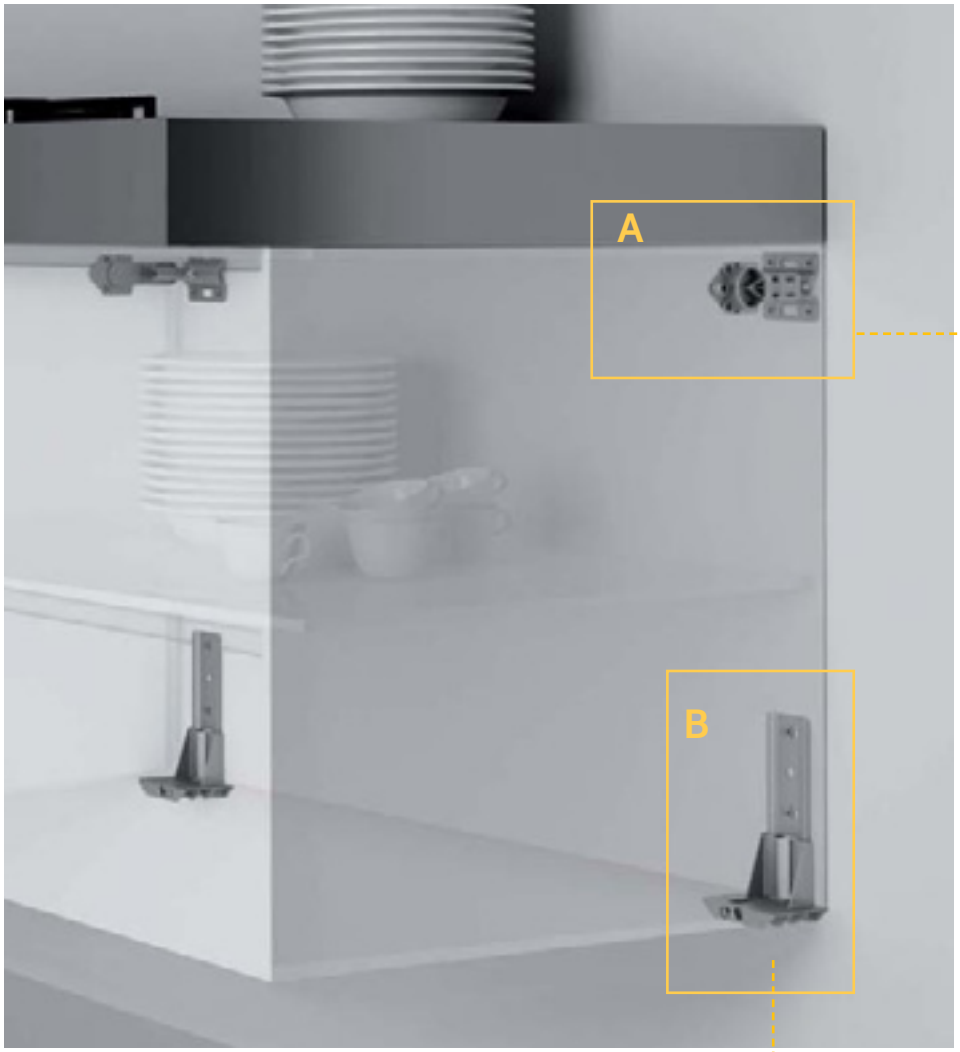

B

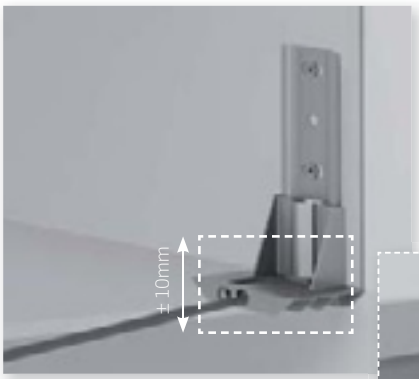

No previous machining of the module required before fixing the lower support.-

A

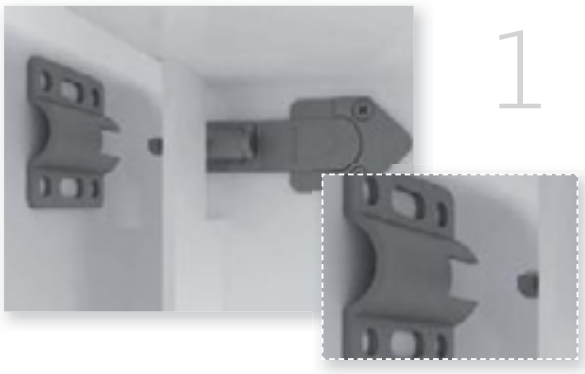

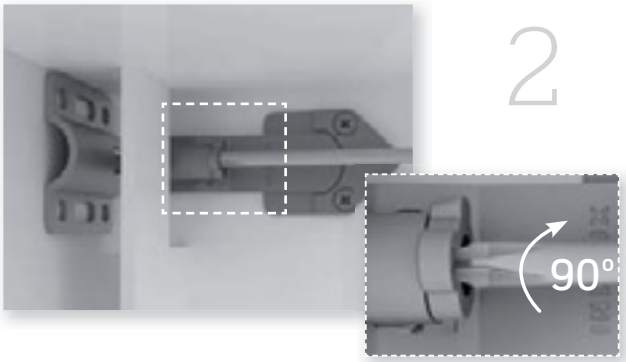

Turn 90° to lock the fitting.

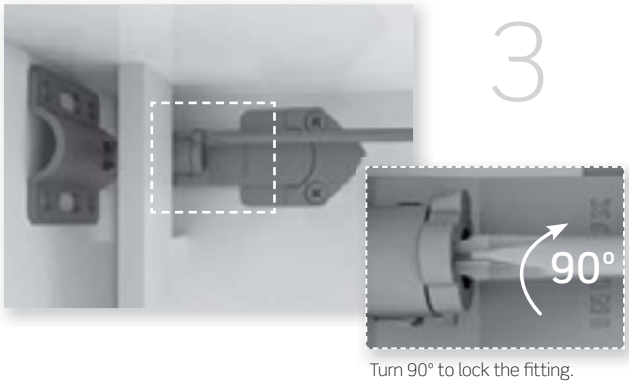

Turn 90° to lock the fitting.

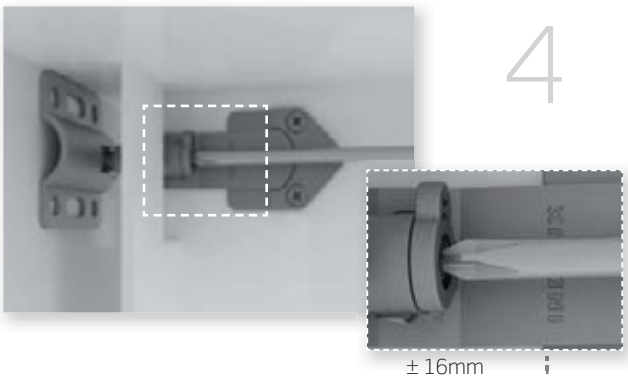

± 16mm

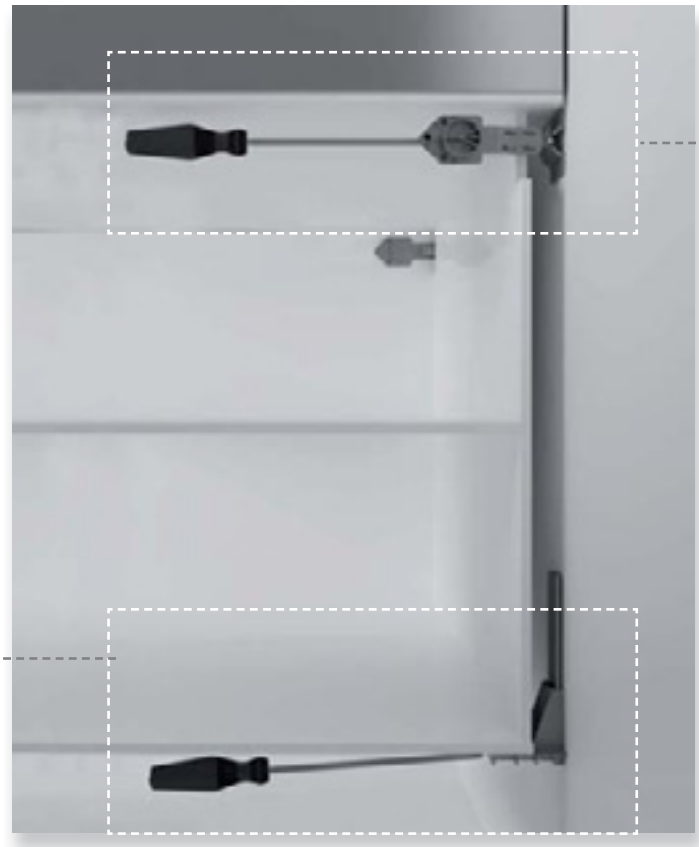

SCARPI-4
Cabinet hanger

Heavy duty cabinet hanger: 65Kg./unit according to DIN 68840 certified by LGA (equivalent to 260Kg. of final load per set).

- It allows three independent adjustments, easily accessible from the front side.
- Concealed by an extra thin cover in different colours.
- Available for knock-in or screw-on assembly.
- The hanger is entirely made of steel and therefore it can be recycled without any problems.

pp.

1 SCARPI-4 316

- **SCARPI-4** cabinet hanger .....  316
- Accessories 317

1 SCARPI-4

SCARPI-4 cabinet hanger

Highly resistant cupboard hangers: 65Kg./unit according to DIN 68840 certified by LGA (equivalent to 260Kg. of final load per set). It allows three independent adjustments, easily accessible from the front side. Concealed by an extra thin cover in different colours. Available for knock-in or screw-on assembly. The hanger is entirely made of steel and therefore it can be recycled without any problems.

Euro-Screw hanger.

	Left	Right	
Zinc-plated	625.000.036	625.100.033	200

Euro-screw screws included.

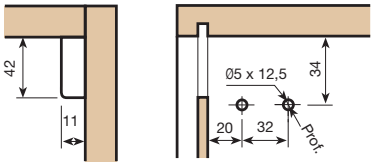



3 Adjustments	
Height	13mm.
Front	17mm.
Side	8mm.

Knock-in hanger.

	Left	Right	
Zinc-plated	625.200.030	625.300.034	200

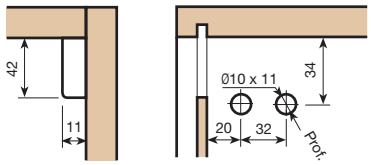



3 Adjustments	
Height	13mm.
Front	17mm.
Side	8mm.

Screw-on hanger.

	Left	Right	
Zinc-plated	625.400.031	625.500.035	200

Ø5 x 16 screws included.

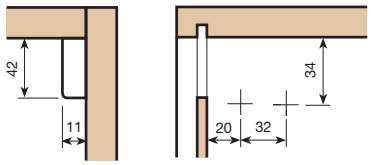



3 Adjustments	
Height	13mm.
Front	17mm.
Side	8mm.

Cover.

		Left	Right	
White	Ral 9001	639.000.003	639.100.000	
Brown	Ral 8016	639.000.014	639.100.011	
Grey	Ral 9006	639.000.143	639.100.140	400
Oak	Ral 1002	639.000.191	639.100.195	
Nickel		639.000.062	639.100.066	200

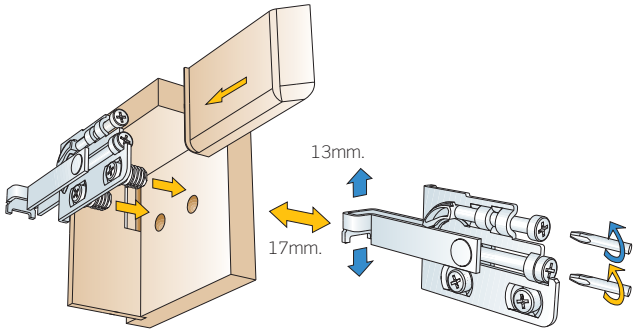

Accessories

Bag of accessories.

	620.400.105	200

Packed in boxes containing 200 bags. Each bag containing 1 double wall mounting plate. (B), 4 screws Ø4,5 x 45 (C), and 4 plastic wall plugs Ø8 x 40 (D).

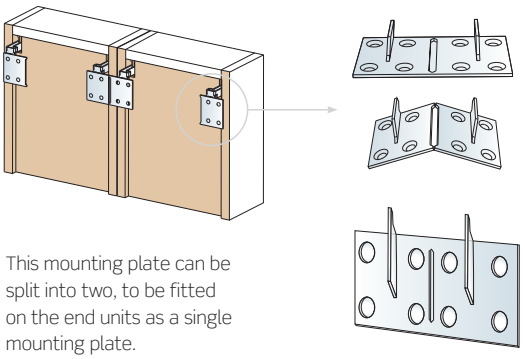

This mounting plate can be split into two, to be fitted on the end units as a single mounting plate.

Double wall mounting plate.

Zinc-plated	623.000.033	200

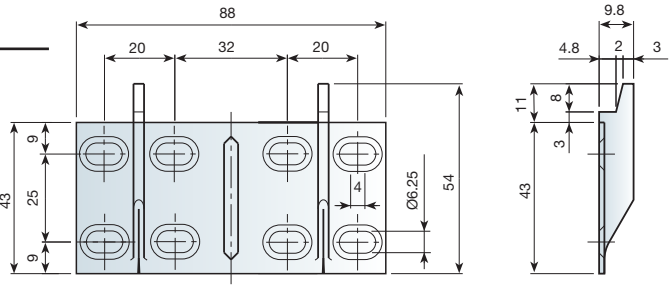

Screws Ø4,5 x 35.

Zinc-plated	982.435.031	5.000

Plastic wall plugs Ø6 x 30.

Natural	662.130.302	1.000 or 10.000



Plastic wall plugs Ø8 x 40.

Natural	662.240.106	1.000 or 10.000



Square screw hook.

Zinc-plated	661.200.035	1.000



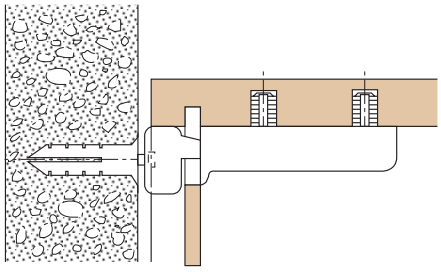

NOTES

SCARPI-5
Cabinet hanger

Heavy duty cabinet hanger:
65Kg./unit according to DIN 68840 certified by LGA
(equivalent to 260Kg. of final load per set).
Concealed by a cover in different colours.
Available for knock-in or screw-on assembly.

pp.

1 SCARPI-5 320

- **SCARPI-5** cabinet hanger ..... 320 
- Accessories 321

1 SCARPI-5

SCARPI-5 cabinet hanger

Highly resistant cupboard hangers: 65Kg./unit according to DIN 68840 certified by LGA (equivalent to 260Kg. of final load per set). Concealed by a cover in different colours. Available for knock-in or screw-on assembly.

Screw-fix cabinet hanger.

		Left	Right	
White	Ral 9001	626.200.002	626.300.006	250



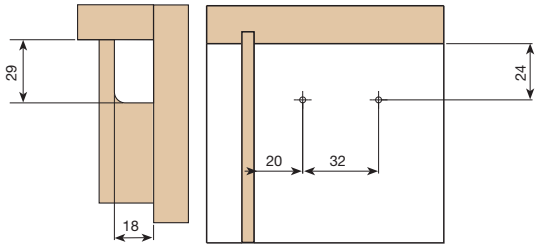

3 Adjustments	
Height	14mm.
Front	12mm.
Side	6mm.

Knock-in hanger.

		Left	Right	
White	Ral 9001	626.400.003	626.500.000	250



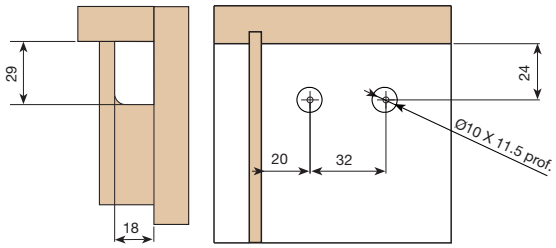

3 Adjustments	
Height	14mm.
Front	15mm.
Side	6mm.

Cover.

		Left	Right	
White	Ral 9001	639.400.005	639.500.002	500
Grey		639.400.145	639.500.142	



Accessories

Bag of accessories.

	620.400.105	200

Packed in boxes containing 200 bags. Each bag containing 1 double wall Mounting plate. (B), 4 screws Ø4.5 x 45 (c), and 4 plastic wall plugs Ø8 x 40 (d).

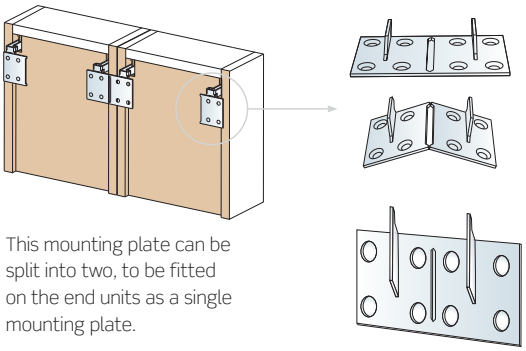

This mounting plate can be split into two, to be fitted on the end units as a single mounting plate.

Double wall mounting plate.

Zinc-plated	623.000.033	200

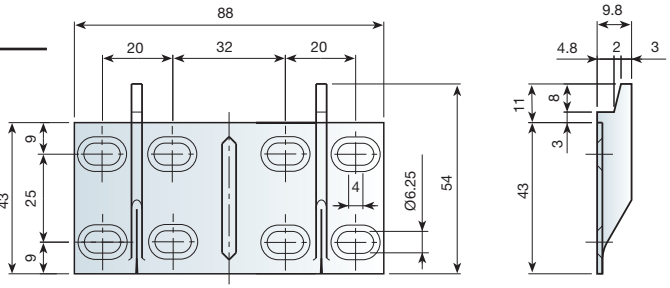

Screws Ø4,5 x 35.

Zinc-plated	982.435.031	5.000

Plastic wall plugs Ø6 x 30.

Natural	662.130.302	1.000 or 10.000



Plastic wall plugs Ø8 x 40.

Natural	662.240.106	1.000 or 10.000



Square hook.

Zinc-plated	661.200.035	1.000



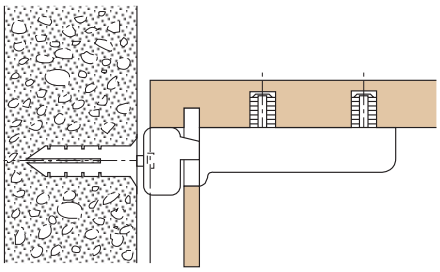

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

TRASER-6

Concealed hangers

TRASER-6

Concealed hangers

No need for tools, INDAUX's **TRASER-6** cabinet hanger offers maximum simplicity, adjustment and resistance.

High strength

The **TRASER-6** cabinet hanger has been designed for standard kitchen module use with a height from 600 to 1.000mm and a depth from 300 to 350mm. For other measurements, please make a request to Indaux's Tecnical Departament.



A = 600 to 1.000mm
B = 300 to 350mm

The maximum load per hanger is 65Kg./unit according to DIN 68840 certified by LGA (equivalent to 260Kg. of final load per set), cabinet dimensions: height 700mm. depth 350mm.

Easy to fit

Fixed to the cabinet-back side, independent to the cabinet top type.

Highly adjustable

Side adjustment with steel guide up to 16mm. Height adjustment up to 18mm with Phillips® Nº. 2, Ø6 or Pozidriv® Nº.2, Ø6 screwdrivers. Depth adjustment up to 25mm.

Ecological

This hanger is entirely made of metal and is easily recycled.

pp.

1 TRASER-6 325
- Rapid fitting 325
- Knock-in fitting 326
- Screw fitting 327
- Short knock-in fitting 328
- Accessories 329

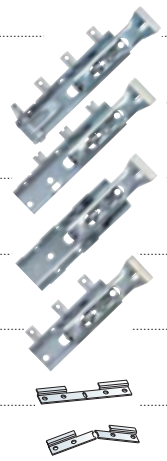

1 TRASER-6

TRASER-6: Rapid fitting

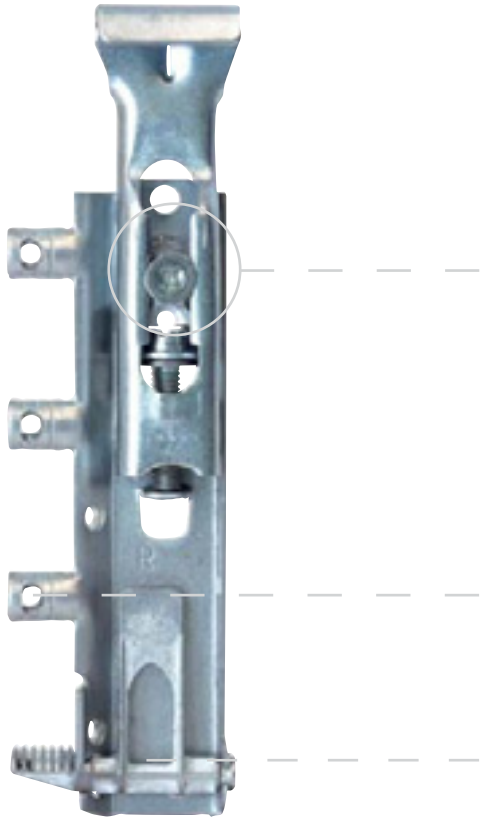

We present the fastest, most convenient and safest fitting system on the market. You won't need any tools to fit or remove your hangers. It won't even take you any time. Fitting Traser 6 is child's play. Try it, you'll be surprised.

Maximum problem-free adjustment and precision.
Why not respect the beauty of your furniture to the maximum? That's what we do. We have reduced the number of holes to be drilled in your cabinet backs like no-one else. A small Ø18mm hole provides access to all adjustments. But we give you even more. If you don't want to drill your cabinet backs, you can still fully adjust your hanger. We are unique in this as well. Our adjustment screws never penetrate the back of the furniture.

Maximum safety.
In addition to speed, convenience and appearance, we also want you to know how safe our system is. Our R&D department has developed a product which can take a nominal load of 65 kgs. per hanger. Months of effort and imagination and hundreds of tests have enabled us to certify compliance with the DIN 68840 standard certified by LGA (equivalent to 260Kg. of final load per set), cabinet height 700mm. depth 350mm. Please check for smaller sizes.

Maximum simplicity.
By using the fixing lever you will discover the meaning of convenience. No other system can give you this. By just turning the lever 180°, you will perceive the sensation of safety which our hanger's anchoring system provides.

References

TRASER-6 Cabinet hanger, Rapid fitting

Left	624.200.032	100
Right	624.300.036	

The maximum load per hanger is 65 kgs. According to din 68840 (equivalent to 260Kg. of a final load per set), cabinet height 700mm. depth 350mm.
NOTE: for smaller modules please consult us.

Depth adjustment.
Up to 25mm both at the front and back, in this case, without any need to drill the back of the furniture.

Height adjustment.
Up to 18mm with a Phillips® No.2 , Ø6 screwdriver or a Pozidriv® No.2, Ø6. Both adjustments through the same 18mm diameter hole.

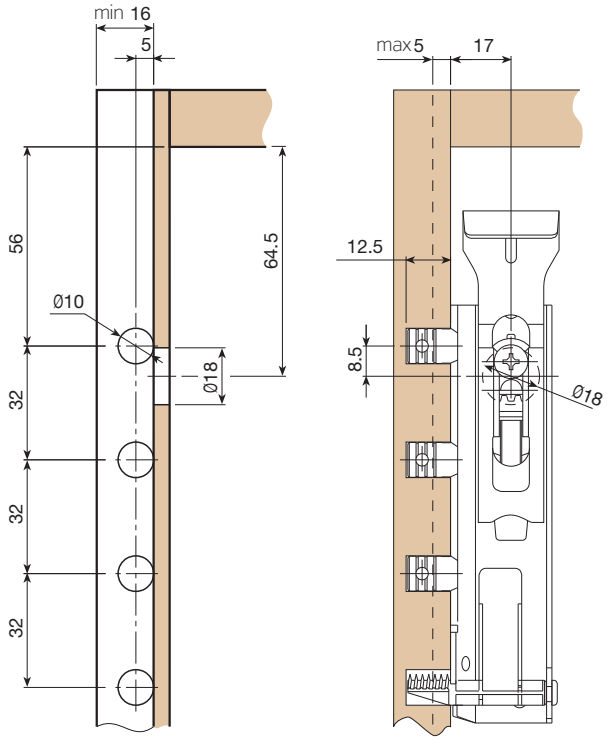

TRASER-6: Knock-in fitting

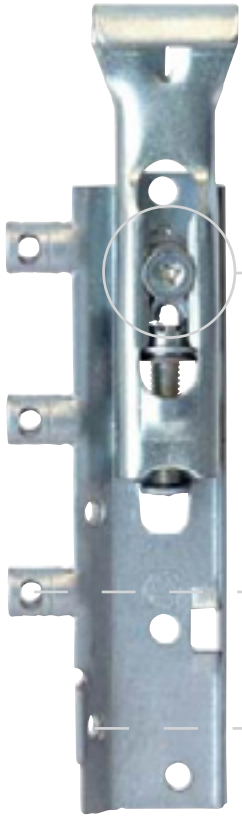

Maximum problem-free adjustment and precision.
Why not respect the beauty of your furniture to the maximum? That's what we do. We have reduced the number of holes to be drilled in your cabinet backs like no-one else. A small Ø18mm hole provides access to all adjustments. But we give you even more. If you don't want to drill your cabinet back, you can still fully adjust your hanger. We are unique in this as well. Our adjustment screws never penetrate the back of the furniture.

Maximum safety.
In addition to appearance, we also want you to know how safe our system is. We have worked to achieve a nominal load capacity of 65 kgs per hanger. Months of effort and imagination and hundreds of tests have enabled us to certify compliance with the DIN 68840 standard certified by LGA (equivalent to 260Kg. of final load per set), cabinet height 700mm. depth 350mm. Please check for smaller sizes. The dowels have an additional feature. They have fixing holes for additional screwing. They only need to be used when applying extremely high loads.

Maximum simplicity.
Fixing is done on the side of the cabinet. You just have to screw one 3.5 x 20 screw into the fixing hole.

TRASER-6 Cabinet hanger, Knock-in fitting.

Left	624.000.031	100
Right	624.100.035	

The maximum load per hanger is 65 kgs. According to din 68840 (equivalent to 260Kg. of a final load per set), cabinet height 700mm. depth 350mm.
NOTE: for smaller modules please consult us.

Depth adjustment.
Up to 25mm both at the front and back, in this case, without any need to drill the back of the furniture.

Height adjustment.
Up to 18mm with a Phillips® No.2, Ø6 screwdriver or a Pozidriv® No.2, Ø6. Both adjustments through the same 18mm diameter hole.

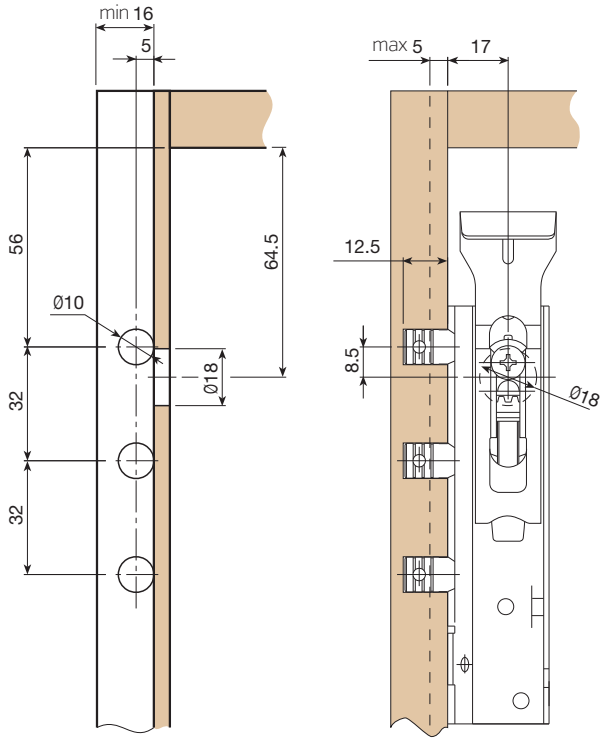

TRASER-6: Screw fitting

For those who prefer the traditional fixing system, we present the screw fitting system. The hanger can be fitted on both sides, left or right.

Maximum problem-free adjustment and precision.
Why not respect the beauty of your furniture to the maximum? That's what we do. We have reduced the number of holes to be drilled in your cabinet backs like no-one else. A small Ø18mm hole provides access to all adjustments. But we give you even more. If you don't want to drill your cabinet back, you can still fully adjust your hanger. We are unique in this as well. Our adjustment screws never penetrate the back of the furniture.

Maximum safety.
In addition to appearance, we also want you to know how safe our system is. We have worked to achieve a nominal load capacity of 65 kgs. per hanger. Months of effort and imagination and hundreds of tests have enabled us to certify compliance with the DIN 68840 standard certified by LGA (equivalent to 260Kg. of final load per set), cabinet height 700mm. depth 350mm. Please check for smaller sizes.

Maximum simplicity.
Fixing is done on the side of the cabinet. You just have to screw three 3.5 x 20 screw into the fixing hole.

TRASER-6 Cabinet hanger, Screw fitting.

624.400.033	100

The maximum load per hanger is 65 kgs. According to din 68840 (equivalent to 260Kg. of a final load per set), cabinet height 700mm. depth 350mm.
NOTE: for smaller modules please consult us.

Depth adjustment.
Up to 25mm both at the front and back, in this case, without any need to drill the back of the furniture.

Height adjustment.
Up to 18mm with a Phillips® No.2, Ø6 screwdriver or a Pozidriv® No.2, Ø6. Both adjustments through the same 18mm diameter hole.

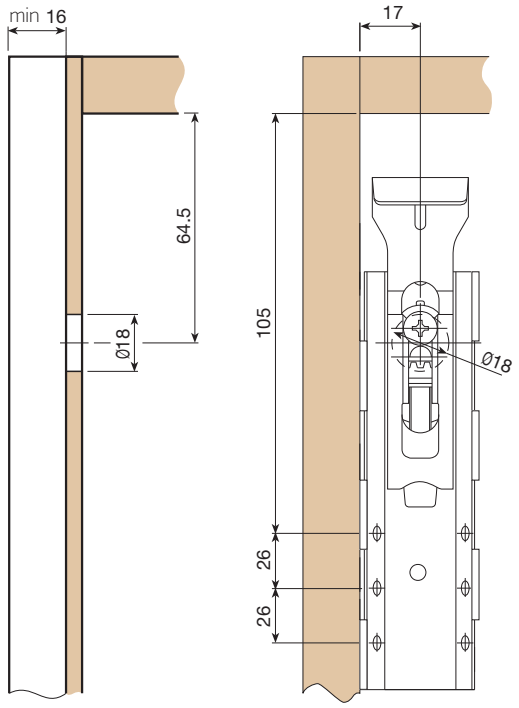

TRASER-6: Short knock-in fitting

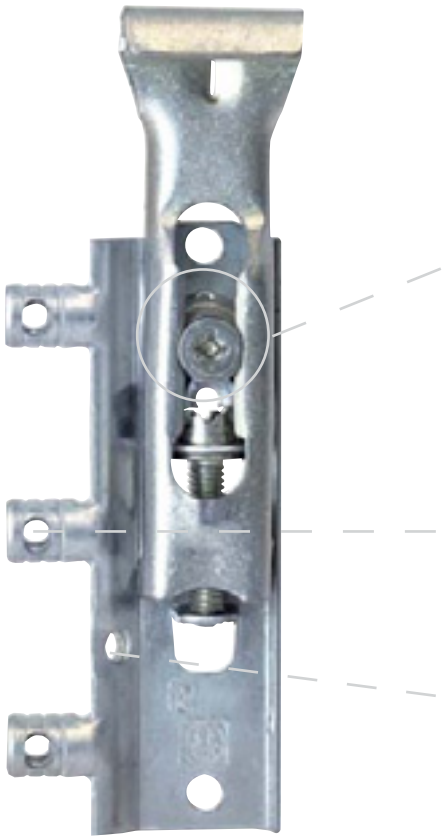

Maximum problem-free adjustment and precision.
Why not respect the beauty of your furniture to the maximum? That's what we do. We have reduced the number of holes to be drilled in your cabinet backs like no-one else. A small Ø18mm hole provides access to all adjustments. But we give you even more. If you don't want to drill your cabinet back, you can still fully adjust your hanger. We are unique in this as well. Our adjustment screws never penetrate the back of the furniture.

Maximum safety.
In addition to appearance, we also want you to know how safe our system is. We have worked to achieve a nominal load capacity of 65 kgs. per hanger. Months of effort and imagination and hundreds of tests have enabled us to certify compliance with the DIN 68840 standard certified by LGA (equivalent to 260Kg. of final load per set), cabinet height 700mm. depth 350mm. Please check for smaller sizes. The dowels have an additional feature. They have fixing holes for additional screwing. They only need to be used when applying extremely high loads.

Maximum simplicity.
Fixing is done on the side of the cabinet. You just have to screw one 3.5 x 20 screw into the fixing hole.

TRASER-6 Cabinet hanger, Knock-in fitting.

	Left	Right	
Zinc-plated	624.500.030	624.600.034	100

The maximum load per hanger is 65 kgs. According to din 68840 (equivalent to 260Kg. of a final load per set), cabinet height 700mm. depth 350mm.
NOTE: for smaller modules please consult us.

Depth adjustment.
Up to 25mm both at the front and back, in this case, without any need to drill the back of the furniture.

Height adjustment.
Up to 18mm with a Phillips® No.2, Ø6 screwdriver or a Pozidriv® No.2, Ø6. Both adjustments through the same 18mm diameter hole.

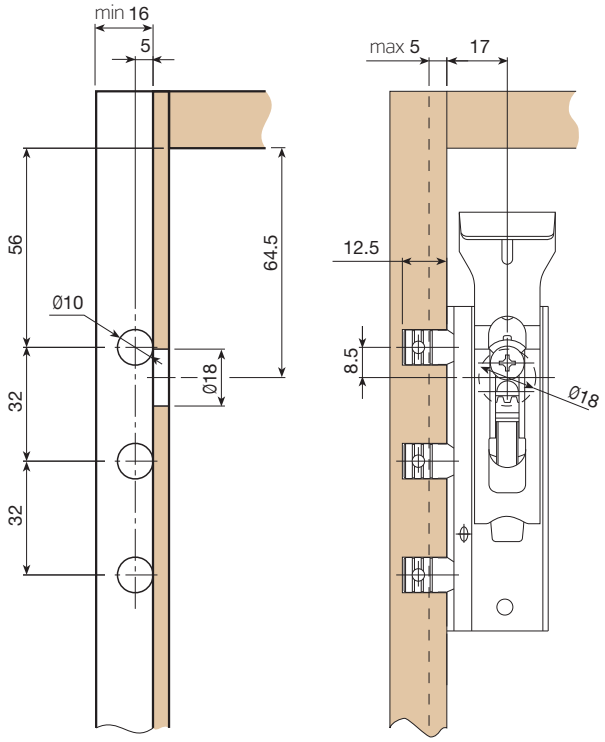

TRASER-6: Accessories

Double wall mounting plate.

Length (mm.)	Zinc-plated	
200	619.015.036	150
250	619.020.032	150
300	619.025.035	150
350	619.030.031	100
400	619.035.034	100
450	619.040.030	100
500	619.045.033	40
550	619.050.036	40
600	619.055.032	40
650	619.060.035	40
750	619.070.034	40
800	619.075.030	25
900	619.085.036	25
1000	619.095.035	25
1200	619.115.033	25
1350	619.130.035	25

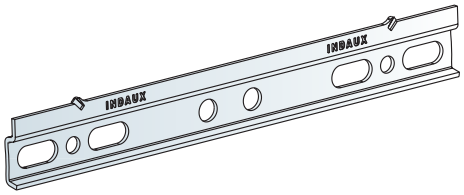

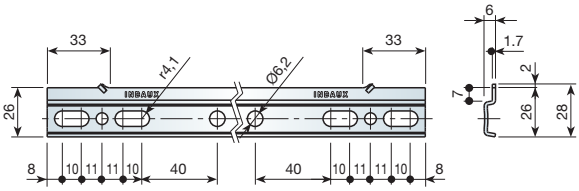

Double wall mounting plate.

Length (mm.)	Zinc-plated	
2029	619.200.035	15

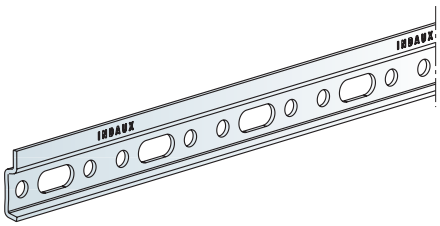

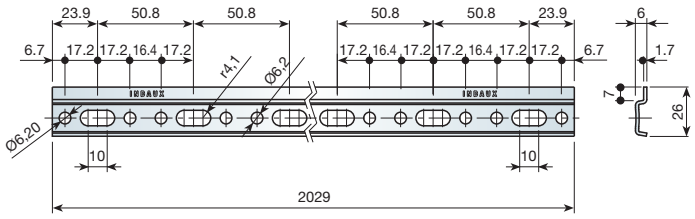

Double wall mounting plate.

Length (mm.)		
130	621.900.031	200
182	621.901.033	

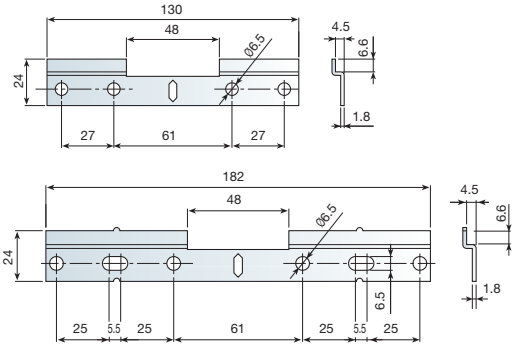

Ø18mm. cover.

White	Ral 9001	961.618.000	1.000
Nickel		961.618.066	



Bag of accessories.

length of wall mounting plate (mm.)		
130	630.800.100	200
182	630.801.102	

Each bag contains 1 wall mounting plate, 4 plastic Ø8X40 plugs and 4 Ø4.5X35 screws.

RECYCLABLE STEEL

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

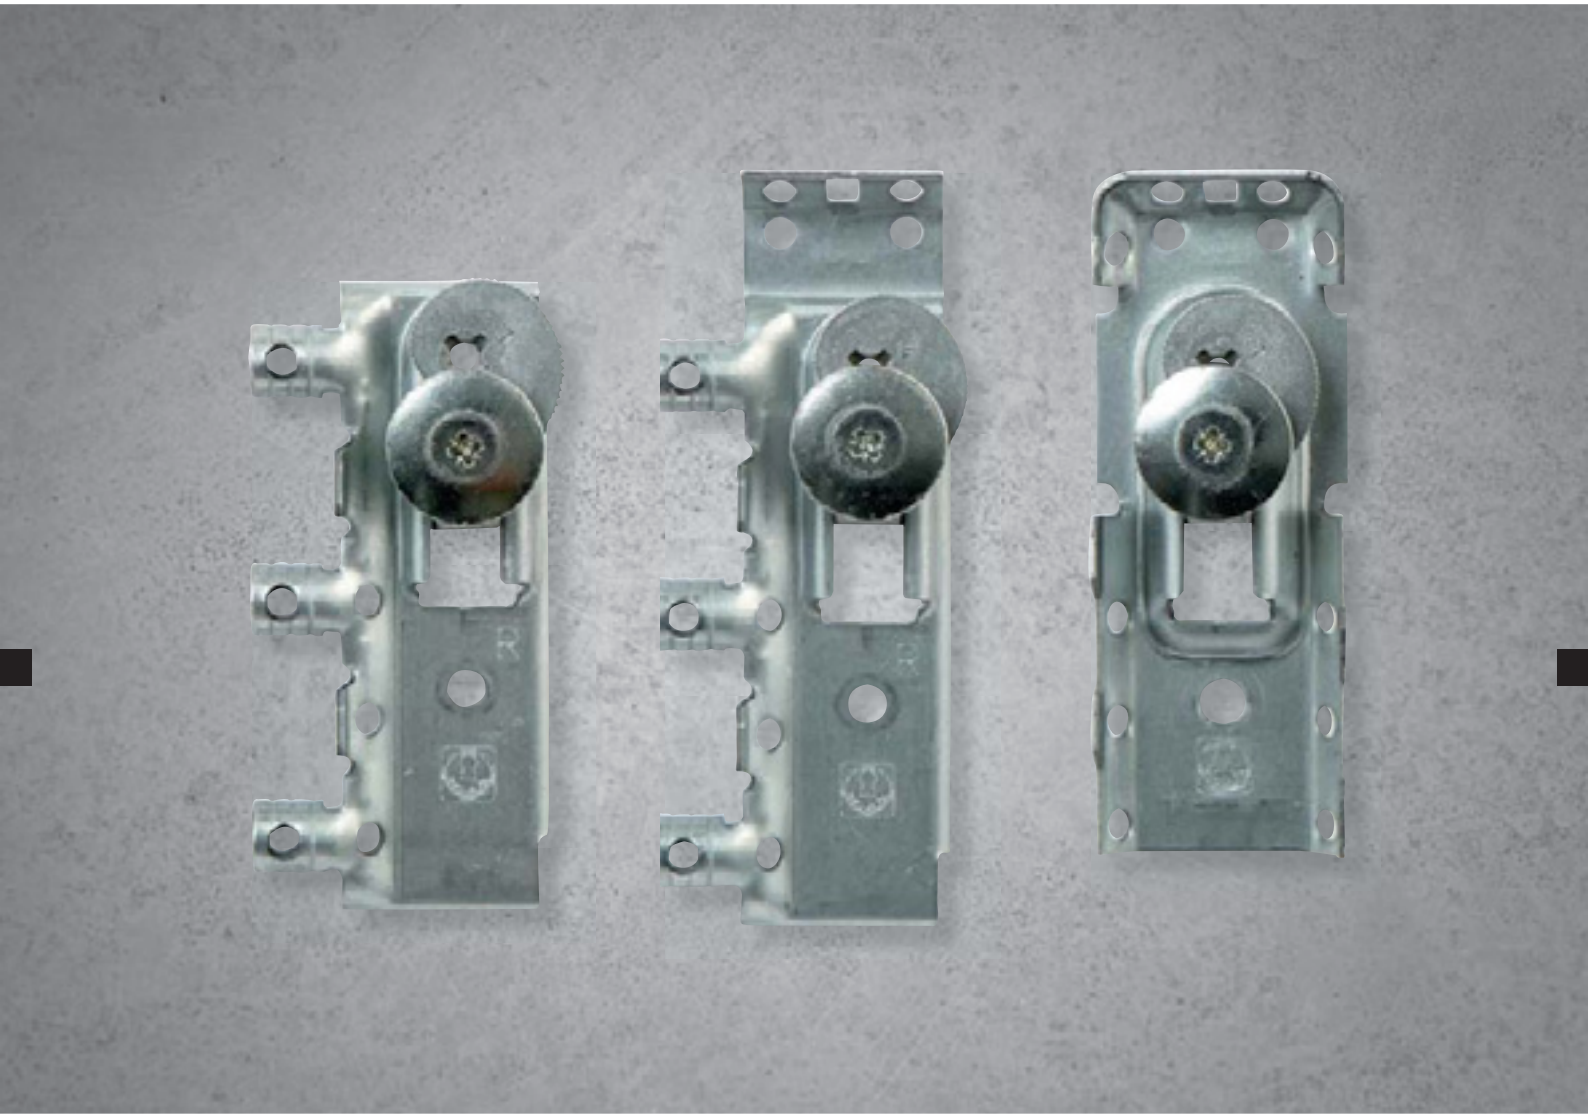

TRASER-8

Concealed hangers

TRASER-8

Concealed hangers

High weight resistance suspension hanger, concealed behind the back of the cabinet. 3-Way adjustment. Screw-fix or dowel-fix versions.

High strength:
The **TRASER-8** has been developed to be used in standard kitchen cabinets sizes such as those 600 to 1,000mm high and 300 to 350mm deep. Please consult for other sizes.



A = 600 to 1.000mm
B = 300 to 350mm

The maximum load per hanger is 65Kg./unit according to DIN 68840 (equivalent to 260Kg. of a final load per set), cabinet height of 700mm and depth of 350mm.

pp.

1 TRASER-8 333
- Knock-in assembly 333
- Knock-in assembly with upper support 334
- Screw-fix assembly 335
- Accessories 336



1 TRASER-8

TRASER-8: Knock-in assembly

Knock-in assembly.

Zinc-plated		
Left-hand	627.100.036	100
Right-hand	627.200.033	

The maximum load per hanger is 65Kg./unit according to DIN 68840 (equivalent to 260Kg. of a final load per set) cabinet height 700mm, depth 350mm. Please consult for other sizes. Fixing screws as indicated.

3 adjustments	
Height	11 mm
Front	10 mm
Side	12 mm

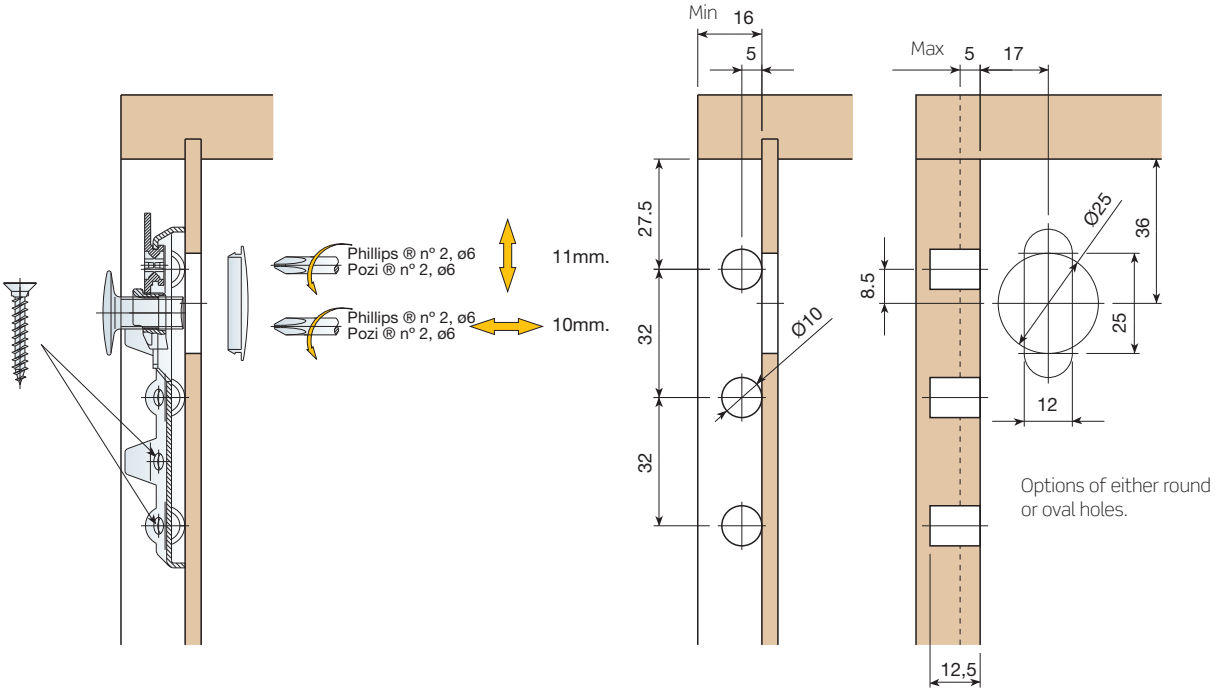

TRASER-8: Knock-in assembly with upper support

Knock-in assembly with upper support.

Zinc-plated		
Left-hand	627.300.030	100
Right-hand	627.400.034	

The maximum load per hanger is 65Kg./unit according to DIN 68840 (equivalent to 260Kg. of a final load per set) cabinet height 700mm, depth 350mm. Please consult for other sizes. Fixing screws as indicated.

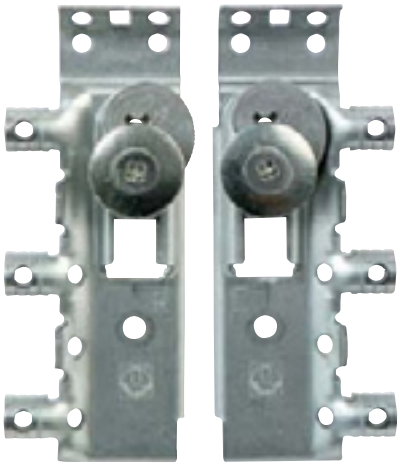

3 adjustments	
Height	11mm.
Front	10mm.
Side	12mm.

Assembly on to a cabinet with a deep top

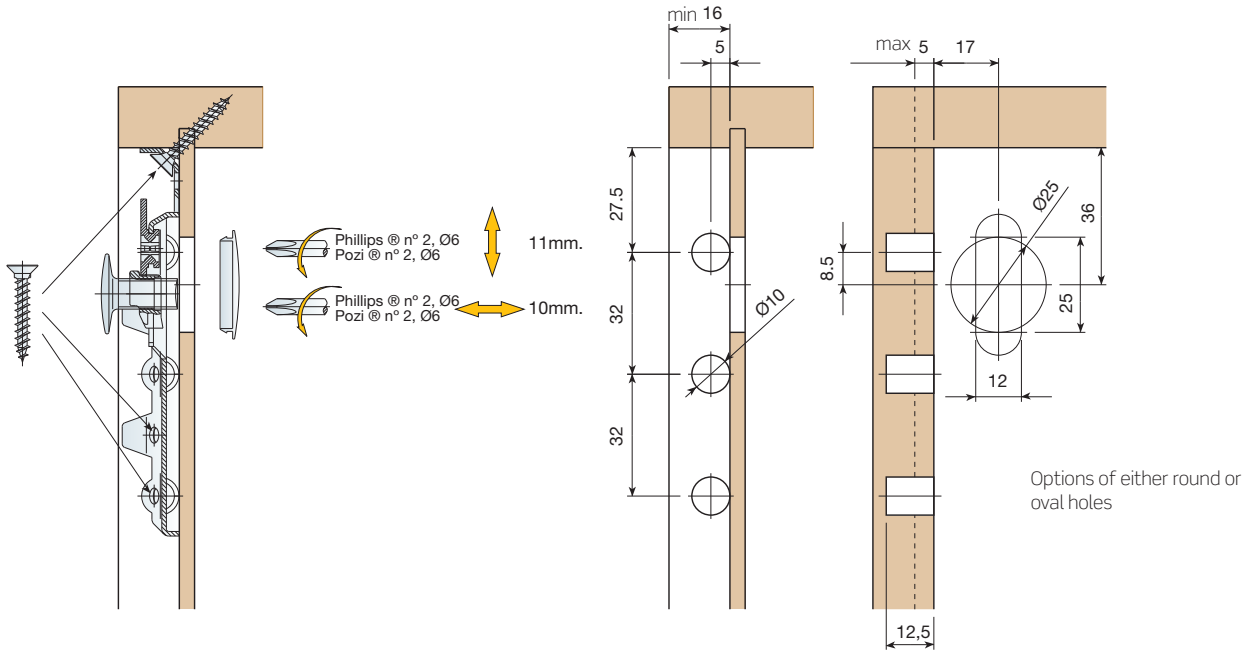

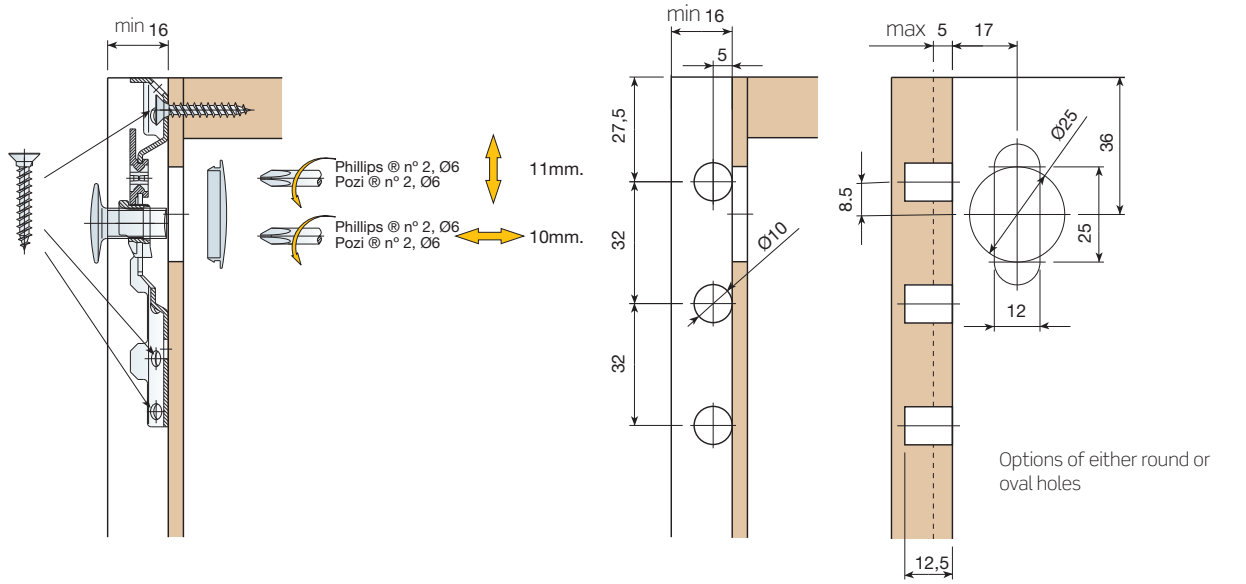

TRASER-8: Screw-fixed assembly

Screw-fix.

Zinc-plated	627.000.032	100

The maximum load per hanger is 65Kg./unit according to DIN 68840 (equivalent to 260Kg. of a final load per set) cabinet height 700mm, depth 350mm. Please consult for other sizes. Fixing screws as indicated.

3 adjustments	
Height	11 mm
Front	10 mm
Side	12 mm

Assembly onto a cabinet with a deep top

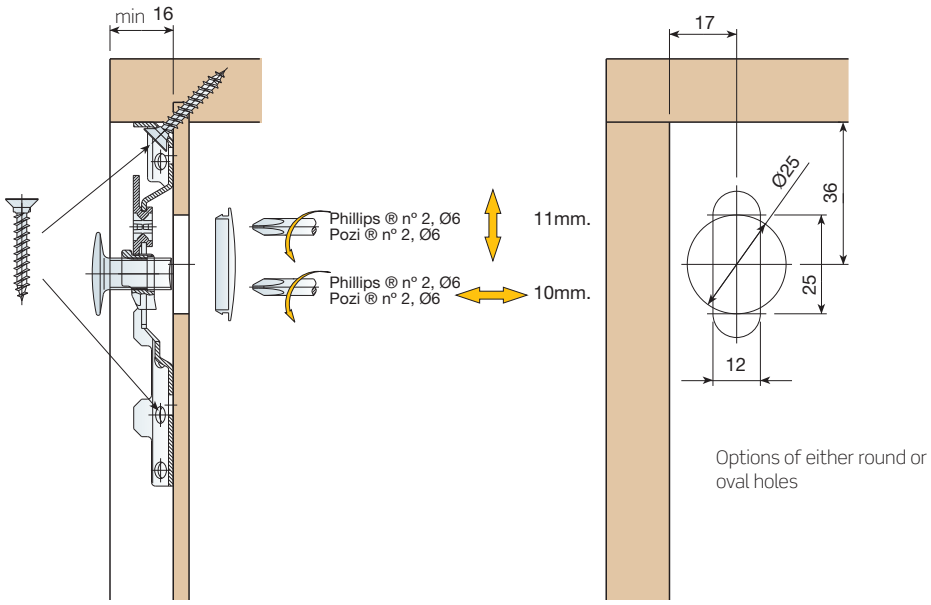

Options of either round or oval holes

Assembly onto a cabinet with a short top

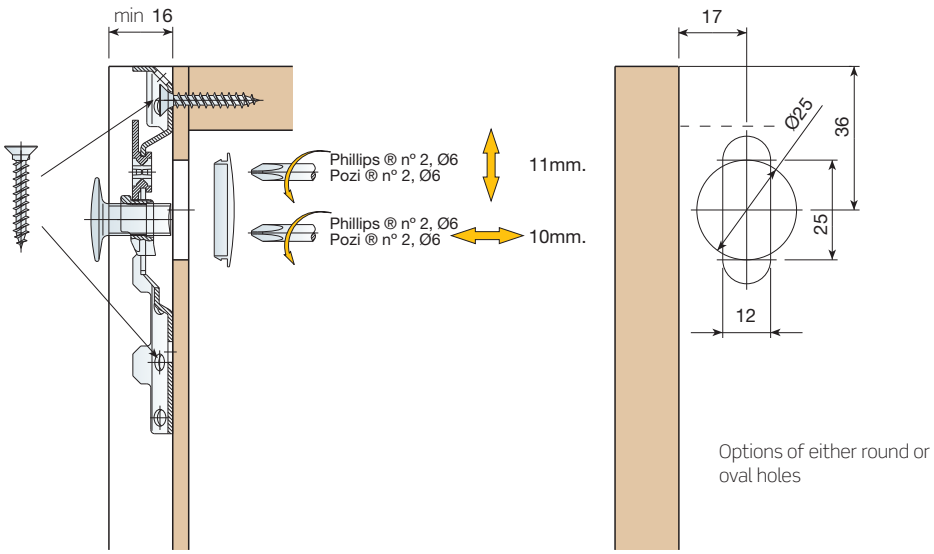

Options of either round or oval holes

TRASER-8: Accessories

Traser single wall mounting plate.

Zinc-plated	622.000.035	500

Bag of accessories.

	630.100.100	250

250 Bags per box. Each bag consists of 2 wall mounting plates, 4 x ø6 x 30 Plastic wall plugs and 4 x Ø4.5 X 35 screws.



Traser double wall mounting plate.

Zinc-plated	620.400.034	250

Bag of accessories

	630.700.103	200

250 Bags per box. Each bag consists of 2 wall mounting plates, 4 x ø6 x 30 Plastic wall plugs and 4 x Ø4.5 X 35 screws.

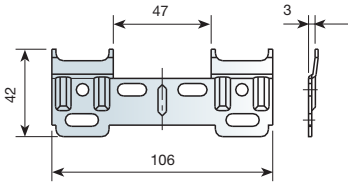

Double wall mounting plate.

Length (mm.)	Zinc-plated	
2029	619.200.035	15

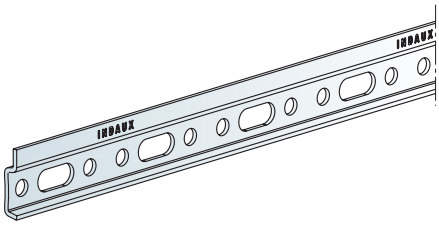

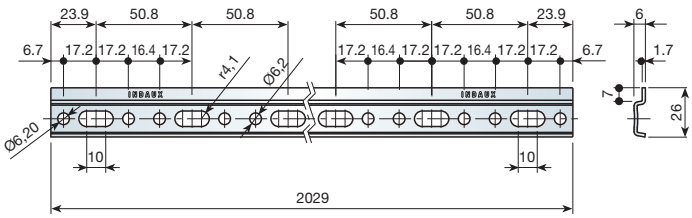

Double wall mounting plate.

Length (mm.)	Zinc-plated	
200	619.015.036	150
250	619.020.032	150
300	619.025.035	150
350	619.030.031	100
400	619.035.034	100
450	619.040.030	100
500	619.045.033	40
550	619.050.036	40
600	619.055.032	40
650	619.060.035	40
750	619.070.034	40
800	619.075.030	25
900	619.085.036	25
1000	619.095.035	25
1200	619.115.033	25
1350	619.130.035	25

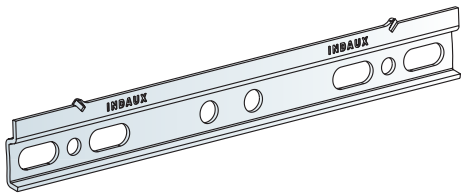

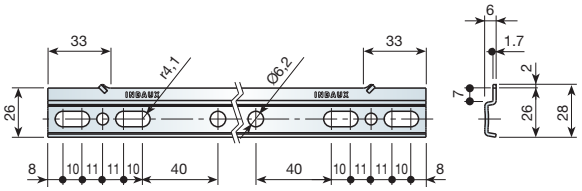

Cover cap for ø25 hole.

White	Ral 9003	530.400.006	2.000
Nickel-plated		530.400.065	1.000



Cover cap for oval 12 hole.

White	Ral 9003	961.412.001	1.000
Nickel-plated		961.512.064	



NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

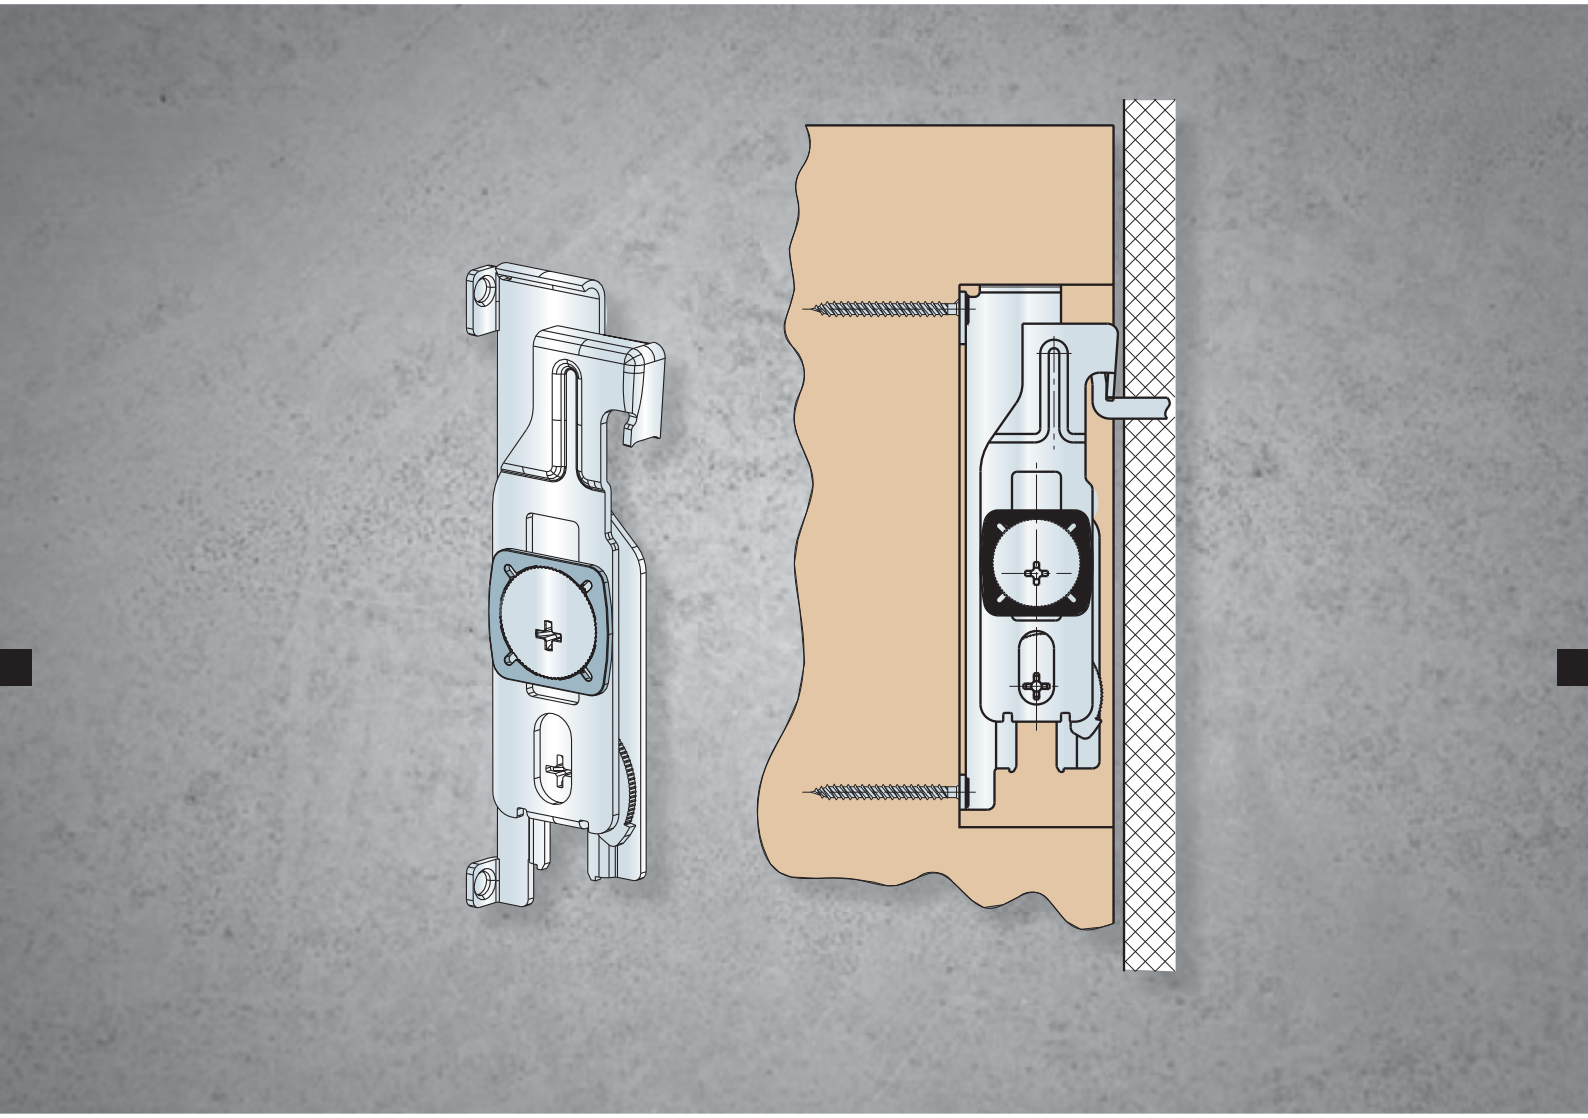

TRASER-7

Concealed hangers

TRASER-7

Concealed hangers

High weight resistance cabinet suspension bracket. Concealed within the interior of the side of the cabinet. Does not require a back to the cabinet. Eliminates the gap between the cabinet and the wall. The same fitting can be used either on the left-hand or on the right-hand side. 3 adjustments.

pp.

1 TRASER-7 341

- Screw-fix 341
- Accessories 342



1 TRASER-7

TRASER-7: Screw-fix assembly

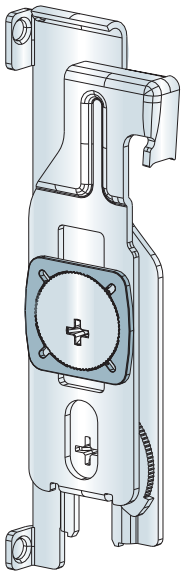

TRASER-7 built-in screw-fix hanger.

Zinc-plated	626.000.104	100

The maximum load per hanger is 65 kg in accordance with DIN68840.

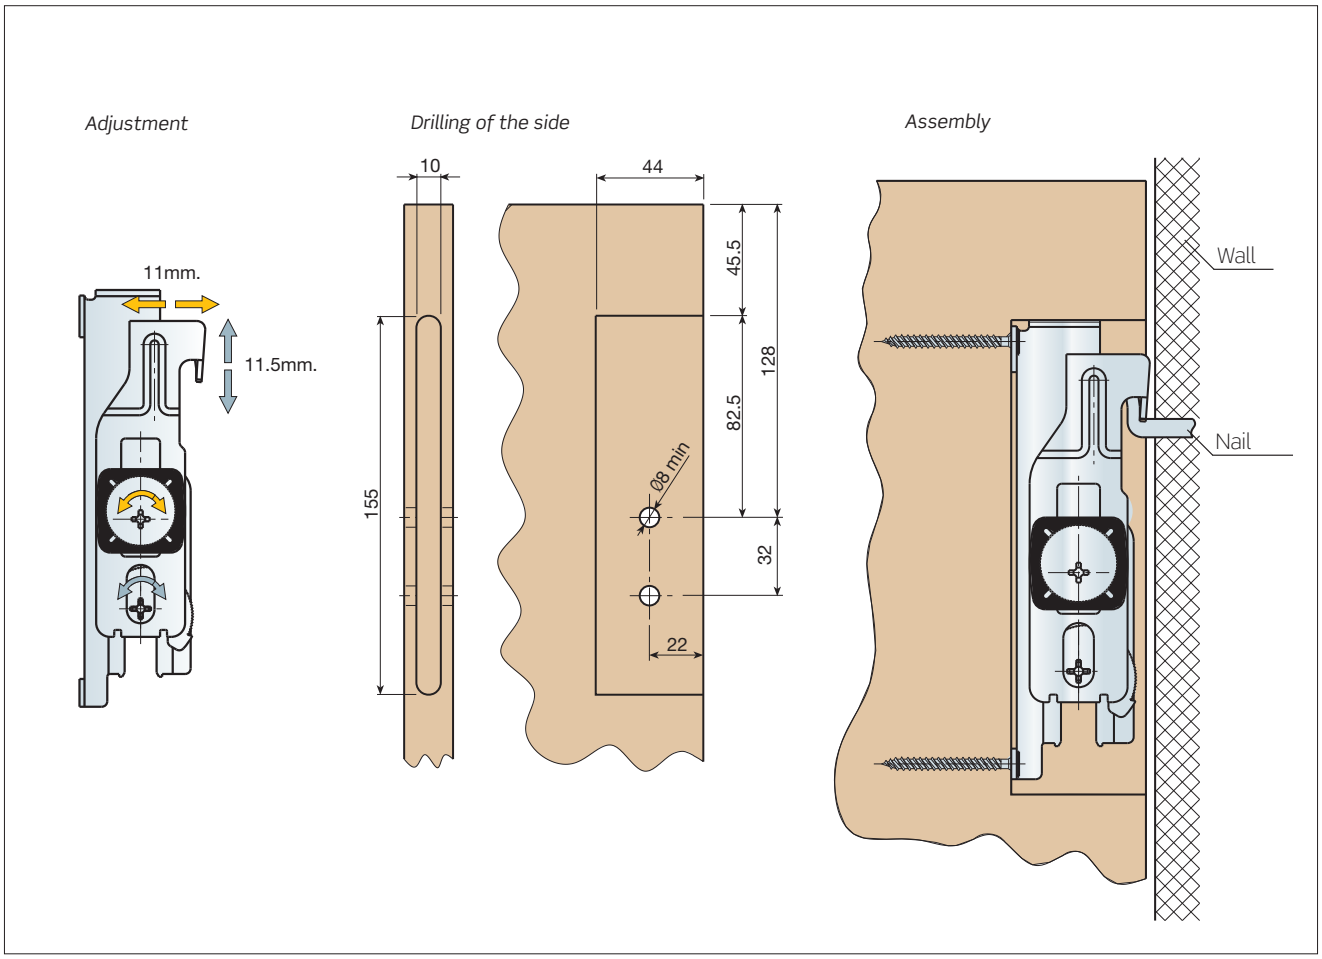

TRASER-7: Accessories

Plastic wall plugs Ø6 x 30.

Natural	662.130.302	1.000 or 10.000



Plastic wall plugs Ø8 x 40.

Natural	662.240.106	1.000 or 10.000



Square hook.

Zinc-plated	661.200.035	1.000



MISCELLANEOUS HANGERS

pp.

1 ADJUSTABLE HANGER 344

2 INTERLOCKING HANGER 345

3 EXTRACTOR HOOD ADJUSTMENT PIVOT 346

1 ADJUSTABLE HANGER

Adjustable hanger.

Zinc-plated	655.500.031	500

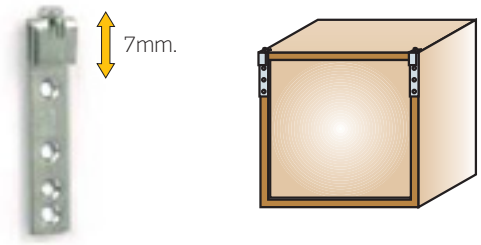

Adjustable cabinet hanger.

	Left	Right	
Zinc-plated	655.700.032	655.600.035	500

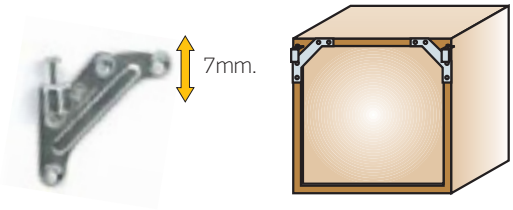

Twin coupler with side stops.

Zinc-plated	619.800.031	250

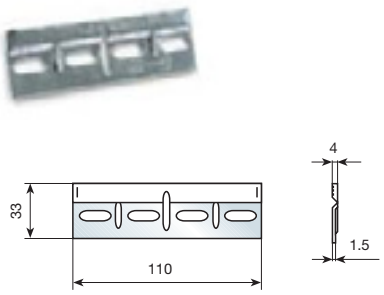

Cabinet hanger support.

Zinc-plated	620.600.035	500

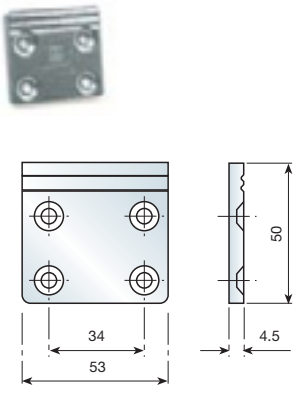

2 INTERLOCKING HANGER

This hanger is very handy for bathroom accessories and other elements where hanging is necessary, and is 100% concealed.

Hanging support.

Zinc-plated	621.700.030	2.000



Assembly: Place the support on the wall with the hook facing upwards, and on the shelf with the hook facing downwards. Hang the shelf by interlocking the two hooks. The supports will be held tightly together by the hooking system.

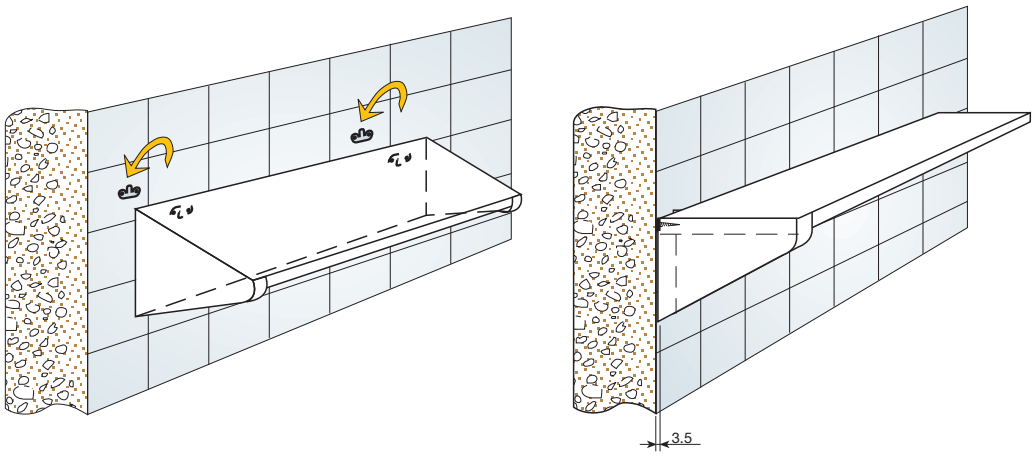

3 EXTRACTOR HOOD ADJUSTMENT PIVOT

Extractor hood adjustment pivot.

White	Ral 9001	610.000.005	500
Brown	Ral 8016	610.000.016	

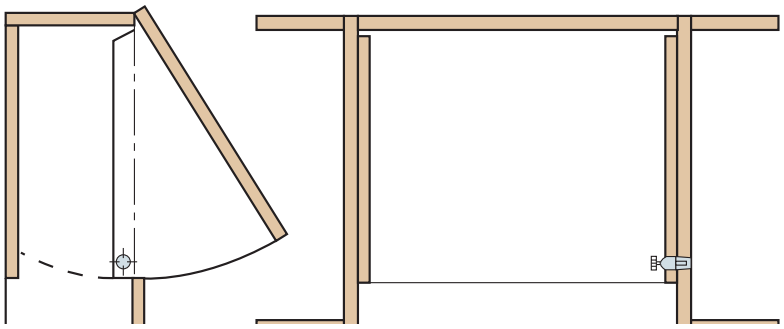

TENTI-3
TENTI Shelf Support

1 TENTI-3

Concealed shelf support with 3 adjustments. The hole must be drilled in the centre of the shelf to allow fixing either way up.

TENTI-3 Shelf support unit.

633.000.104	100

Packed in boxes with 100 bags. Each bag contains 1 shelf support, 1 wall Mounting plate, 6 plastic wall plugs ø 6 x 30 and 6 wood-threaded screws Ø4.5 X 35.

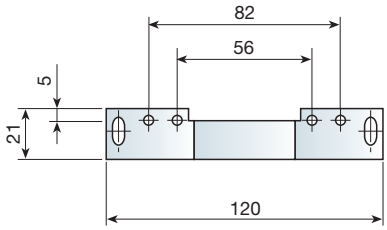

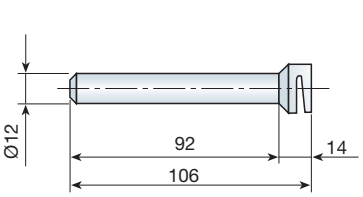



Fix the plate to the wall and ensure it is level before fixing the wall plugs.

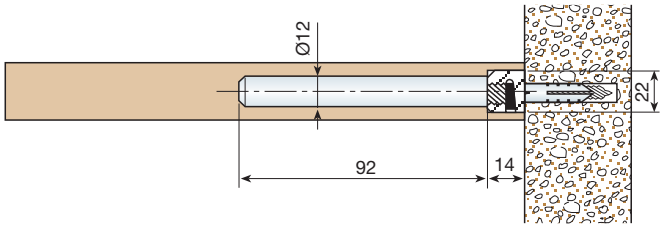

Shelf with 3 slots



Shelf with one slot



TENTI-4
TENTI Shelf Support

1 TENTI-4

This support has 3 adjustments and comes with a Ø12 rod for a minimum 18 mm-thick shelf.

Cover.

White	Ral 9001	640.200.002	
Brown	Ral 8016	640.200.013	
Black	Ral 9005	640.200.024	500
Oak	Ral 1002	640.200.190	

TENTI-4C Shelf support unit.

Ø12mm.	633.112.104	100

It comes in boxes of 100 bags. Each bag contains 1 shelf support, 2 plastic wall plugs Ø6 x 30 and 2 screws Ø4.5 x 35.

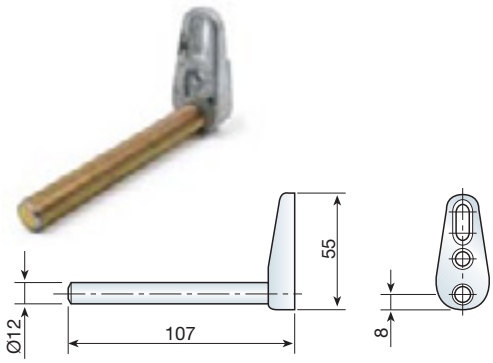

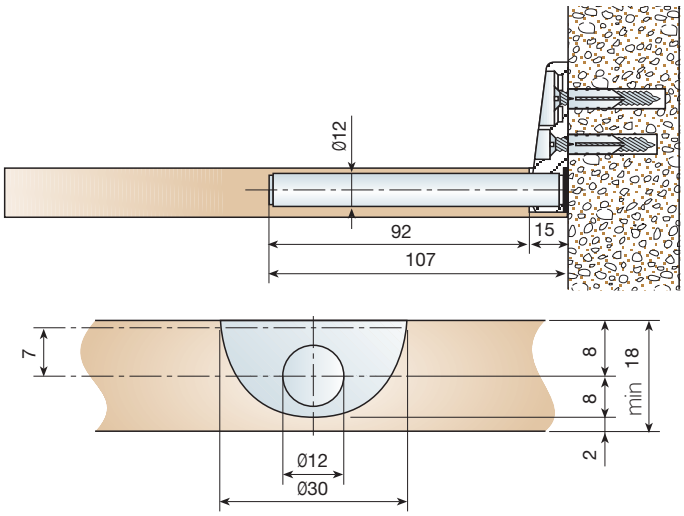

Slot for Ø12 mm rod.

TENTI-4C
TENTI Shelf Support

1 TENTI-4C

Shelf support with 3 adjustments, designed to allow concentric and off-Centered mechanization. The concentric mechanization allows two drillings to be made at the same time. For the off-centered mechanization, the two drillings must be made in two different operations. The advantage of the off-centered mechanization is that the shelves may be less thick than for concentric mechanization: minimum 15 mm, for off-centered mechanization and 18 mm for concentric mechanizatio.

Cover.

White	Ral 9001	640.200.002	
Brown	Ral 8016	640.200.013	
Black	Ral 9005	640.200.024	500
Oak	Ral 1002	640.200.190	

TENTI-4C Shelf support unit.

Ø10mm.	633.410.105	100

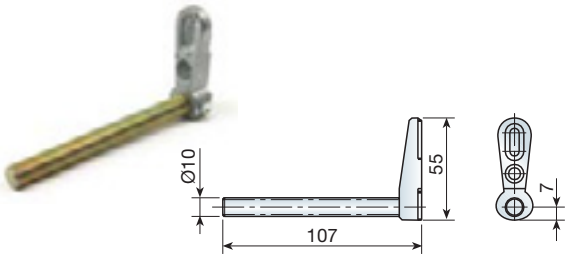

Packed in boxes with 100 bags. Each bag contains 1 shelf support, 2 plastic wall plugs Ø6 x 30 and 2 wood-threaded screws Ø4.5 X 35.

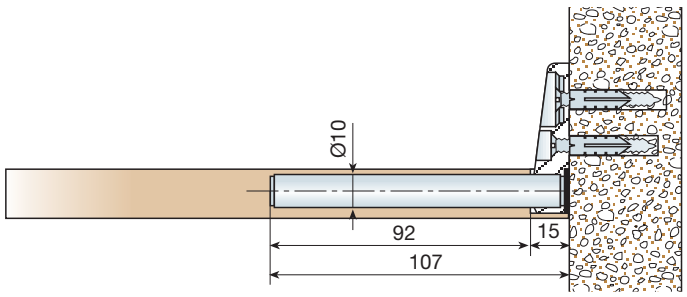

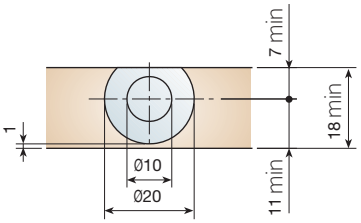

Concentric Mechanization in one Single operation for min. 18mm. Shelf thickness.



Off-centered mechanization in two different operations for min. 15mm. Shelf thickness.

TENTI-5
TENTI Shelf Support

1 TENTI-5

Shelf support with 3 adjustments with Ø12 rod for min. 19mm thick shelves.

Cover plate.

White	Ral 9001	640.300.006	
Brown	Ral 8016	640.300.010	
Black	Ral 9005	640.300.021	250
Oak	Ral 1002	640.300.194	

TENTI-5 shelf support unit.

Ø12mm.	633.212.101	50

Packed in boxes with 50 bags. Each bag contains 1 shelf support, 4 plastic wall plugs Ø6 x 30 and 4 wood-threaded screws Ø4.5 X 35.





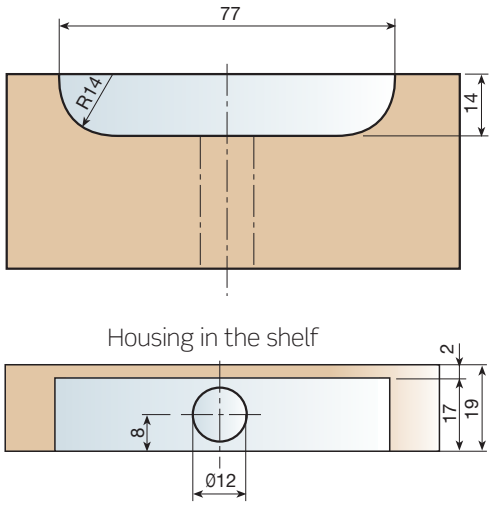

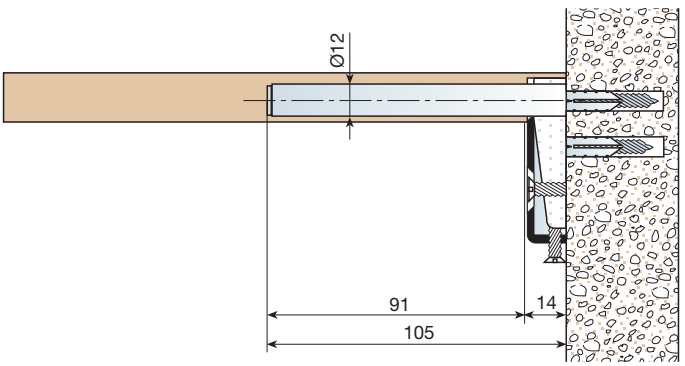

TENTI-7
TENTI Shelf Support

1 TENTI-7

Upper Cover.

White	Ral 9001	640.400.003	
Brown	Ral 8016	640.400.014	
Black	Ral 9005	640.400.025	250
Oak	Ral 1002	640.400.191	

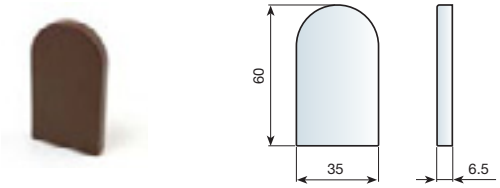

TENTI-7 shelf support.

Zinc-plated	633.514.103	50

Packed in boxes of 50 bags. Each bag contains 1 single support, 2 plastic wall plugs Ø6 x 30, 2 wood-threaded screws Ø4.5 X 35 and 2 screws Ø3.5 X 25.

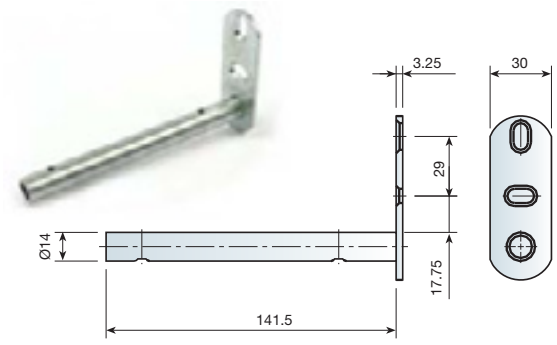

Lower Cover.

White	Ral 9001	640.500.000	
Brown	Ral 8016	640.500.011	
Black	Ral 9005	640.500.022	250
Oak	Ral 1002	640.500.195	

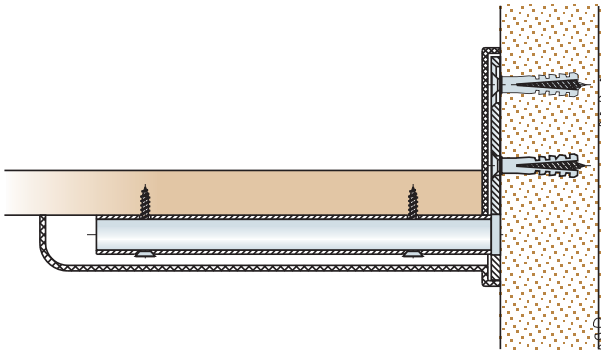

TENTI-8
TENTI Shelf Support

1 TENTI-8

The most important characteristic of this shelf support is that it is completely concealed and able to hold heavy loads. Additionally, it allows the shelf to be adjusted in any direction.

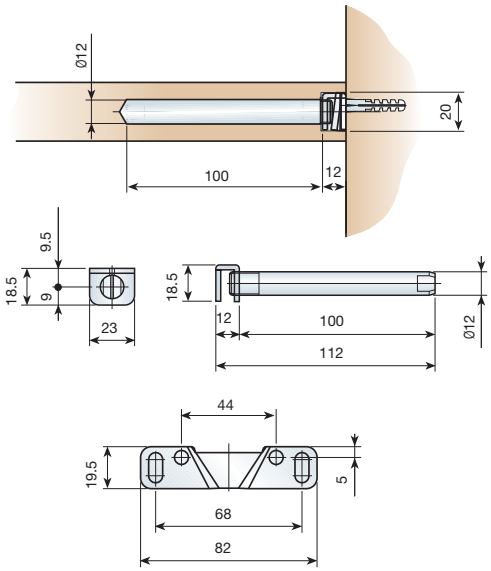

TENTI-8 shelf support.

632.500.105	100

Packed in boxes of 100 bags. Each bag contains 1 support, 4 plastic wall plugs Ø6x 30 and 4 screws Ø4.5X35.

Assembly TENTI-8

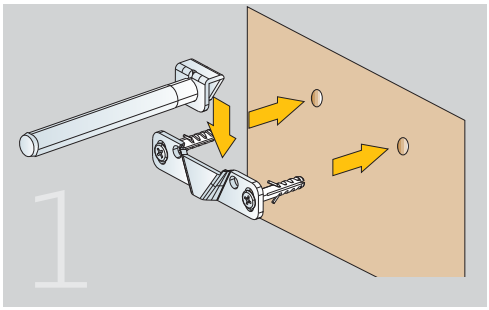

Place the support on the wall with the supplied wall plugs and screws and place the rod on the support.

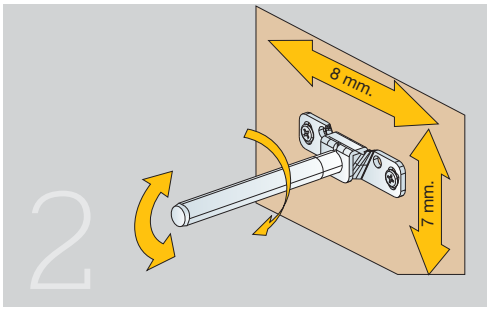

Oval holes allow accurate levelling. It can be horizontally adjusted by moving the rod along the support. Furthermore, the gradient may easily be adjusted by just turning the rod.

Fix the support in its definitive position with The other two wall plugs and screws to avoid the shelf displacing the levelled position.

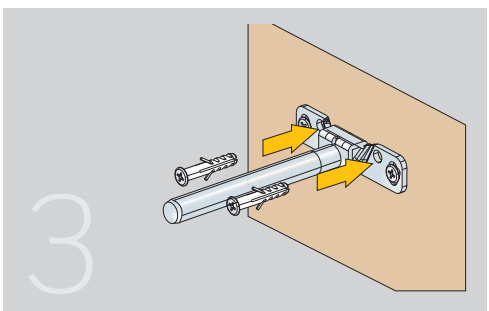

Finally, place the shelf in position. This can subsequently be removed whenever necessary to carry out further adjustments.

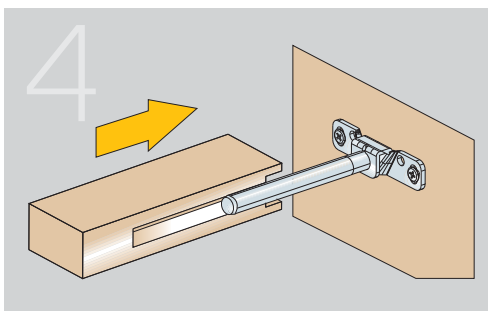

INDAUX
FURNITURE FITTINGS MANUFACTURER

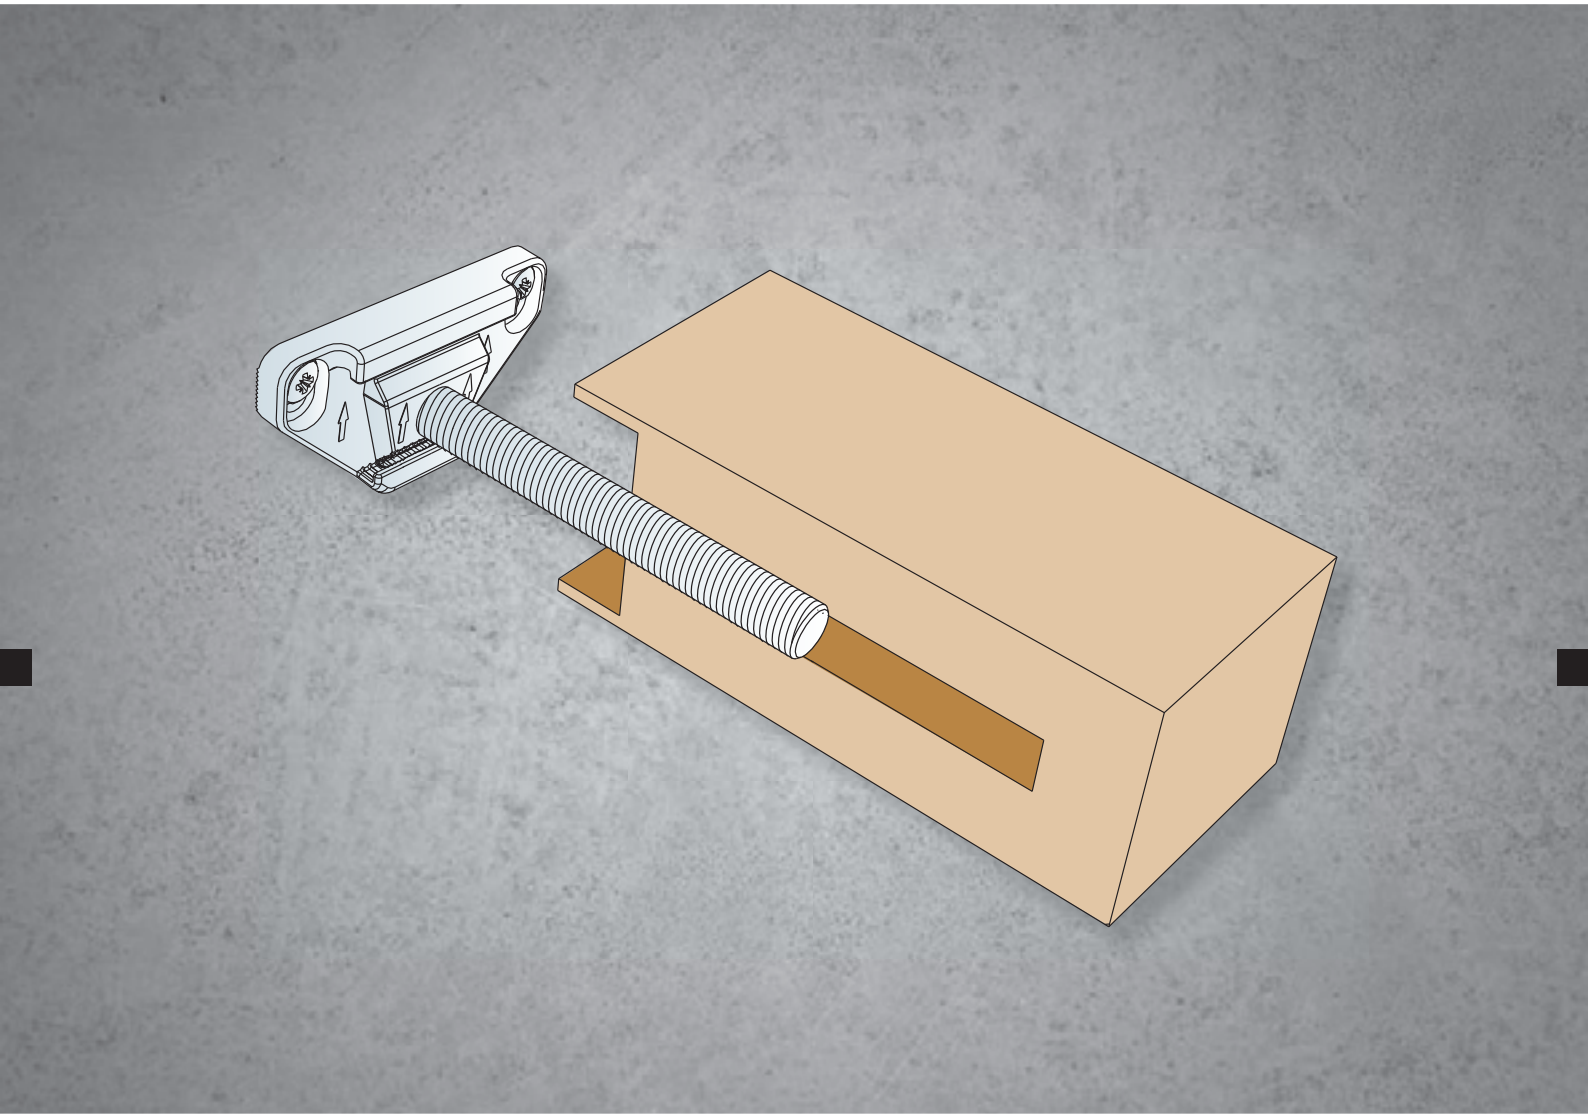

TENTI-9

TENTI Shelf Support

TENTI-9
TENTI Shelf Support

1 TENTI-9

Completely concealed shelf support. Capable of withstanding heavy loads. No cover cap is necessary. 3-way adjustment.

Shelf support

Natural	633.612.103	100

Each reference consists of 1 shelf support set, 2 x Ø6x30 wall plugs and 2 x Ø4.5X45 screws.

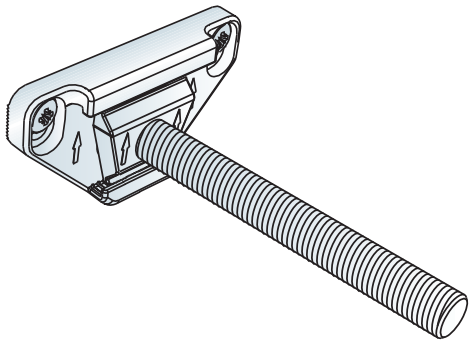

Machining of the shelf

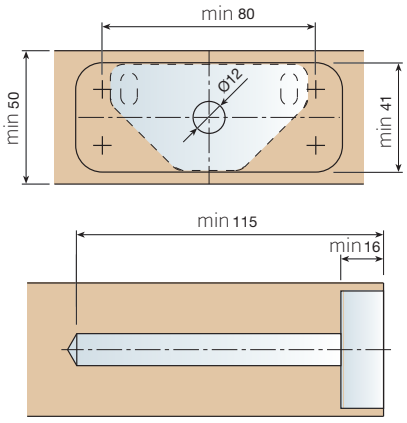

Assembly

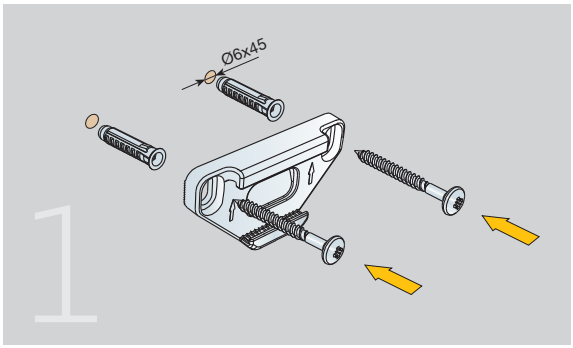

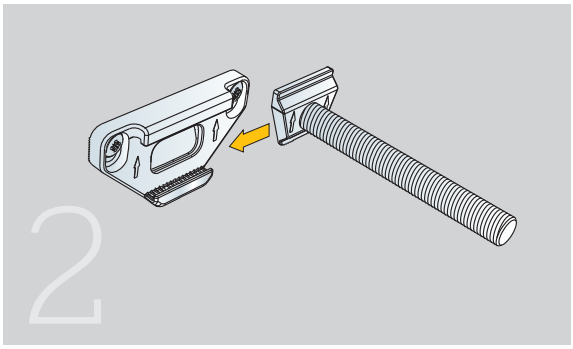

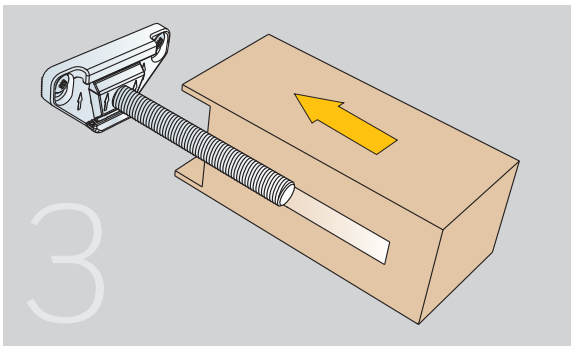

Adjustment

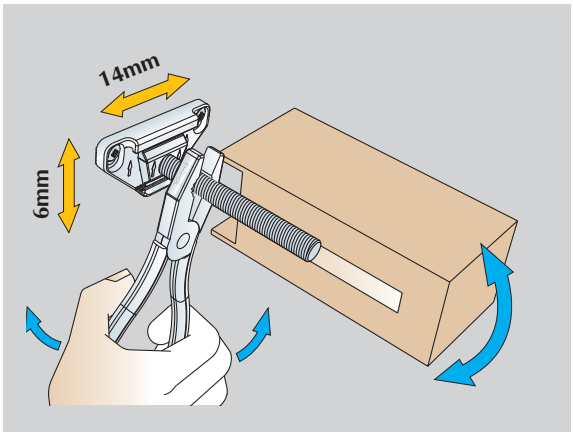

INDAUX
FURNITURE FITTINGS MANUFACTURER

06

RUNNERS

CISNE ball bearing runners 358

1. CISNE-17 360
2. CISNE-27 362
3. CISNE-35 365
4. CISNE-45 366
5. CISNE Indamatic independent ..... INDA matic 367

GACELA roller runners 371

1. GACELA 372
2. GACELA-3 378
3. GACELA Indamatic windows ..... INDA matic 380
4. GACELA Indamatic independent ..... INDA matic 382

MARC concealed runners 383



1. MARC partial extension runners 386
2. MARC full extension runners 394

CISNE
Ball bearing runners

pp.

1 CISNE-17 360
- **CISNE-17** short 360
- **Cisne-17** adjustable 361

2 CISNE-27 362
- **CISNE-27-0** 362
  Partial extension 362
  Telescopic 363
- **CISNE-27-1** 364

3 CISNE-35 365

4 CISNE-45 366

5 CISNE **INDAMATIC** INDEPENDENT 367
- **INDAMATIC** set 367
- Runners 368

1 CISNE-17

CISNE-17 Short

Quick fixing "**arpon**" or screw-on fixing.

Drawer length	Reference	Drawer slide	Body slide	Extension loss	Drilling			Distance	
		RC	RF	PS	A1	A2	A3	B	
152 a 210	776.134.752	134	151	59	96	-	-	103	
220 a 260	776.159.753	159	183	59	64	-	64	128	
270 a 310	776.183.752	183	183	59	64	-	64	152	
315 a 355	776.215.753	215	215	77	64	32	64	184	50
370 a 410	776.243.753	243	247	77	64	64	64	212	
420 a 460	776.277.751	277	279	95	64	96	64	246	
470 a 510	776.311.756	311	311	113	64	128	64	280	
520 a 560	776.335.755	335	343	113	64	160	64	304	

Every reference consists of a set of runners.

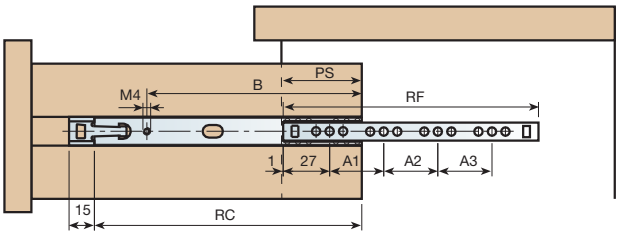

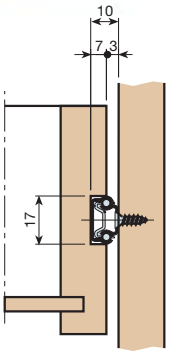

Screw-fix

M4 x 7	730.507.035	1.000
M4 x 8	730.508.030	or
M4 x 10	730.510.034	5.000

Quick fixing **ARPON-17**

Stainless steel	732.517.100	500 or 2.000

*Quick assembly using the **ARPÓN** coupling system*

This system offers tool-free assembly, also removing the need to mechanise the side of the drawer. All it requires is for the ARPÓN (or HARPOON TAB) to be inserted in the groove along the side. When the runner is pulled, it will automatically be coupled. To clean the drawer, just raise the ARPÓN·tabs slightly. You may alternatively opt for screw-fix assembly to place the same runner

CISNE 17 adjustable

Quick- mounting **CISNE 17** short, adjustable Ø8 assembly.

Drawer length	Reference	Drawer slide RC	Body slide RF	Extension loss PS	Distance A	Distance B	
250	775.525.752	159	176	59	128	128	
300	775.530.755	183	176	59	128	152	
350	775.535.751	215	212	77	160	184	
400	775.540.754	243	234	77	192	212	50
450	775.545.750	277	268	95	224	246	
500	775.550.753	311	302	113	256	280	
550	775.555.756	335	328	113	288	304	

Every reference consists of a set of runners.

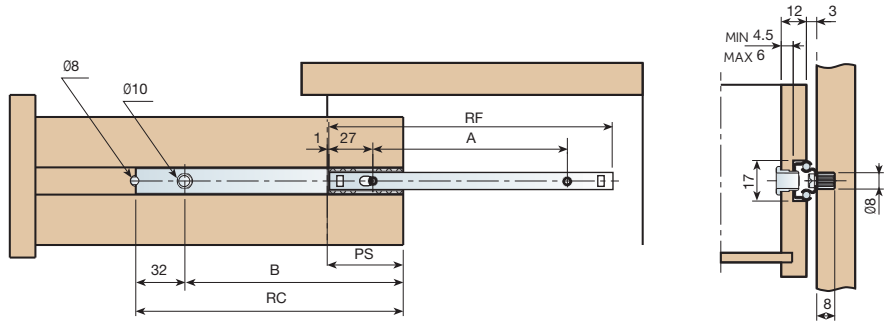

Quick-coupling fixing device Ø8 and Ø10.

White	Ral 9001	722.908.001	
Brown	Ral 8016	722.908.012	2.000
Black	Ral 9005	722.908.023	



Assembly

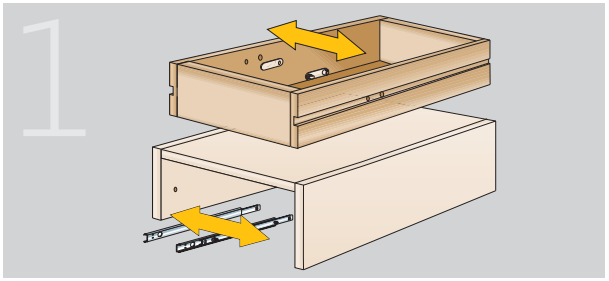

Drill the body and place the runners.
Assemble the fixing devices in the drawer.

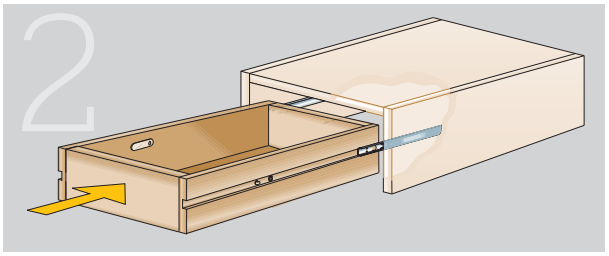

Place the drawer on the runners and slide to complete assembly.

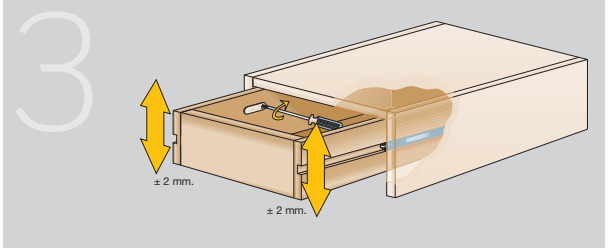

To adjust the drawer simply align the fixing device and the runner, then turn the screw driver through the hole in the drawer. VERTICAL ADJUSTMENT ± 2mm.

2 CISNE-27

CISNE-27-0: Partial extension

ARPON quick assembly or screw-fix assembly.

Drawer length	Reference	Drawer slide RC	Body slide RF	Extension loss PS	Drilling A	Distance B	
300	781.030.751	196	214	71	32	165	
350	781.035.754	221	214	71	32	190	
400	781.040.750	246	246	71	64	215	25
450	781.045.753	277	278	83	96	246	
500	781.050.756	302	310	83	128	271	
550	781.055.752	327	342	83	160	296	

Every reference consists of a set of runners.

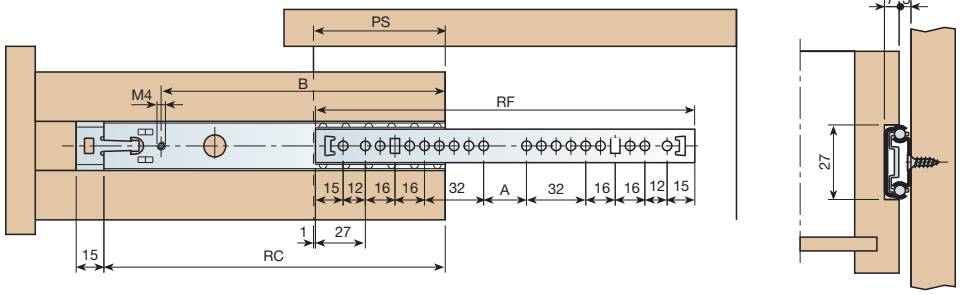

Fixing Screw

M4 x 7	730.507.035	1.000
M4 x 8	730.508.030	or
M4 x 10	730.510.034	5.000

Quick fixing **ARPON-27**

Stainless steel	732.527.106	500 or 2.000

*Quick assembly using the **ARPÓN** coupling system*

This system offers tool-free assembly, also removing the need to mechanise the side of the drawer. All it requires is for the ARPÓN (or HARPOON TAB) to be inserted in the groove along the side. When the runner is pulled, it will automatically be coupled. To clean the drawer, just raise the ARPÓN tabs slightly. You may alternatively opt for screw-fix assembly to place the same.

CISNE-27-0: Telescopic

Quick fixing **ARPON** or screw-on fixing runner

Drawer length	Reference	Drawer slide RC	Body slide RF	Drilling A	Distance B	
300	781.230.752	196	214	32	165	
350	781.235.755	221	214	32	190	
400	781.240.751	246	246	64	215	15
450	781.245.754	277	278	96	246	
500	781.250.750	302	310	128	271	
550	781.255.753	327	310	160	296	

Every reference consists of a set of runners.

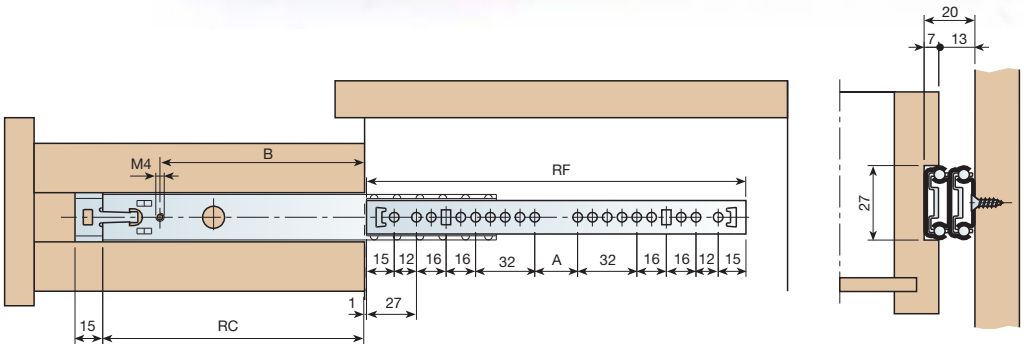

Fixing Screw

M4 x 7	730.507.035	1.000
M4 x 8	730.508.030	or
M4 x 10	730.510.034	5.000

Quick fixing **ARPON-27**

Stainless steel	732.527.106	500 or 2.000

*Quick assembly using the **ARPÓN** coupling system*

This system offers tool-free assembly, also removing the need to mechanise the side of the drawer. All it requires is for the ARPÓN (or HARPOON TAB) to be inserted in the groove along the side. When the runner is pulled, it will automatically be coupled.
To clean the drawer, just raise the ARPÓN·tabs slightly. You may alternatively opt for screw-fix assembly to place the same.

CISNE-27-1

Interlocking assembly.

Drawer length	Reference	Drawer slide	Body slide	Extension loss	Drilling	Distance	
		RC	RF	PS	A	B	
300	781.130.755	236	214	71	32	202	
350	781.135.751	261	214	71	32	227	
400	781.140.754	286	246	71	64	252	50
450	781.145.750	317	278	83	96	283	
500	781.150.753	342	310	83	128	308	
550	781.155.756	367	342	83	160	333	

Every reference consists of a set of runners.

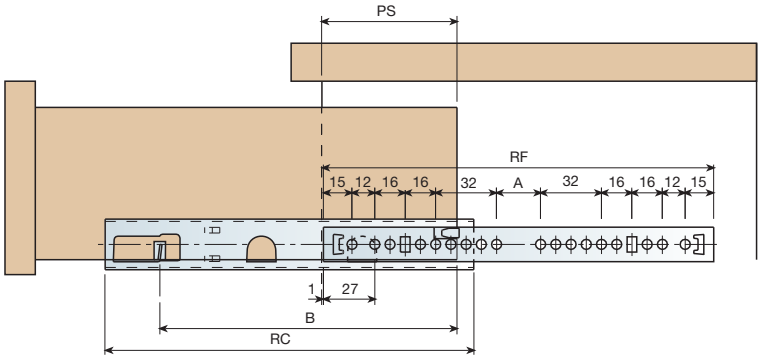

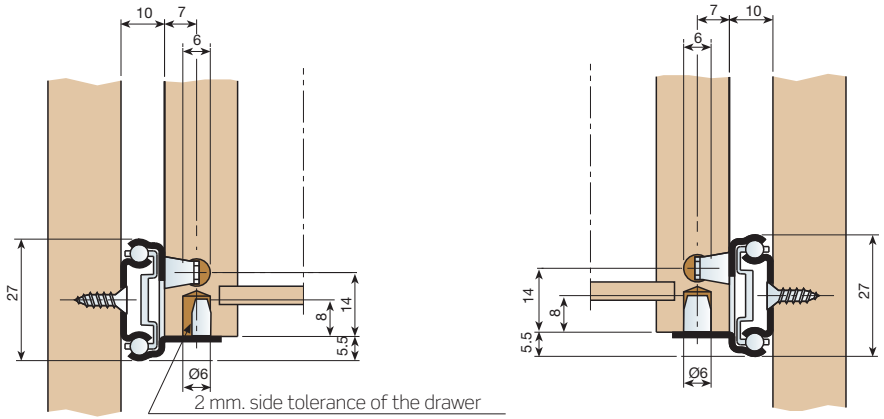

Assembly

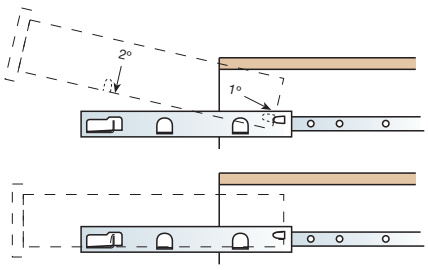

3 CISNE-35

Runner C35 x 9.7mm, for wooden drawers.

Drawer length	Pérdida Salida	Reference	
250 mm.	65	778.825.751	
300 mm.	85	778.830.754	
350 mm.	105	778.835.750	20
400 mm.	100	778.840.753	
450 mm.	112	778.845.756	15
500 mm.	125	778.850.752	
600 mm.	150	778.860.751	10
700 mm.	175	778.870.750	

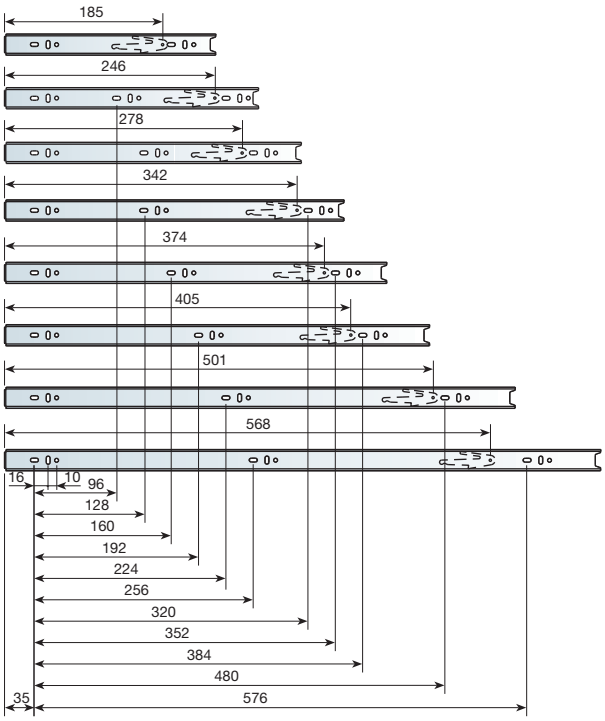

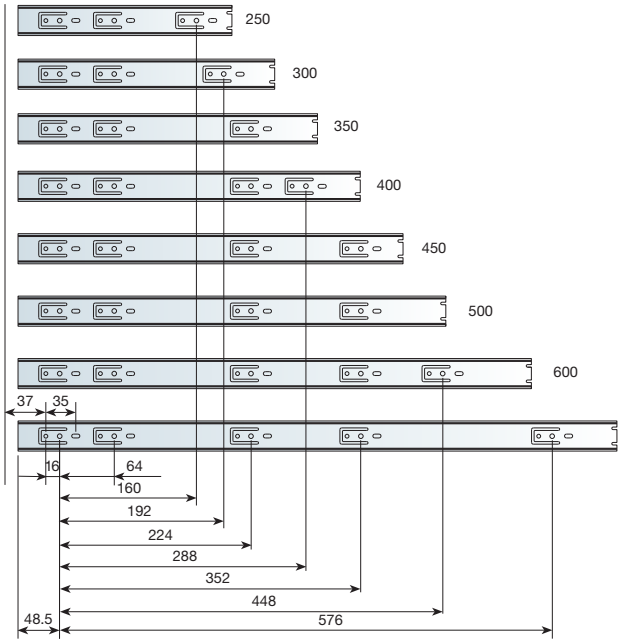

Assembly

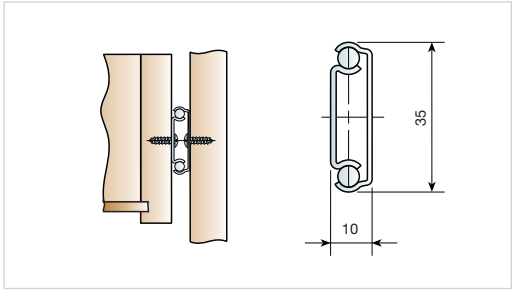



A	250	300	350	400	450	500	600	700
B	140	202	234	298	330	361	457	520

4 CISNE-45

Telescopic runner **C45**, for wooden drawers.

Drawer length	Reference	
250 mm.	778.925.755	
300 mm.	778.930.751	
350 mm.	778.935.754	10
400 mm.	778.940.750	
450 mm.	778.945.753	
500 mm.	778.950.756	
600 mm.	778.960.755	5
700 mm.	778.970.754	

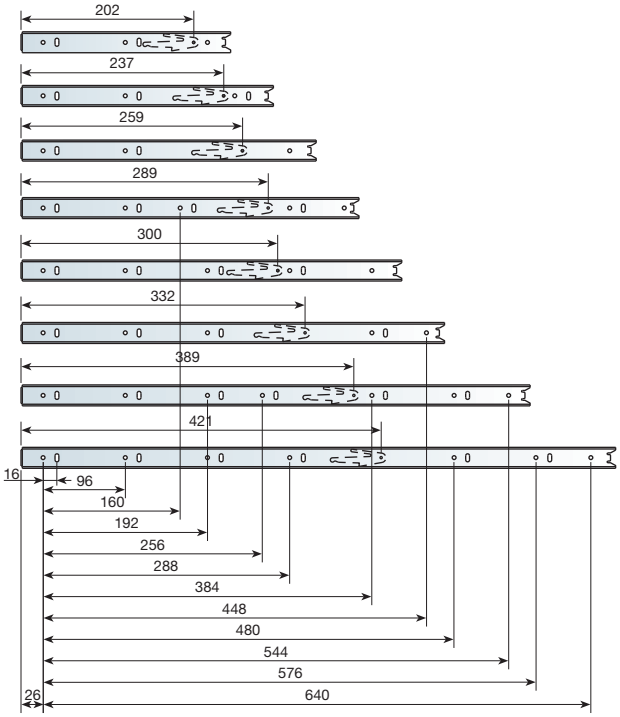

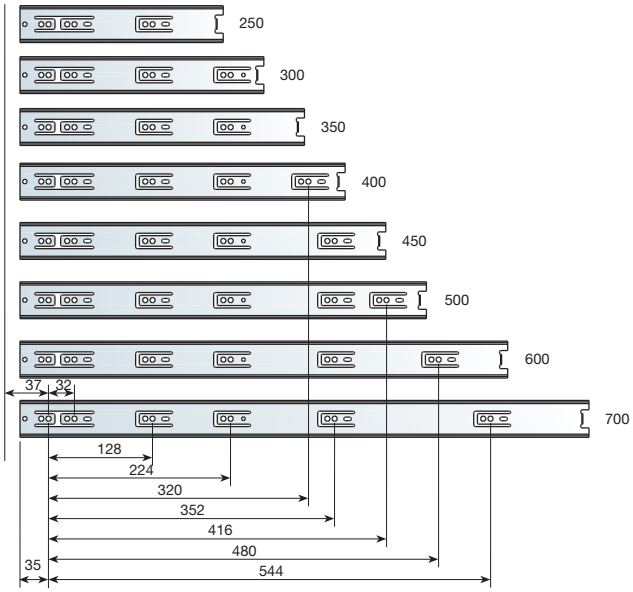

Assembly

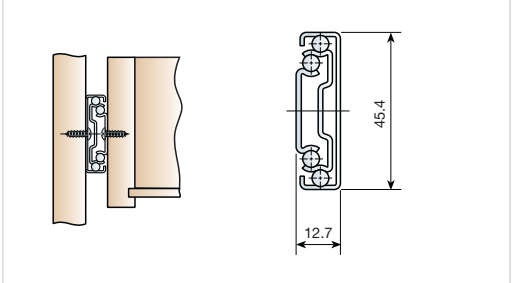

A	250	300	350	400	450	500	600	700
B	275	325	375	425	475	525	625	725

5 CISNE **INDAMATIC** INDEPENDENT

INDAMATIC set for CISNE-17 and CISNE-27 runners

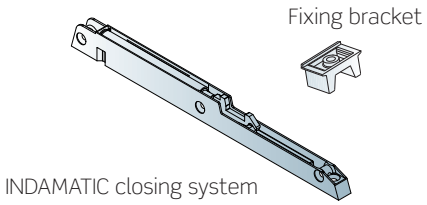

INDAMATIC + fixing bracket.

Grey CDP	197.900.102	50

Each reference consists of one soft-close device and one catch.

INDAmatic
gradual closing

Assembly

Fixing method to the side panel

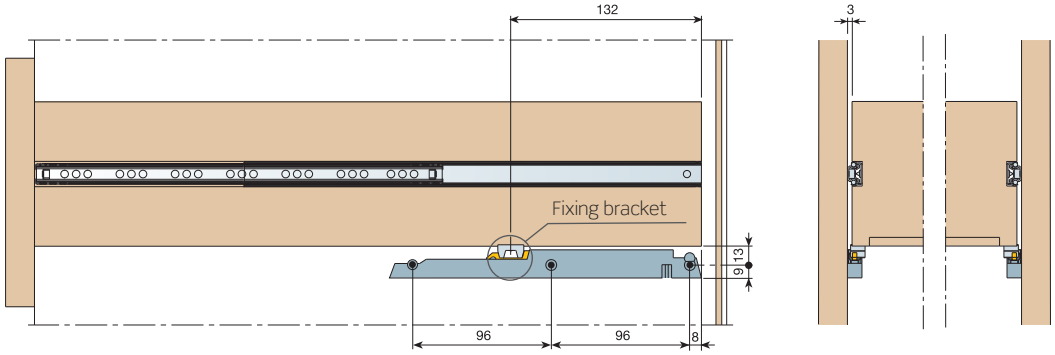

Fixing method to the drawer

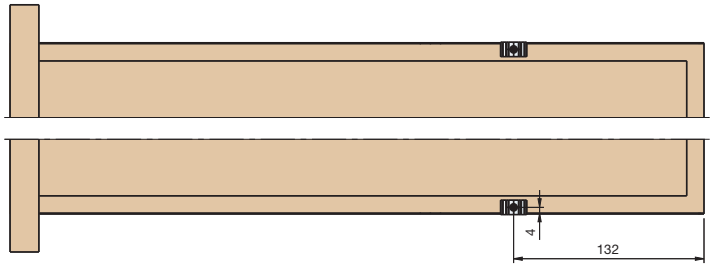



Runners

CISNE 17 short runner without brake.

Drawer length	Reference	Drawer slide RC	Body slide RF	Extension loss PS	Drilling A1	Drilling A2	Drilling A3	Distance B	
152 a 210	776.513.754	134	151	59	96	-	-	103	
220 a 260	776.515.751	159	183	59	64	-	64	128	
270 a 310	776.518.750	183	183	59	64	-	64	152	
315 a 355	776.521.756	215	215	77	64	32	64	184	50
370 a 410	776.524.755	243	247	77	64	64	64	212	
420 a 460	776527.754	277	279	95	64	96	64	246	
470 a 510	776.531.755	311	311	113	64	128	64	280	
520 a 560	776.533.752	335	343	113	64	160	64	304	

Every reference consists of a set of runners.

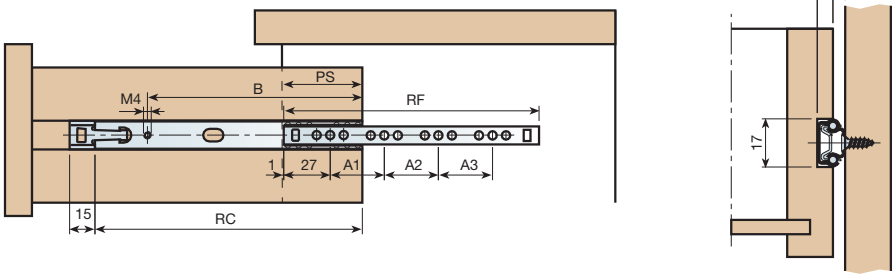

Assembly

Fixing method to the side panel

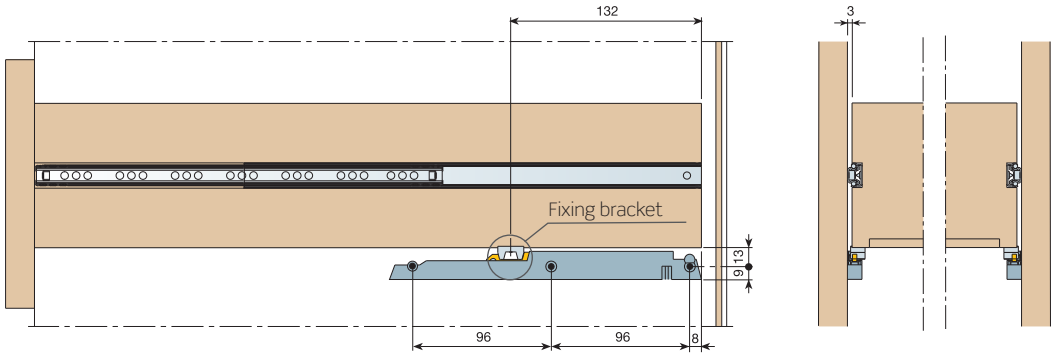

Fixing method to the drawer

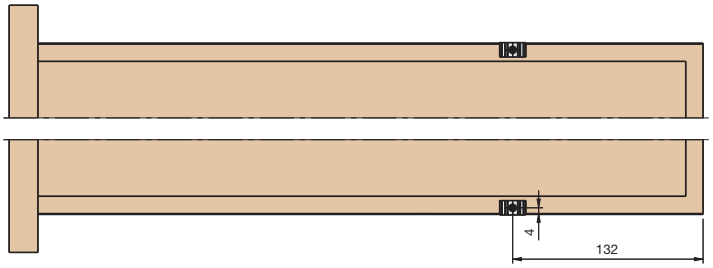



Runners

CISNE 27-0 runner without brake.

Drawer length	Reference	Drawer slide	Body slide	Extension loss	Drilling	Distance	
		RC	RF	PS	A	B	
300	776.619.756	196	214	71	32	165	
350	776.622.755	221	214	71	32	190	
400	776.624.752	246	246	71	64	215	25
450	776.627.751	277	278	83	96	246	
500	776.630.750	302	310	83	128	271	
550	776.632.754	327	342	83	160	296	

Every reference consists of a set of runners.

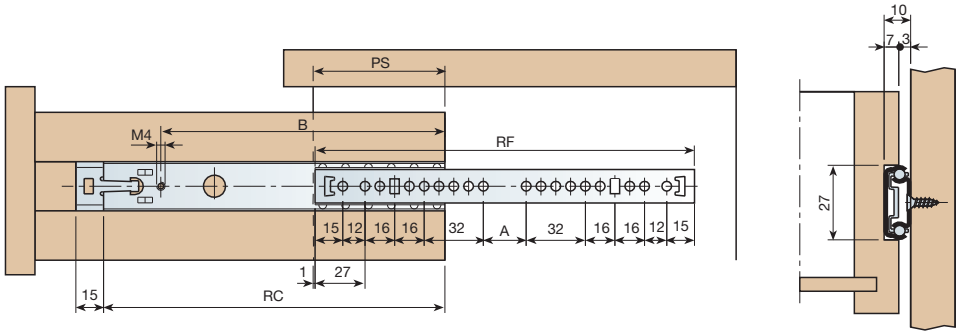

Assembly

Fixing method to the side panel

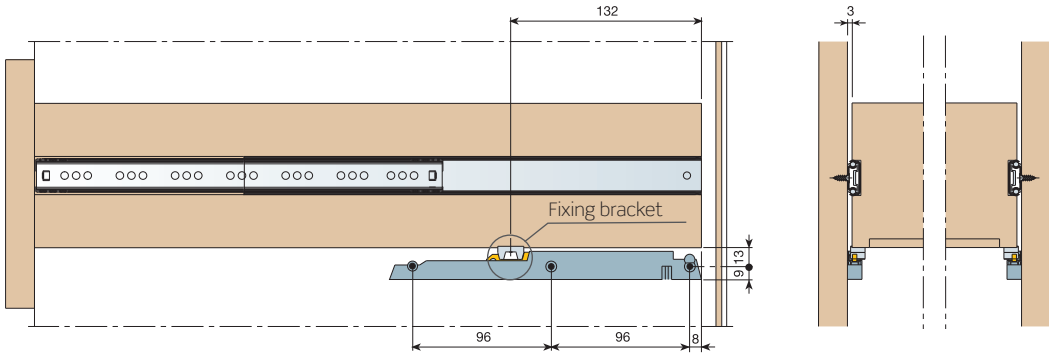

Fixing method to the drawer

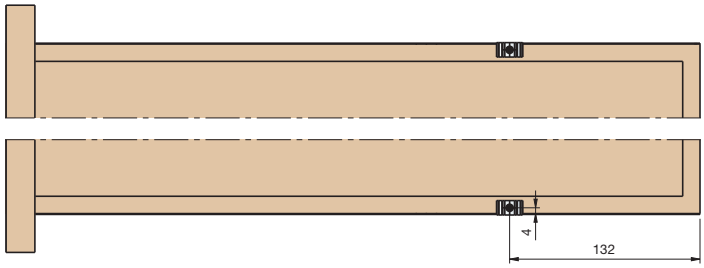



NOTES

GACELA
Roller runners

pp.

1 GACELA 372

- GACELA runner 372
- Adjustable 373
- For dowel-fix drawer assembly 374
- Quick assembly 375
- With adjustable front 376
- For drop-down front 377

2 GACELA-3 378

- GACELA runners 378
- For dowel-fix drawer assembly 379

3 GACELA INDAMATIC WINDOWS 380

4 GACELA INDAMATIC INDEPENDENT ..... INDA-matic 382

1 GACELA

GACELA runner

Self-closing **GACELA** runner.

Length	White Ral 9001	Black Ral 9005	Ext. Loss	
250	760.025.803	760.025.825	59	
300	760.030.806	760.030.821	68	
350	760.035.802	760.035.824	77	
400	760.040.805	760.040.820	86	
450	760.045.801	760.045.823	95	
500	760.050.804	760.050.826	104	100
550	760.055.800	760.055.822	113	
600	760.060.803	760.060.825	122	
700*	760.070.802	760.070.824	140	
800*	760.080.801	760.080.823	158	

In these references, the 4 profiles are packed separately in boxes of 100 units. 700 and 800 lengths come in 4 boxes of 50 units.

GACELA runner: sets.

Length	White Ral 9001	Black Ral 9005	Ext. Loss	
250	760.125.800	760.125.822	59	
300	760.130.803	760.130.825	68	
350	760.135.806	760.135.821	77	30
400	760.140.802	760.140.824	86	
450	760.145.805	760.145.820	95	
500	760.150.801	760.150.823	104	

In these references, the 4 profiles are packed together in boxes of 30 sets.
Minimum order: 300 sets.

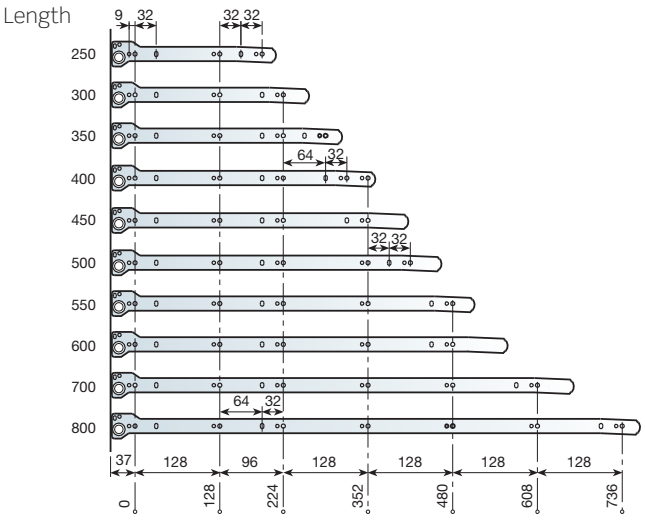

Euro-screw.

	Ø7	Ø7.75	
Nickel-plated	952.810.062	953.610.066	5.000

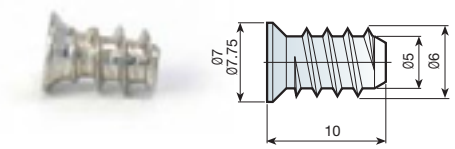

Assembly

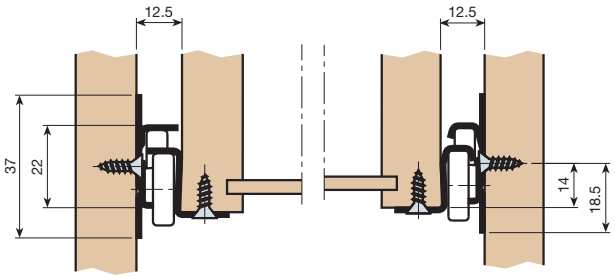

GACELA adjustable runner

GACELA runner, pin fixing

Length	White Ral 9001	Black Ral 9005	Ext. Loss PS	Extension DC	
250	759.525.804	759.525.826	59	128	
300	759.530.800	759.530.822	68	160	
350	759.535.803	759.535.825	77	224	100
400	759.540.806	759.540.821	86	256	
450	759.545.802	759.545.824	95	288	
500	759.550.805	759.550.820	104	320	

In these references, the 4 profiles are packed separately in boxes of 100 units. A 10mm key is available for adjustments. Ref.: 700.500.102.

GACELA runner, screw-on fixing

Length	White Ral 9001	Black Ral 9005	Ext. Loss PS	Extension DC	
250	759.025.805	759.025.820	59	128	
300	759.030.801	759.030.823	68	160	
350	759.035.804	759.035.826	77	224	100
400	759.040.800	759.040.822	86	256	
450	759.045.803	759.045.825	95	288	
500	759.050.806	759.050.821	104	320	

In these references, the 4 profiles are packed separately in boxes of 100 units. A 10mm key is available for adjustments ref. 700.500.102.

Assembly

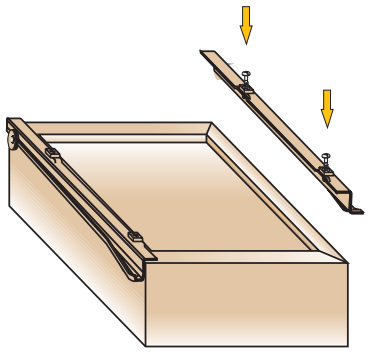

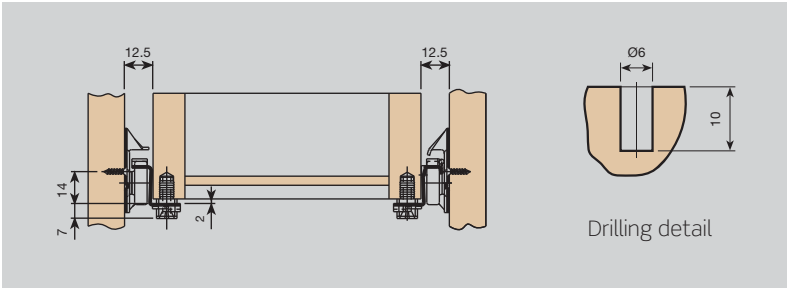

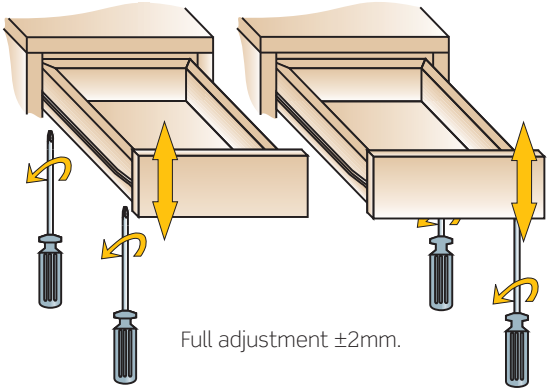

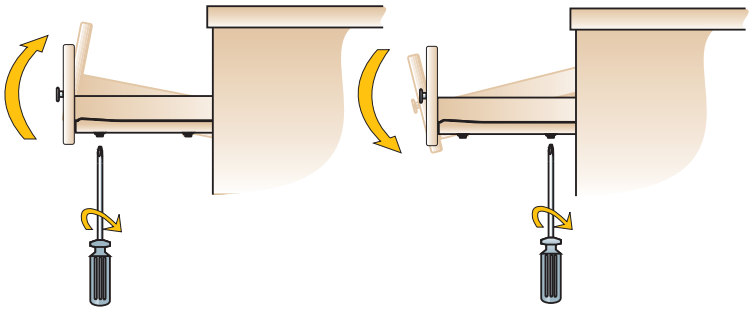

GACELA runner for dowel-fix drawer assembly

GACELA runner for dowel-fix drawer assembly.

Length	White Ral 9001	Black Ral 9005	Ext. Loss	
250	760.725.803	760.725.825	59	
300	760.730.806	760.730.821	68	
350	760.735.802	760.735.824	77	100
400	760.740.805	760.740.820	86	
450	760.745.801	760.745.823	95	
500	760.750.804	760.750.826	104	

In these references, the 4 profiles are packed separately in boxes of 100 units.

Length

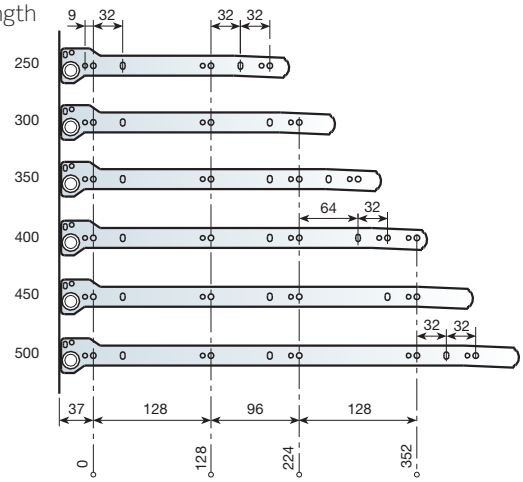

GACELA crimping tool.

751.300.104	1

This is a simple pneumatic tool which fixes the runner to the drawer between two clamps. The tool comes automatically with spring loaded hanging device for easy access.
Assembly: turn the drawer upside down and place the runner on the drawer side. Place the clamps of the tool over each set of clips and press the button.

Assembly

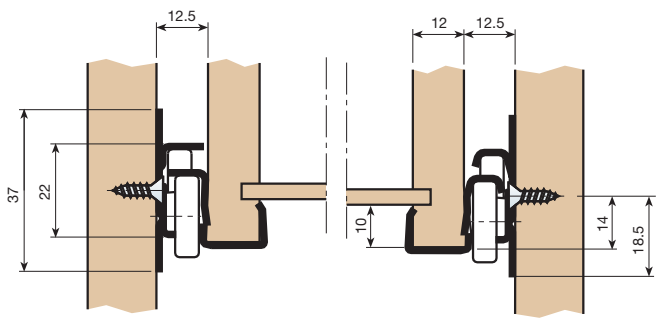

GACELA quick assembly runners

GACELA quick assembly runner.

Length	Drawer	White Ral 9001	C	Loss of extension PS	
350	330	760.235.803	303	77	
400	380	760.240.806	353	86	100
450	430	760.245.802	403	95	
500	480	760.250.805	453	104	

In these references, the 4 profiles are packed separately in boxes of 100 units.

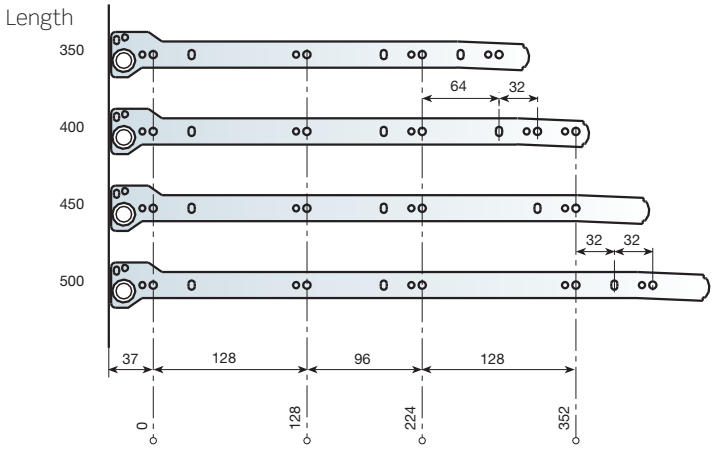

Assembly

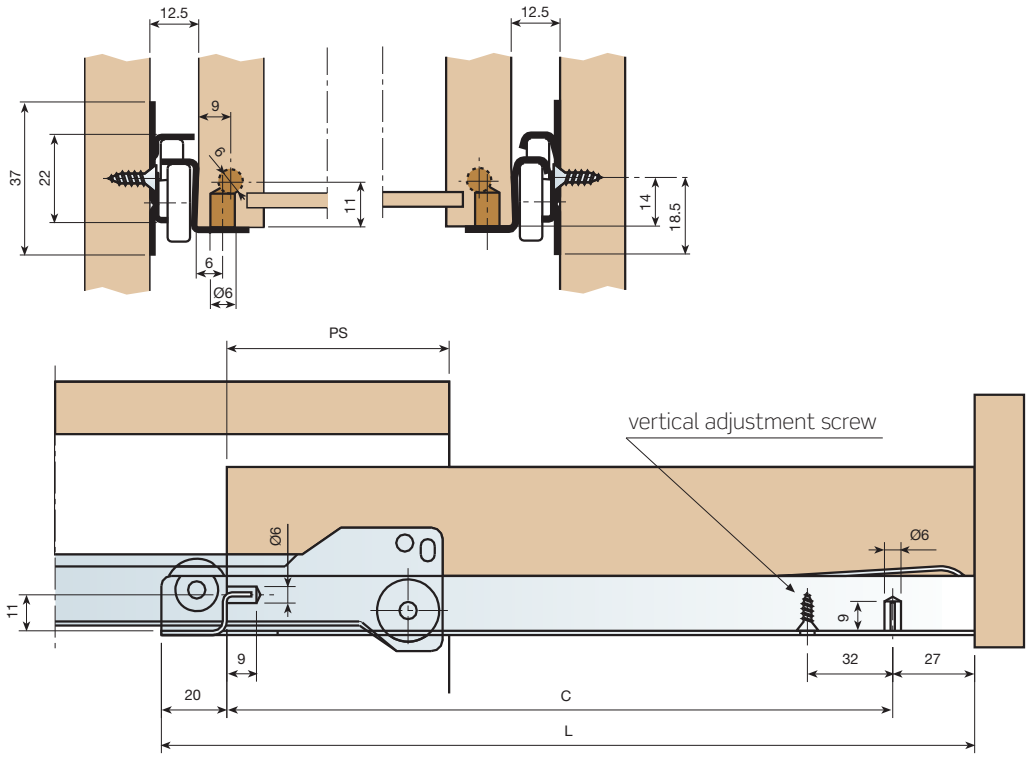

GACELA runners with adjustable front

GACELA runners with adjustable front.

Length	White Ral 9001	Ext. Loss	
450	760.345.806	95	100
500	760.350.802	104	

Supplied with washers and fixing screws.
In these references, the profiles are packed separately:
Z profiles in boxes of 50 and U profiles in boxes of 100.

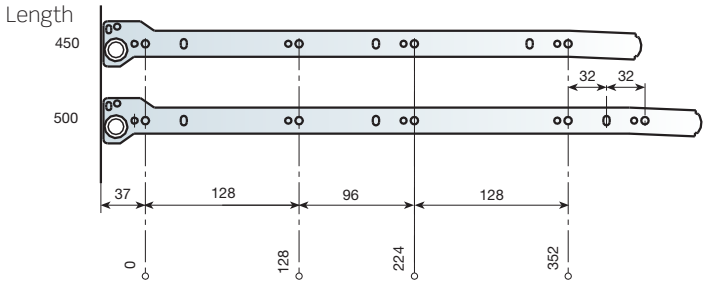

Assembly

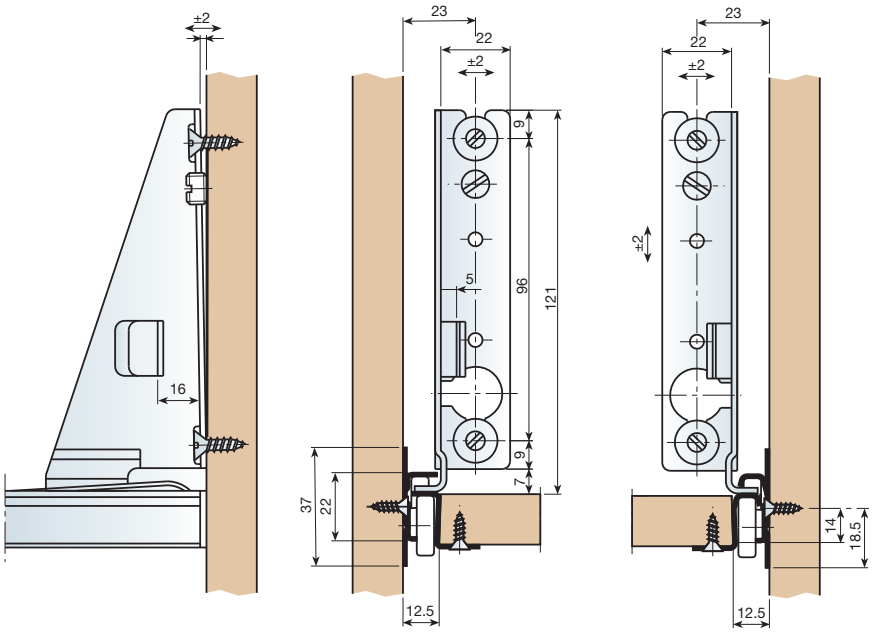

GACELA runners for drop-down front

GACELA with fitting for drop-down front.

Length	White Ral 9001	Extension loss PS	
450	759.745.803	95	100
500	759.750.806	104	

In these references, the 4 profiles are packed separately in boxes of 100 units.

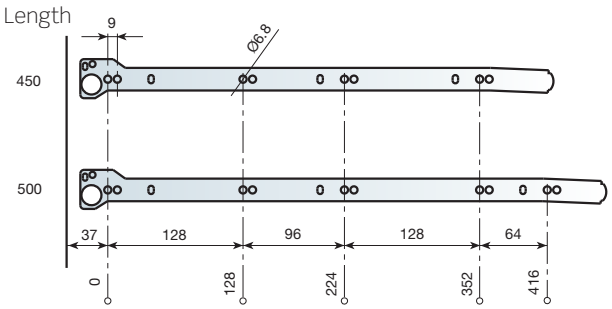

Assembly

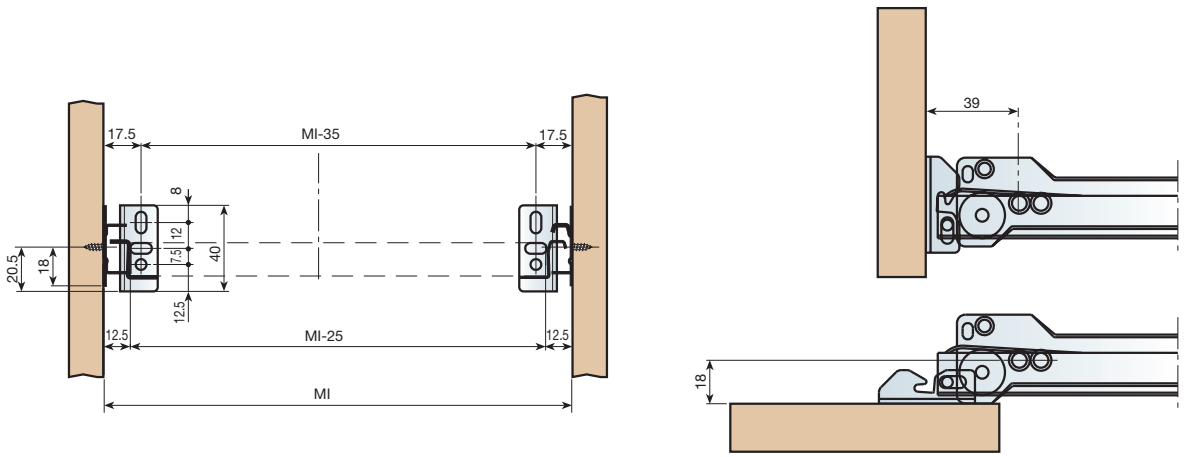

2 GACELA-3

GACELA-3 Runner

GACELA-3 runner: screw-fix assembly.

Length	White Ral 9001	Black Ral 9005		Ext. Loss PS	
300	755.030.006	755.030.021	755.030.312	85	
350	755.035.002	755.035.024	755.035.315	85	
400	755.040.005	755.040.020	755.040.311	85	
450	755.045.001	755.045.023	755.045.314	95	100
500	755.050.004	755.050.026	755.050.310	102	
550	755.055.000	755.055.022	755.055.313	109	
600	755.060.003	755.060.025	755.060.316	119	

In these references, the 4 profiles are packed separately in boxes of 100 units.

Length

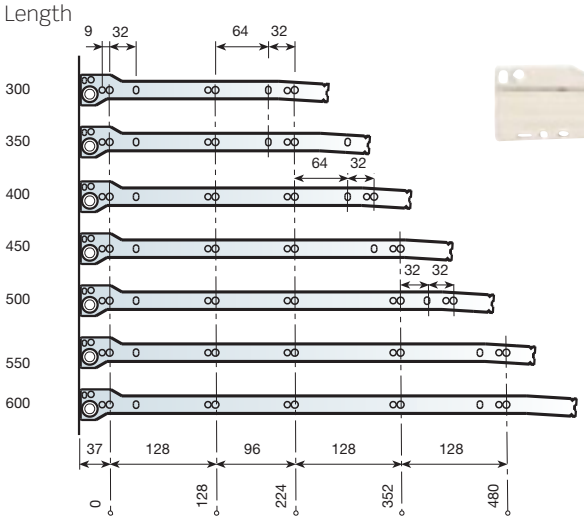

GACELA-3 runner: screw-fix assembly.

Length	White Ral 9001	Black Ral 9005		Ext. Loss PS	
300	755.730.006	755.730.021	755.730.312	85	
350	755.735.002	755.735.024	755.735.315	85	
400	755.740.005	755.740.020	755.740.311	85	
450	755.745.001	755.745.023	755.745.314	95	25
500	755.750.004	755.750.026	755.750.310	102	
550	755.755.000	755.755.022	755.755.313	109	
600	755.760.003	755.760.025	755.760.316	119	

In these references, the 4 profiles are packed together in boxes of 25 sets.
Minimum order: 100 sets.

Assembly

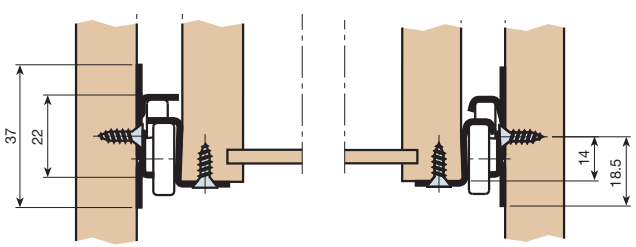

GACELA-3 runner for dowel-fix drawer assembly

GACELA-3 runner: screw-fix assembly.

Length	White Ral 9001	Black Ral 9005	Grey Ral 9065	Ext. Loss PS	
250	755.225.004	755.225.026	755.225.310	85	
300	755.230.000	755.230.022	755.230.313	85	
350	755.235.003	755.235.025	755.235.316	85	
400	755.240.006	755.240.021	755.240.312	85	100
450	755.245.002	755.245.024	755.245.315	95	
500	755.250.005	755.250.020	755.250.311	102	
550	755.255.001	755.255.023	755.255.314	109	
600	755.260.004	755.260.026	755.260.310	119	

In these references, the 4 profiles are packed separately in boxes of 100 units.

Length

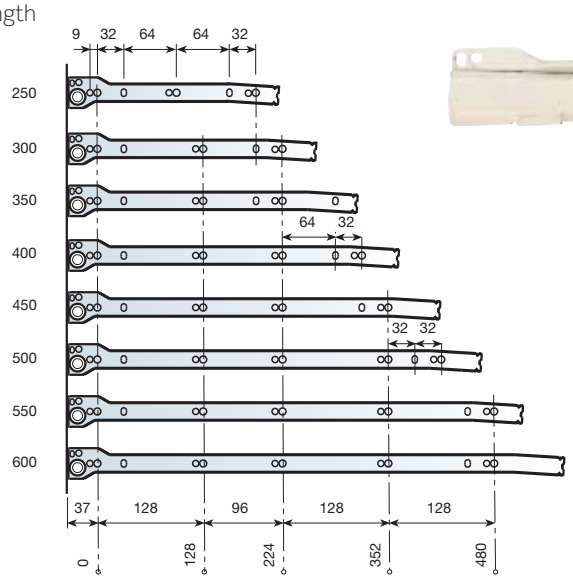

GACELA crimping tool

751.300.104	1

This is a simple pneumatic tool which fixes the runner to the drawer between two clamps. The tool comes automatically with spring loaded hanging device for easy access. Assembly: turn the drawer upside down and place the runner on the drawer side. Place the clamps of the tool over each set of clips and press the button.

Assembly

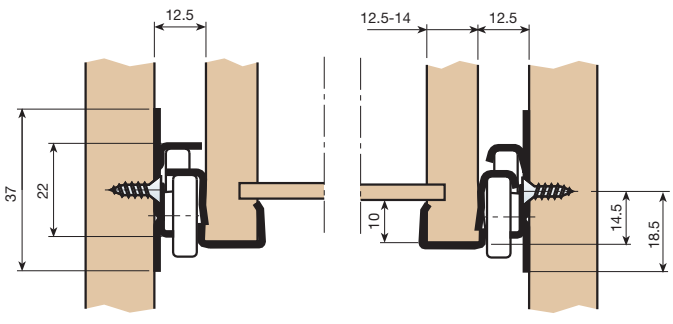

3 GACELA INDAMATIC WINDOWS

Indamatic set

Left	Ral 9005	197.993.025	50
Right	Ral 9005	197.992.023	

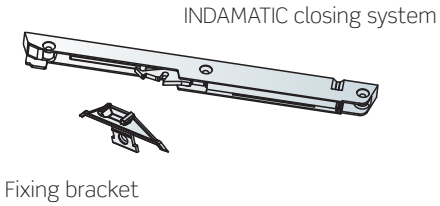

INDA-matic
gradual closing

Screw-fixed GACELA

Deep	White Ral 9001	Black Ral 9005	
250	759.225.806	759.225.821	100
300	759.230.802	759.230.824	
350	759.235.805	759.235.820	
400	759.240.801	759.240.823	
450	759.245.804	759.245.826	
500	759.250.800	759.250.822	
550	759.255.803	759.255.825	
600	759.260.806	759.260.821	
700	759.270.805	759.270.820	
800	759.280.804	759.280.826	

In these references, the 4 profiles are packed separately in boxes of 100 units. 700 and 800 lengths come in 4 boxes of 50 units.

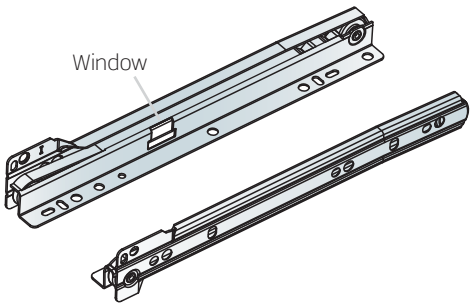

Adjustable screw-fixed GACELA

Deep	White Ral 9001	Black Ral 9005	Extension DC	
250	759.325.803	759.325.825	128	100
270	759.327.800	759.327.822	160	
300	759.330.806	759.330.821	160	
350	759.335.802	759.335.824	224	
400	759.340.805	759.340.820	256	
450	759.345.801	759.345.823	288	
500	759.350.804	759.350.826	320	
550	759.355.800	759.355.822	384	
700	759.370.802	759.370.824	512	
800	759.380.801	759.380.823	576	

In these references, the 4 profiles are packed separately in boxes of 100 units. 700 and 800 lengths come in 4 boxes of 50 units.

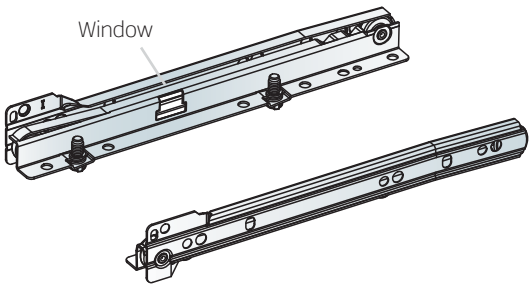

Assembly

INDAMATIC assembly sequence

1. Support on the points indicated, 1 and 2
2. Affix with the 3 screws

Important:

The part must be well supported on the runner as indicated.

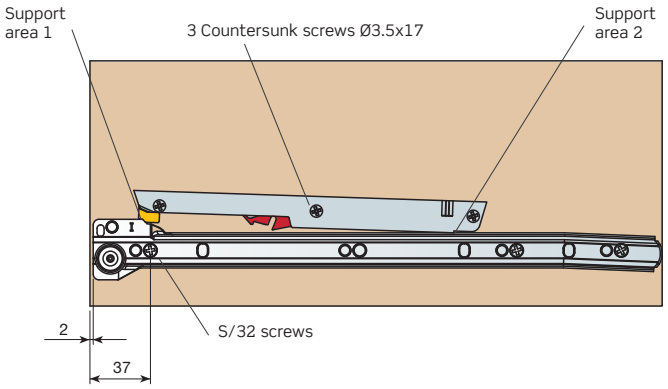

Technical data

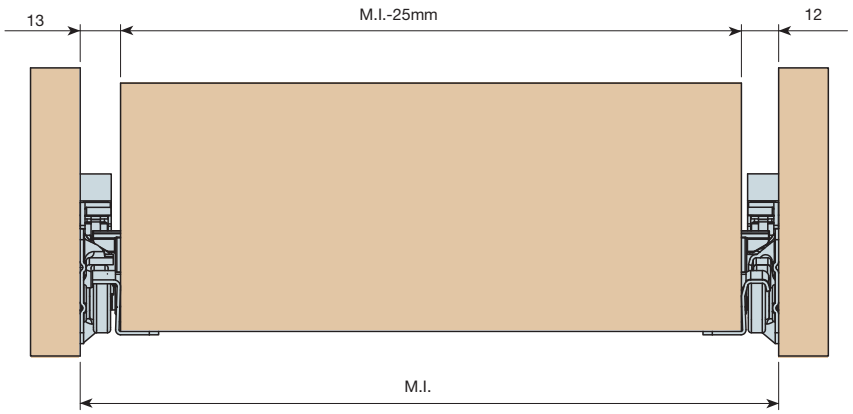

Fixing bracket assembly

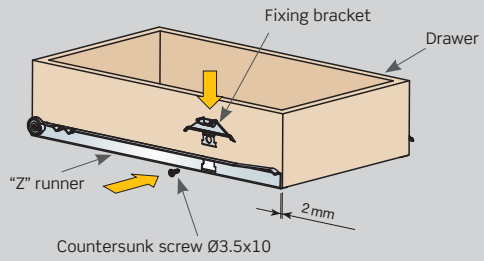

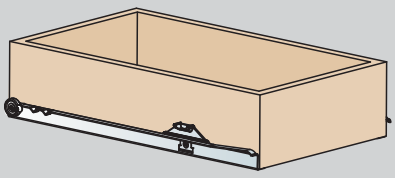

1. Affix the runner to the drawer
2. Clip the fixing bracket to the runner
3. Affix with the screw

4 GACELA INDAMATIC INDEPENDENT

INDAMATIC closing system



Fixing bracket

Indamatic set for **GACELA** roller runners

Grey	197.980.101	50

Each reference consists of one soft-close device and one pin.

INDAmatic gradual closing

Assembly

Fixing method to the side panel

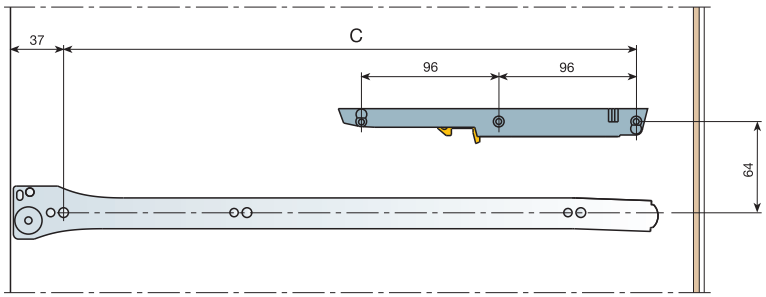

Length rawer	B	C
250	108	192
300	140	224
350	204	288
400	268	352
450	300	384
500	364	448
550	396	480
600	460	544
700	556	640
800	652	736

Fixing method to the drawer

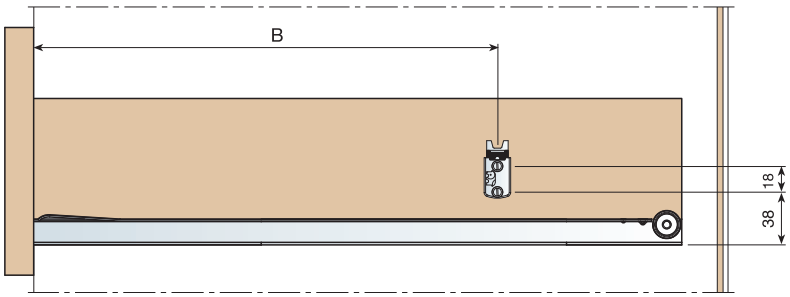



Fixing bracket adjustament

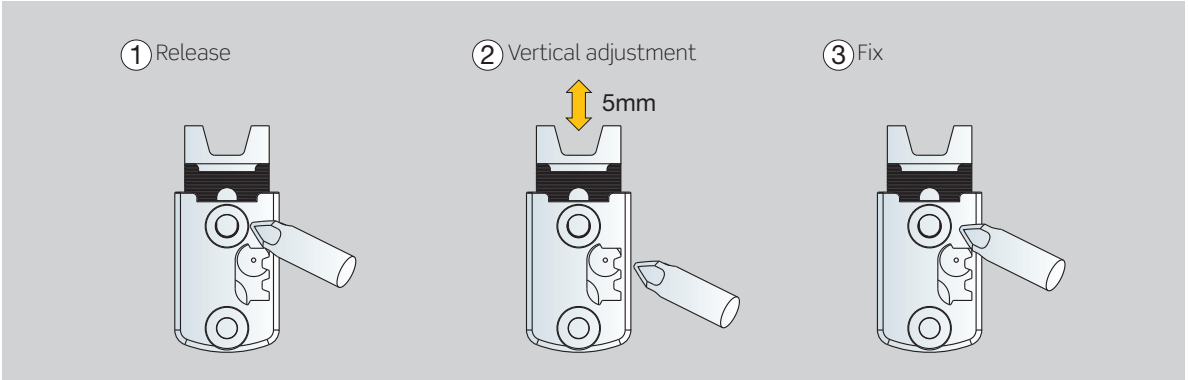

INDAUX
FURNITURE FITTINGS MANUFACTURER

MARC

Concealed runners for wooden drawers

INDA-matic
gradual closing

MARC

Concealed runners for wooden drawers

Pin or clip mounting.
Single or full extension.
Gravity self-closing or spring self-closing or indamatic soft closing or IMPULSE reverse opening.

1 MARC RUNNERS: SINGLE EXTENSION 386

■ Gravity Self-Closing 386
> Plastic roller-bearing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 250 to 650mm.

■ Gravity Self-Closing + **impulse** Reverse Opening Premounted 388
> Plastic roller-bearing "Impulse" reverse opening premounted.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 250 to 650mm.

■ Direct Self-Closing 390
> Plastic roller-bearing. Spring-Closing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 250 to 650mm.

■ **Indamatic** Gradual Soft-Closing 392
> Plastic roller-bearing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 250 to 650mm.
> Spring Self-Closing + Soft-Closing.

2 MARC RUNNERS: SINGLE EXTENSION 394

■ Direct Self-Closing 394
> Full extension runner. Spring Self-Closing.
> Metal roller-bearing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 300 to 600m.

■ Indamatic Gradual Soft-Closing 396
> Full extension runner with Indamatic gradual closing system.
> Metal roller-bearing.
> Pin or clip-mounting. 3mm height adjustment.
> Lengths from 350 to 650mm.

1 MARC RUNNERS: SINGLE EXTENSION

Gravity Self-Closing

Plastic roller-bearing.
Pin or clip-mounting. 3mm height adjustment.
Lengths from 250 to 650mm.

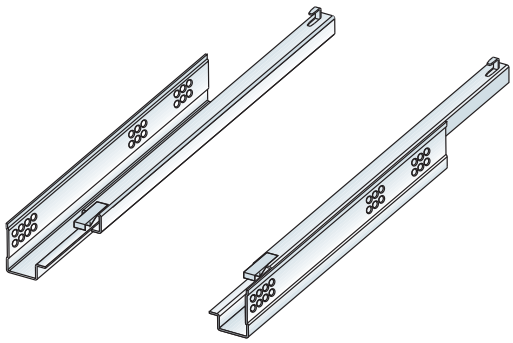

Single extension. gravity self-closing. pin mounting.

Load	Drawer length	Reference	Extension loss	C	
25Kp	250	766.525.034	62	180	24
	300	766.530.030	62	205	
	350	766.535.033	62	230	
	400	766.540.036	82	265	
	450	766.545.032	82	290	
	500	766.550.035	104	325	
	550	766.555.031	104	350	
	600	766.560.034	104	375	
	650	766.565.030	104	400	

Drilling Pattern

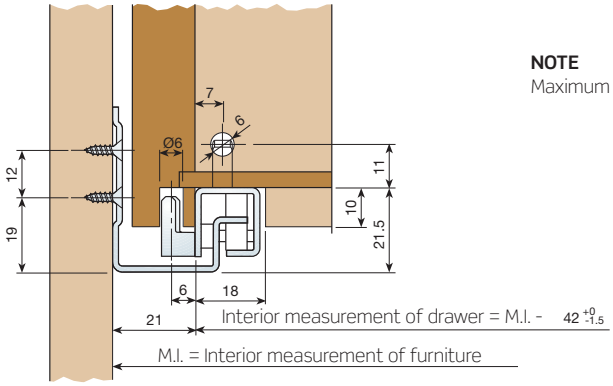

NOTE
Maximum drawer thickness 18mm

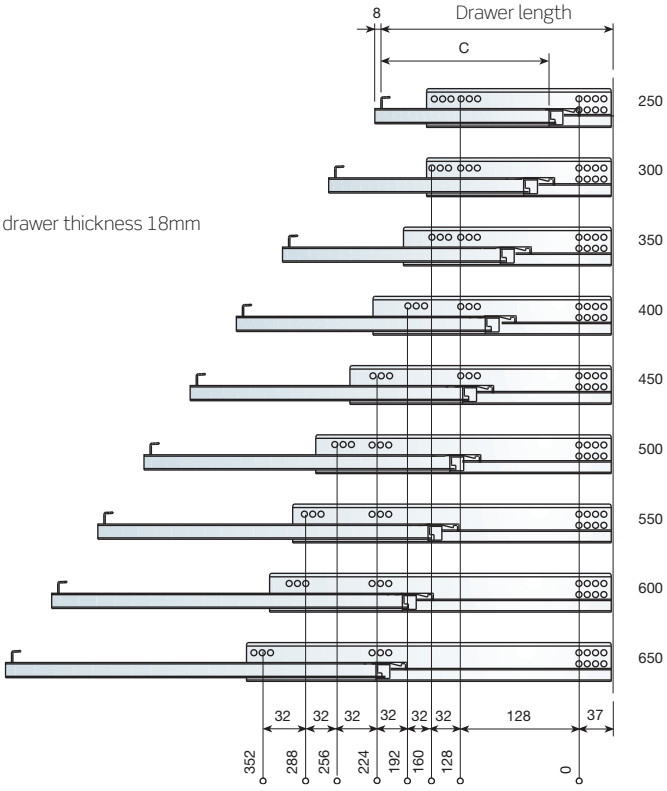

Assembly & Adjustment

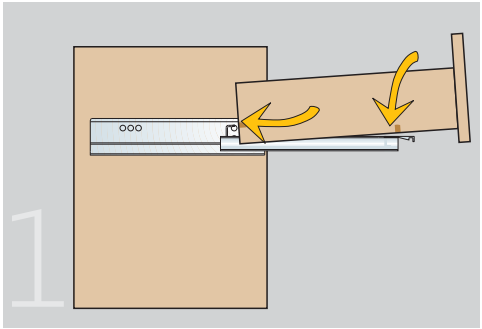

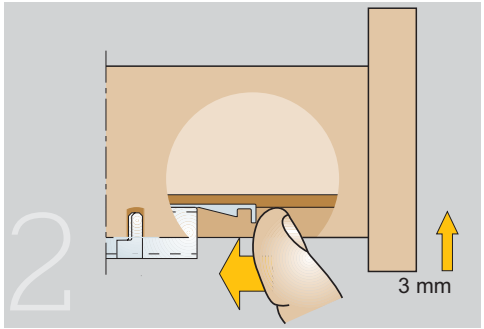

Gravity Self-Closing

Single extension. gravity self-closing. clip-mounting.

Load	Drawer length	Reference	Extension loss	L	
25Kp	250	766.425.030	62	0	24
	300	766.430.033	62	30	
	350	766.435.036	62	55	
	400	766.440.032	82	70	
	450	766.445.035	82	95	
	500	766.450.031	104	110	
	550	766.455.034	104	135	
	600	766.460.030	104	160	
	650	766.465.033	104	185	

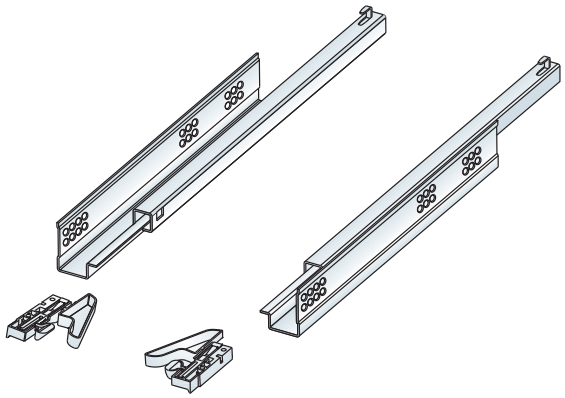

Clip-on brackets.

	set	
	731.245.104	100

Drilling Pattern

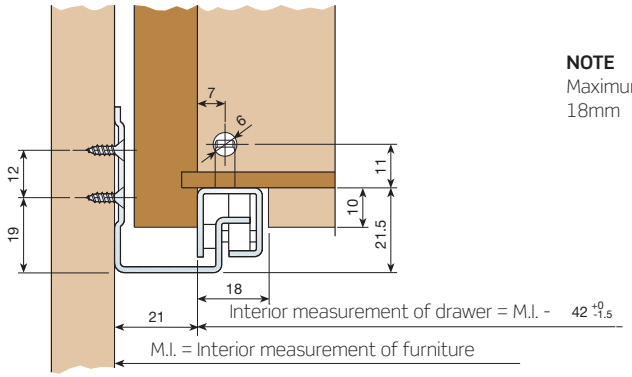

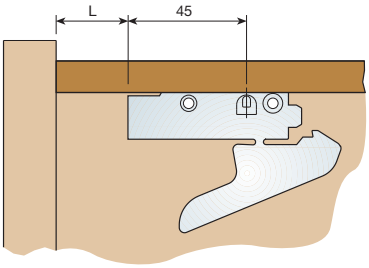

NOTE
Maximum drawer thickness
18mm

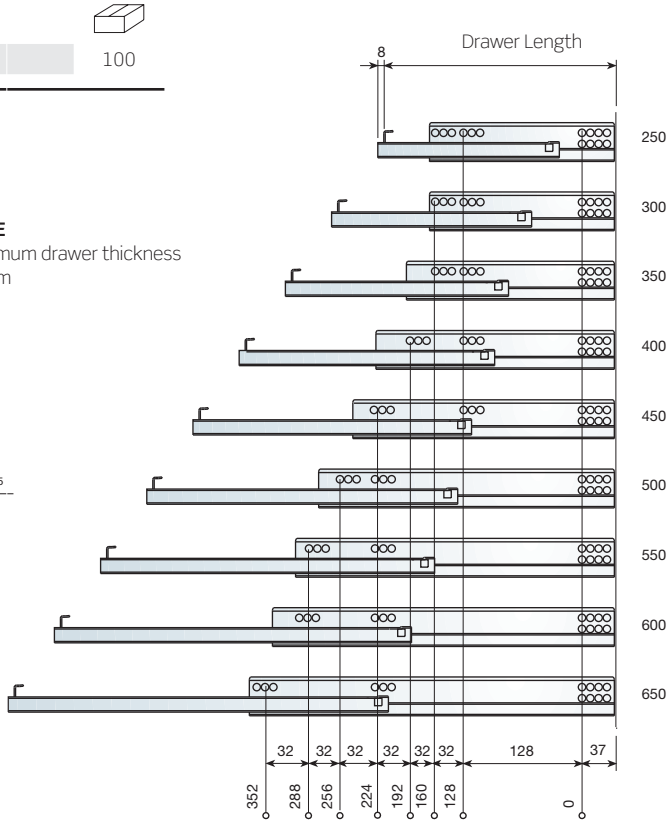

Assembly & Adjustment

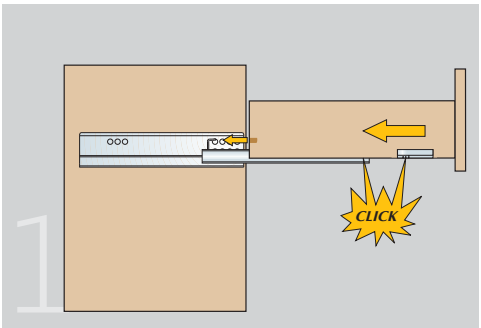

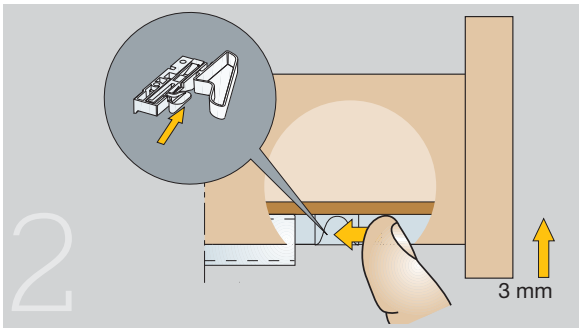

Gravity Self-Closing + "impulse" reverse opening premounted, Pin mounting

Single extension. GravitySelf-Closing. Pin mounting.

Load	Drawer length	Reference	Extension loss	C	
25Kp	250	766.125.032	62	180	24
	300	766.130.035	62	205	
	350	766.135.031	62	230	
	400	766.140.034	82	265	
	450	766.145.030	82	290	
	500	766.150.033	104	325	
	550	766.155.036	104	350	
	600	766.160.032	104	375	
	650	766.165.035	104	400	

The set is made up of the runner, 1 base and 1 push-latch.

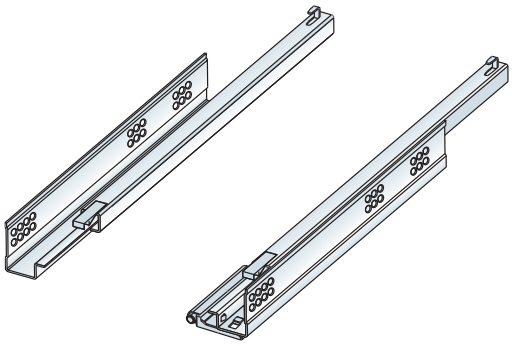

NOTE
> IMPULSE reverse opening push-latch delivered unassembled
> Maximum drawer thickness 18mm

Drilling Pattern

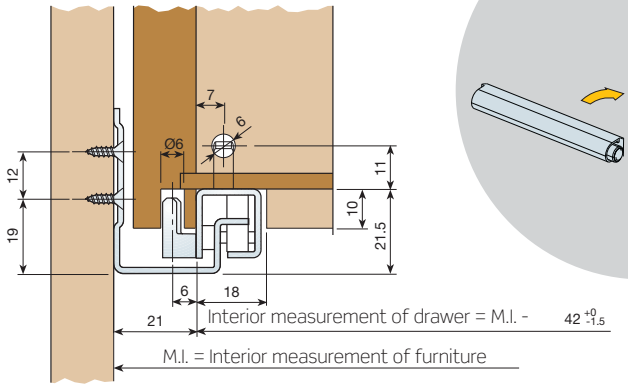

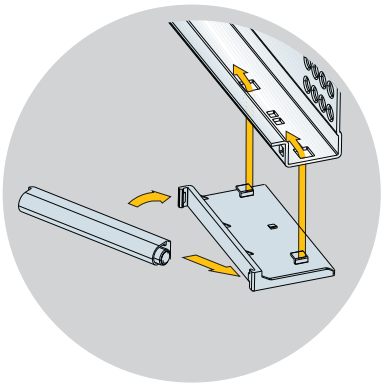

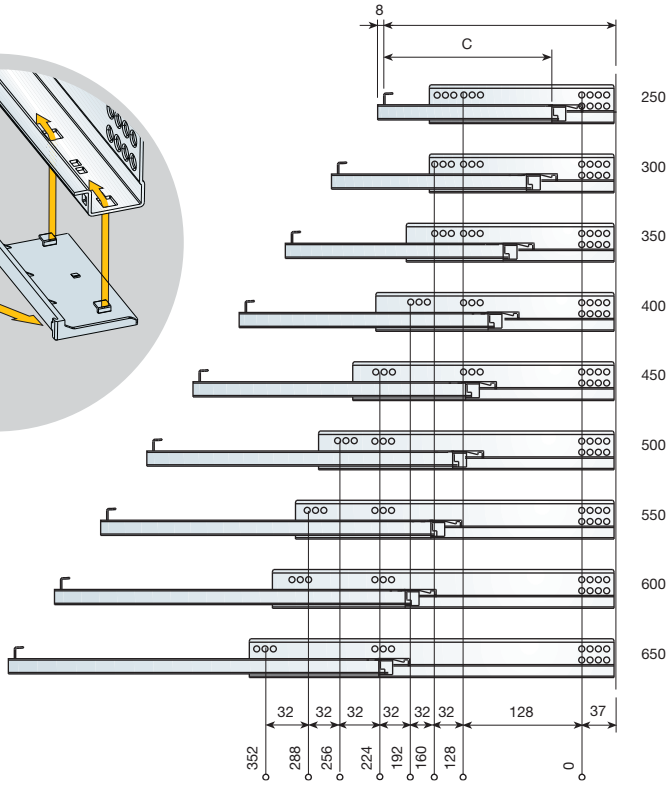

Assembly & Adjustment

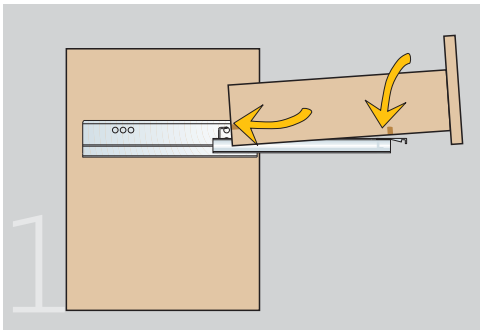

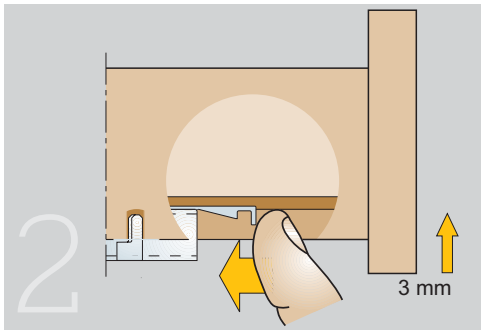

Gravity Self-Closing + "impulse" reverse opening premounted, Clip mounting

Single extension. Gravity Self-Closing. Clip-on mounting.

Load	Drawer length	Reference	Extension loss	L	
25Kp	250	766.025.035	62	0	24
	300	766.030.031	62	30	
	350	766.035.034	62	55	
	400	766.040.030	82	70	
	450	766.045.033	82	95	
	500	766.050.036	104	110	
	550	766.055.032	104	135	
	600	766.060.035	104	160	
	650	766.065.031	104	185	

The set is made up of the runner, 1 base and 1 push-latch.

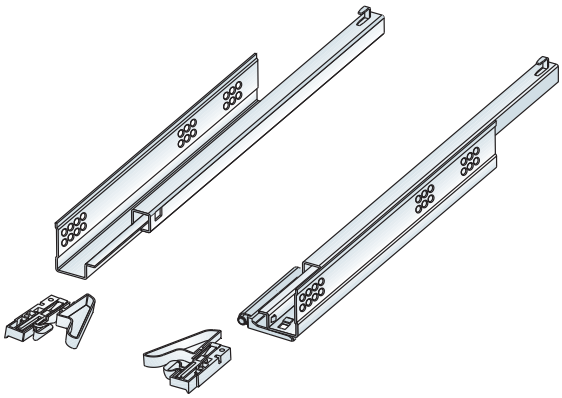

Clip-on brackets.

Set	
731.245.104	100

NOTE
> IMPULSE reverse opening push-latch delivered unassembled
> Maximum drawer thickness 18mm

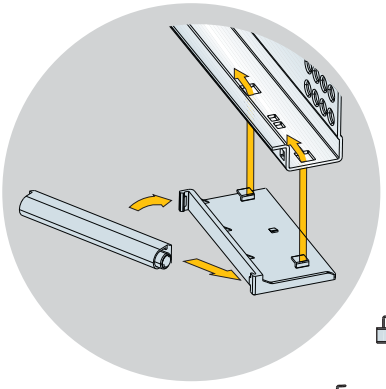

Drilling Pattern

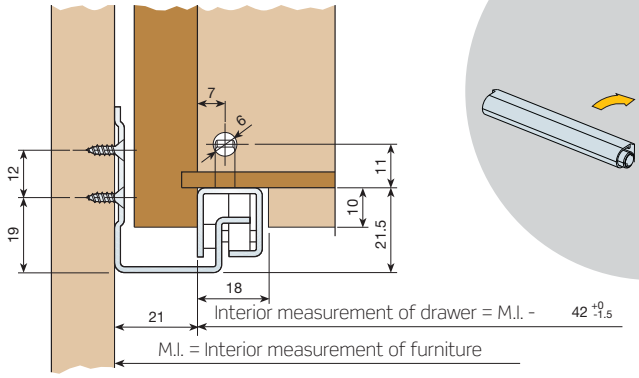

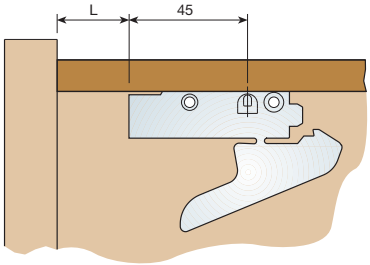

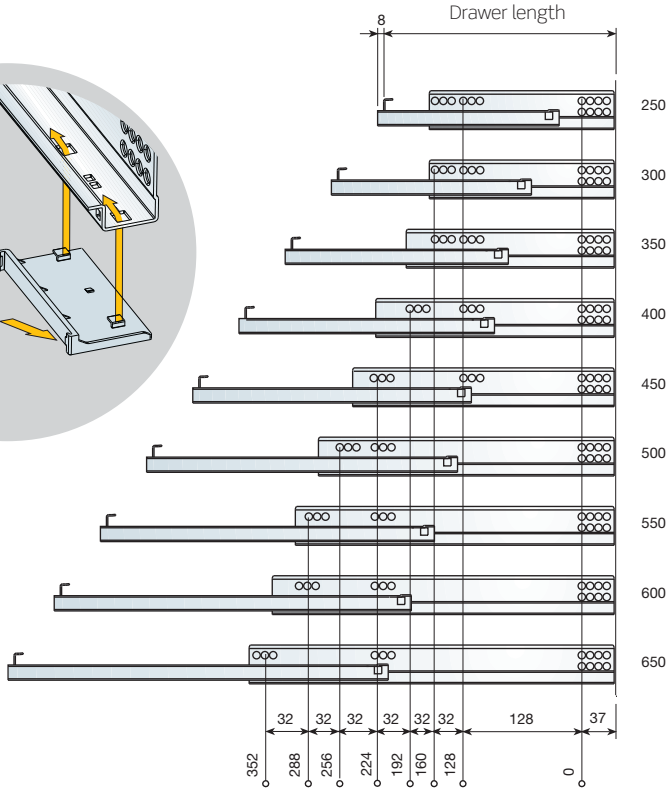

Assembly & Adjustment

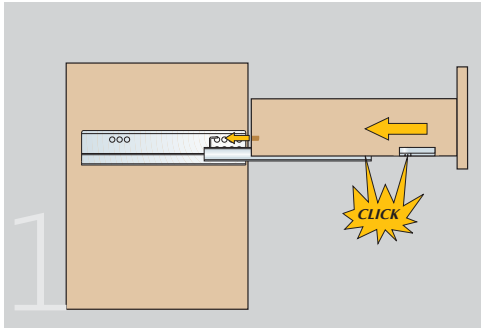

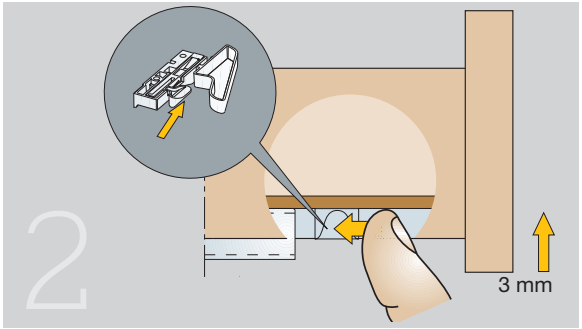

Direct Self-Closing, Pin mounting

Single extension. self-closing. pin mounting.

Load	Drawer length	Reference	Extension loss	C	
25Kp	300	769.630.035	62	260	24
	350	769.635.031	62	310	
	400	769.640.034	82	330	
	450	769.645.030	82	355	
	500	769.650.033	104	395	
	550	769.655.036	104	420	
	600	769.660.032	104	445	
	650	769.665.035	104	470	

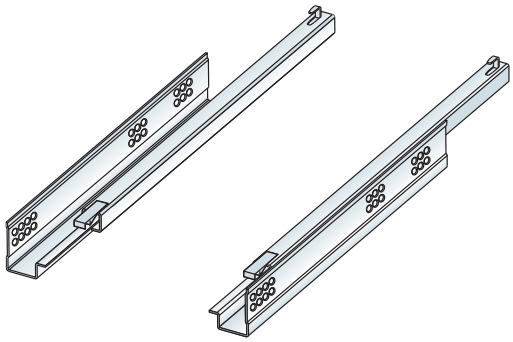

Drilling pattern

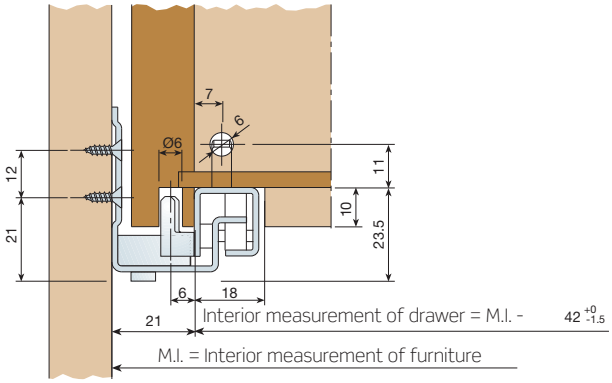

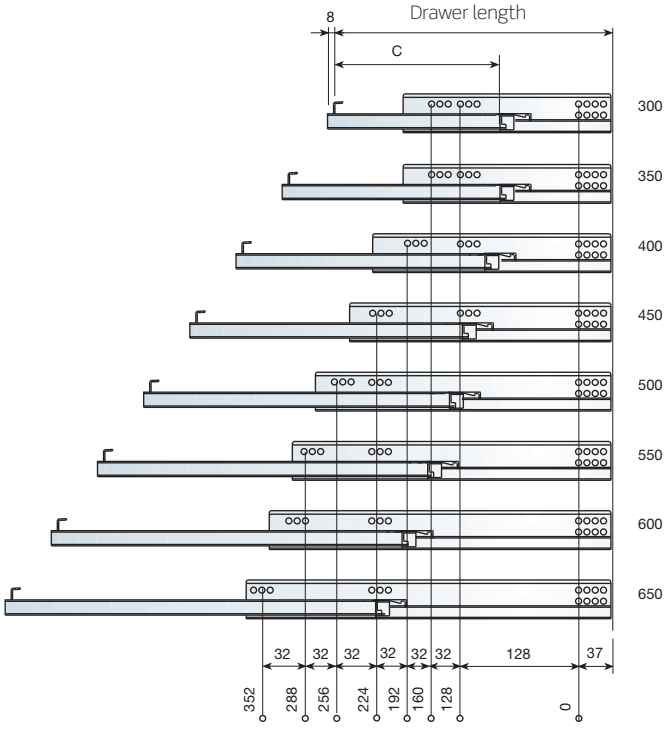

NOTE
Maximum drawer thickness 18mm

Assembly & Adjustment

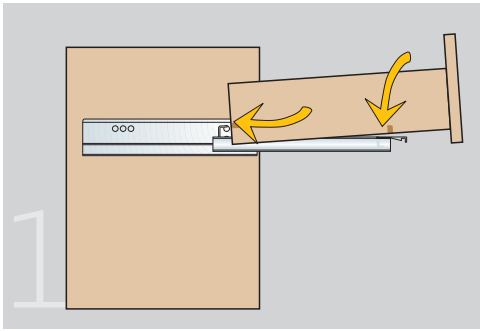

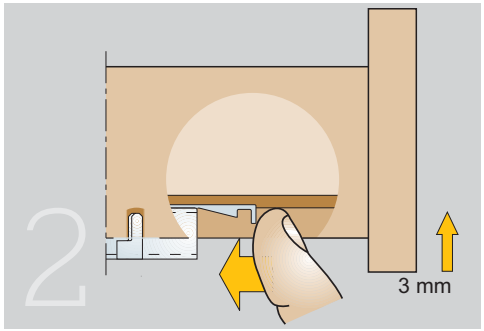

Direct Self-Closing, Clip mounting

Single extension. Self-Closing. Clip-mounting.

Load	Drawer length	Reference	Extension loss	L	
25Kp	300	769.430.034	62	0	24
	350	769.435.030	62	25	
	400	769.440.033	82	40	
	450	769.445.036	82	65	
	500	769.450.032	104	80	
	550	769.455.035	104	105	
	600	769.460.031	104	130	
	650	769.465.034	104	155	

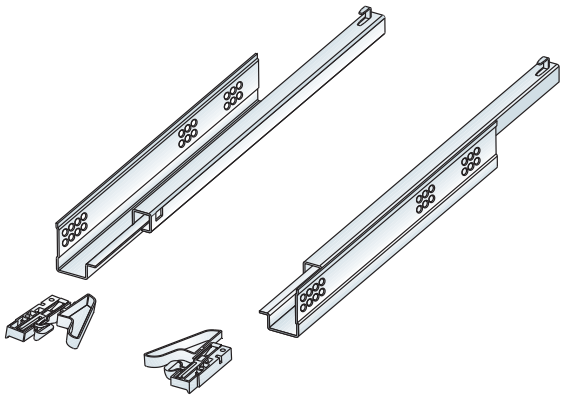

Clip-on brackets.

	Set	
	731.245.104	100

Drilling pattern

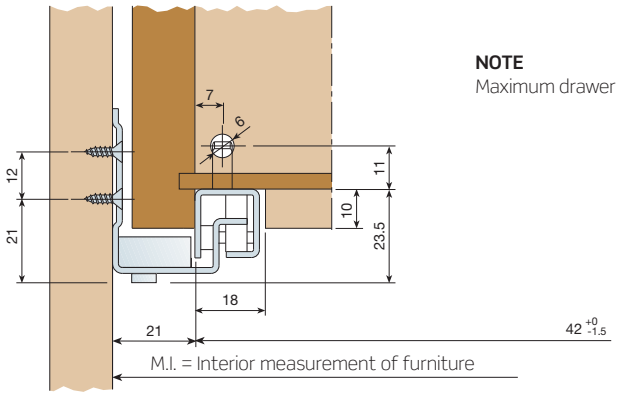

NOTE
Maximum drawer thickness 18mm

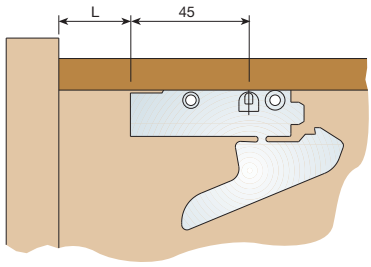

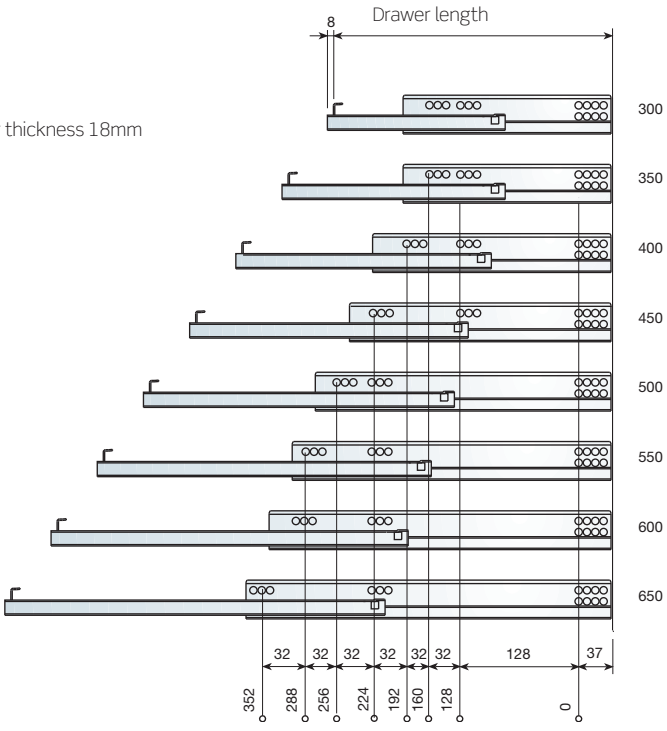

Assembly & Adjustment

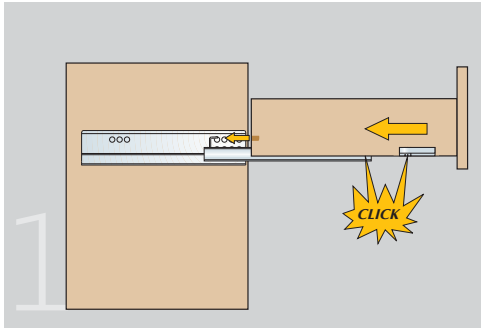

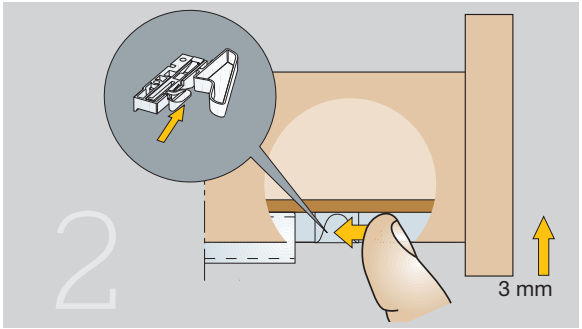

Gradual Soft-Closing, Pin mounting

INDAmatic gradual closing

Plastic roller-bearing.
Pin or clip-mounting. 3mm height adjustment.
Lengths from 350 to 650mm.

				C	
25Kp	300	769.730.032	62	260	24
	350	769.735.035	62	310	
	400	769.740.031	82	330	
	450	769.745.034	82	355	
	500	769.750.030	104	395	
	550	769.755.033	104	420	
	600	769.760.036	104	445	
	650	769.765.032	104	470	

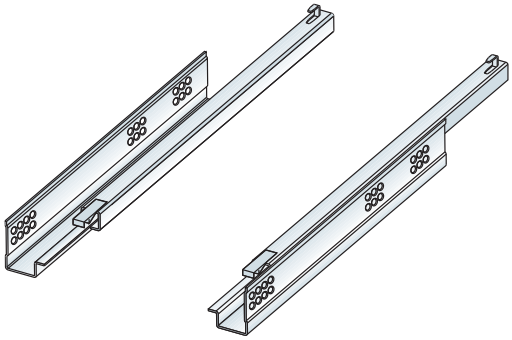

Drilling pattern

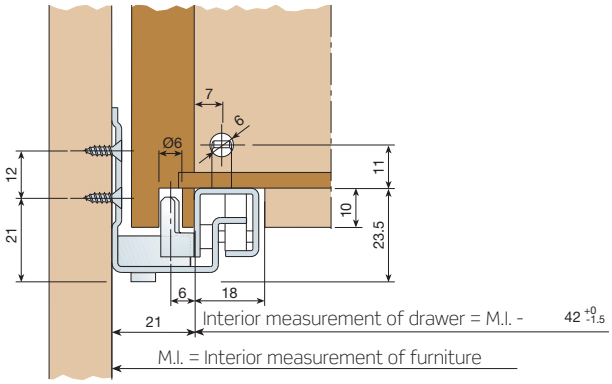

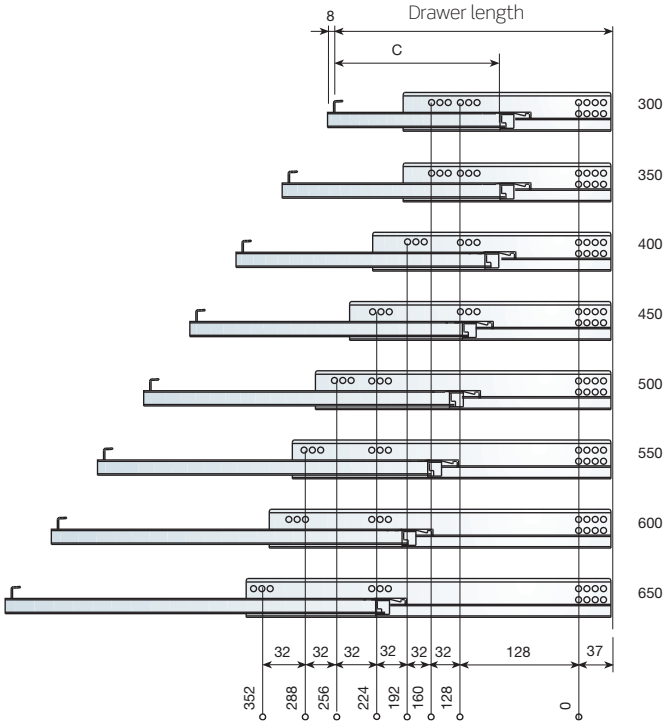

NOTE
Maximum drawer thickness 18mm

Assembly & Adjustment

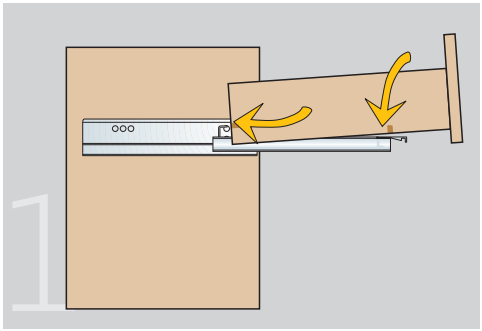

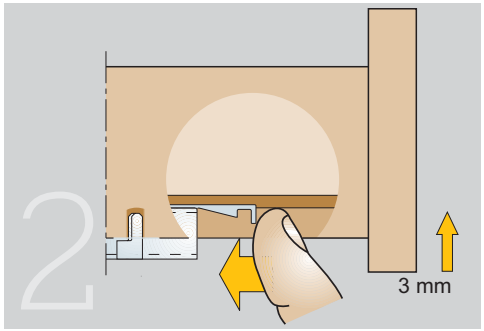

Gradual Soft-Closing, Clip mounting

INDAmatic
gradual closing

Single extension. Clip-mounting. Indamatic.

Load	Drawer length	Reference	Extension loss	L	
25Kp	300	769.530.031	62	0	24
	350	769.535.034	62	25	
	400	769.540.030	82	40	
	450	769.545.033	82	65	
	500	769.550.036	104	80	
	550	769.555.032	104	105	
	600	769.560.035	104	130	
	650	769.565.031	104	155	

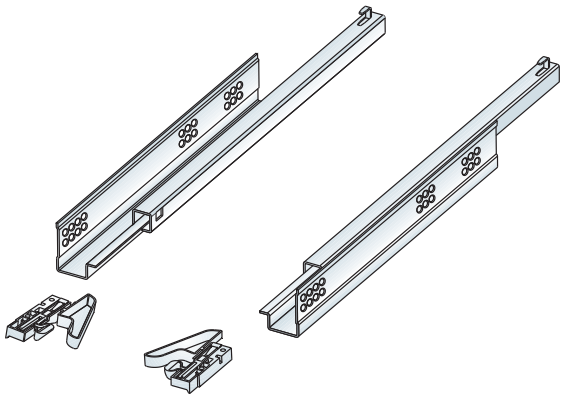

Clip-on brackets

	Set	
	731.245.104	100

Drilling pattern

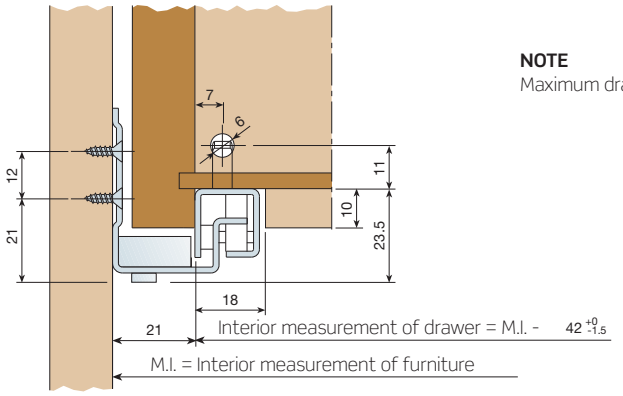

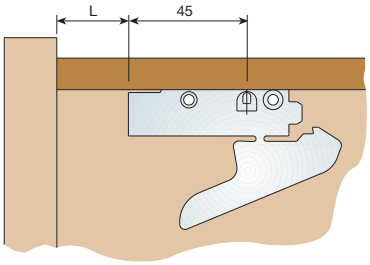

NOTE
Maximum drawer thickness 18mm

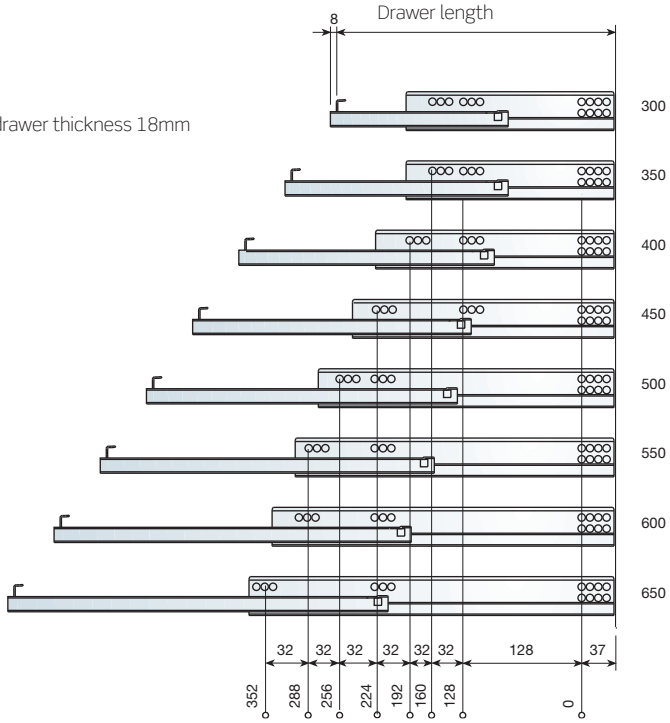

Assembly & Adjustment

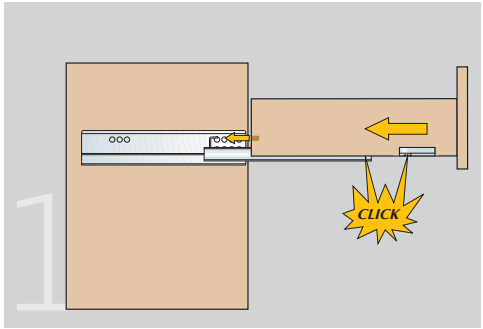

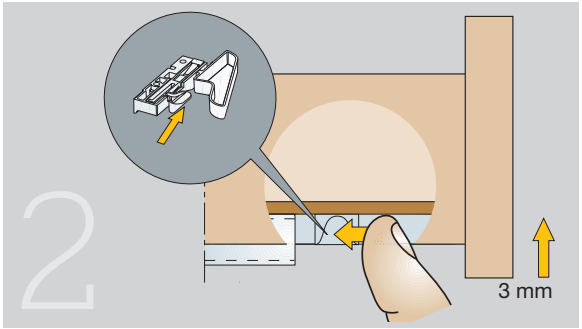

2 MARC RUNNERS: FULL EXTENSION

Direct Self-Closing, Pin mounting

Metal roller-bearing.
Pin or clip-mounting. 3mm height adjustment.
Lengths from 300 to 650mm.
Spring self-closing.

Full extension. self-closing. pin mounting.

Load	Drawer length	Reference	Extension loss	C	
	300	762.630.035	0	281	
	350	762.635.031	0	331	
	400	762.640.034	0	381	20
25Kp	450	762.645.030	0	431	
	500	762.650.033	0	481	
	550	762.655.036	0	531	
	600	762.660.032	0	581	

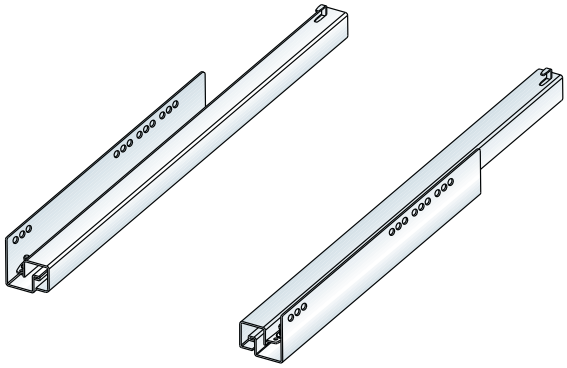

Drilling Pattern

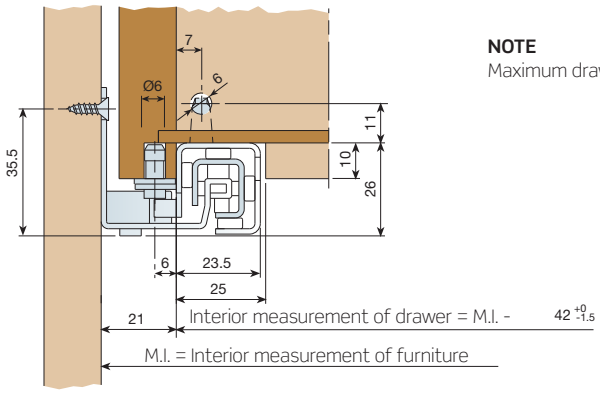

NOTE
Maximum drawer thickness 18mm

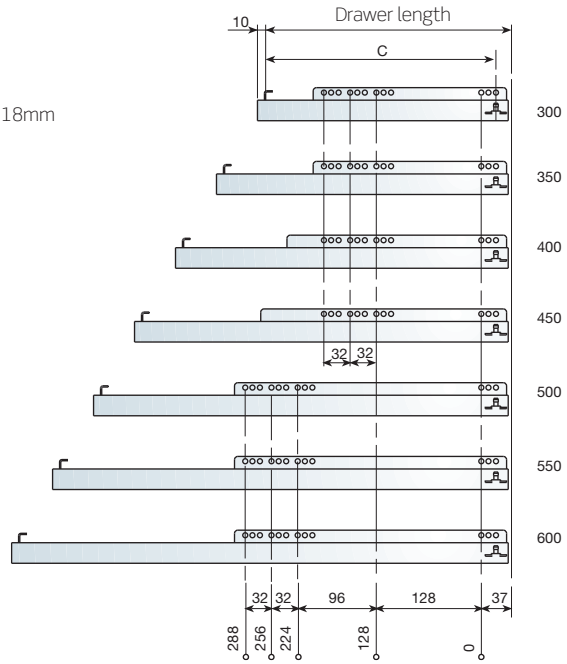

Assembly & Adjustment

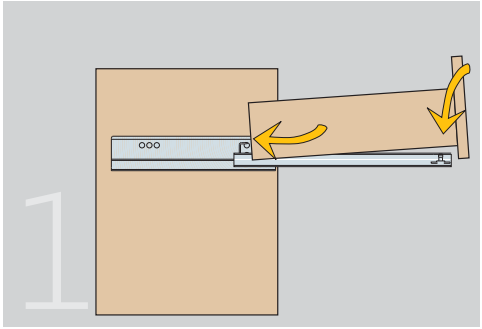

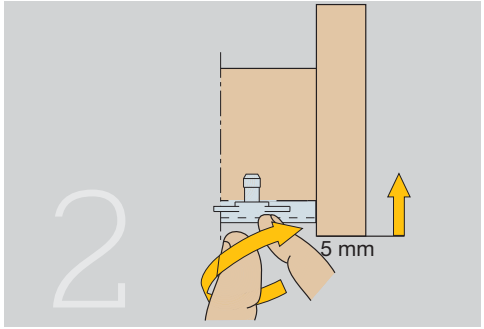

Direct Self-Closing, Clip mounting

Full extension. Self-Closing. Clip-mounting.

Load	Drawer length	Reference	Extension loss	
25Kp	300	763.030.030	0	20
	350	763.035.033	0	
	400	763.040.036	0	
	450	763.045.032	0	
	500	763.050.035	0	
	550	763.055.031	0	
	600	763.060.034	0	

Clip-on brackets.

	Set	
	731.245.104	100

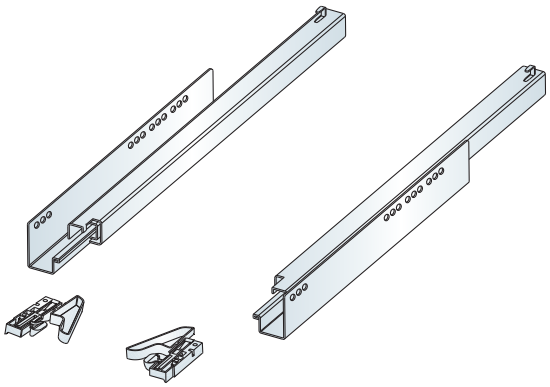

Drilling pattern

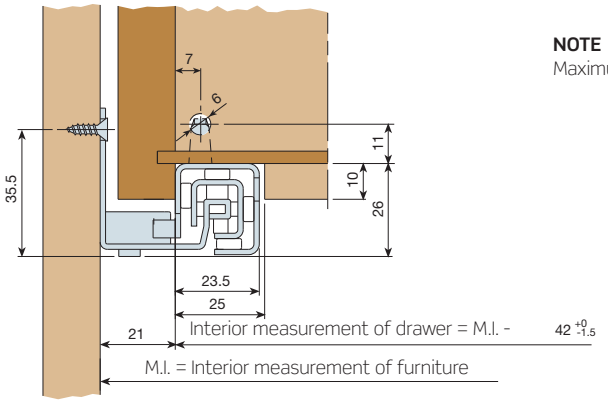



NOTE
Maximum drawer thickness 18mm

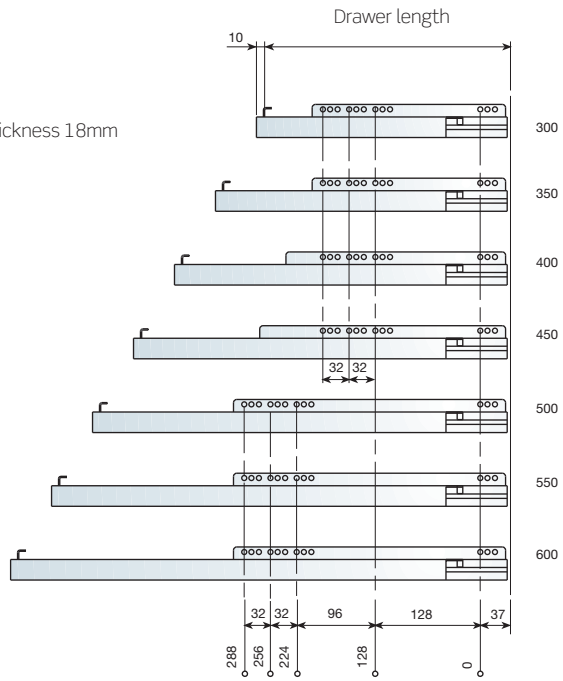

Assembly & Adjustment

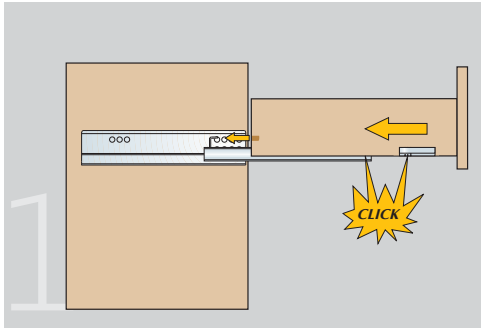

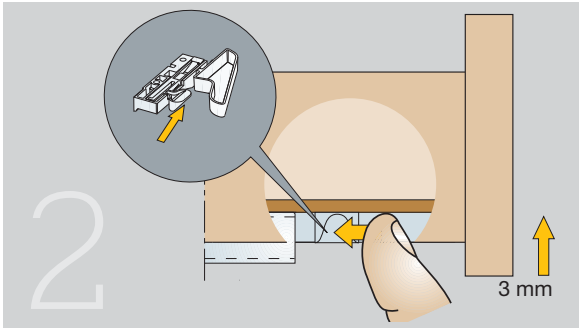

Gradual Soft-Closing, Pin mounting

INDAmatic gradual closing

Metal roller-bearing.
Pin or clip-mounting. 3mm height adjustment.
Lengths from 300 to 600mm.

Full extension. Soft-Closing. Pin mounting. Indamatic.

Load	Drawer length	Reference	Extension loss	C	
	300	762.730.032	0	281	
	350	762.735.035	0	331	
	400	762.740.031	0	381	20
25Kp	450	762.745.034	0	431	
	500	762.750.030	0	481	
	550	762.755.033	0	531	
	600	762.760.036	0	581	

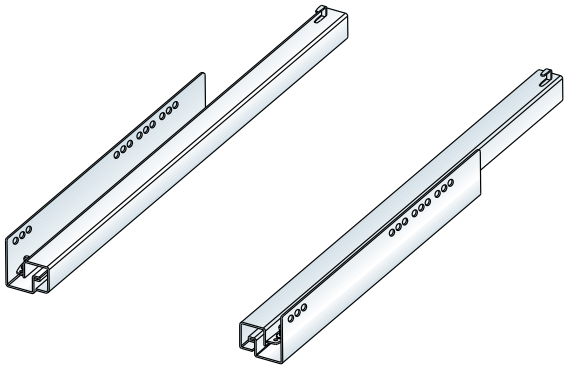

Drilling pattern

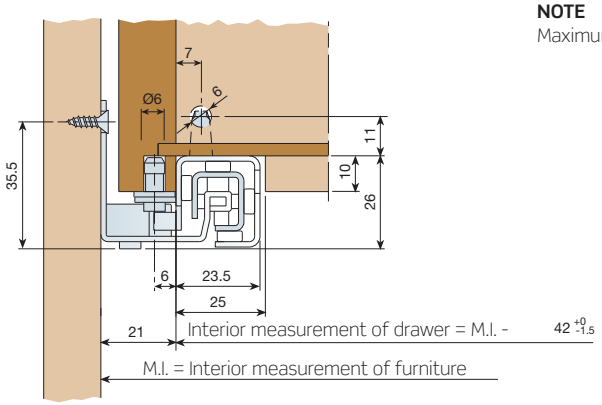

NOTE
Maximum drawer thickness 18mm

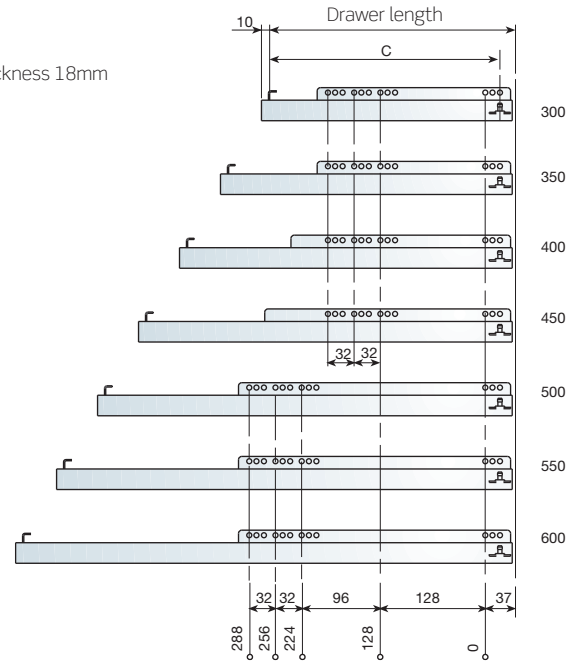

Assembly & Adjustment

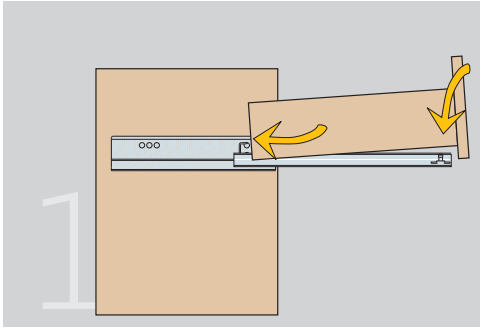

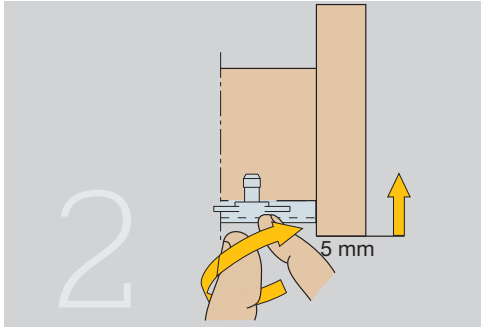

Gradual Soft-Closing, Clip mounting

INDAmatic gradual closing

Full extension. Soft-Closing. Clip-mounting. Indamatic.

Load	Drawer length	Reference	Extension loss	
25Kp	300	763.130.034	0	20
	350	763.135.030	0	
	400	763.140.033	0	
	450	763.145.036	0	
	500	763.150.032	0	
	550	763.155.035	0	
	600	763.160.031	0	

Clip-on brackets.

	set	
	731.245.104	100

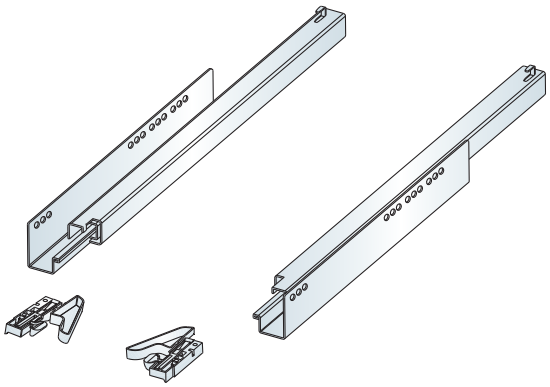

Drilling pattern

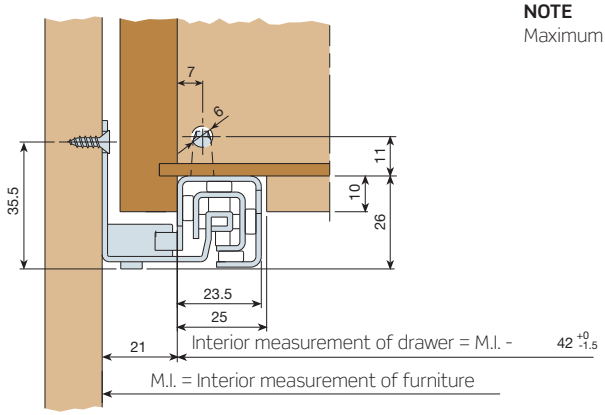



NOTE
Maximum drawer thickness 18mm

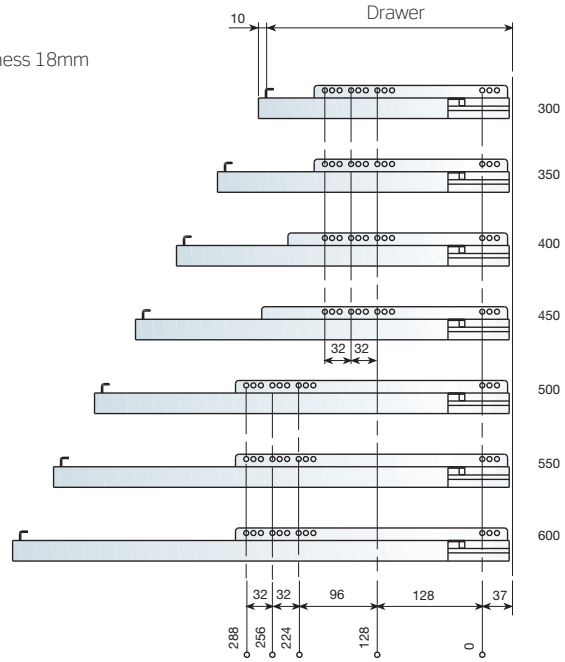

Assembly & Adjustment

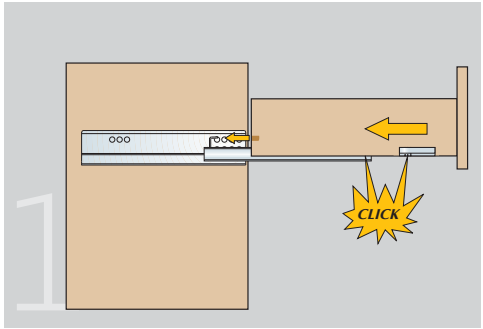

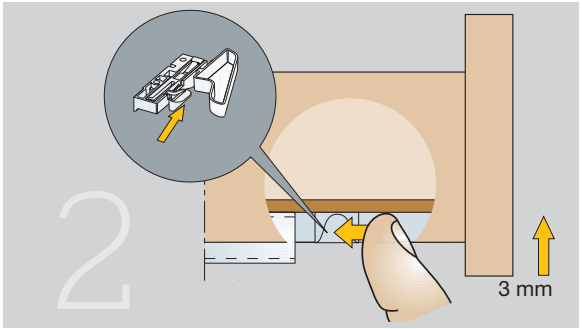

INDAUX
FURNITURE FITTINGS MANUFACTURER

07

DRAWERS

ATTRACTION drawers 401

ALUX drawers 441

EUROPA drawers .....  451

EUROPA-2 drawers 463

SUPRA drawers .....  485

INDAUX drawers 497

COMBI drawers 503

BARANDILLA pots & pans drawer 517

UNDER-OVEN drawers 519

SUPRAPLEX and SUPRAKIT drawer 523

OFFIBOX drawers 563

Keyboard trays 585

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

ATTRACTION

Twin walled drawer

Twin-walled steel drawer with a complete range of concealed runners up to 50 Kilos resistance.
Indamatic gradual soft closing system incorporated.

INDAUX

Full extension up to 50 Kg

ATTRACTION drawer with telescopic runner enabling full extension in order to make full use of the drawer's capacity. Suitable for large drawers as it can hold up to 50 kg. Also available in 25 kg, with single extension runners.

A perfect finish

This drawer comes in three attractive finishes: metal grey, stainless steel or white. These finishes are elegant and with the perfect level of sophistication which allows for their integration in any kitchen and bathroom design. All the accessories are

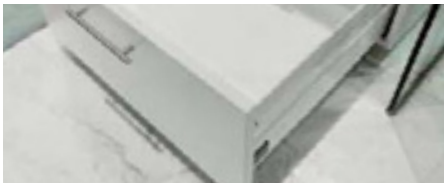

made in these same finishes and always combined with a darker grey tone for the plastic pieces.

INDAUX

Gradual soft closing **Indamatic**

INDAmatic
gradual closing

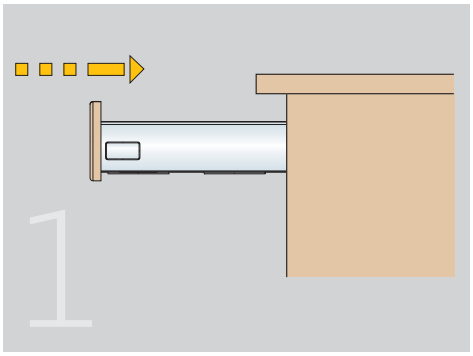

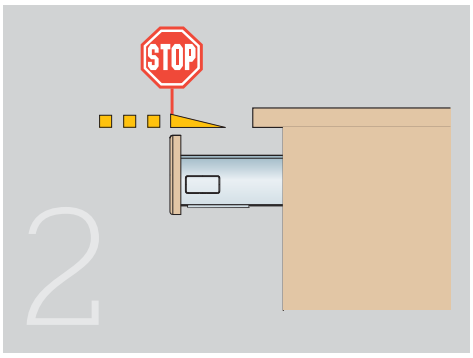

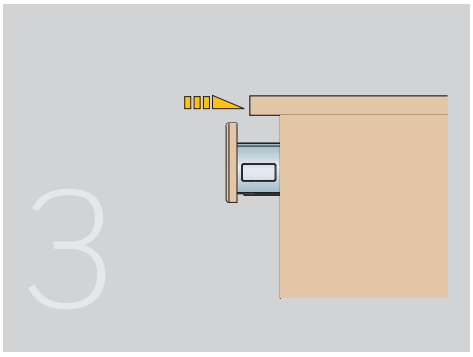

Inner drawers

Inner drawers concealed behind doors optimize the cabinet volume utilisation. Used as a visible option, the drawer front is aligned with the cabinet side, creating a harmonized view.

A world of accessories

A complete range with a wide variety of accessories to cover most organization needs, guaranteeing maximum space efficiency on standard and pan drawers.
Such as: customized cut-Lery trays, pan drawers and their accessories, spice holders, dividers...

Cutlery trays with removable utensil dividers for easy customization.

The utensils are located in a transversal position regarding the drawer trajectory to avoid eventual damages produced by knifes and forks.

Knife and spice holders are available for further customization.

INDAUX

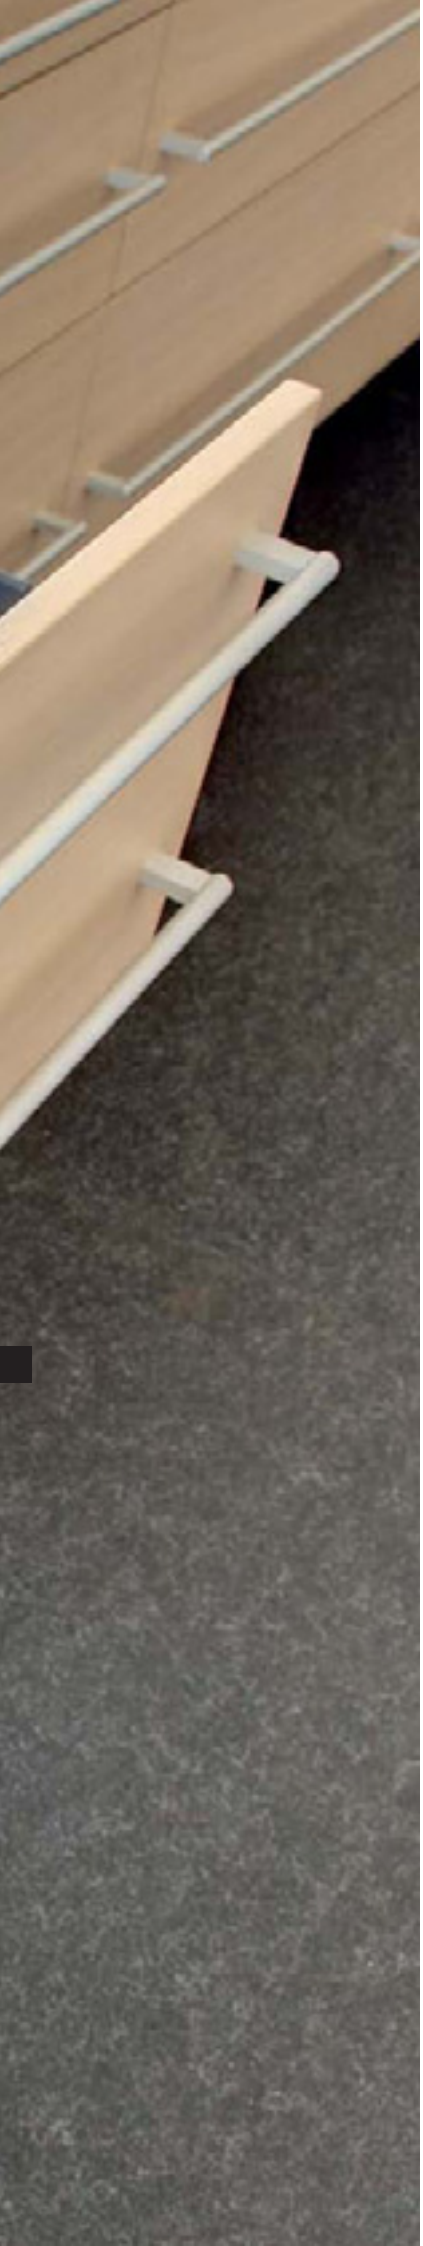

Optimum space...

The **Under-sink** drawer version for maximum space efficiency.

INDA-matic
gradual closing

ATTRACTION

Twin walled drawer

Twin walled steel drawer with a complete range of self-closing runners, up to 50 KGs weight resistance, incorporating Indamatic gradual soft closing.

pp.

1 RANGE CONTENT 420

2 COMPONENTS 422
- Drawer breakdown 422
- Lower front drawer 424
- High front drawer 425
- Drawer kit 427
- Inner drawer 429
- Drawer stabiliser 430

3 ACCESSORIES 431
- Under-sink drawer 431
- Accesories for high front drawer 433
- Cutlery tray, knife tray and spice rack 434

4 DRAWER ASSEMBLY JIG 435

5 TECHNICAL INFORMATION 436
- Drawer base dimensions 436
- Drilling and positioning for the drawer runner 437
- Drilling for the drawer front 438
- Drawer assembly 439

1 RANGE CONTENT

Drawer

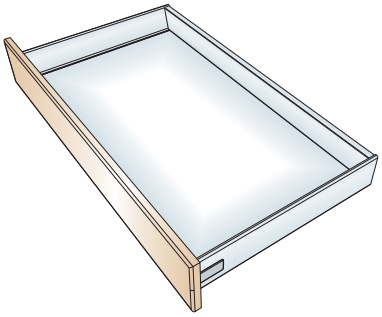

... with steel back
... with wooden back
... with a cutlery tray
+ knife holder
+ spice holder
... with dividers



Pan drawer with extension sides

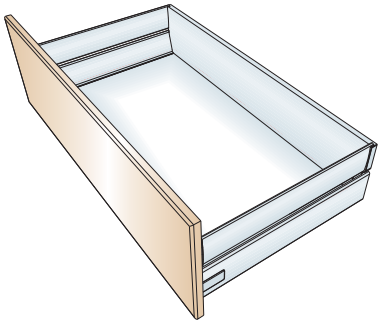

... with steel back
... with wooden back
... with pan dividers
... with plate dividers



Pan drawer with rails

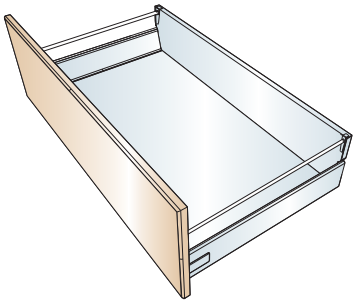

... with steel back
... with wooden back
... with pan dividers



Inner drawer

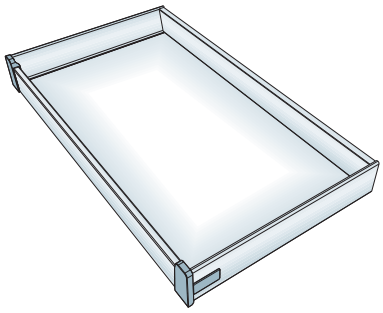

... with steel back
... with wooden back
... with dividers



Inner pan drawer

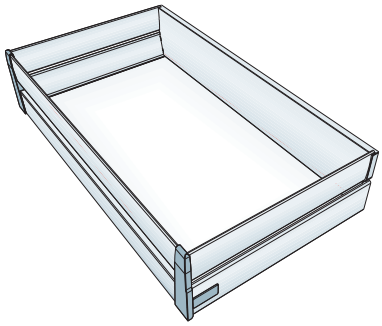

... with steel back
... with wooden back
... with pan dividers
... with plate dividers





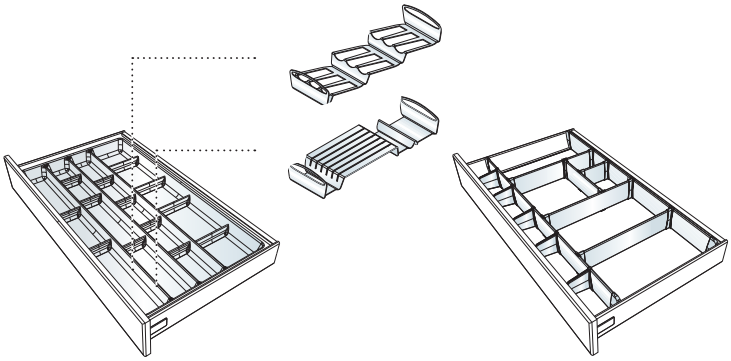





















2 COMPONENTS

Drawer breakdown

Double walled high fronted drawer parts

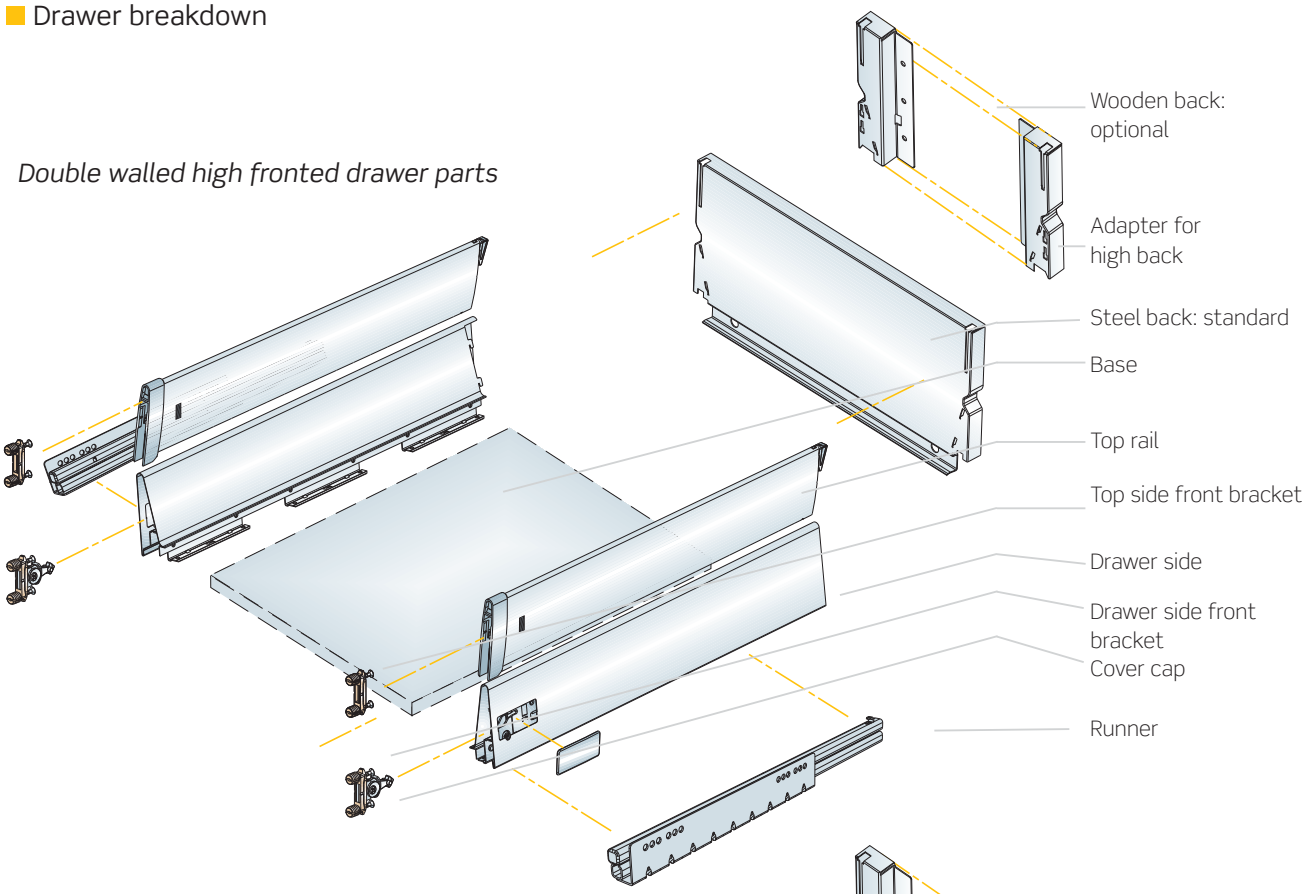

Tubular high fronted drawer

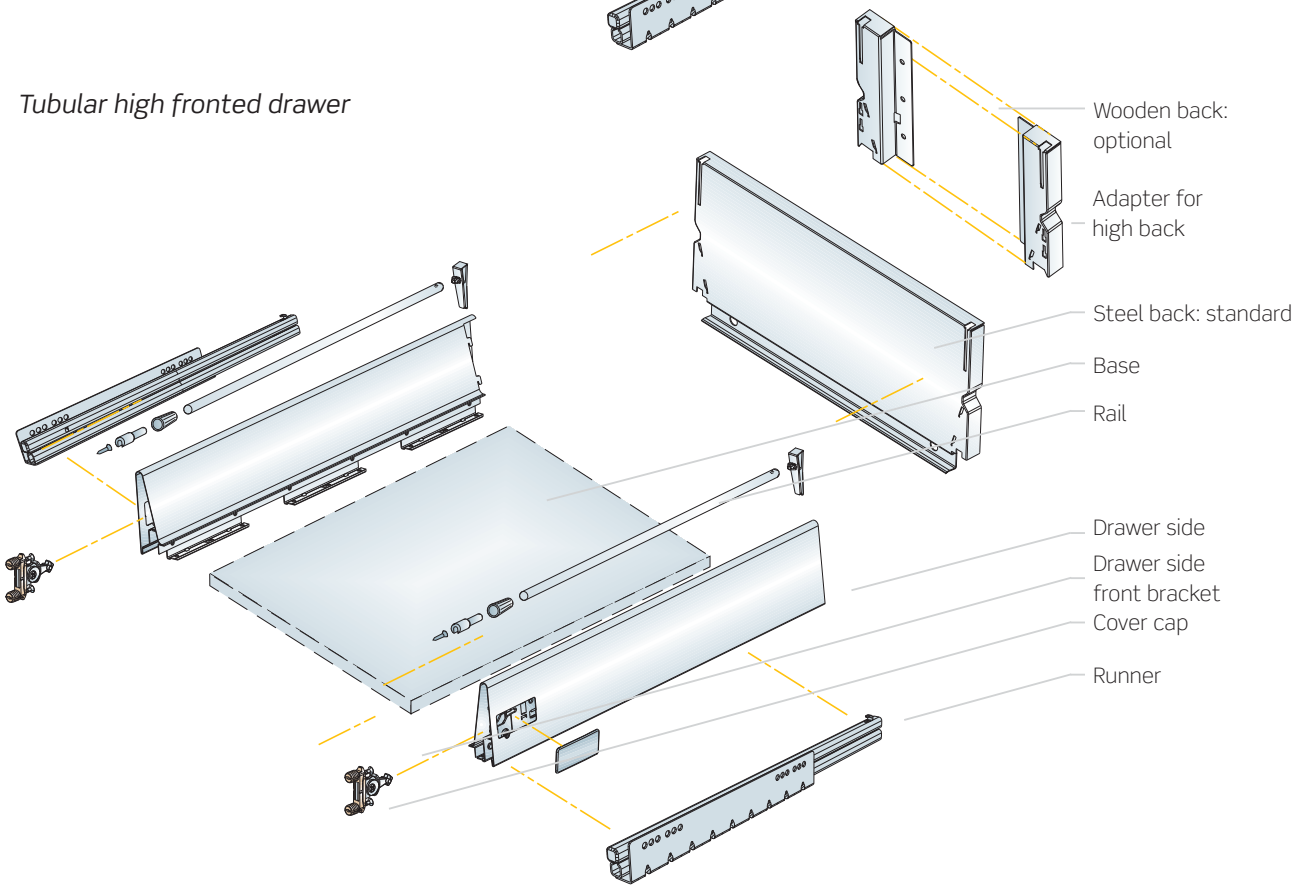

Drawer breakdown

Low fronted drawer

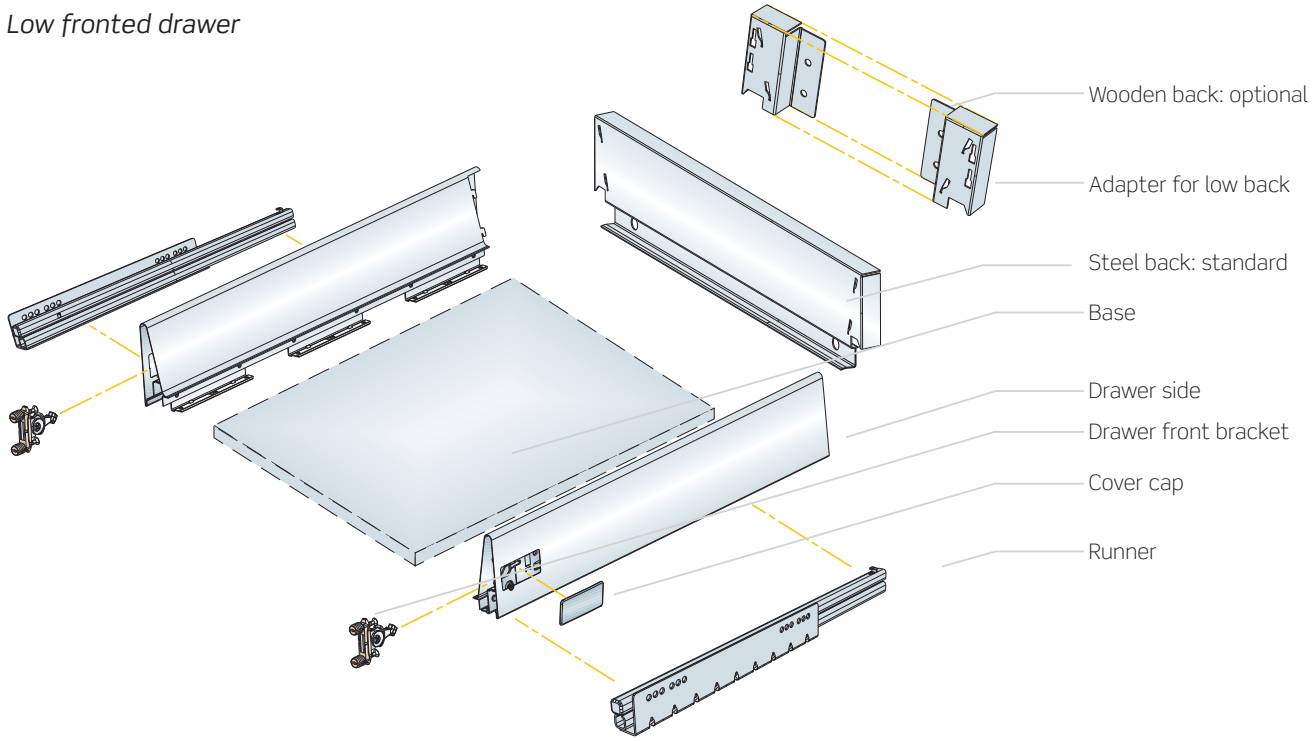

Lower front drawer

Drawer sides

Depth	White	Stainless steel	Metal grey	
270	657.027.136	657.027.103	657.027.140	
350	657.035.131	657.035.105	657.035.142	
400	657.040.134	657.040.101	657.040.145	20
480	657.048.136	657.048.103	657.048.140	
600	657.060.132	657.060.106	657.060.143	

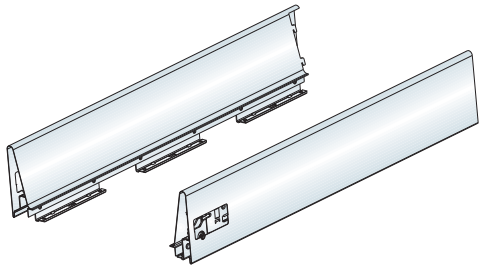

25 Kg. single extension runner.

	Thickness 16		
Depth	Gravity closing	**Indamatic**	
400	655.840.032	655.940.036	
480	655.848.034	655.948.031	24
520*	657.852.031	657.952.035	
600	655.860.030	655.960.034	

(*) For 480mm drawer to obtain full accessibility.

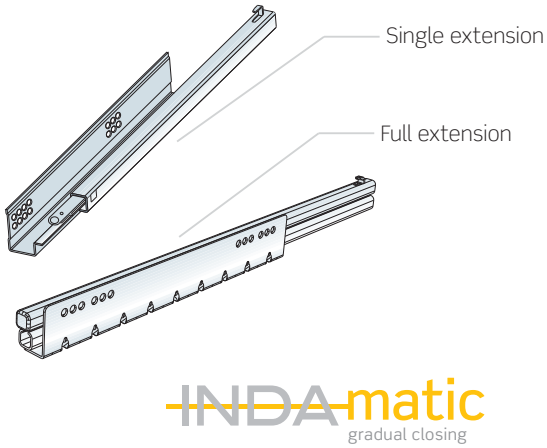

50 Kg. full extension runner.

	Thickness 16	Thickness 19	
Depth	**Indamatic**	**Indamatic**	
270	659.527.035	661.727.032	
350	659.535.030	661.735.034	
400	659.540.033	661.740.030	10
480	659.548.035	661.748.032	
600	659.560.031	661.760.035	

Full extension runners always equipped with Indamatic gradual closing, premounted.

Low steel back

Cabinet width	White	Nickel-plated**	Metal grey	
300	657.230.136	657.230.066	657.230.140	
350	657.235.132	657.235.062	657.235.143	
400	657.240.135	657.240.065	657.240.146	
450	657.245.131	657.245.061	657.245.142	
500	657.250.134	657.250.064	657.250.145	20
550	657.255.130	657.255.060	657.255.141	
600	657.260.133	657.260.063	657.260.144	
700	657.270.132	657.270.062	657.270.143	
800*	657.280.131	657.280.061	657.280.142	
900*	657.290.130	657.290.060	657.290.141	
1000*	657.291.132	657.291.062	657.291.143	
1200*	657.299.134	657.299.064	657.299.145	

(*) With drawer lateral stabilizer fixing.
(**) For stainless steel drawer sides.



Lower front drawer

Drawer side front bracket. Quick assembly

1 set	658.000.103	100

Each reference consists of 2 brackets with expand dowels.



Drawer side front bracket. Screw mounting

1 set	658.050.105	100

Each reference consists of 2 brackets.



Cover caps

	Grey	
1 set	657.900.143	100

Each reference consists of 2 caps.



Adapter for low back (wooden back).

Cabinet width	White	Nickel-plated*	Metal grey	
1 set		657.700.061	657.700.142	40

(*) For stainless steel drawer sides.



High front drawer

Drawer sides

Depth	White	Stainless steel	Metal grey	
270	657.027.136	657.027.103	657.027.140	
350	657.035.131	657.035.105	657.035.142	
400	657.040.134	657.040.101	657.040.145	20
480	657.048.136	657.048.103	657.048.140	
600	657.060.132	657.060.106	657.060.143	

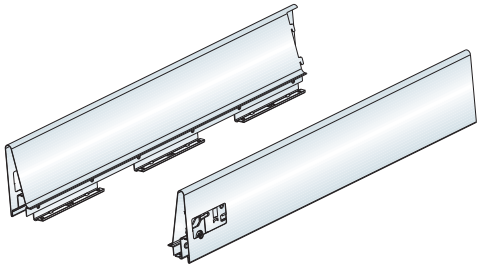

25 Kg. single extension runner.

		Thickness 16		
Depth	Extension loss	Gravity closing	**Indamatic**	
400	80	655.840.032	655.940.036	
480	100	655.848.034	655.948.031	24
520*	60	657.852.031	657.952.035	
600	100	655.860.030	655.960.034	

(*) For 480mm drawer to obtain full accessibility.

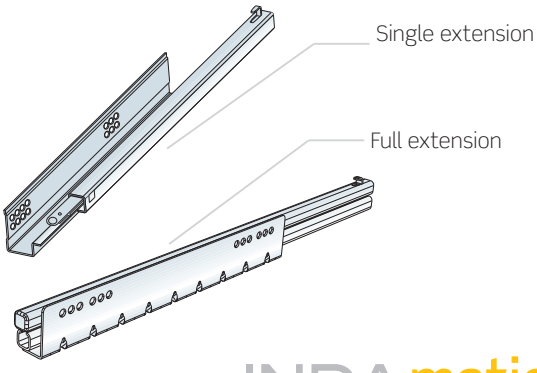

INDA-matic
gradual closing

High front drawer

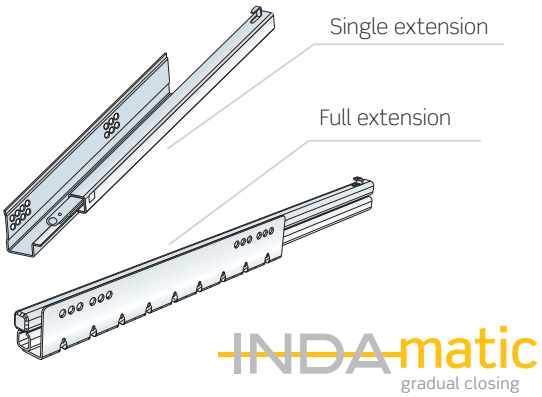

50 Kg. full extension runner.

	Thickness 16	Thickness 19	
Depth	**Indamatic**	**Indamatic**	
270	659.527.035	661.727.032	
350	659.535.030	661.735.034	
400	659.540.033	661.740.030	10
480	659.548.035	661.748.032	
600	659.560.031	661.760.035	

Full extension runners always equipped with Indamatic gradual closing, premounted.

High steel back

Cabinet width	White	Nickel-plated**	Metal grey	
300	657.330.133	657.330.063	657.330.144	
350	657.335.136	657.335.066	657.335.140	
400	657.340.132	657.340.062	657.340.143	
450	657.345.135	657.345.065	657.345.146	
500	657.350.131	657.350.061	657.350.142	20
550	657.355.134	657.355.064	657.355.145	
600	657.360.130	657.360.060	657.360.141	
700	657.370.136	657.370.066	657.370.140	
800*	657.380.135	657.380.065	657.380.146	
900*	657.390.134	657.390.064	657.390.145	
1000*	657.391.136	657.391.066	657.391.140	
1200*	657.399.131	657.399.061	657.399.142	



Twin walled or tubular.
(*) With drawer lateral stabilizer fixing.
(**) For stainless steel drawers.

Drawer side front bracket. Quick assembly

1 set	658.000.103	100



Each reference consists of 2 brackets with expand dowels.

Drawer side front bracket. Screw mounting

1 set	658.050.105	100



Each reference consists of 2 brackets.

Cover caps

	Grey	
1 set	657.900.143	100



Each reference consists of 2 caps.

Tubular rails

Depth	White	Silver matt anodized*	Metal grey	
270	660.127.134	660.127.064	660.127.145	
350	660.135.136	660.135.166	660.135.140	
400	660.140.132	660.140.062	660.140.143	20
480	660.148.134	660.148.064	660.148.145	
600	660.160.130	660.160.060	660.160.141	

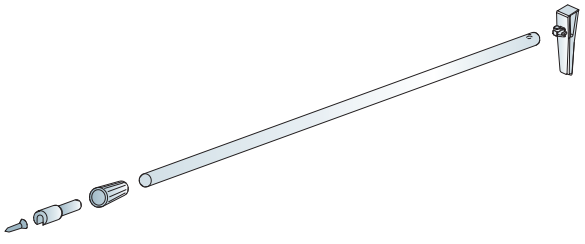

Each reference consists of 2 screws, 2 connectors, 2 covers, 2 rails and 2 rear fixing devices.
(*) For stainless steel drawers.

High front drawer

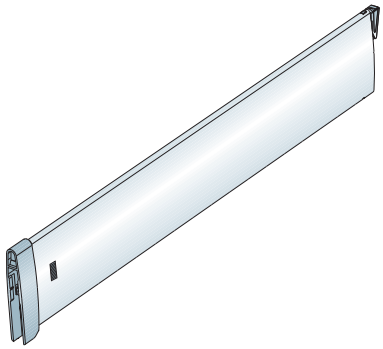

Double walled rails

Depth	White	Stainless steel	Metal grey	
270	658.327.132	658.327.106	658.327.143	
350	658.335.134	658.335.101	658.335.145	
400	658.340.130	658.340.104	658.340.141	20
480	658.348.132	658.348.106	658.348.143	
600	658.360.135	658.360.102	658.360.146	

Referenced by pair.



Double walled rail front bracket. Quick assembly

1 set	658.100.100	100

Each reference consists of 2 brackets with expand dowels.

Double walled rail front bracket. Screw mounting

1 set	658.150.102	100

Each reference consists of 2 brackets.



Adapter for high back (wooden back)

Cabinet width	White	Nickel-plated*	Metal grey	
1 set	657.800.135	657.800.065	657.800.146	40

Double walled or tubular.
(*) For stainless steel drawers.

Drawer kit



50Kg total extractable runner kit with adaptable back:

Low drawer kit.

Module	Metallic grey	
270	655.627.140	
350	655.635.142	1
400	655.640.145	
480	655.648.140	

Each reference is made up of:
1 Set of runners (50kg., Total extraction with **Indamatic** gradual soft-closing system)
2 Drawer sides
2 Wood adaptors for low backs
2 Front fixing brackets (m/screws)
2 Covers
1 Page with assembly instructions

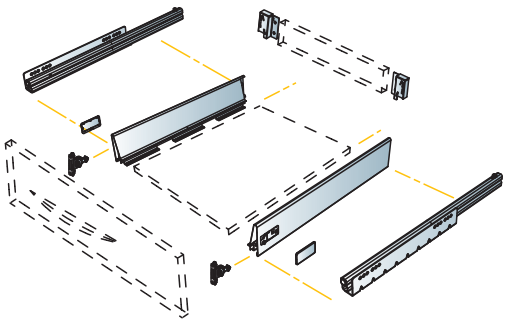

Pan drawer kit with tubes.

Module	Metallic grey	
270	655.727.144	
350	655.735.146	1
400	655.740.142	
480	655.748.144	

Each reference is made up of:
1 Set of runners (50kg., Total extraction with **Indamatic** gradual soft-closing system)
2 Drawer sides
2 Wood adaptors for high backs
2 Lateral tubes with corresponding fixing brackets and caps
2 Front fixing brackets (m/screws)
2 Covers
1 Page with assembly instructions

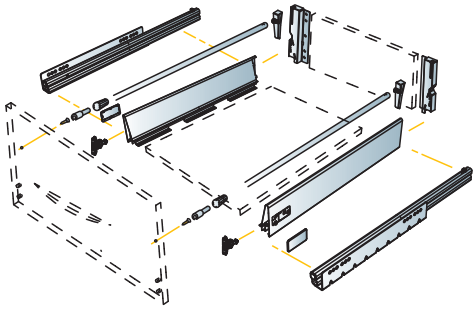

Drawer kit



Accessibility **MARC** runner kit
Total 25Kg with adaptable back:

Low drawer kit.

Module	Metallic grey	
480	655.452.140	1

Each reference is made up of:
1 Set of runners (25kg.,Total accessibility with **Indamatic** gradual soft-closing system)
2 Drawer sides
2 Wood adaptors for low backs
2 Front fixing brackets (m/screws)
2 Covers
1 Page with assembly instructions

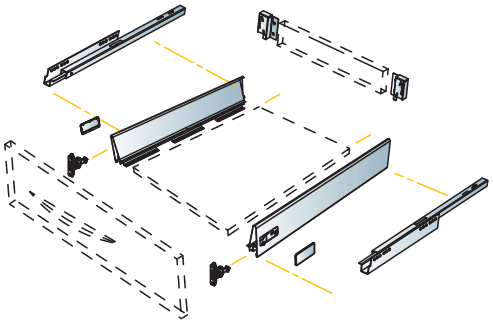

Pan drawer kit with tubes.

Module	Metallic grey	
480	655.552.144	1

Each reference is made up of:
1 Set of runners (25kg., Total accessibility with **Indamatic** gradual soft-closing system)
2 Drawer sides
2 Wood adaptors for high backs
2 Lateral tubes with corresponding fixing brackets and caps
2 Front fixing brackets (m/screws)
2 Covers
1 Page with assembly instructions

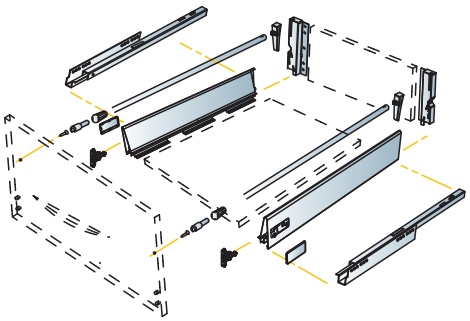

Pan drawer kit with enclosures.

Module	Metallic grey	
480	653.952.143	1

Each reference is made up of:
1 Set of runners (25kg., Total accessibility with **Indamatic** gradual soft-closing system)
2 Drawer sides
2 Wood adaptors for high backs
2 Double walled side enclosures
2 Front fixing brackets (m/screws)
2 Covers
1 Page with assembly instructions

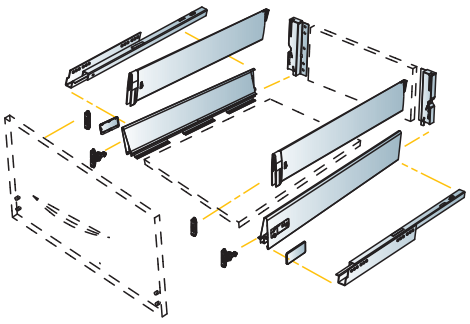

Basic Kit for 16 mm thickness

Depth	Stainless steel	Metal grey	
480	656.148.102	656.148.146	160

Each reference consists of:
1 Set of 50 kg full extension runner with **Indamatic** gradual soft-closing premounted
1 set of drawer sides,
1 set of front brackets, screw mounting,
2 cover caps,
1 assembly instructions with template.

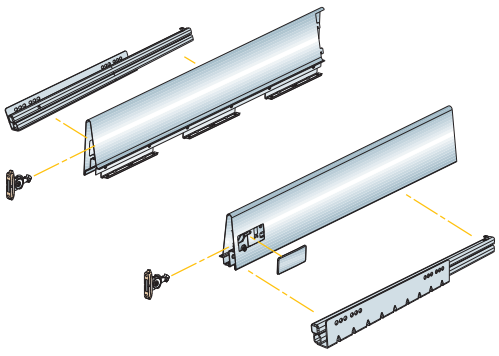

Inner drawer

Lower front inner drawer.

Cabinet width	Stainless steel	Metal grey	
300	660.230.104	660.230.141	
350	660.235.100	660.235.144	
400	660.240.103	660.240.140	
450	660.245.106	660.245.143	20
500	660.250.102	660.250.146	
600	660.260.101	660.260.145	
700	660.270.100	660.270.144	
800	660.280.106	660.280.143	
900	660.290.105	660.290.142	
1000	660.291.100	660.291.144	
1200	660.299.102	660.299.146	

Each reference delivered complete and unassembled.



NOTE
to clip off the inner drawer front remove both cover caps and release the locking device.

Higher front inner drawer.

Cabinet width	Stainless steel	Metal grey	
300	660.330.101	660.330.145	
350	660.335.104	660.335.141	
400	660.340.100	660.340.144	
450	660.345.103	660.345.140	20
500	660.350.106	660.350.143	
600	660.360.105	660.360.142	
700	660.370.104	660.370.141	
800	660.380.103	660.380.140	
900	660.390.102	660.390.146	
1000	660.391.104	660.391.141	
1200	660.399.106	660.399.143	

Each reference delivered complete and unassembled.



Double walled rails for inner drawers.

Depth	Stainless steel	Metal grey	
270	658.227.102	658.227.146	
350	658.238.104	658.235.141	
400	658.240.100	658.240.144	20
480	658.248.102	658.248.146	
600	658.260.105	658.260.142	

Each reference consists of one complete set.



Inner drawer hinge.

Half overlay 172° opening	323.410.065	25



Hinge calculations

K = 13	C = K+A+B-E
B = 3	C = 13+2+3-16
A = 2	C = 2mm
E = 16	
C ?	

K = Constant = 15mm

Screw-fix base plate for use with inner drawer hinge.

Height	Steel nickel plated	
0mm	350.210.066	25
2mm	350.212.063	

This hinge allows the inner drawer to be fully extended avoiding any door contact.



Hinges/door

Drawer stabiliser

The Drawer stabiliser device neutralizes lateral movement common to all large drawers
Advisable for use in 800 mm cabinets width and more.
Available for 480 and 600 mm drawer depth.
The assistance runner has 2 pivots, each side, which fits in the main runner fix rail as a template, providing a correct position.

Stabiliser.

	Grey		
Cabinet width	P: 480mm	P: 600mm	
800	654.880.144	655.080.145	
900	654.890.143	655.090.144	10*
1000	654.891.145	655.091.146	
1200	654.899.140	655.099.141	

Each reference consists of 1 set of assistance runners 2 gears, 1 left Bracket, 1 right bracket and the tube.
*10 Sets in 2 boxes: box a: 10 tubes
Box b: 10 sets. Of assistance runners + 2 gears + 1 left bracket + 1 right bracket.

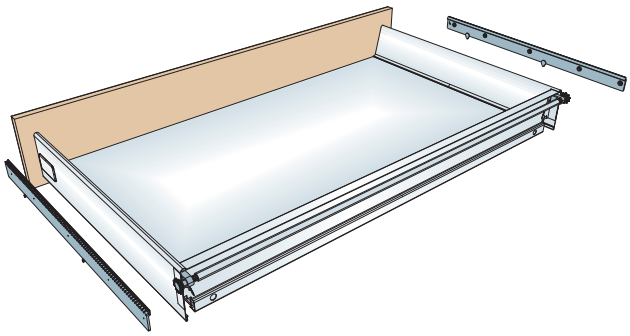

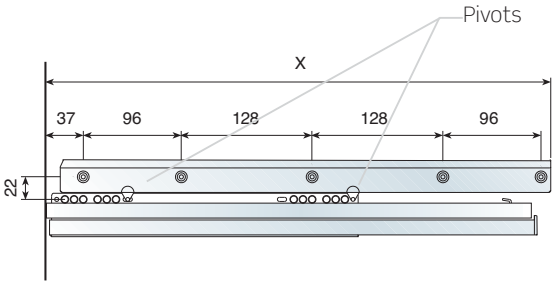



High front drawer



Low front drawer

Drawer depth: P

P	X
480	495
600	615

PLEASE NOTE
For special sizes, order the nearest size above the standard reference and cut it to the cabinet inner width minus 50 mm.

Assembly instructions

1- Position the assistance runner on to the main runner, which must be previously fitted.
2- Clip both brackets onto the metal back.
3- Insert the tube between brackets and fix it with the gears.

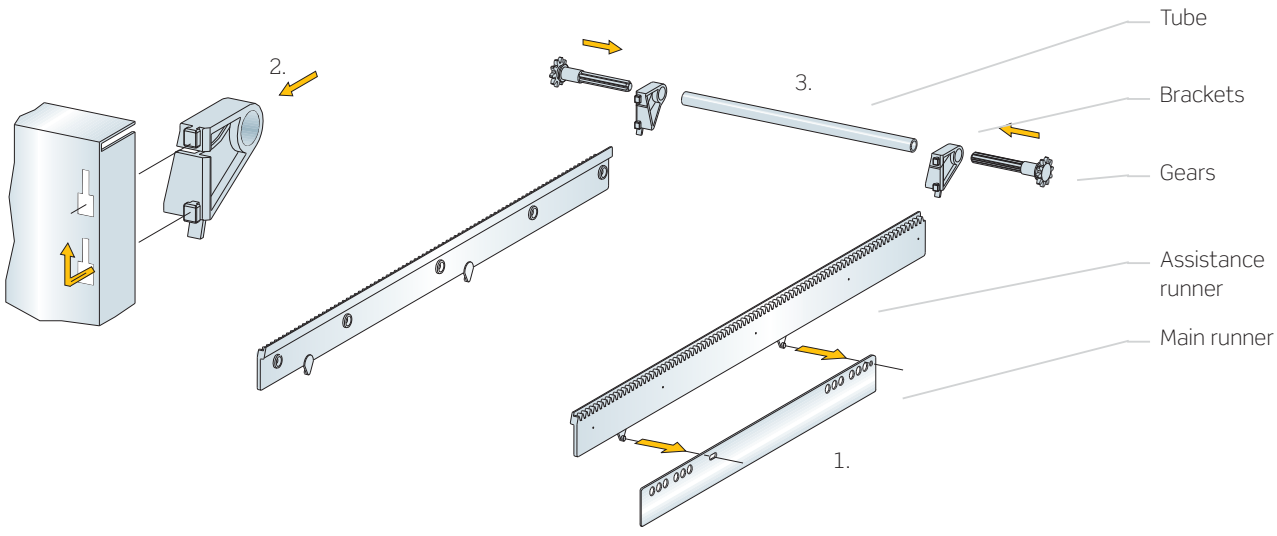

3 ACCESSORIES

Under-sink drawer

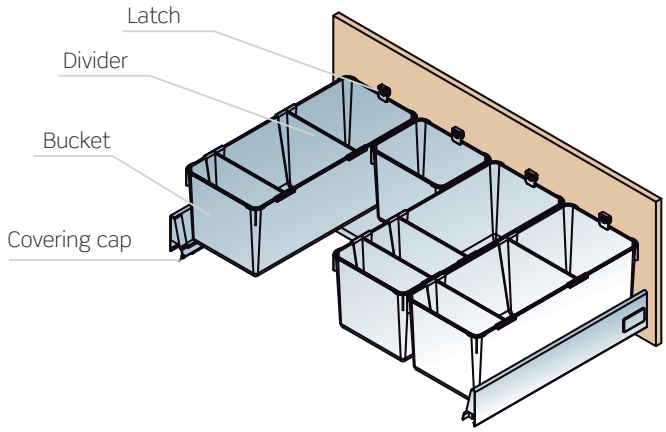

Note
Drawer sides are the standard "ATTRACTION"

Under-sink bucket

		Dividers	grey ral 40.00	
A - Small	205x150x180	-	689.915.140	
B - Medium	460x155x180	2	689.916.146	10
C - Large	460x205x180	2	689.920.140	

Each reference consists of 1 bucket, dividers and 1 lach with 1 screw.



Drawer side covering cap.

Depth of the drawer side	grey ral 40.00	
480	689.748.146	5
600	689.760.142	

Each reference consists of 1 set of caps (left + right).

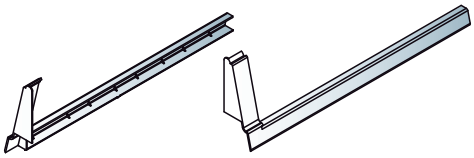

Example of configurations:

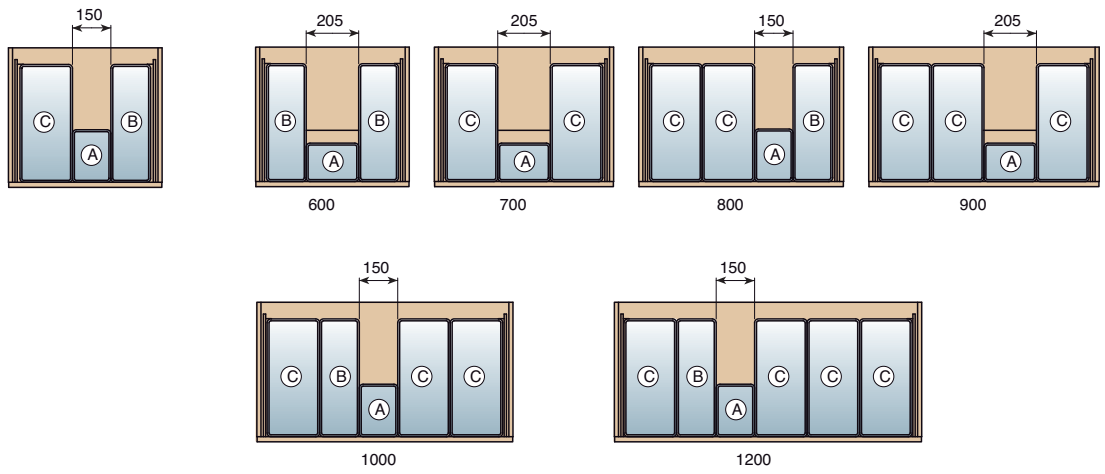

Under-sink drawer

Cut of the wooden side

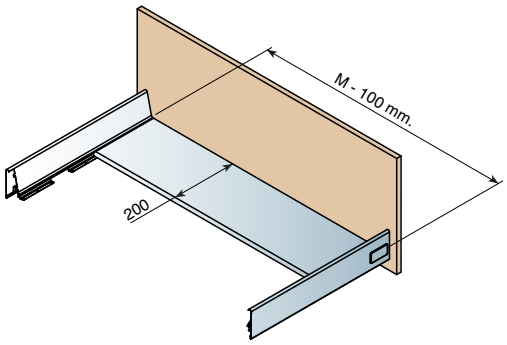

Bucket

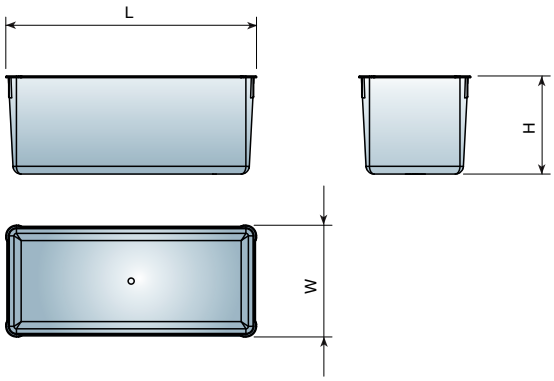

	L length	W width	H height
a - small	205	150	180
b - medium	460	155	180
c - large	460	205	180

Assembly

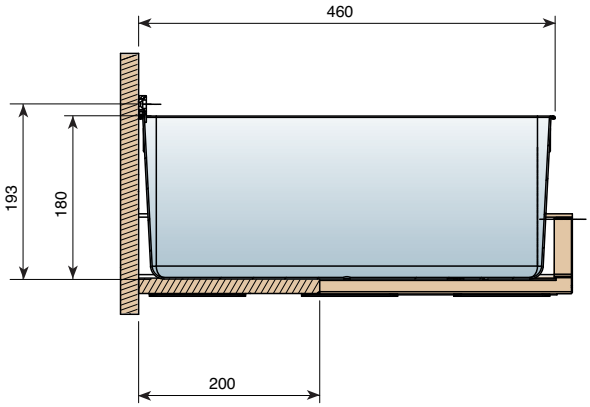

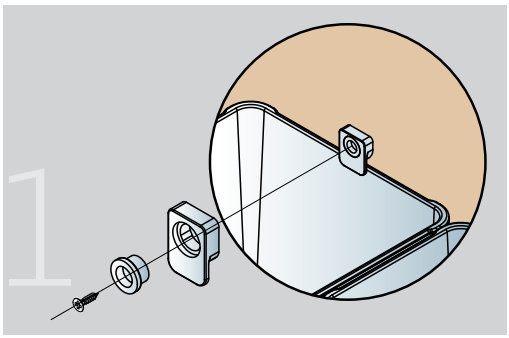

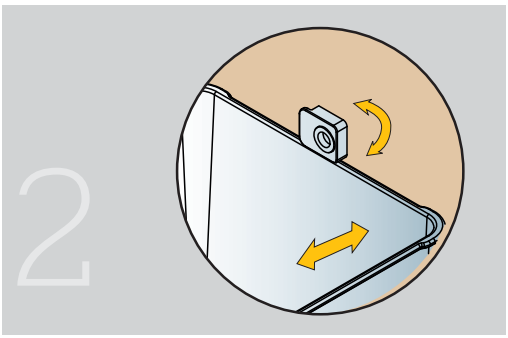

Accessories for high front drawers

Cross dividers for high front drawers.

Single: Cooking utensils & provisions.

Cabinet width	Sides	Joining bracket	Divider	Stainless steel	Metal grey	
300	3	6	7	660.630.106	660.630.143	
350	3	6	9	660.635.102	660.635.146	
400	3	6	9	660.640.105	660.640.142	
450	3	6	9	660.645.101	660.645.145	
500	2	4	8	660.650.104	660.650.141	10*
600	2	4	8	660.660.103	660.660.140	
700	2	4	8	660.670.102	660.670.146	
800	2	4	12	660.680.101	660.680.145	
900	2	4	12	660.690.100	660.690.144	
1000	2	4	16	660.691.102	660.691.146	
1200	2	4	16	660.699.104	660.699.141	

Each reference consists of 1 set of cross divider + connectors + lateral dividers. All unassembled
*10 sets in 2 boxes:
Box a: 10 sets connectors & lateral dividers
Box b: 10 sets of cross dividers

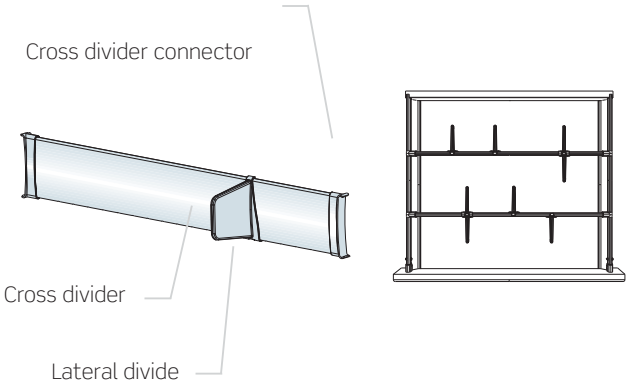

PLEASE NOTE
These accessories are ideal for the storing of pots and pans, as well as storage jars..

Tubular cross divider.

Cabinet width	Divider tube	Abrazadera	Divider	Aluminium matt silver*	Grey	
300	6	6	7	660.030.066	660.030.140	
350	6	6	9	660.035.062	660.035.143	
400	6	6	9	660.040.065	660.040.146	
450	6	6	9	660.045.061	660.045.142	
500	4	4	8	660.050.064	660.050.145	10
600	4	4	8	660.060.063	660.060.144	
700	4	4	8	660.070.062	660.070.143	
800	4	4	12	660.080.061	660.080.142	
900	4	4	12	660.090.060	660.090.141	
1000	4	4	16	660.091.062	660.091.143	
1200	4	4	16	660.099.064	660.099.145	

Each reference consists of 1set of cross dividers + corner joining brackets+ bottle dividers. All unassembled
(*) For stainless steel drawers

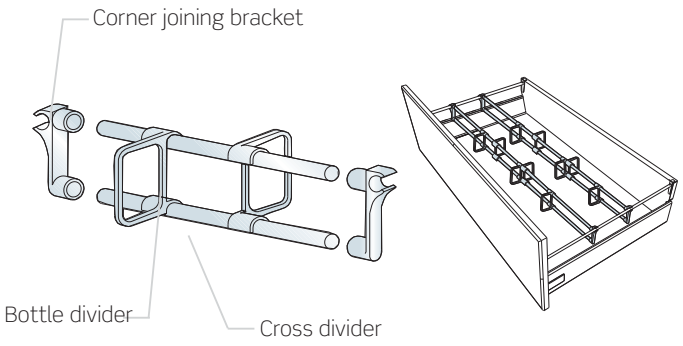

Cutlery tray, knife tray and spice rack

480 mm deep cutlery tray with dividers.

Cabinet width	Short divider	Long divider	Metal grey	
300	3	-	659.630.145	
350	2	2	659.635.141	
400	2	2	659.640.144	
450	3	2	659.645.140	10
500	3	2	659.650.143	
600	4	2	659.660.142	
800	9	4	659.680.140	
900	9	4	659.690.146	
1000	9	4	659.691.141	
1200	12	5	659.699.143	

Each reference consists of 1 cutlery tray + bag of dividers.

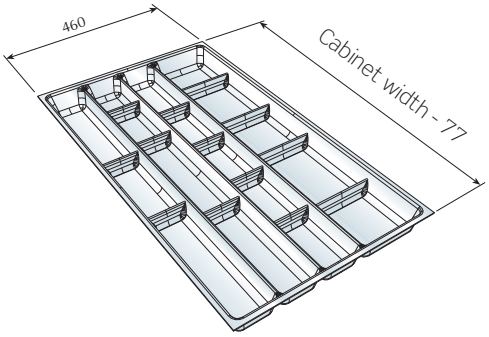

Knife holder.

	Anodized matt silver	
1 piece	656.900.101	1



Spice holder.

	Anodized matt silver	
1 piece	656.950.103	1



4 DRAWER ASSEMBLY JIG

This drawer assembly kit will save time and money.
The full range of drawers can be assembled on this jig. It is particularly ideal for assembling wide drawers.
Set-up times are greatly reduced thanks to the pre-positioned stops.
There is no need to connect it to either an electricity supply or compressed air.

Assembly jig.

1 jig	752.900105

Drawer assembly

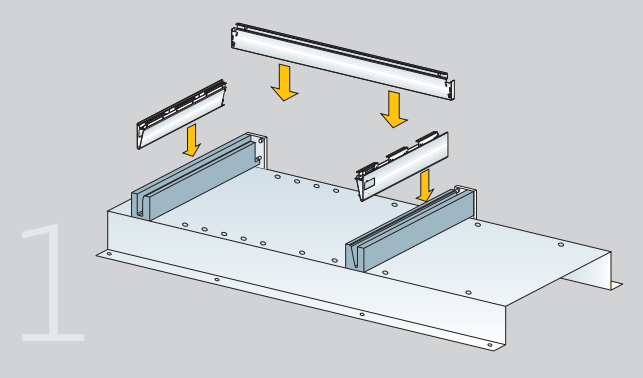

Quick and easy manual assembly.
Simply locate the components in the corresponding positions.

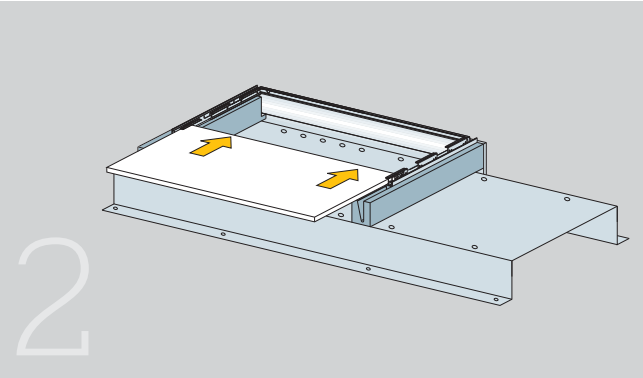

Insert the drawer base.

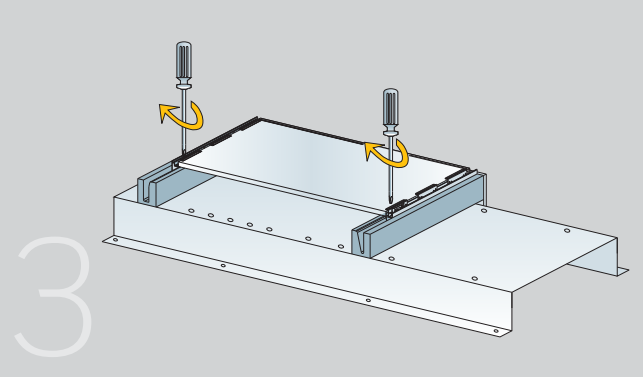

Simply screw the drawer base to the sides, and the drawer will be fully assembled.

5 TECHNICAL INFORMATION

Drawer base dimensions

Base

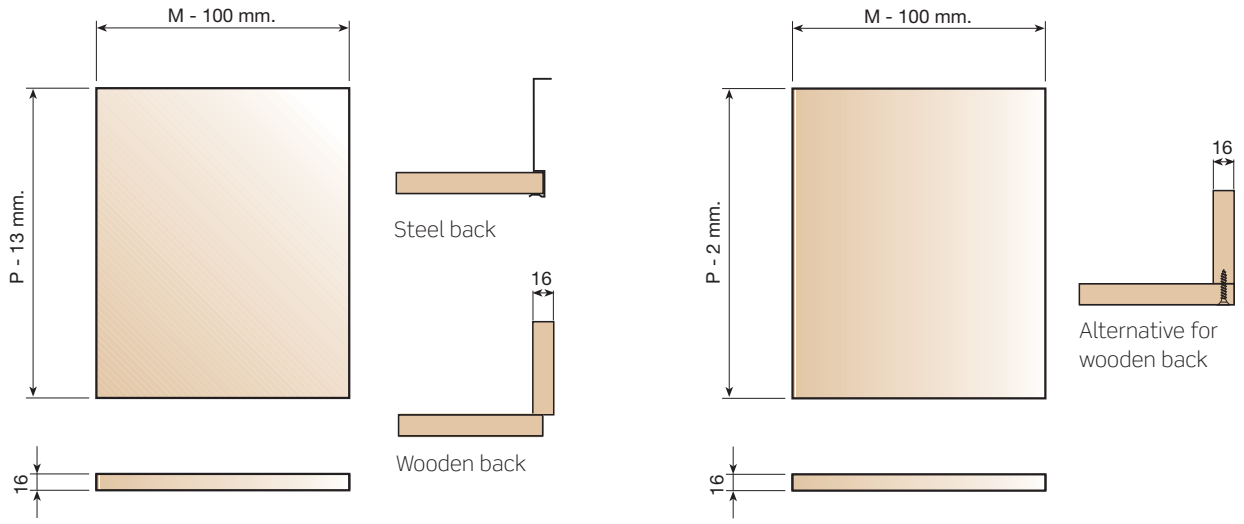

P = Nominal drawer depth
M = Cabinet width

Back

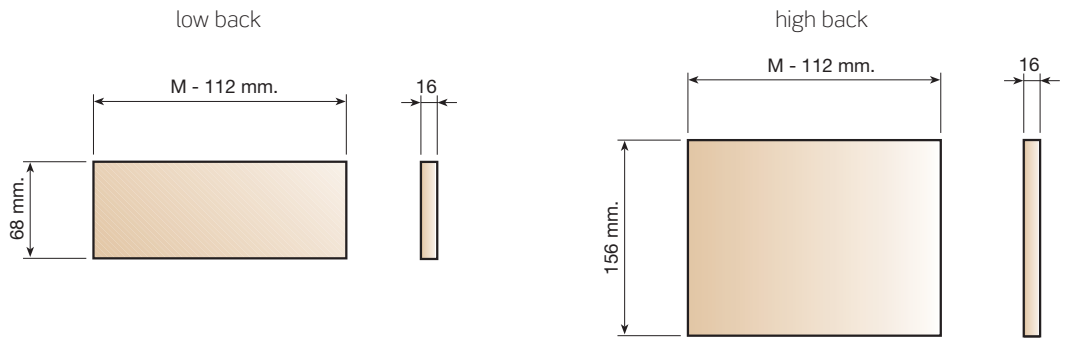

Drilling and positioning for the drawer runner

Full extension runner

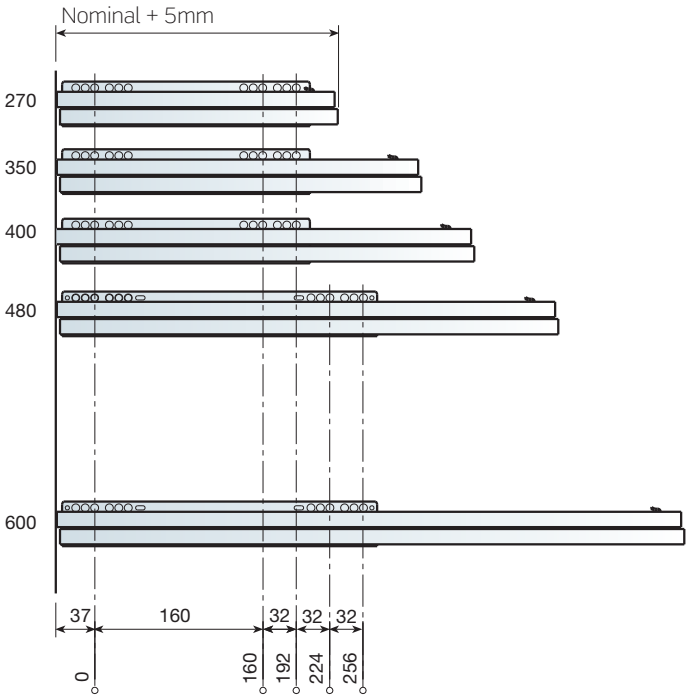

Single extension runner

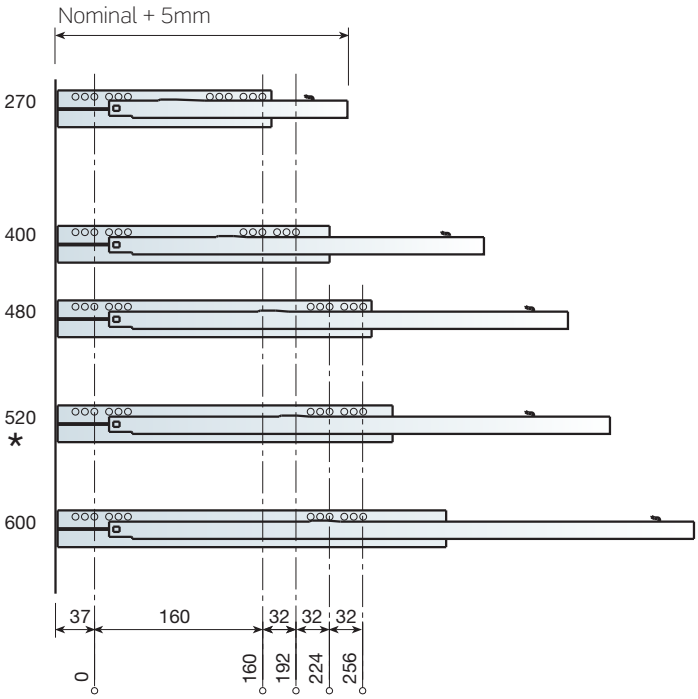

* 520 mm runner for 480 mm drawer, full accessibility runner, needs a free cabinet depth of 520 mm

Inner drawer



PLEASE NOTE
Move the runner backwards using the alternative hole.

Specific case:
Drawer with damper



PLEASE NOTE
Do not use dampers or similar on runners equipped with cushioning systems.

Drilling for the drawer front

INDAmatic

	A (minimun)	H
Gravity closing runner	34	92
Runner with **Indamatic**	44	102

Low front drawer with full extension runner

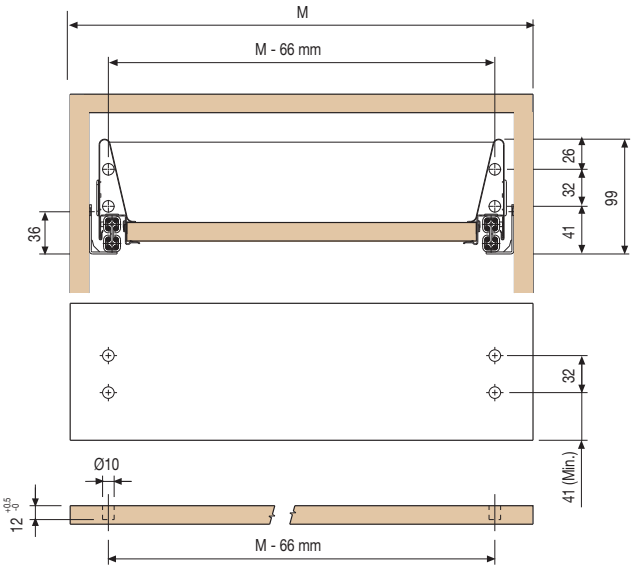

Low front drawer with single extension runner

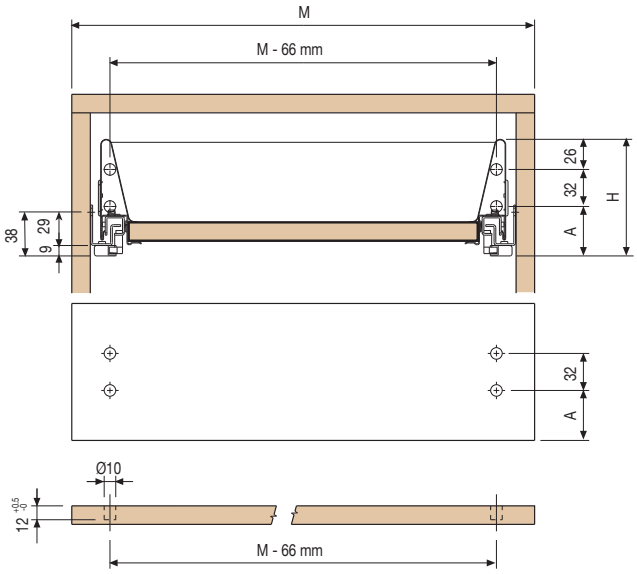

Pan drawer with full extension runner

With tubular rails | With double walled rails

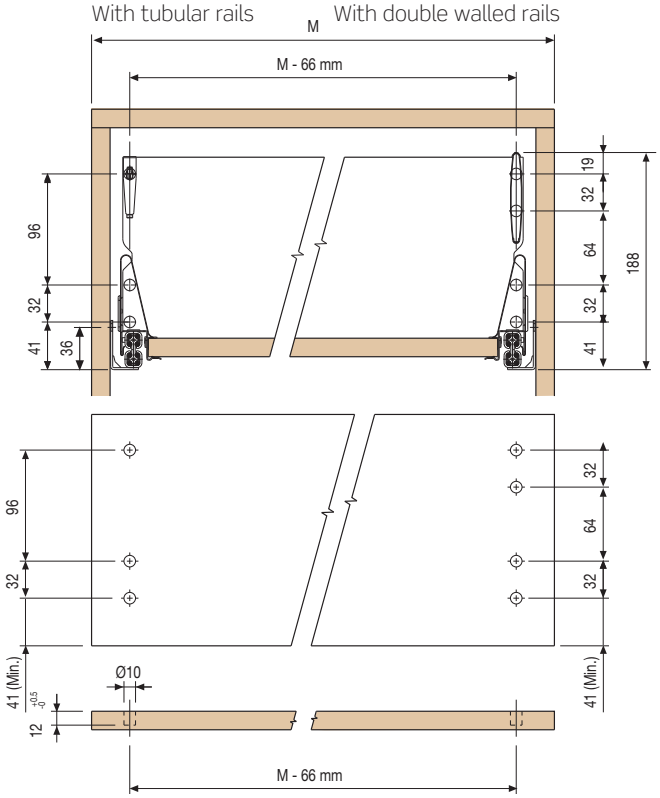

Pan drawer with partial extension runner

With tubular rails | With double walled rails

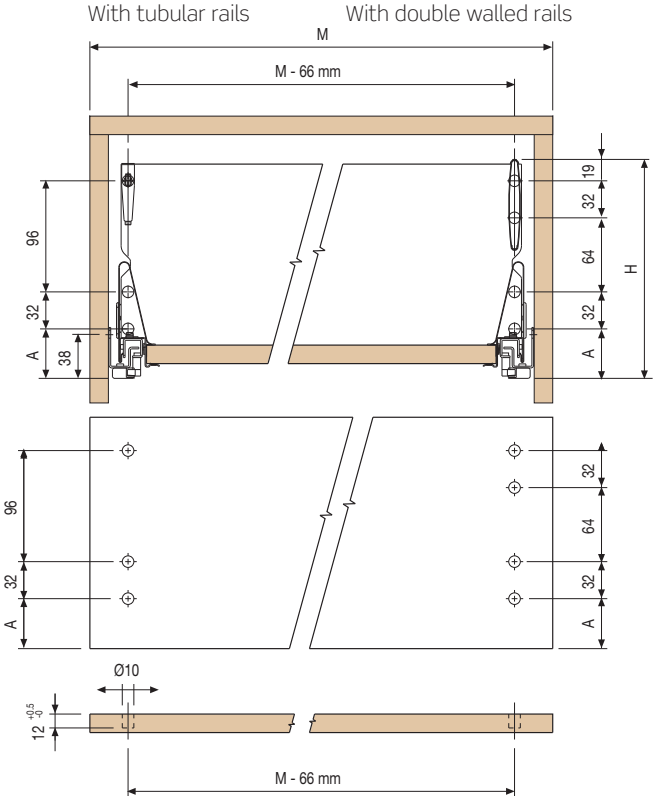

INDAmatic

	A (minimun)	H
Gravity closing runner	34	181
Runner with **Indamatic**	44	191

Drawer assembly

Drawer assembly

Quick and simple manual assembly. Place the drawer on the runners and close it. The drawer itself will automatically clip on to the runner.

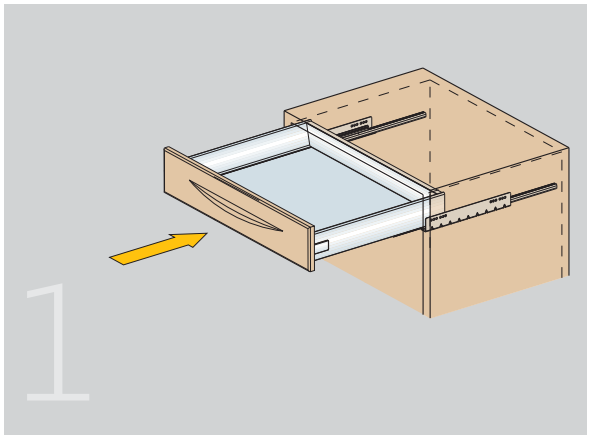

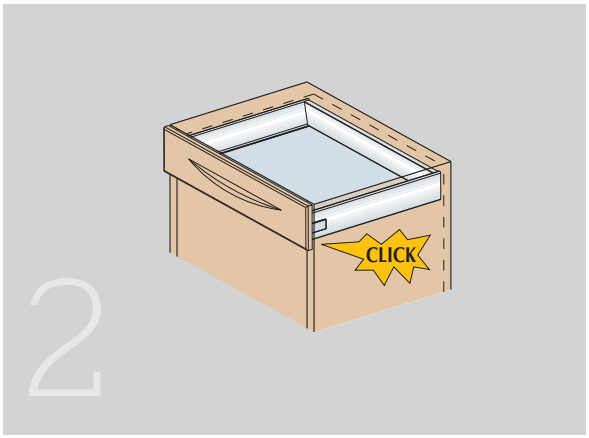

Drawer removal

To remove, simultaneously press both tabs as shown, and pull out the drawer.

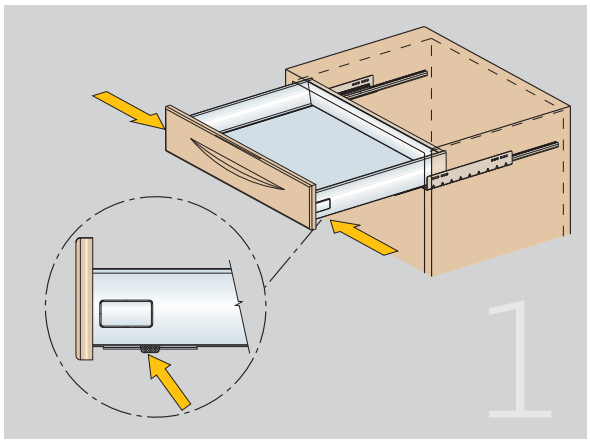

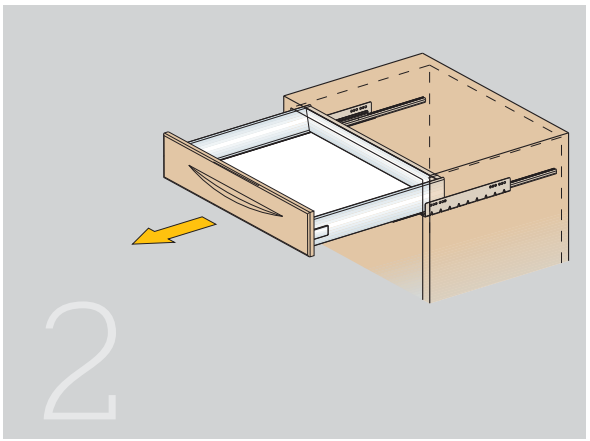

Drawer assembly

Drawer front assembly

Gently insert the drawer front hooks, into their slots.
A spring will drive it to its final position.

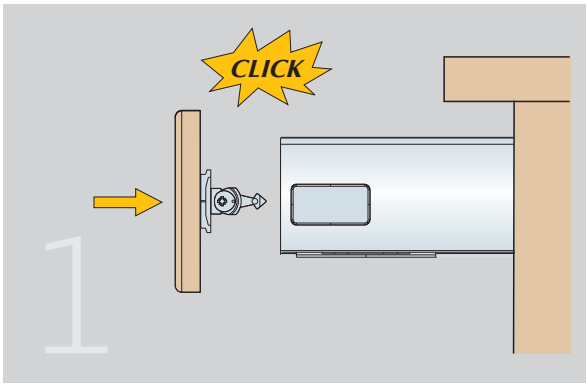

Front alignment

Adjust as shown below.

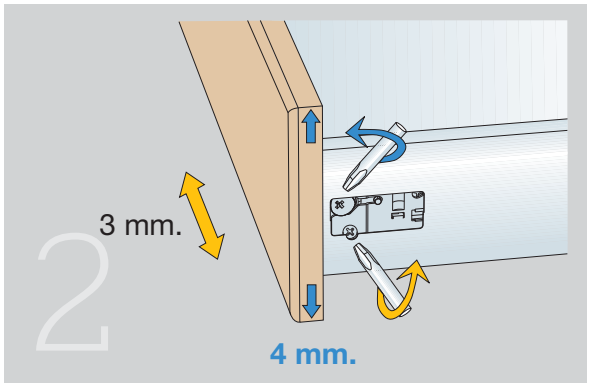

Drawer front unassembly

To remove tilt down and pull out.

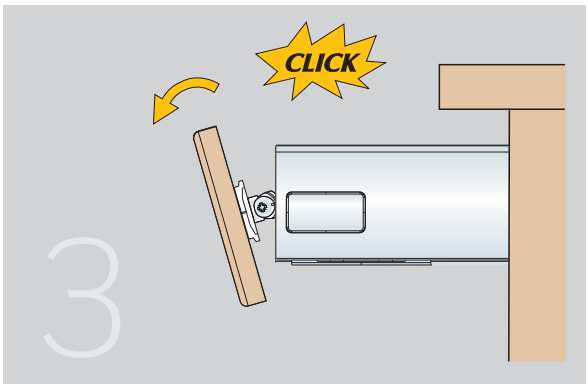

INDAUX
HERSTELLER VON MÖBELBESCHLÄGEN

ALUX SCHUBKASTEN

Mit integriertem Selbsteinzug.

ALUX SCHUBKASTEN

Mit integriertem Selbsteinzug.

ALUX der kombinierbare Aluminium-Schubkasten mit integriertem Selbsteinzug, passend zu den Präzisionsführungen MARC und MARC mit Teleskopauszug.

S.

1 SCHUBKASTENKOMPONENTEN ALUX 444
- Schubkastenseiten 444
- Schubkastenrückwände 444
- Eckverbinder 444
- Frontadapter 444
- Schubkasten Schubkastenführungen 445
- Frontadapter und Abdeckkappe 446

2 ZUBEHÖR SCHUBKASTEN ALUX 447
- Topfschubkasten 447
- Besteckeinsatz 449

3 TECHNISCHE DATEN 450
- ALUX-2 450
- ALUX-3 450

1 SCHUBKASTENKOMPONENTEN **ALUX**

ALUX der kombinierbare Aluminium-Schubkasten mit integriertem Selbsteinzug, passend zu den Präzisionsführungen **MARC** und **MARC** mit Teleskopauszug.

ALUX-3
(Rückwand aus Aluminium)

Schubkastenseiten

ALUX-2, ALUX-3 Schubkastenseiten.

Länge	Silber eloxiert	
270	679.127.514	
400	679.140.512	20
480	679.148.514	

Artikelnummer enthält einen kompletten Satz Schubkastenseiten. Wird mit Schrauben für den Boden geliefert.

ALUX-2
(Rückwand aus Holz)

Schubkastenrückwande

ALUX-3 Rückwand 16 mm Schubkastenseiten.

Korpusbreite	Silber eloxiert	
300	679.230.510	
350	679.235.513	
400	679.240.516	20
450	679.245.512	
500	679.250.515	
600	679.260.514	

ALUX-3 Schubkastenrückwand für Sonderbreiten.

Korpusbreite	Silber eloxiert	
Spezialmaß	679.200.513	20

Bitte bei Bestellung Länge des Profils angeben (siehe hierzu technische Daten). Dieses Profil wird nach mass geliefert und mit Blechtreibschrauben und Eckverbindern an die Seitenwände und die Auflage fixiert.

ALUX-3 Schubkastenrückwand für Sonderbreiten.

Korpusbreite	Silber eloxiert	
2.770	679.205.516	5

Eckverbinder

Eckverbinder.

Grau Ral 7037	732.800.305	20

Artikelnummer enthält 1 rechten und 1 linken Eckverbinder.

Frontadapter

Frontadapter für Innenschubkästen.

Grau Ral 7037	689.100.300	20

Artikelnummer besteht aus 1 linken und 1 rechten Frontadapter.

Schubkastenführungen

MARC Führung mit Selbsteinzugssystem.

L	Auszugsverlust PS	Artikelnummer	
270	65	765.127.031	
400	85	765.140.036	20
480	106	765.148.031	

Länge

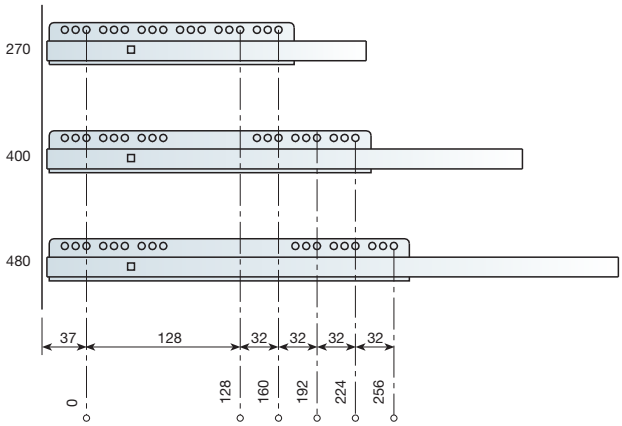



MARC Vollauszug mit vormontiertem Selbsteinzug.

L	Auszugsverlust PS	Artikelnummer	
270	0	765.227.035	
400	0	765.240.033	20
480	0	765.248.035	

Länge

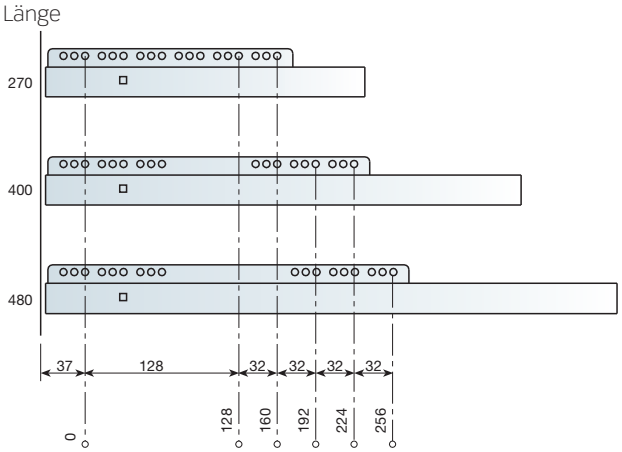



Frontadapter und Abdeckkappe

Verstellbare Frontadapter.

Schraubmontage	689.200.105	100
Dübelmontage Ø8mm	688.300.104	

Artikelnummer enthält einen rechten und einen linken Frontadapter.

Frontbefestigung

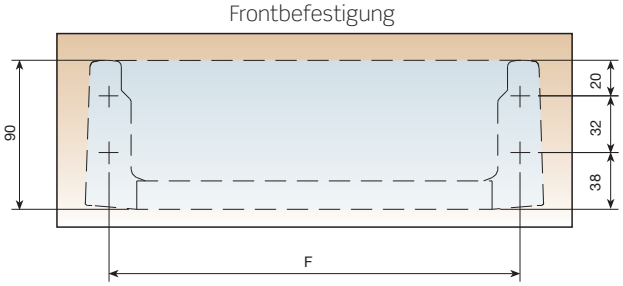

F=MI-45
MI=Korpus-Innenbreite

Komplettfixierung
mit halber Drehung



Abdeckkappe.

Grau Ral 7037	961.310.302	100

Der verstellbare **ALUX**-Frontadapter wurde entworfen, um dessen Verstellung vom Innenraum des Schubkastens aus zu erleichtern. Dies ermöglicht es, den Schubkasten zu verstellen, selbst wenn dieser direkt an eine Wand grenzt. Nach vorgenommener Verstellung wird die Abdeckkappe aufgesetzt.

2 ZUBEHÖR SCHUBKASTEN ALUX

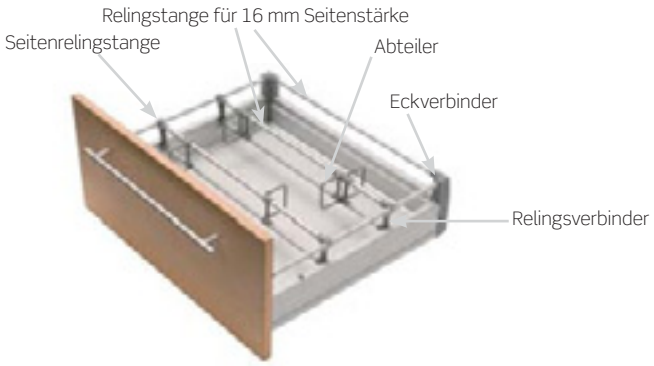

Topfschubkasten

Seitenrelingstange.

Schubkastenlänge	Silber eloxiert	
270	746.227.506	
400	746.240.504	50
480	746.248.506	

Relingstange für 16mm Seitenstärke.

Korpusbreite	Silber eloxiert	
300	746.530.503	
350	746.535.506	
400	746.540.502	50
450	746.545.505	
500	746.550.501	
600	746.560.500	

Relingstange für Sonderlängen.

	Silber eloxiert	
	746.300.505	50

Stangenlänge beim Auftrag bitte angeben: MI=Korpusinnenmaß .
L = MI-77mm.

Abteiler.

Grau Ral 7037	748.100.301	50

ALUX-3 Eckverbinder.

Grau Ral 7037	732.900.302	20

Artikelnummer enthält einen kompletten Satz.

Relingsverbinder.

Grau Ral 7037	732.400.303	100

Topfschubkasten

Relingsfrontadapter.

Grau Ral 7037	730.700.305	50

Artikelnummer enthält einen kompletten Satz. 10mm Tiefenverstellung.

Frontbefestigung = MI - 45
MI = Korpusinnenbreite.

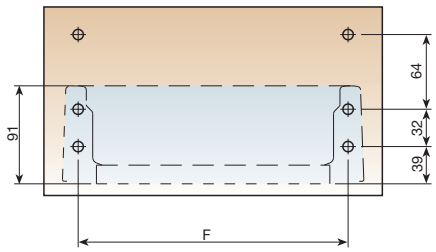

Rückwandadapter für **ALUX-2.**

	Naturbelassen	
	733.100.104	50

Artikelnummer enthält einen kompletten Satz Adapter.

Montage

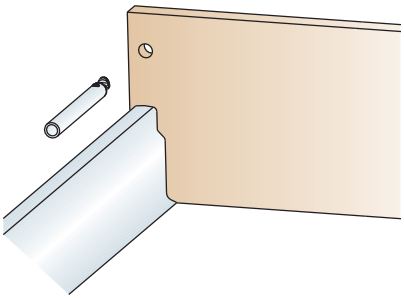

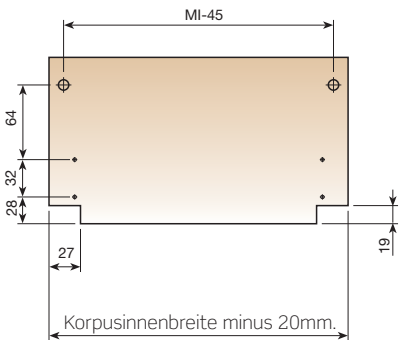

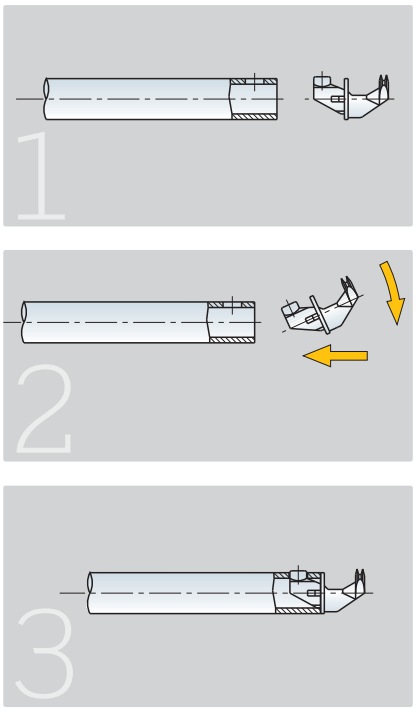

Adapter in das Rohr einsetzen

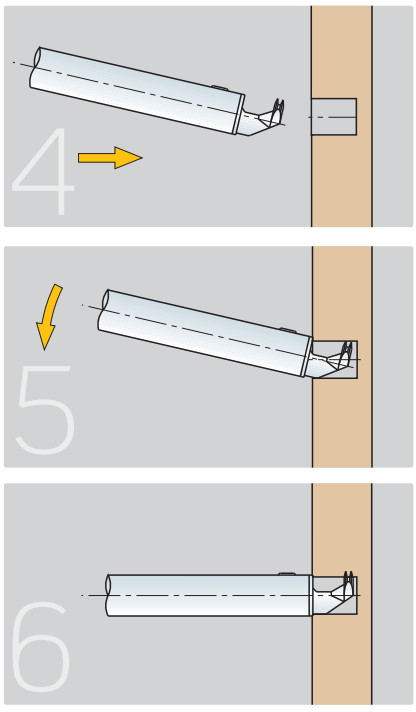

Rohr gemeinsam mit Adapter in einer Ø10x12 - Bohrung montieren

Besteckeinsatz

Besteckeinsatz mit Trennelementen für 480 mm tiefe Schubkästen.

Korpusbreite	Grey Ral 7037	
300	678.730.301	
400	678.740.300	
450	678.745.303	20
500	678.750.306	
600	678.760.305	

Für 480mm tiefe Schubkästen.

Korpusbreite

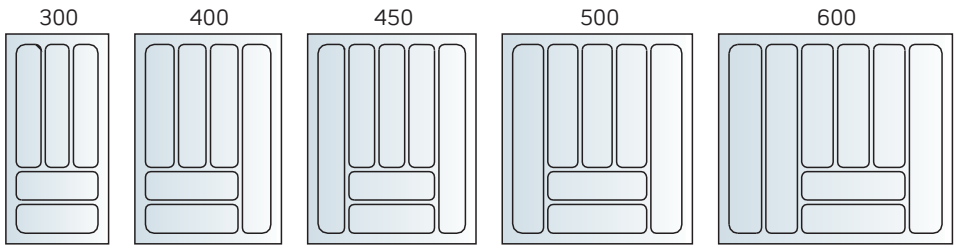

3 TECHNISCHE DATEN

ALUX-2

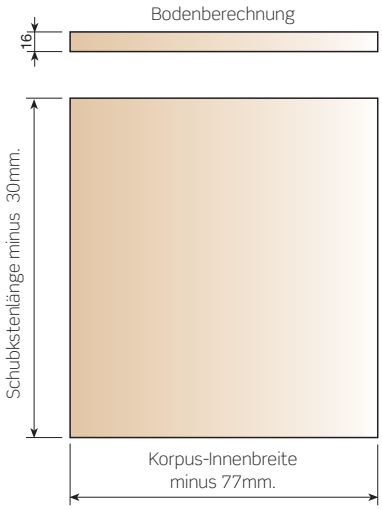

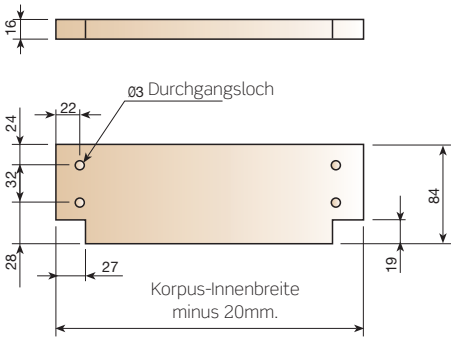

ALUX-3

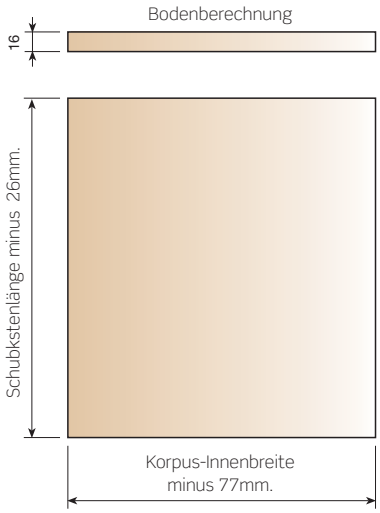



ALUX-2 *Innenschubkasten*

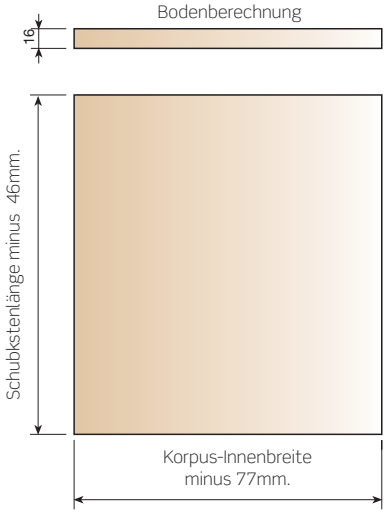

ALUX-3 *Innenschubkasten*

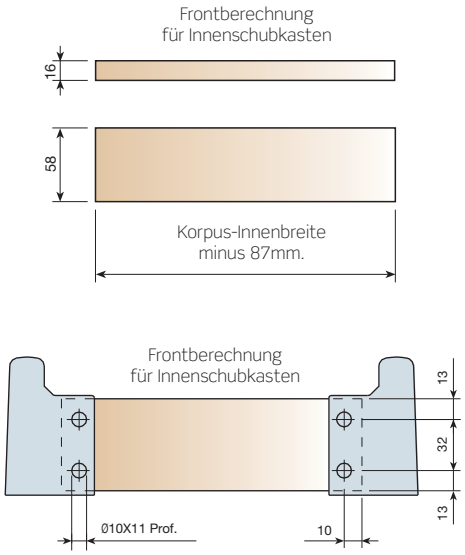

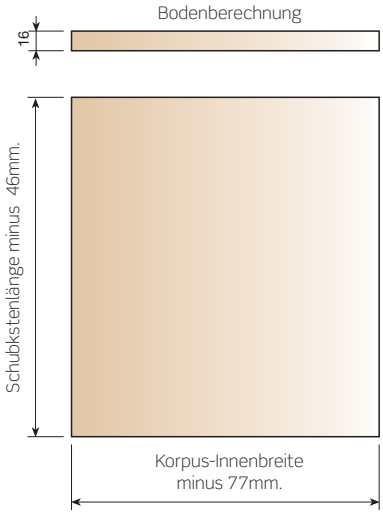

INDAUX
FURNITURE FITTINGS MANUFACTURER

EUROPA
Compact drawer

INDAmatic
gradual closing

EUROPA
Compact drawer

> 300 to 900mm models.
> 4 options of invisible runners.
> Indamatic soft-closing system.

pp.

1 COMPONENTS 454

- Drawers 454
  - *Stainless steel* 454
  - *Plastic coated steel* 454
  - *Plastic moulded* 455
- Special drawer sizes 456
- Runner range 457
  - *Partial extension* 457
  - *Full extension* 459
- Front bracket 460

2 ACCESSORIES 460

- Pots & pans drawer accessories 460
- Cutlery tray 461
- Plastic moulded drawer side cover 461
- Mat 461

1 COMPONENTS

Drawer: *Stainless steel*

Stainless steel drawer.

Module	Stainless steel	
300	684.030.104	
350	684.035.100	
400	684.040.103	10
450	684.045.106	
500	684.050.102	
600	684.060.101	

Drawer: *Plastic coated steel*

Plastic coated steel drawer.

Module	White Ral 9001	Grey	Wood maple-honey	
300	684.130.005	684.130.311	684.130.904	
350	684.135.001	684.135.314	684.135.900	
400	684.140.004	684.140.310	684.140.903	10
450	684.145.000	684.145.313	684.145.906	
500	684.150.003	684.150.316	684.150.902	
600	684.160.002	684.160.315	684.160.901	

Grey plastic coated steel drawer **KIT-5**

Module	Grey / **Indamatic** **	Grey *	
300	686.230.311	684.430.316	
350	686.235.314	684.435.312	
400	686.240.310	684.440.315	1
450	686.245.313	684.445.311	
500	686.250.316	684.450.314	
600	686.260.315	684.460.313	

INDAmatic
gradual closing

(*) Each box contains 5 drawers with the corresponding **MARC** runners (480mm. length), adjustable front brackets and screws.
(*) With **INDAMATIC** gradual soft-closing.

Drawer: *Plastic moulded*

Plastic moulded drawer.

Module	White Ral 9001	Grey Ral 7040	
300	684.530.000	684.530.313	
350	684.535.003	684.535.316	
400	684.540.006	684.540.312	20
450	684.545.002	684.545.315	
500	684.550.005	684.550.311	
600	684.560.004	684.560.310	
900	684.590.001	684.590.314	10

KIT of white Ral 9001 plastic moulded drawers.

	4 drawers KIT		5 drawers KIT		
Module	Self-closing	**Indamatic****	Self-closing	**Indamatic****	
300	684.830.005	686.530.003	684.930.002	686.830.001	
350	684.835.001	686.535.006	684.935.005	686.835.004	10
400	684.840.004	686.540.002	684.940.001	686.840.000	
450	684.845.000	686.545.005	684.945.004	686.845.003	
500	684.850.003	686.550.001	684.950.000	686.850.006	
600	684.860.002	686.560.000	684.960.006	686.860.005	
900	684.890.006	686.590.004	684.990.003	686.890.002	

INDAmatic
gradual closing

(*) Each box contains 5 drawers with the corresponding **MARC** runners (480mm. length), adjustable front brackets and screws.
(*) With **Indamatic** gradual soft-closing.

Cutlery drawer.

Module	White Ral 9001	Grey Ral 7040	
300	684.630.004	684.630.310	
350	684.635.000	684.635.313	
400	684.640.003	684.640.316	20
450	684.645.006	684.645.312	
500	684.650.002	684.650.315	
600	684.660.001	684.660.314	

Cutlery drawer with tray.

Module	White Ral 9001	Grey Ral 7040	
300	684.730.001	684.730.314	
350	684.735.004	684.735.310	
400	684.740.000	684.740.313	5
450	684.745.003	684.745.316	
500	684.750.006	684.750.312	
600	684.760.005	684.760.311	

Special drawer sizes

Plastic moulded drawer sides.

Length of the drawer	White Ral 9001	Grey Ral 7040	
270	683.327.002	683.327.315	
400	683.340.000	683.340.313	20
480	683.348.002	683.348.315	

Calculation of the bottom

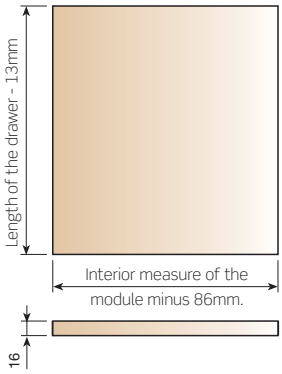

Calculation of the back





Aluminium sides.

Length of the drawer	Silver anodized	
270	683.427.511	
400	683.440.516	20
480	683.448.511	

Calculation of the bottom

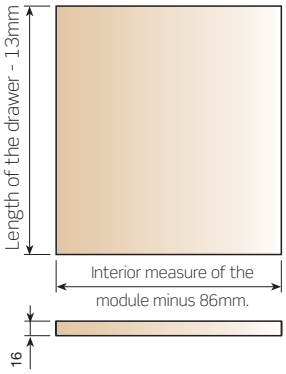

Calculation of the back





Runner range: *partial extension*

MARC runner with drop.

Length	Extension	Ref. Side	
	PS	16mm.	
270	60	768.527.034	
400	80	768.540.032	20
480	90	768.548.034	
520	50	768.552.035	

Panel cavity		
Module	F	long
300	160	
350	210	
400	260	408
450	310	
500	360	
600	460	

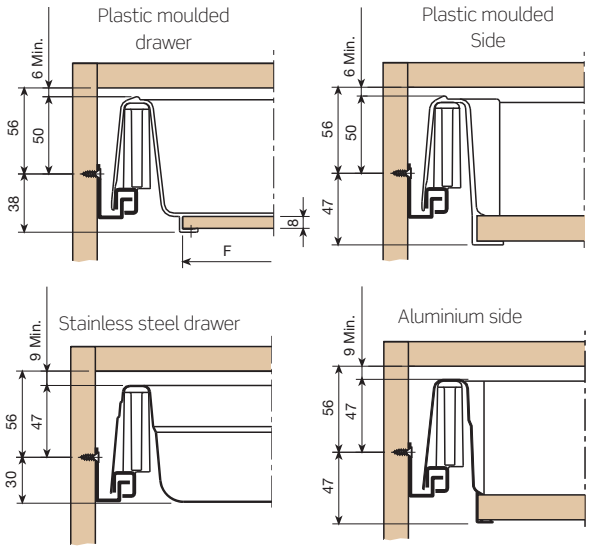

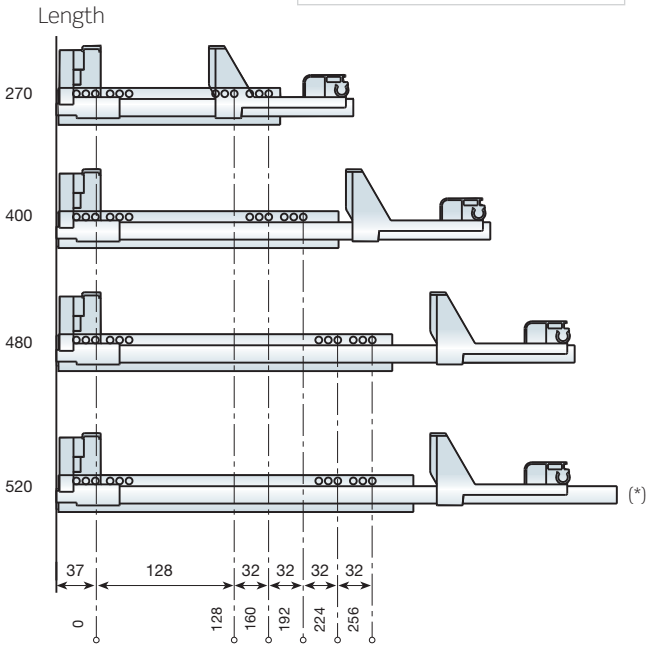

(*)= real length = nominal length+ 5mm except in the 520mm version where real length = nominal length

Runner range: *Partial extension*

MARC runner with self-closing system.

Length	Extension Loss	Ref. Side	Ref. Side	
	PS	15÷16mm.	18÷19mm.	
270	50	767.127.034	768.127.032	
400	70	767.140.032	768.140.030	20
480	70	767.148.034	768.148.032	
520	25	767.152.035	768.152.033	

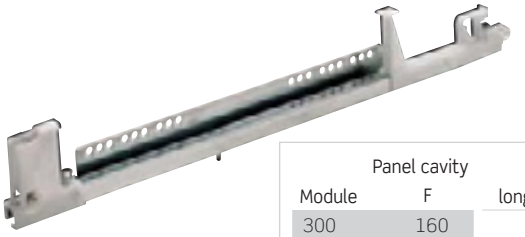

Panel cavity		
Module	F	long
300	160	
350	210	
400	260	408
450	310	
500	360	
600	460	

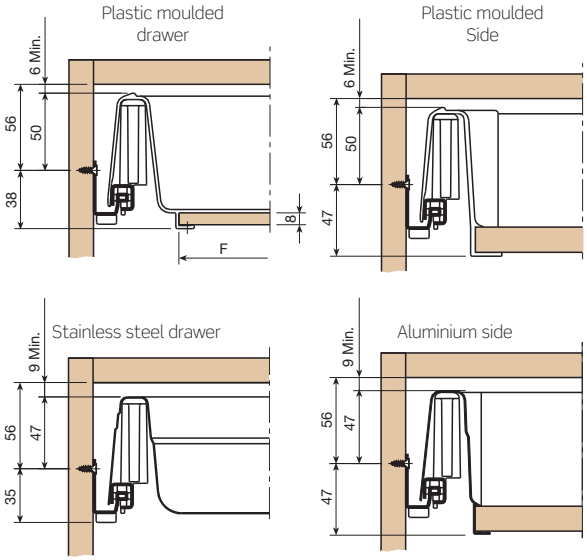

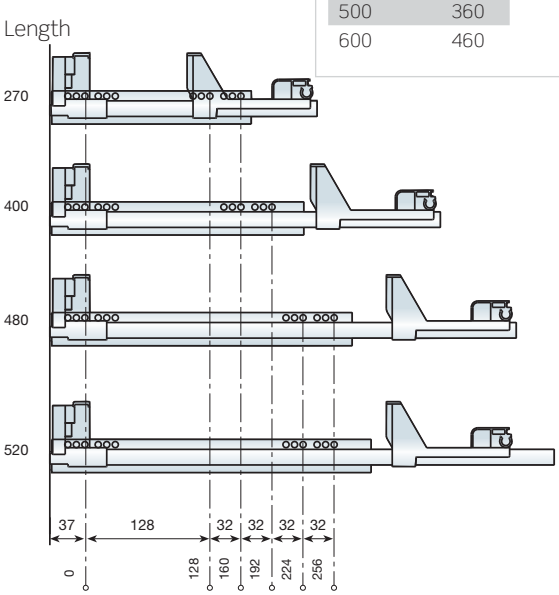

MARC runner with self and soft-closing.

Length	Extension Loss	Ref. Side	
	PS	16mm.	
270	50	768.827.032	
400	70	768.840.030	20
480	92	768.848.032	
520	60	768.852.033	

INDAmatic
gradual closing

(*)= real length = nominal length+ 5mm except in the 520mm version where real length = nominal length

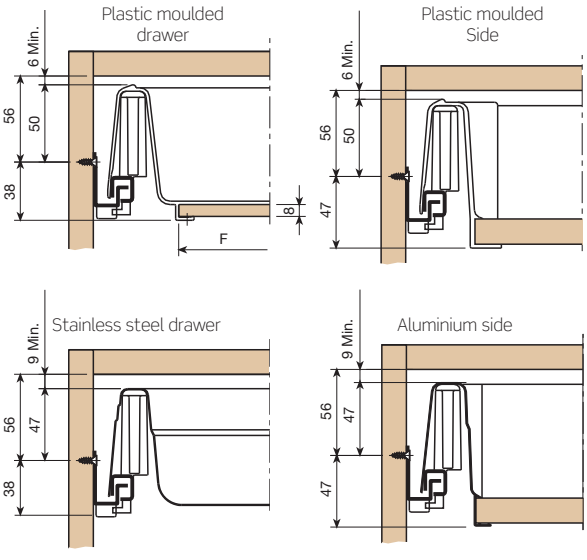

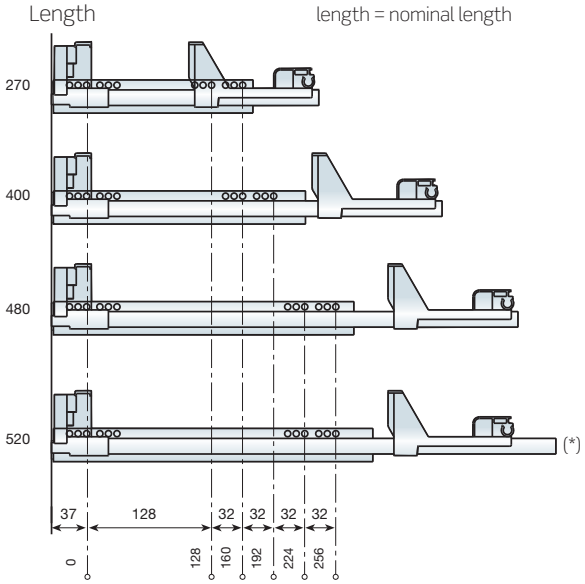

Runner range: *full extension*

Full extension **MARC** with self-closing.

Length	Extension Loss	Ref. Side	Ref. Side	
	PS	15÷16mm.	18÷19mm.	
270	0	767.327.035	768.327.033	
400	0	767.340.033	768.340.031	10
480	0	767.348.035	768.348.033	

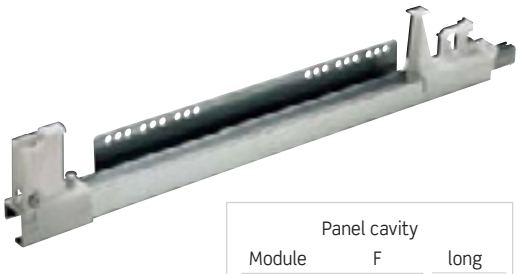

Panel cavity		
Module	F	long
300	160	
350	210	
400	260	408
450	310	
500	360	
600	460	

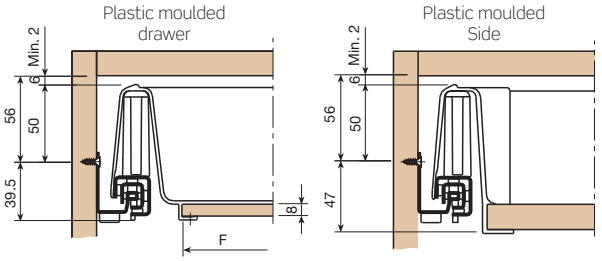

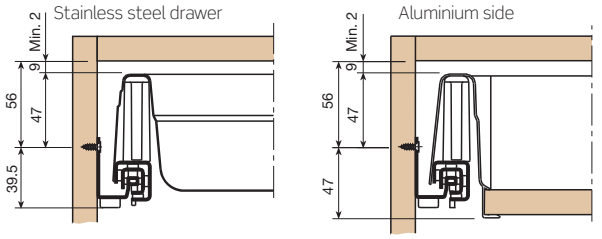

Length

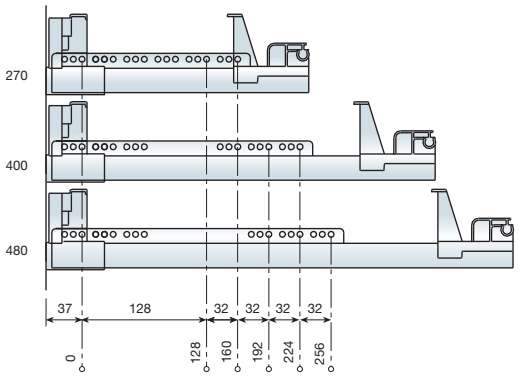

Full extension **MARC** runner with self and soft-closing.

Length	Extension Loss	Ref. Side	Ref. Side	
	PS	15÷16mm.	18÷19mm.	
270	0	767.427.032	768.427.030	
400	0	767.440.030	768.440.035	10
480	0	767.448.032	768.448.030	

INDAmatic
gradual closing

(*)= real length = nominal length + 5mm

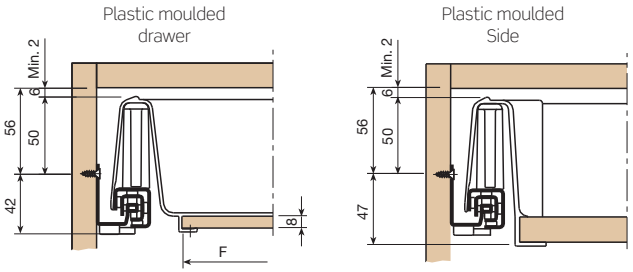

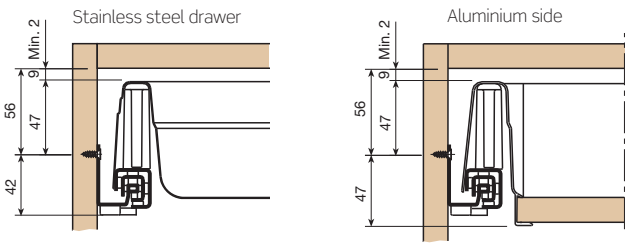

Length (*)

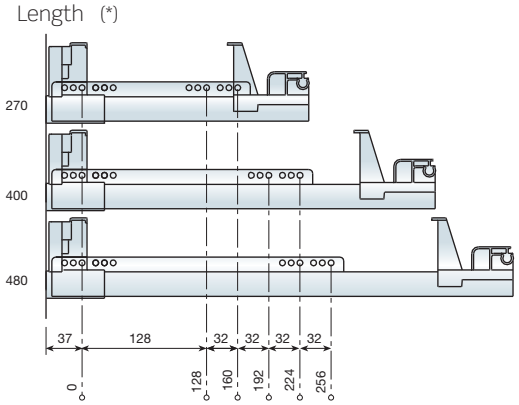

Front Bracket

Front Bracket.

Natural	685.900.106	100

Reference consists of 1 complete set of brackets.



Module	F
300	216
350	266
400	316
450	366
500	416
600	516
700	616
800	716
900	816

Plastic moulded drawer front fixing.



Stainless steel, epoxy coated and plastic coated drawers front fixing.



2 ACCESSORIES

Pots & Pans drawer accessories

Chrome-plated pan drawer extender.

Module	Reference	
300	743.330.125	
350	743.335.121	
400	743.340.124	
450	743.345.120	20
500	743.350.123	
600	743.360.122	
700	743.370.121	
800	743.380.120	
900	743.390.126	

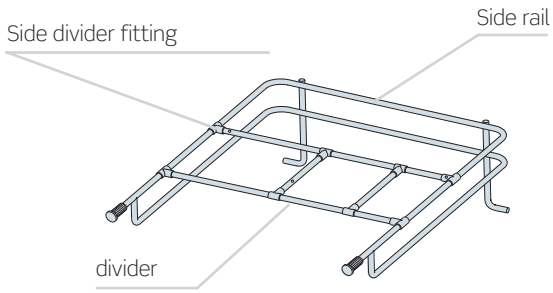

Chrome-plated divider.

Module	Reference	
300	745.830.120	
350	745.835.123	
400	745.840.126	
450	745.845.122	50
500	745.850.125	
600	745.860.124	
700	745.870.123	
800	745.880.122	
900	745.890.121	

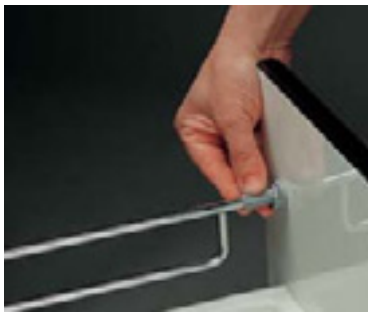

Fixing device.

Finish	Reference	
Grey Ral 7037	732.401.305	100

Front bracket for pan drawer extender.

Finish	Reference	
Grey Ral 7037	730.600.301	100

Reference consists of 1 complete set of brackets..



Cutlery tray

Plastic cutlery tray for steel drawers.

Module	White Ral 9001	Grey Ral 7037	Wood maple-honey	
300	687.530.001	687.530.303	687.530.911	
350	687.535.004	687.535.306	687.535.914	
400	687.540.000	687.540.302	687.540.910	20
450	687.545.003	687.545.305	687.545.913	
500	687.550.006	687.550.301	687.550.916	
600	687.560.005	687.560.300	687.560.915	

Cutlery tray for plastic-moulded drawer.

Module	White	metallic grey	
900	687.590.002	687.590.142	10

Side cover for plastic-moulded drawer

Decor side cover for plastic drawer.

Finish	Reference	
Bright-anodized	664.548.500	100

Reference consists of 1 complete set of decor side covers.

Mat

Mat for steel drawers.

Module	Grey Ral 7037	
300	443.130.306	
350	443.135.302	
400	443.140.305	
450	443.145.301	20
500	443.150.304	
600	443.160.303	
900	443.190.300	

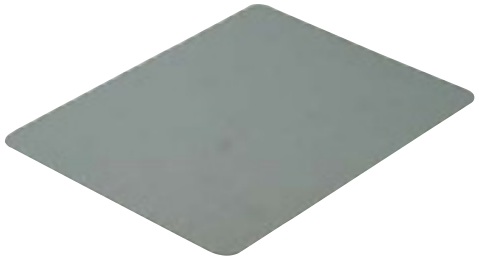

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

EUROPA 2

Compact multi-modular double-walled drawer

The whole range

The EUROPA-2 drawer has an extensive range to help solve all your bathroom and kitchen organisational needs: high and low drawers; drawer with enclosures, with tubes, modular cutlery holders, pan holders, dividers for organising space, dish holders...

The EUROPA-2 drawer is available in: coated steel, stainless steel or plastic (which can be personalised).

A pre-asssembled functional drawer easy to fit, available in 12 sizes and 3 depths (270,480, 600mm).

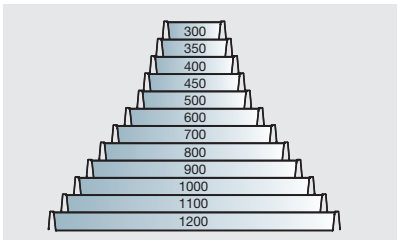

The EUROPA-2 interior dividing systems enable the drawers storage space to be optimised fully.

The cutlery holders are equipped with dividers that can be placed anywhere, customizing your own preferences.

The dividers make storage easier and keep the pan drawer tidy, so that the contents remain neatly stored and accessible.

Full extension and excellent stacking



Stacking folded drawers 84 drawers in only 1 metre height.



Stacking inserted drawers 47 drawers in 1 metre height.

INDAmatic
gradual closing

Full extension runner equipped with **Indamatic**, the gradual solft closing system by **Indaux**.

EUROPA-2

INDAmatic gradual closing

Compact multi-modular double-walled drawer

New range of multi-modular drawers with **Indamatic**.
Two versions: folded drawers and plastic molded drawers.
Available in coated steel, stainless steel or plastic. 12 sizes (300 to 1200mm.) and 3 depths (270, 480, 600mm). Compactly stacked for easy transport and storage.

pp.

1 COMPONENTES 472

- Drawers 472
  - *Steel and steel PVC coated* 472
  - *Plastic molded* 473
- Runner range 474
- Runner support bracket 474
- Front fixing brackets 475

2 ACCESSORIES 475

- Accessories for tubular high front drawers 475
- Accessories for high front drawers with dividers 477
- Cutlery Tray 478
- Support 478
- Drawer stabiliser 479

3 TECHNICAL INFORMATION 480

- Drawer front drilling template 480
- Drawer assembly 481
- Front alignment 481
- Assembly for tubular high front drawers 482
- High drawer assembly with dividers 483

1 COMPONENTS

Drawer: *Stainless steel and steel PVC coated*

270mm deep steel drawer.

Module	Stainless steel	Grey	
300	678.430.104	678.430.314	
350	678.435.100	678.435.310	
400	678.440.103	678.440.313	10
450	678.445.106	678.445.316	
500	678.450.102	678.450.312	



480mm deep steel drawer.

Module	Stainless steel	Grey	
300	678.530.101	678.530.311	
350	678.535.104	678.535.314	
400	678.540.100	678.540.310	
450	678.545.103	678.545.313	10
500	678.550.106	678.550.316	
600	678.560.105	678.560.315	
700	678.570.104	678.570.314	
800	678.580.103	678.580.313	
900	678.590.102	678.590.312	5
1000	678.591.104	678.591.314	
1200	678.599.106	678.599.316	

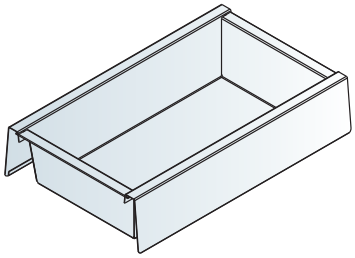

600mm deep steel drawer.

Module	Stainless steel	Grey	
600	678.660.102	678.660.312	
900	678.690.106	678.690.316	5
1200	678.699.103	678.699.313	

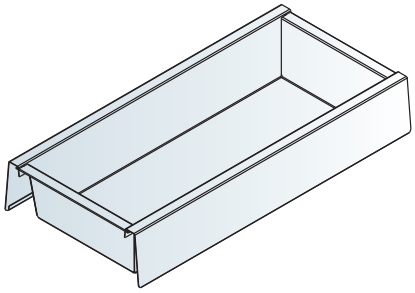

480mm steel drawer in KIT-5.

Module	Stainless steel	Grey	
300	686.630.103	686.630.313	
350	686.635.106	686.635.316	
400	686.640.102	686.640.312	
450	686.645.105	686.645.315	1
500	686.650.101	686.650.311	
600	686.660.100	686.660.310	
800	686.680.105	686.680.315	

Each box contains 5 drawers with their corresponding runners, front fixing brackets and screws.

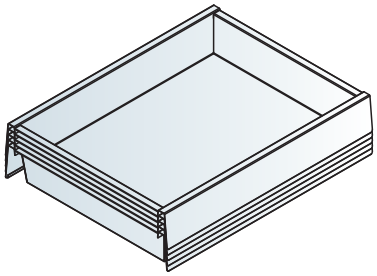

480mm steel drawer in KIT-1.

Module	Grey		Module	Grey	
300	686.130.141		700	686.170.144	
350	686.135.144		800	686.180.143	
400	686.140.140	1	900	686.190.144	1
450	686.145.143		1000	686.191.144	
500	686.150.146		1200	686.199.146	
600	686.160.145				

Each box contains 1 drawer with their corresponding runners, front fixing brackets and screws, and a assembly instructions template.

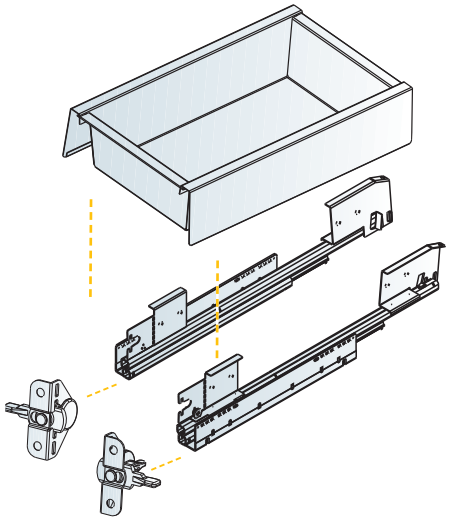

Drawer: *Plastic molded*

480mm plastic molded drawer.

Module	White Ral 9001	Grey Ral 7040	
300	689.430.000	689.430.313	
350	689.435.003	689.435.316	
400	689.440.006	689.440.312	20
450	689.445.002	689.445.315	
500	689.450.005	689.450.311	
600	689.460.004	689.460.310	
900	689.490.001	689.490.314	10

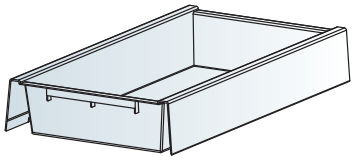

480mm plastic molded drawer **KIT-4**.

Module	White Ral 9001	Grey Ral 7040	
300	689.530.004	689.530.310	
350	689.535.000	689.535.313	
400	689.540.003	689.540.316	
450	689.545.006	689.545.312	1
500	689.550.002	689.550.315	
600	689.560.001	689.560.314	
900	689.590.005	689.590.311	

Each box contains 4 drawers with their corresponding runners, front fixing brackets and screws.

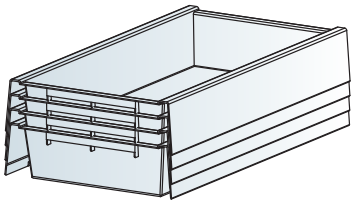

480mm plastic molded drawer **KIT-5**.

Module	White Ral 9001	Grey Ral 7040	
300	689.630.001	689.630.314	
350	689.635.004	689.635.310	
400	689.640.000	689.640.313	
450	689.645.003	689.645.316	1
500	689.650.006	689.650.312	
600	689.660.005	689.660.311	
900	689.690.002	689.690.315	

Each box contains 4 drawers with their corresponding runners, front fixing brackets and screws.

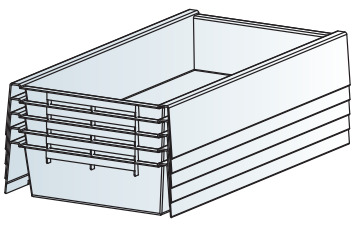

Runner range: *Full extension*

Full extension with self-closing.

Length	Ref. Side 15÷16mm.	Ref. Side 18÷19mm.	
270	664.727.033	664.827.030	
480	664.748.033	664.848.030	10
600	664.760.036	664.860.033	

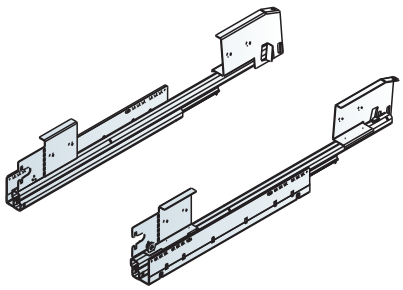





INDA-matic
gradual closing

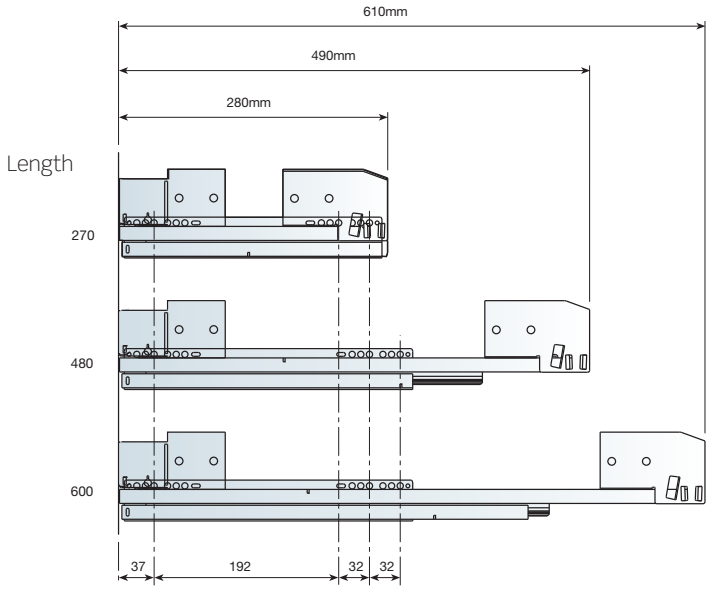

Runner support bracket

Runner support bracket.

	Length 480 / 600	
Grey Ral 7040	748.700.315	10



Note
Increases the load capacity of the runner from 30 to 45kg.

Assembly

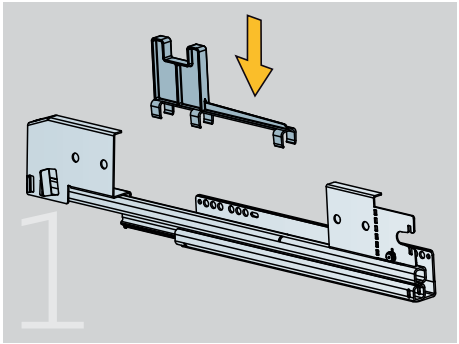

Lean the support against the mobile rail.

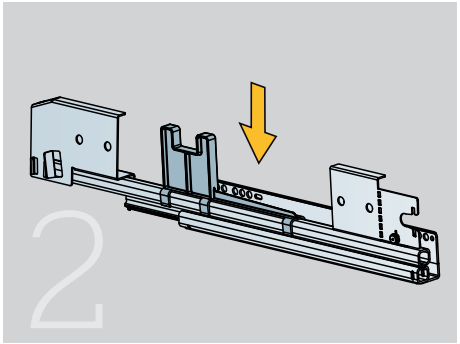

Press the support to clip it into the runner.

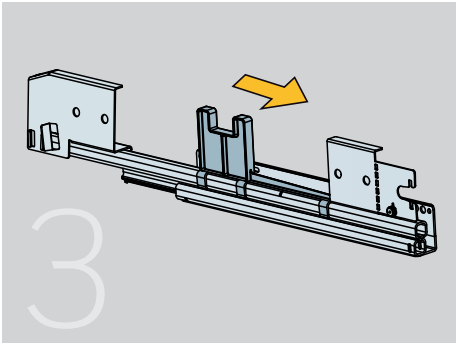

Slide the support till the front metal bracket.

Front fixing brackets

Adjustable front fixing brackets.

Grey Ral 7040	674.000.316	100

Each reference consists of a complete set of fixing brackets.

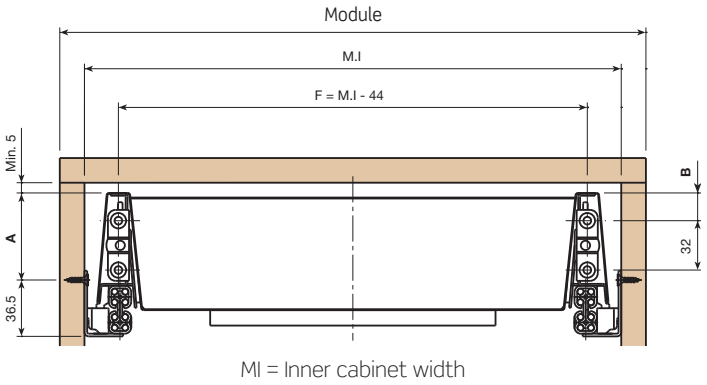

MI = Inner cabinet width

Front Fixing brackets

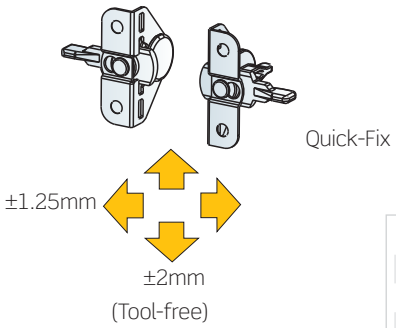

	A	B
Steel drawer	56.5	18
Plastic molded drawer	58	19.5

NOTE:
Extension "F" is the same for all the sides 15/16 and 18/19mm of the module.
It is compensated by the runners.

Module	F
300	224
350	274
400	324
450	374
500	424
600	524
700	624
800	724
900	824
1000	924
1200	1124

2 ACCESSORIES

Accessories for tubular high front drawers

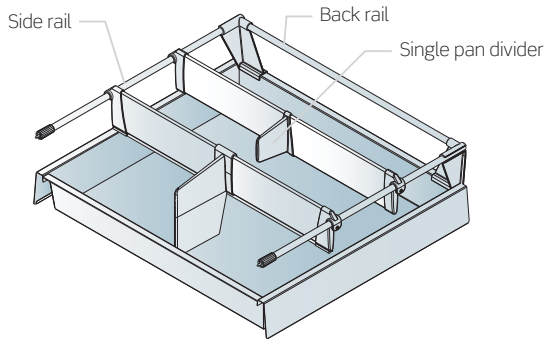

Side rail.

Depth	Grey Ral 7040	
270	733.927.316	
480	733.948.316	10
600	733.960.312	

Each reference is made of 1 set of side rails, 1 set of back supports and 1 set of upper brackets. All unassembled.

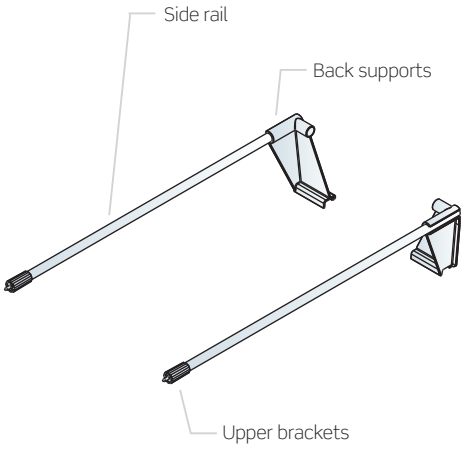

Back rail.

Module	L	Grey Ral 7040	
300	191	747.130.311	
350	241	747.135.314	
400	291	747.140.310	
450	341	747.145.313	
500	391	747.150.316	
600	491	747.160.315	10
700	591	747.170.314	
800	691	747.180.313	
900	791	747.190.312	
1000	891	747.191.314	
1200	1091	747.199.316	

Tubes needed for different sides.



Accessories for tubular high front drawers

Single divider for tubular high front drawers

Module	Cross Divider	Connector	Divider	Stainless steel	Grey Ral 7040	
300	3	6	7	648.430.101	648.430.311	
350	3	6	9	648.435.104	648.435.314	
400	3	6	9	648.440.100	648.440.310	
450	3	6	9	648.445.103	648.445.313	
500	2	4	8	648.450.106	648.450.316	10
600	2	4	8	648.460.105	648.460.315	
700	2	4	8	648.470.104	648.470.314	
800	2	4	12	648.480.103	648.480.313	
900	2	4	12	648.490.102	648.490.312	
1000	2	4	16	648.491.104	648.491.314	
1200	2	4	16	648.499.106	648.499.316	

Every ref. has transversal enclosures, connectors, dividers and screws. Everything unassembled.
*10 sets in separate boxes. Each box A contains 10 bags with plastic accessories and a bag of screws. The transversal enclosures are available in boxes of 10 units.

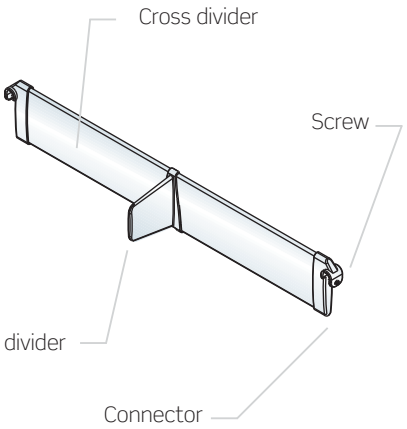

Accessories for high front drawers with dividers

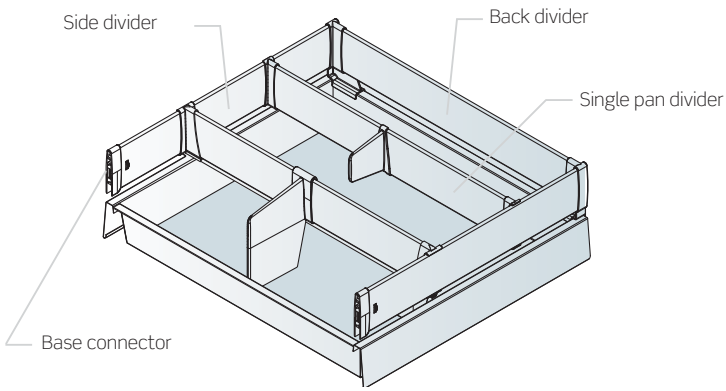

Side divider.

Depth	Stainless steel	Grey Ral 7040	
270	648.327.105	648.327.315	
480	648.348.105	648.348.315	10
600	648.360.101	648.360.311	

Each reference is made up of 2 dividers with fixing brackets and 1 set of back supports. Back supports are unassembled.

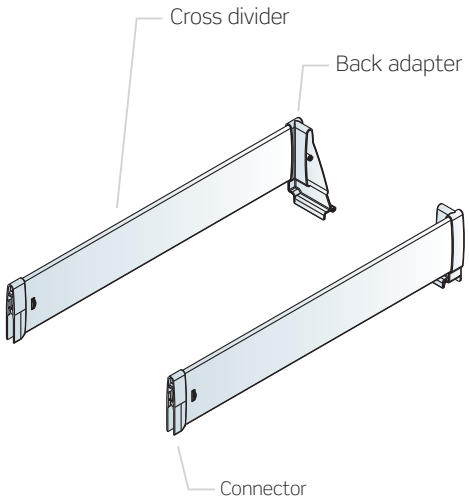

Accessories for high front drawers with dividers

Back divider.

Module	L	Stainless steel	Grey Ral 7040	
300	198	648.230.100	648.230.310	
350	248	648.235.103	648.235.313	
400	298	648.240.106	648.240.316	
450	348	648.245.102	648.245.312	
500	398	648.250.105	648.250.315	
600	498	648.260.104	648.260.314	10
700	598	648.270.103	648.270.313	
800	698	648.280.102	648.280.312	
900	798	648.290.101	648.290.311	
1000	898	648.291.103	648.291.313	
1200	1098	648.299.105	648.299.315	



Double walled rail front bracket. Quick assembly.

1 set	658.100.100	100

Each reference consists of 2 brackets with expand dowels.



Double walled rail front bracket. Screw mounting.

1 set	658.150.102	100

Each reference consists of 2 brackets.



Single: Cooking utensils & provisions

Cabinet width	Sides	Joining bracket	Divider	Stainless steel	Grey Ral 7040	
300	3	6	7	648.630.102	648.630.312	
350	3	6	9	648.635.105	648.635.315	
400	3	6	9	648.640.101	648.640.311	
450	3	6	9	648.645.104	648.645.314	
500	2	4	8	648.650.100	648.650.310	
600	2	4	8	648.660.106	648.660.316	10*
700	2	4	8	648.670.105	648.670.315	
800	2	4	12	648.680.104	648.680.314	
900	2	4	12	648.690.103	648.690.313	
1000	2	4	16	648.691.105	648.691.315	
1200	2	4	16	648.699.100	648.699.310	

Each reference consists of 1 set of cross divider + connectors + lateral dividers. All unassembled.
*10 sets in 2 boxes:
Box a: 10 sets connectors & lateral dividers
Box b: 10 sets of cross dividers

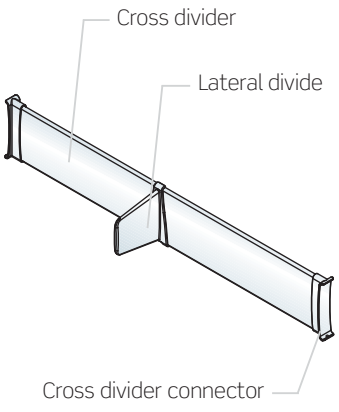

PLEASE NOTE
These accessories are ideal for the storing of pots and pans, as well as storage jars.

Cutlery tray

480mm deep cutlery tray with dividers.

Cabinet width	Short divider	Long divider	Metal grey	
300	3	0	664.930.140	
350	2	2	664.935.143	
400	2	2	664.940.146	
450	3	2	664.945.142	
500	3	2	664.950.145	10
600	4	2	664.960.144	
800	9	4	664.980.142	
900	9	4	664.990.141	
1000	9	4	664.991.143	
1200	12	5	664.999.145	

Each reference consists of 1 cutlery tray and a bag of dividers.

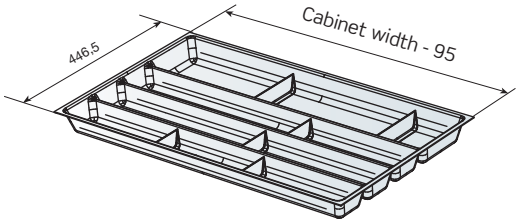

Support

Support. metal drawer front fixing bracket.

Grey Ral 7040	748.600.311	50

It is recommended to use this bracket for curved front surfaces in case of curved fronts.



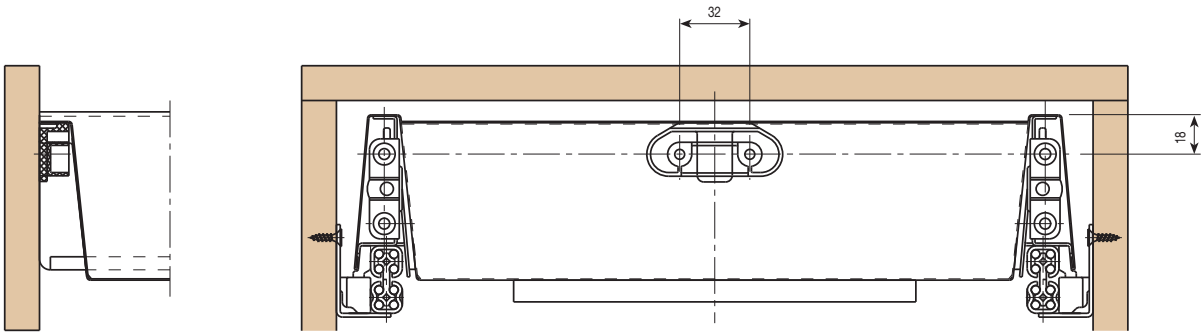

Drawer stabiliser

The Drawer stabiliser device neutralizes lateral movement common to all large drawers.
Advisable for use in 800mm cabinets width and more.
Available for 480 and 600mm depths for lower front drawers and pan drawers.
The assistance runner has 2 pivots each side, which fit in the main runner fix rail as a template, providing the correct position.

Stabiliser.

	Grey		
Cabinet width	480mm.	600mm.	
800	650.780.314	650.880.311	
900	650.790.313	650.890.310	10
1000	650.791.315	650.891.312	
1200	650.799.310	650.899.314	

Each ref. is made up of 1 rod, 2 racks, 2 gear sets and 4 lateral supports.
*10 units in 2 boxes:
box a: 10 rods and 20 racks.
box b: 20 gear sets and 40 lateral supports.
Box B is common to all the references and will include one label indicating said references.

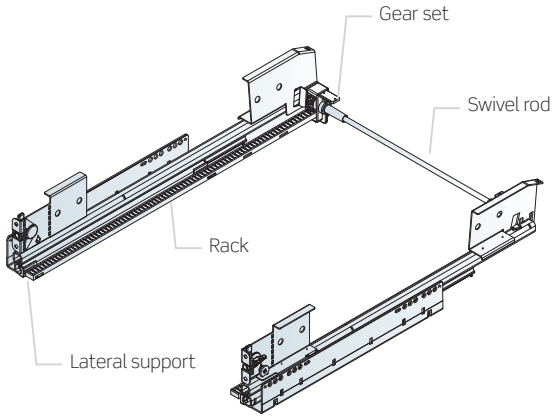

Assembly

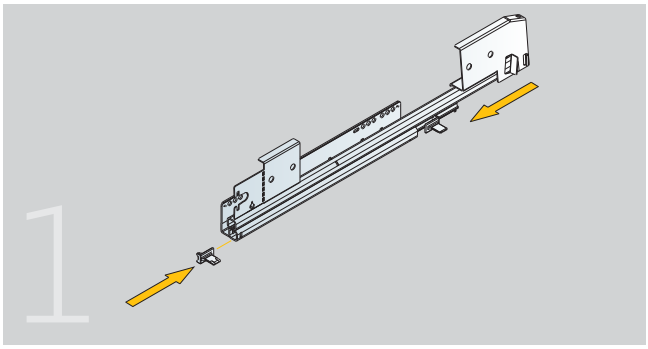

Assemble the lateral supports to the rails of the runner.

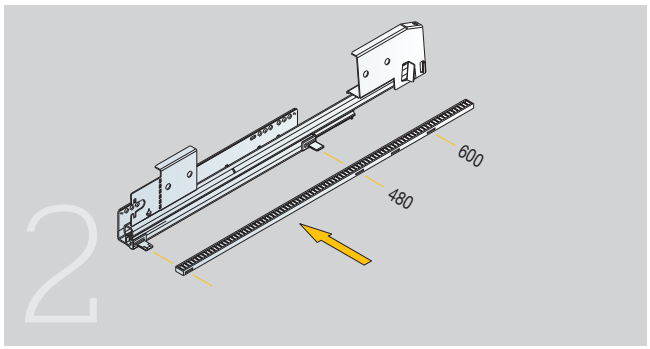

Insert the assistance runner onto the lateral supports.

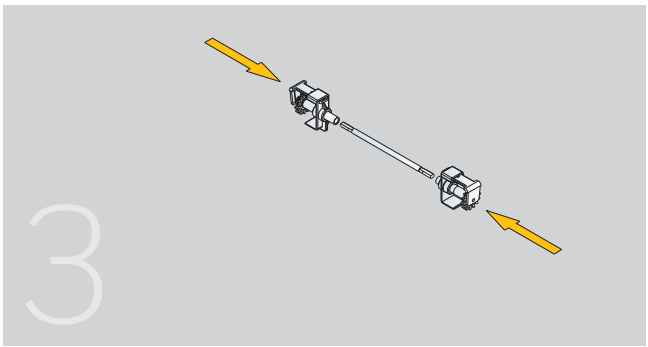

Assemble the gear set into rod by matching the flat sections.

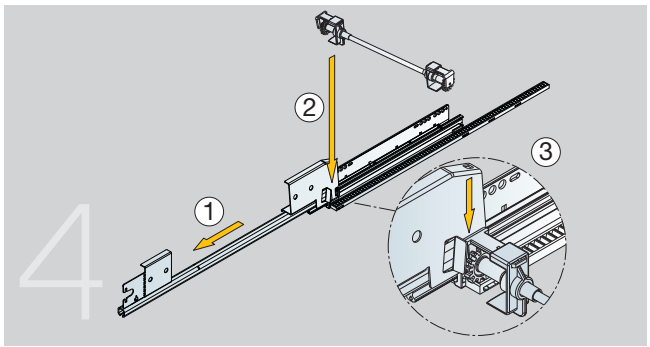

1- Open the runners. 2- Insert the gear set with the rod into the cavity. 3- Adjust the gear with the assistance runner.

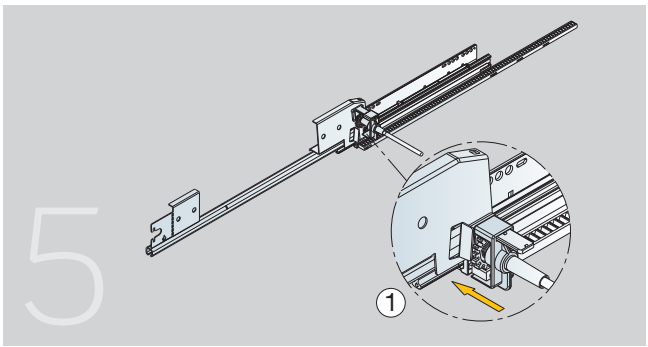

Adjust the gear with the assistance runner and adjust the movable support to secure it.

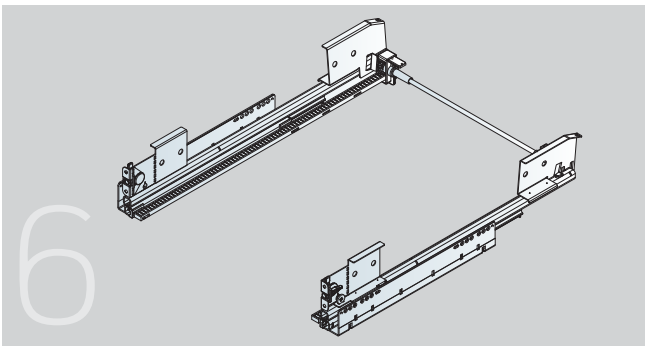

Close the runners.

3 TECHNICAL INFORMATION

Drawer front drilling template

Tubular high front drawers

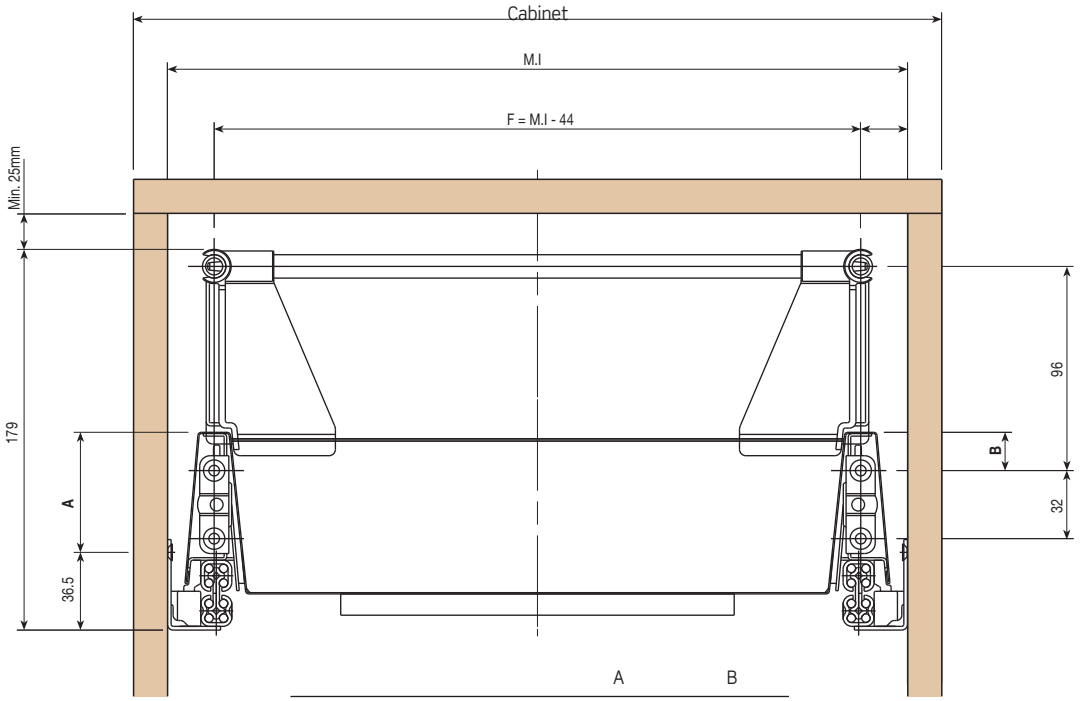

	A	B
Steel drawer	56.5	18
Plastic molded drawer	58	19.5

High front drawers with dividers

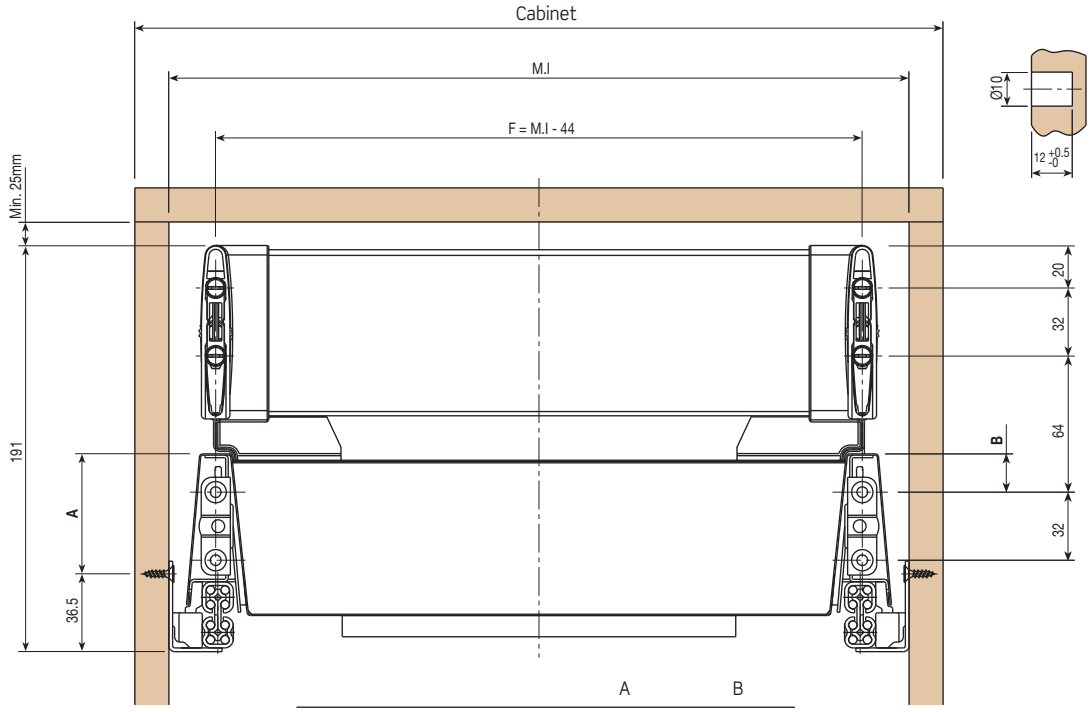

	A	B
Steel drawer	56.5	18
Plastic molded drawer	58	19.5

Drawer assembly

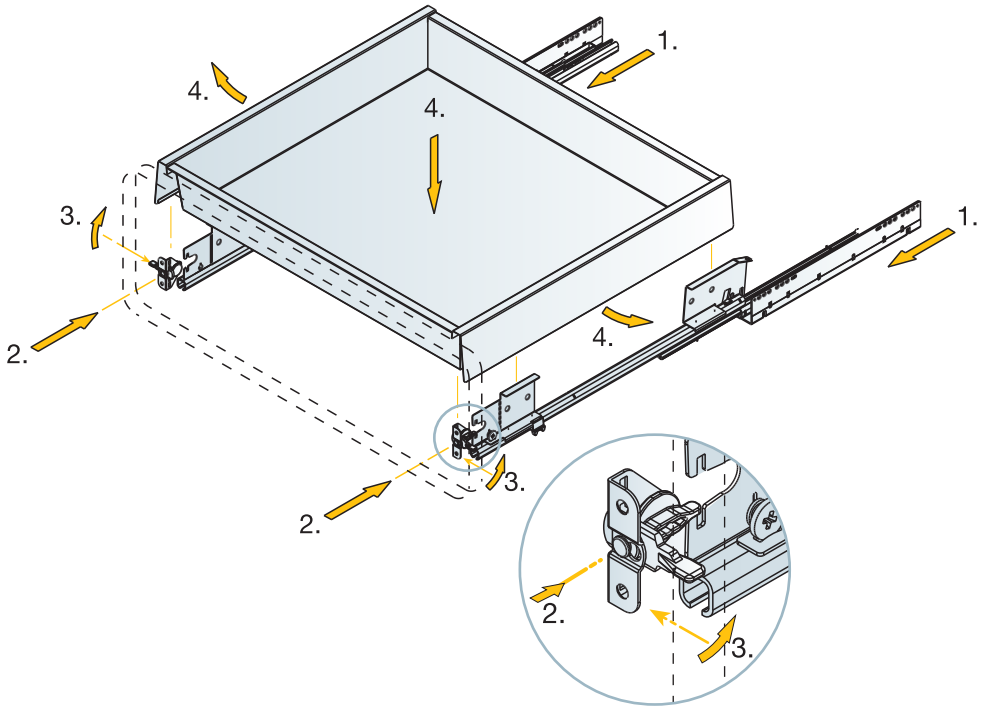

Quick and easy manual assembly.
1- Completely extend runners.
2- Insert the front brackets into the runners.
3- Turn the levers upwards to fix the front to the runners.
4- Place the drawer on the runners by opening the drawer sides and clip-on to the runners.

Front alignment

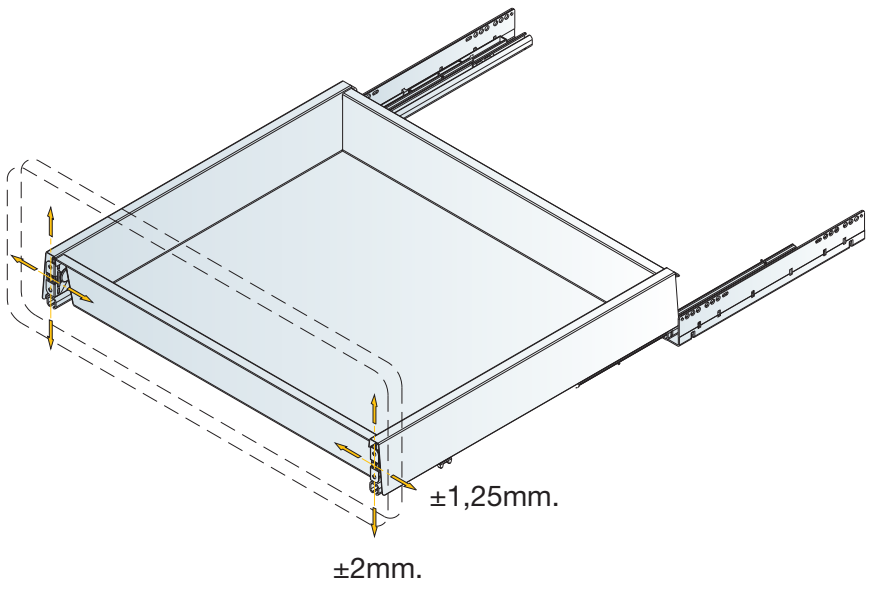

Assembly for tubular high front drawers

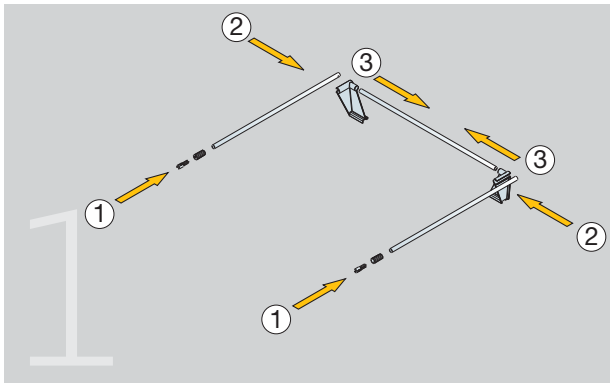

1- Assemble the front brackets in the tube thread.
2- Assemble the lateral tubes by appying pressure to the back adapters and lining up the tube hole with the adaptor.
3- Assemble the side tubes and adaptors in the back tube.

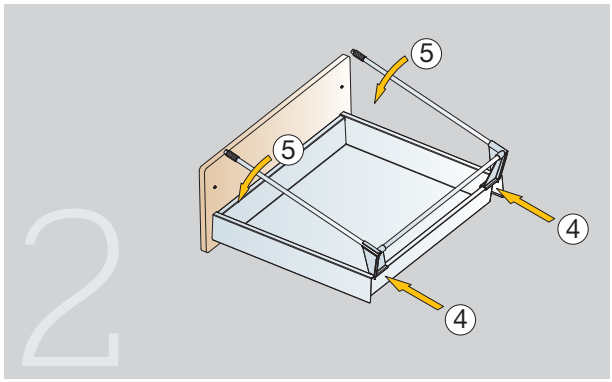

4- Insert the back adapters to the drawer wings.
5- Rotate the lateral tubes until they are assembled in the screws.

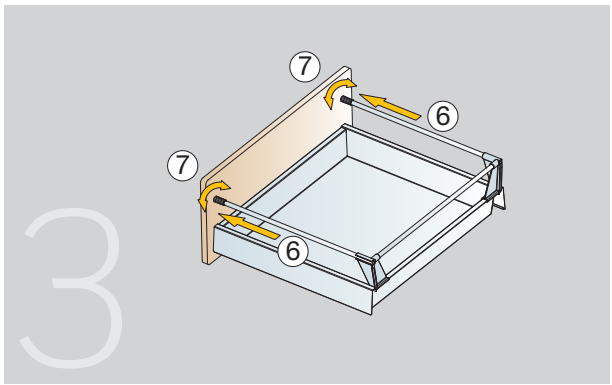

6- Move the caps towards the drawer front.
7- Move the caps to regulate the drawer front.

High drawer assembly with dividers

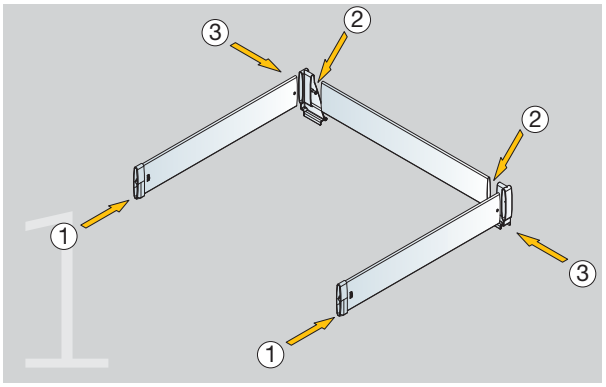

1- Assemble the side dividers into the back adapters.
2- Screw the adapter to the side dividers.
3- Join the side dividers to the back divider.

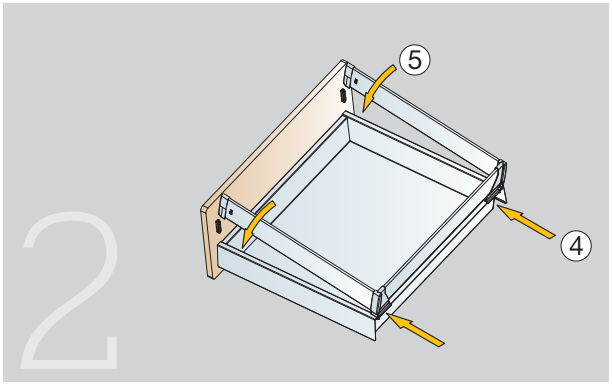

4- Insert the rear adapters to the drawer wings.
5- Turn the side dividers until they fit into the front brachets.

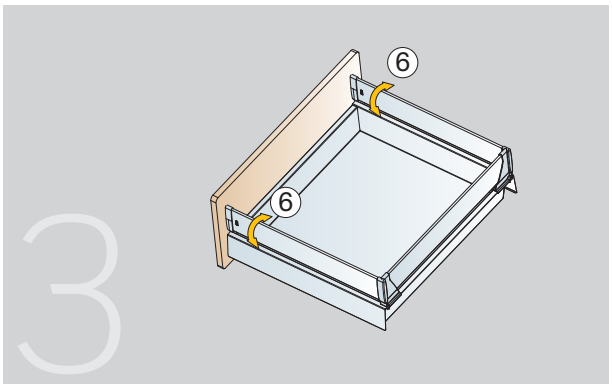

6- Turn the wheel to adjust the drawer front.

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

SUPRA

Range of metal drawers

INDA-matic
gradual closing

SUPRA
Range of metal drawers

Economical metal drawer easily assembled and installed, now with the option of incorporating the Indamatic soft closing. Wood and metal backs, available in different heights and depths. Accessories for both kitchen and bathroom.

pp.

1 SUPRA DRAWER 487
- Drawers with wooden back 487
- Drawers with steel back. Quick assembly 488
- Runners 489
- Front coupler 490
- Pan drawer accessories 491
- Cutlery tray 492
- Technical data 493
- Drawers in kit 495

2 INDAMATIC ASSEMBLY FOR SUPRA DRAWER 496

1 SUPRA DRAWER

Drawers with wooden back

SUPRA-54 drawer

L	White Ral 9001	Grey Ral 7040	
270	653.027.001		
350	653.035.003		
400	653.040.006		
450	653.045.002		100
500	653.050.005	653.050.311	
550	653.055.001		

Each reference consists of two drawer sides. Each side is packed separately. The sides come in boxes of 25 units.

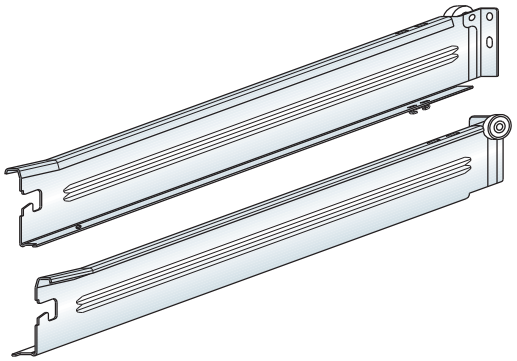

SUPRA-86 drawer

L	White Ral 9001	Grey Ral 7040	Grey Silver	
270	653.127.005	653.127.311	653.127.812	
350	653.135.000	653.135.313	653.135.814	
400	653.140.003	653.140.316	653.140.810	
450	653.145.006	653.145.312	653.145.813	100
500	653.150.002	653.150.315	653.150.816	
550	653.155.005	653.155.311	653.155.812	

Each reference consists of two drawer sides. Each side is packed separately. The sides come in boxes of 25 units.

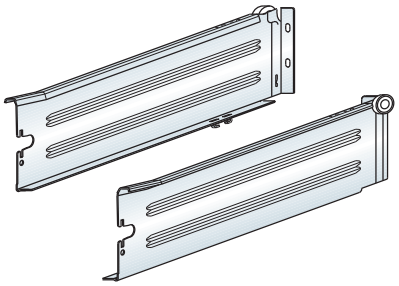

SUPRA-118 drawer

L	White Ral 9001	Grey Ral 7040	Grey Silver	
350	653.235.004	653.235.310	653.235.811	
400	653.240.000	653.240.313	653.240.814	
450	653.245.003	653.245.316	653.245.810	100
500	653.250.006	653.250.312	653.250.813	
550	653.255.002	653.255.315	653.255.816	

Each reference consists of two drawer sides. Each side is packed separately. The sides come in boxes of 25 units

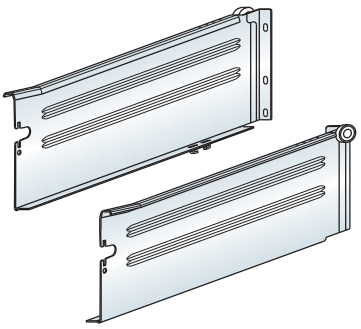

SUPRA-150 drawer

L	White Ral 9001	Grey Ral 7040	Grey Silver	
350	653.335.001	653.335.314	653.335.815	
400	653.340.004	653.340.310	653.340.811	
450	653.345.000	653.345.313	653.345.814	100
500	653.350.003	653.350.316	653.350.810	
550	653.355.006	653.355.312	653.355.813	

Each reference consists of two drawer sides. Each side is packed separately. The sides come in boxes of 25 units

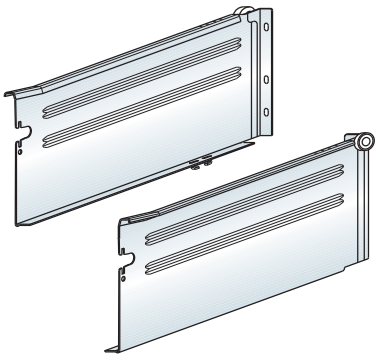

Drawers with steel back. Quick assembly

86 mm. steel back for SUPRA-86.

Module	White Ral 9001	Grey Ral 7040 - 16mm.	
300	654.030.005	654.030.311	
350	654.035.001	654.035.314	
400	654.040.004	654.040.310	
450	654.045.000	654.045.313	25
500	654.050.003	654.050.316	
600	654.060.002	654.060.315	
900	654.090.006	654.090.312	

Minimum order: 25 backs.



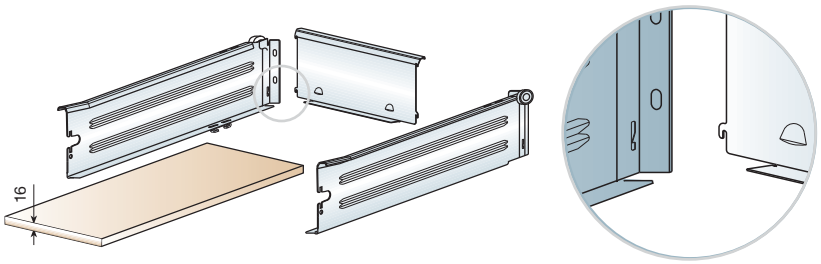

150 mm. steel back for SUPRA-86.

Module	White Ral 9001	Grey Ral 7040 - 16mm.	
300	654.130.002	654.130.315	
350	654.135.005	654.135.311	
400	654.140.001	654.140.314	
450	654.145.004	654.145.310	25
500	654.150.000	654.150.313	
600	654.160.006	654.160.312	
900	654.190.003	654.190.316	

Minimum order: 25 backs.

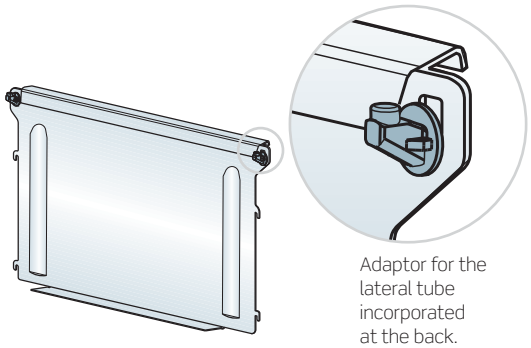

Adaptor for the lateral tube incorporated at the back.

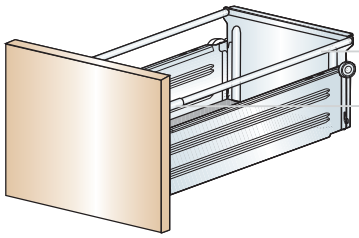

Lateral tube

Upper fixing bracket ref. 730.700.003 (3 parts)

SUPRA-86 Quick assembly.

L	White Ral 9001	
270	653.127.005	
350	653.135.000	
400	653.140.003	100
450	653.145.006	
500	653.150.002	
550	653.155.005	

Each reference consists of two drawer sides and the 2 profiles are packed separately. The sides come in boxes of 25 units.



Runners

GACELA runner for SUPRA.

Drawer length	Extension loss P.S.	White Ral 9001	Grey Ral 7040	Grey Silver	
270	52	653.427.003	653.427.316	653.427.810	
350	61	653.435.005	653.435.311	653.435.812	
400	70	653.440.001	653.440.314	653.440.815	100
450	79	653.445.004	653.445.310	653.445.811	
500	88	653.450.000	653.450.313	653.450.814	
550	97	653.455.003	653.455.316	653.455.810	

Reference consists of a complete set of runners, packed separately in boxes of 100 runners.

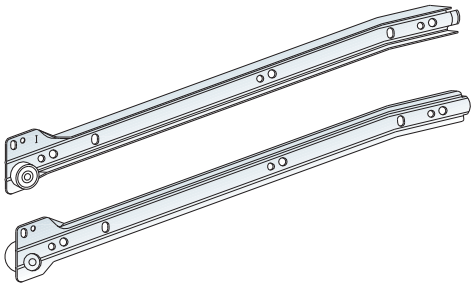

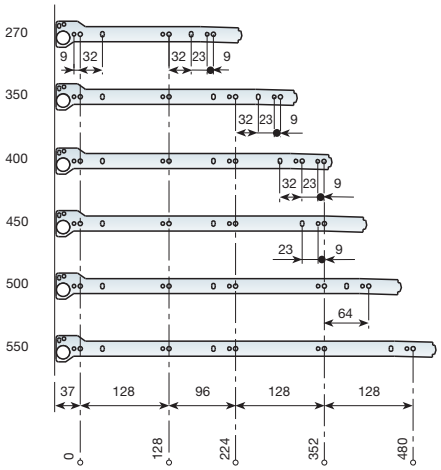

Full extension GACELA runner

Drawer length	Extension loss P.S.	White Ral 9001	Grey Ral 7040	
270	0	653.727.001		
350	0	653.735.003		
400	0	653.740.006		100
450	0	653.745.002		
500	0	653.750.005		
550	0	653.755.001	653.750.311	
600			653.760.310	

Reference consists of 2 S-profiles and 2 U-profiles. U-profiles are packed separately in boxes of 100 runners and S-profiles are packed separately in boxes of 50 runners.

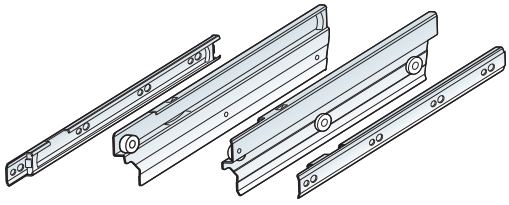

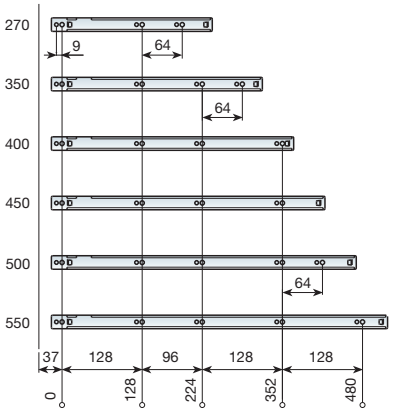



GACELA runner

Telescopic GACELA runner

Front coupler

Plastic front coupler for SUPRA-54 drawer.

White Ral 9001	676.905.003	100
Grey Ral 7040	676.906.311	

Each reference consists of a complete set of couplers
Lateral adjustment 3 mm. Height adjustment 3 mm.



Steel front couplers for SUPRA-86, SUPRA-118 and SUPRA-150 drawers.

Nickel-plated	White Ral 9001	Grey Ral 7040	
679.300.064	677.900.005	677.900.311	100

Each reference consists of a complete set of couplers.
Lateral adjustment 3 mm. Height adjustment 4 mm with no tools required.

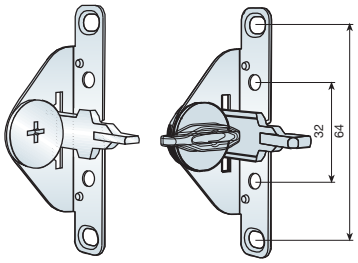

Nickel-plated White / Grey

Cover.

White Ral 9001	654.900.002	100
Grey Ral 7040	654.900.315	

Each reference consists of a complete set of covers.



Cover

Front coupler for SUPRA-86 inner drawer.

White Ral 9001	676.911.001	100

Each reference consists of a complete set of couplers.



Pan drawer accessories

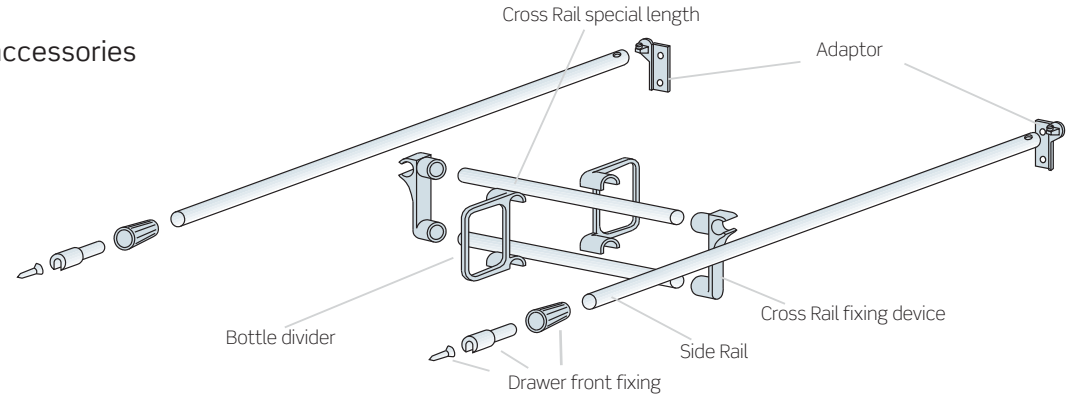

Side rail.

Drawer length	White Ral 9001	Grey Ral 7040	Grey Silver	
350	746.635.002	746.635.304	746.635.816	
400	746.640.005	746.640.300	746.640.812	
450	746.645.001	746.645.303	746.645.815	50
500	746.650.004	746.650.306	746.650.811	

Adaptor.

Nickel-plated	733.000.063	50

Reference consists of a complete set of adaptors.

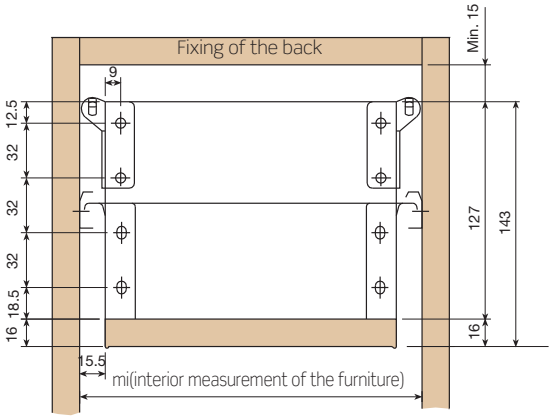

Drawer front fixing.

White Ral 9001	730.700.003	
Grey Ral 7037	730.700.305	50
Grey Ral 7040	730.700.316	

Reference consists of a complete set of couplers.

Cross rail fixing device.

White Ral 9001	732.400.001	100
Grey Ral 7037	732.400.303	

Cross rail for 16mm drawer side.

Module	White Ral 9001	Grey Ral 7040	
350	746.835.003	746.835.316	
400	746.840.006	746.840.312	
450	746.845.002	746.845.315	
500	746.850.005	746.850.311	50
600	746.860.004	746.860.310	
900	746.890.001	746.890.314	

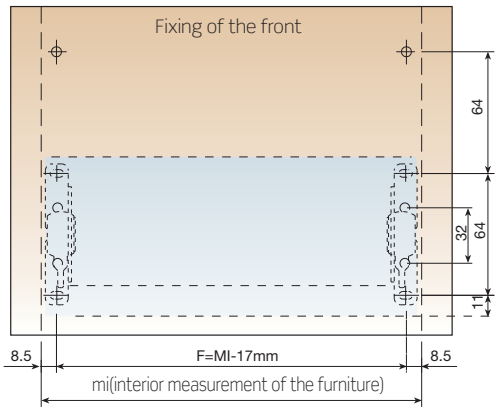

Cross rail, special length.

White Ral 9001	746.700.006	50

MI = Interior measurement of the furniture. L = MI - 48 mm.
Indicate the length of tube desired (L) when ordering.

Bottle divider.

White Ral 9001	748.100.006	50
Grey Ral 7037	748.100.301	

Cutlery tray

Cutlery tray, White Ral 9001.

Module	Length 500	Length 450	
300	678.130.003	678.330.004	
350	678.135.006	678.335.000	
400	678.140.002	678.340.003	20
450	678.145.005	678.345.006	
500	678.150.001	678.350.002	
600	678.160.000	678.360.001	

These module dimensions are for 16 mm. Sides, 450 and 500 mm drawer sizes and 16 mm. Back.

Cutlery tray, Grey Ral 7037.

Module	Length 500	Length 450	
300	678.130.305	678.330.306	
350	678.135.301	678.335.302	
400	678.140.304	678.340.305	20
450	678.145.300	678.345.301	
500	678.150.303	678.350.304	
600	678.160.302	678.360.303	

These module dimensions are for 16 mm. Sides, 450 and 500 mm drawer sizes and 16 mm. Back.

Module

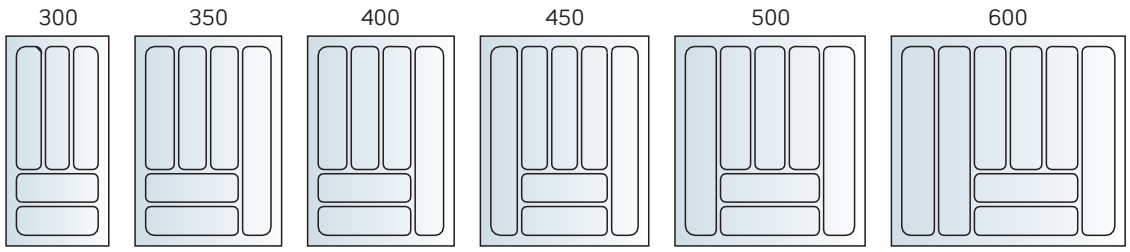

Technical data

Base calculation



Back calculation



L= nominal drawer length

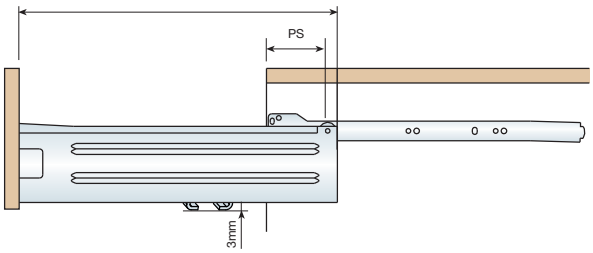

	SUPRA-54	SUPRA-86	SUPRA Metal Back	SUPRA-118	Supra-150	SUPRA-86C int.
H	36	68	-	100	132	68
A	L-2	L-2	L-5	L-2	L-2	L-18

Adjustable steel front adaptor for **SUPRA-86-118-150**

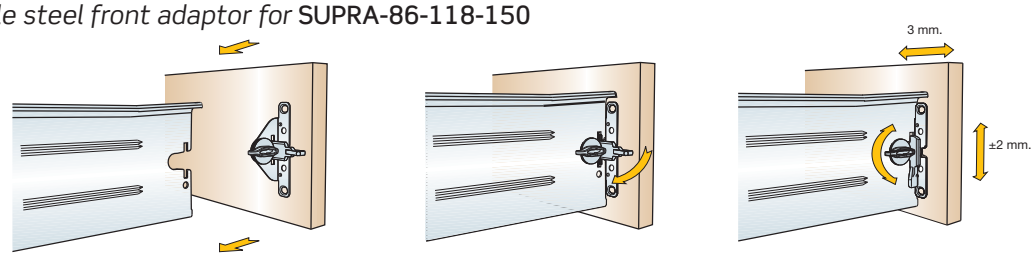

SUPRA-54

Back fixing

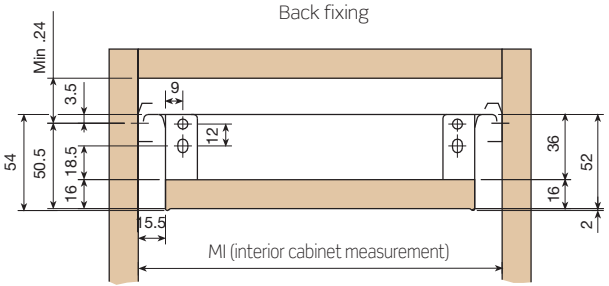

Front fixing

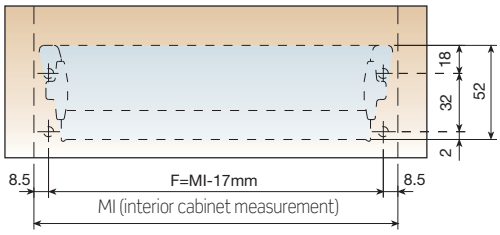

SUPRA-86, *inner drawer*

Back fixing

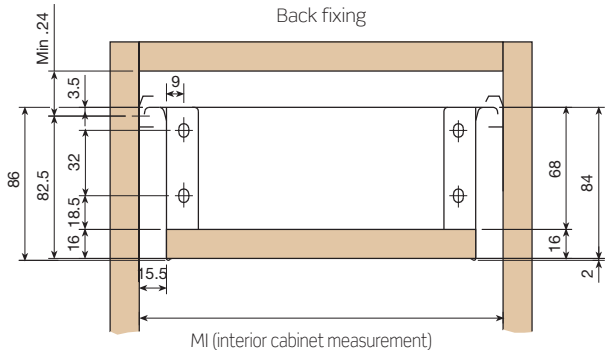

Front fixing

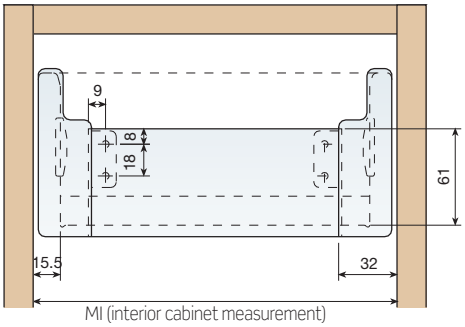

Technical data

SUPRA-86

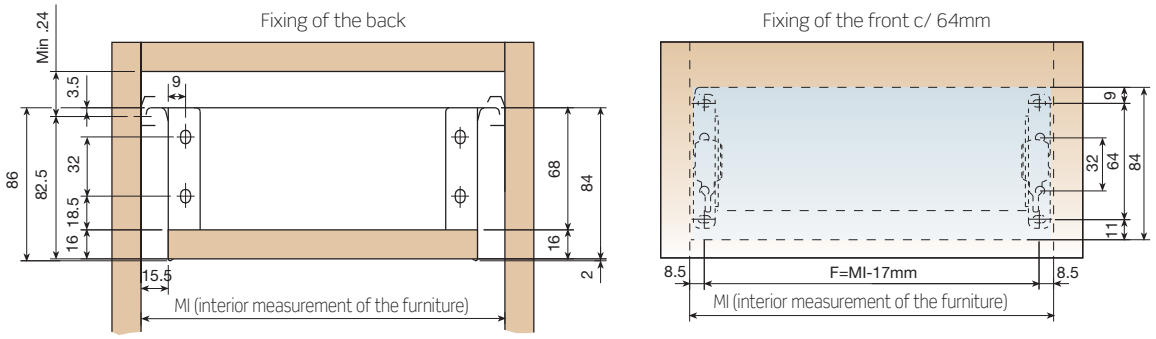

SUPRA-118

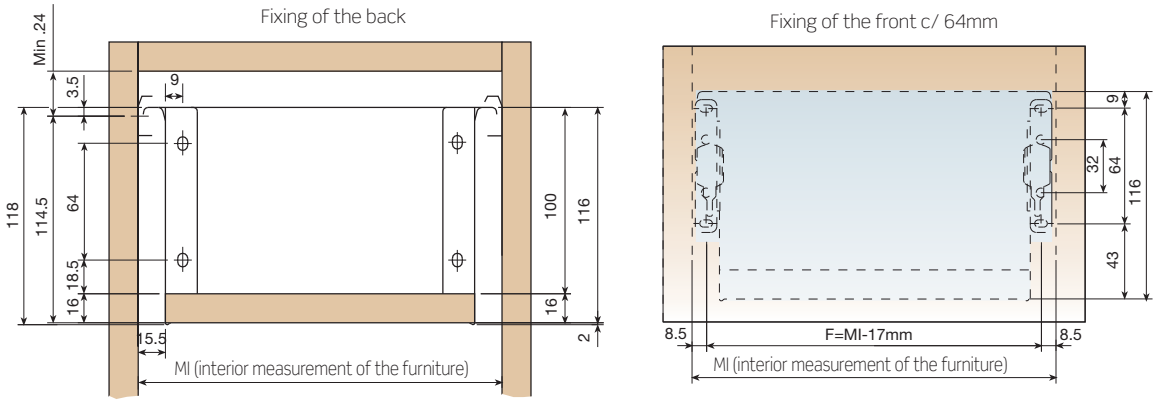

SUPRA-150

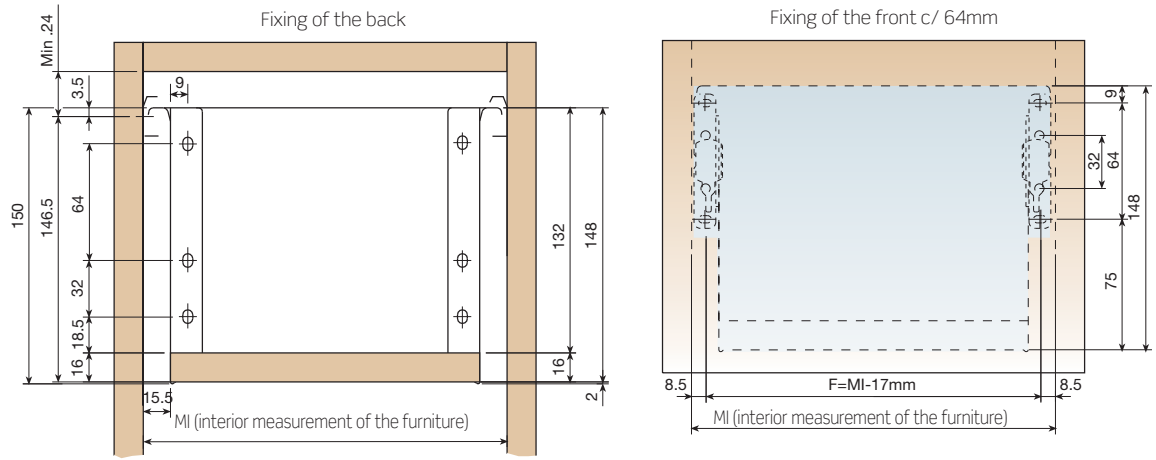

Drawers in kit

Minimum order: 100 sets per reference.

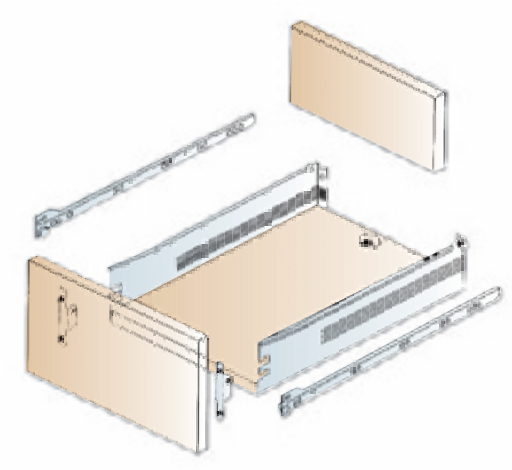

SUPRA-86.

Module	Grey Ral 9006	White Ral 9001	
270		652.027.003	
400		652.040.001	10
450		652.045.004*	
500	652.050.140	652.050.000	

Each reference consists of 1 set of steel front adaptor, 1 set of runners and 1 set of drawer sides.

SUPRA-118.

Module	White Ral 9001	
400	652.140.005*	
450	652.145.001	10
500	652.150.004	

Each reference consists of 1 set of steel front adaptor, 1 set of runners and 1 set of drawer sides.

SUPRA-150.

Module	Grey Ral 9006	White Ral 9001	
400		652.240.002*	
450		652.245.005*	10
500	652.250.141	652.250.001*	

Each reference consists of 1 set of steel front adaptor, 1 set of runners and 1 set of drawer sides.

* References which incorporate the **Indamatic** damper.

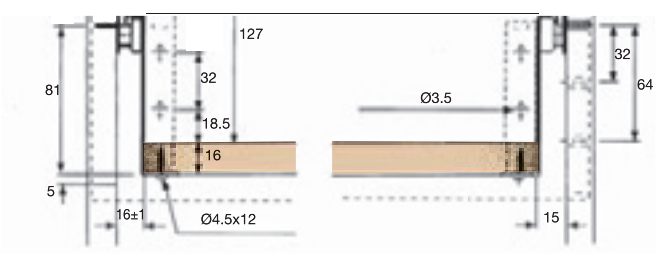

Base calculation



Back calculation



	SUPRA 86	SUPRA 118	SUPRA 150
H	68	100	132
A	L-2	L-2	L-2

2 INDAMATIC ASSEMBLY FOR **SUPRA** DRAWER

INDAMATIC set

INDAMATIC set for **SUPRA** drawer

White	Ral 9001	194.700.004	50
Grey	Ral 7040	194.700.310	

Each reference consists of one soft-close device and one pin.

Fixing bracket

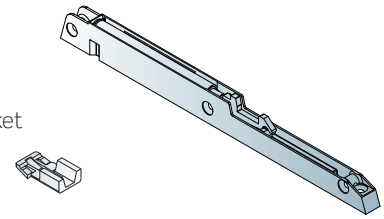

INDAMATIC closing system

INDA-matic gradual closing

INDAMATIC assembly for **SUPRA**

Fixing method to the side panel

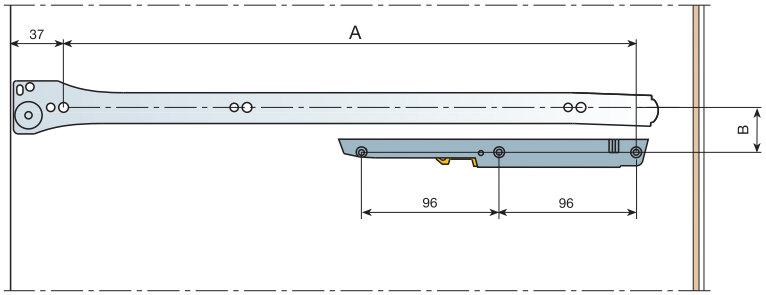

Drawer Length	A
270	223
350	303
400	353
450	403
500	453
550	503

Drawer Height	B
54	40
86	72
118	104
150	136

Fixing method to the drawer

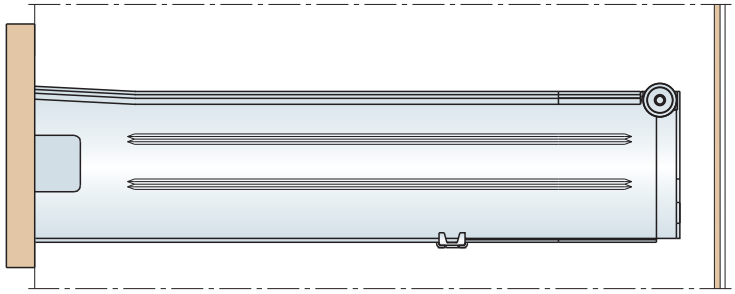

Drawer depth

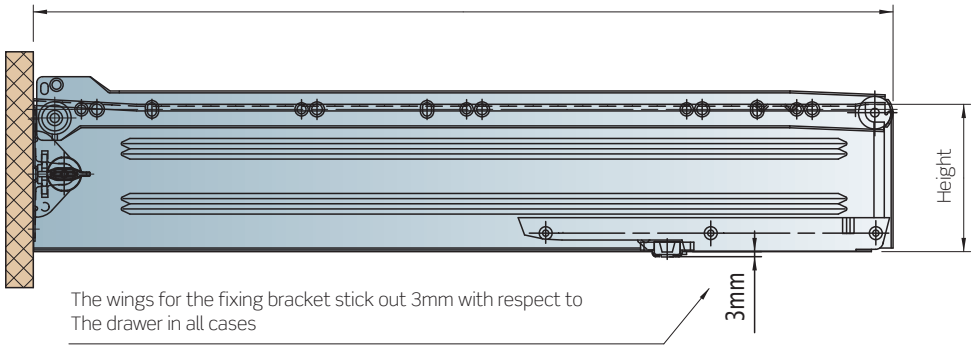

The wings for the fixing bracket stick out 3mm with respect to
The drawer in all cases

Fixing bracket assembly

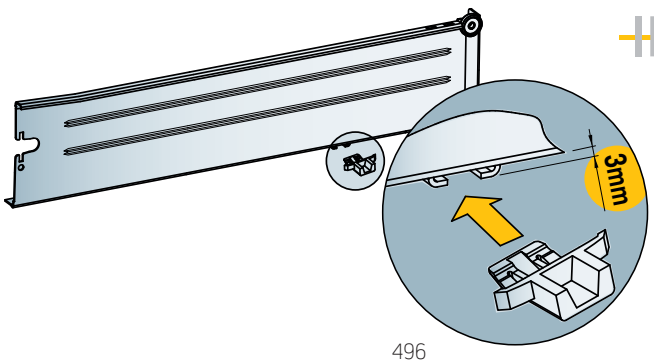

INDA-matic gradual closing

INDAUX
FURNITURE FITTINGS MANUFACTURER

INDAUX
Drawer

INDAUX
Drawer

pp.

1 DRAWER FOR MARC RUNNER 499

2 DRAWER FOR GACELA RUNNER 500

3 PAN DRAWER ACCESSORIES 501

4 CUTLERY TRAY 502

1 DRAWER FOR MARC RUNNER

INDAUX Drawer without window for **MARC** runner.

Module	White Ral 9001	Beige Ral 1015	
300	681.830.004	681.830.461	
350	681.835.000	681.835.464	
400	681.840.003	681.840.460	10
450	681.845.006	681.845.463	
500	681.850.002	681.850.466	
600	681.860.001	681.860.465	

MARC concealed runner with pre-mounted self-closing device.

Length	Extension loss	Reference	Reference	
		15÷16mm. side	18÷19mm. side	
430	90	765.143.035	766.243.030	20
480	60	765.148.031	766.248.033	

Accurate and silent guiding with precision rollers for heavy duty operation.



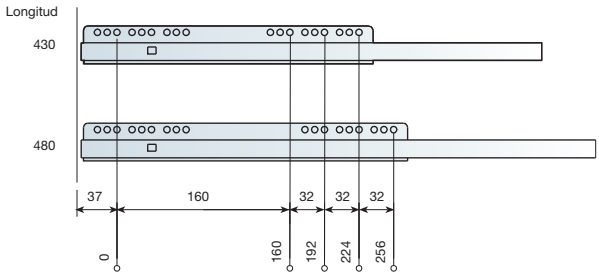

Drawer front fixing bracket.

Screw-fixed assembly	685.600.031	200

Reference consists of a complete set of front brackets.

Module	F
300	181
350	231
400	281
450	331
500	381
600	481

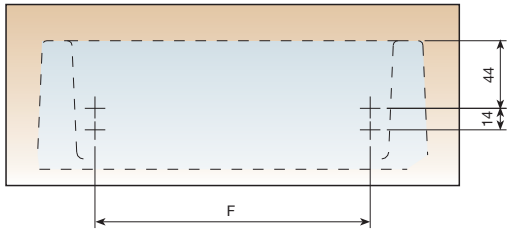

2 DRAWER FOR GACELA RUNNER

INDAUX Drawer for **GACELA** runner.

Module	White Ral 9001	Beige Ral 1015	
300	680.230.003	680.230.460	
350	680.235.006	680.235.463	
400	680.240.002	680.240.466	10
450	680.245.005	680.245.462	
500	680.250.001	680.250.465	
600	680.260.000	680.260.464	

Drawer runner for units with 15÷16 mm end panel.

L	Extension loss PS	White Ral 9001	Beige Ral 1015	
430	77	789.543.801	789.543.860	100
480	35	789.548.804	789.548.863	

Drawer runners for units with 18÷19 mm end panel.

L	Extension loss PS	White Ral 9001	Beige Ral 1015	
430	77	789.643.805	789.643.864	100
480	35	789.648.801	789.648.860	

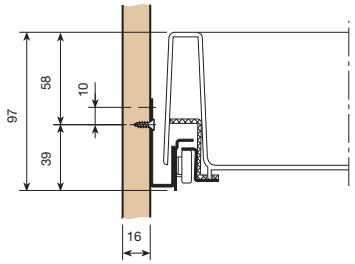

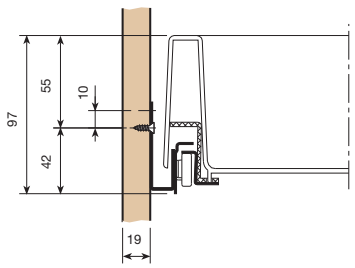

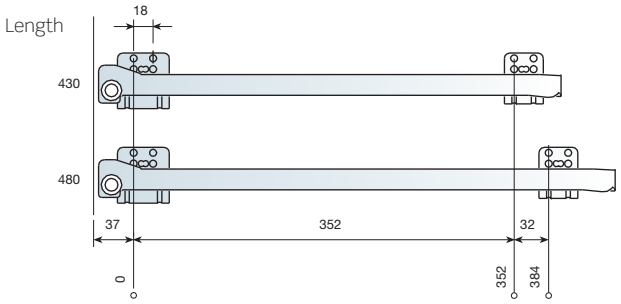

Front fixing bracket.

Screw-fixed assembly	685.600.031	200

Reference consists of a complete set of brackets.

Module	F
300	181
350	231
400	281
450	331
500	381
600	481

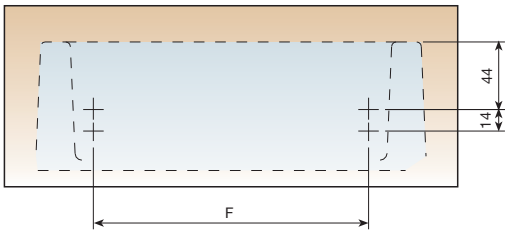

3 PAN DRAWER ACCESSORIES

Outer frame for **INDAUX** drawer.

Module	L	Chrome-plated	
300	230	745.130.120	20
350	280	745.135.123	
400	330	745.140.126	
450	380	745.145.122	
500	430	745.150.125	
600	530	745.160.124	

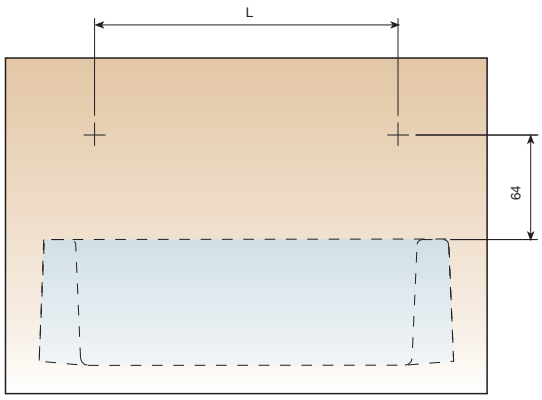

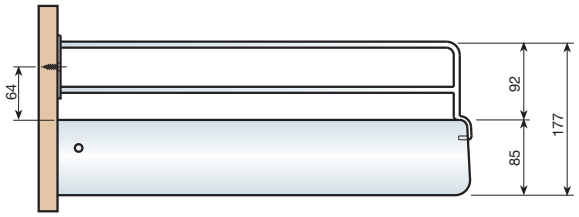

4 CUTLERY TRAY

Specially designed for **INDAUX** drawer. Available in two versions: Adjusted to every module from 300 to 600 and with lateral flap, adaptable to modules from 350 and from 450. Injection moulded with a very resistant impactproof material, obtaining very uniform and strong walls.

INDAUX Cutlery tray.

Module	White Ral 9001	Beige Ral 1015	Measurements	
			Length Width Height	
300	687.130.006	687.130.463	391 206 45	25
350	689.035.001	689.035.465	391 256 45	20
400	687.140.005	687.140.462	391 306 45	25
450	689.045.000	689.045.464	391 356 45	20
500	689.050.003	689.050.460	391 406 45	20
600	689.060.002	689.060.466	391 506 45	20

Without flap. Adjustable to any drawer module.

INDAUX Cutlery tray, models 350 and 450.

Module	White Ral 9001	Beige Ral 1015	
350	687.035.005	687.035.462	25
450	687.045.004	687.045.461	

Cutlery trays with lateral flap for drawer modules from 350 and 450.

INDAUX
FURNITURE FITTINGS MANUFACTURER

COMBI
Compact drawer

INDAmatic
gradual closing

COMBI
Compact drawer

> New design
> Longer and greater capacity
> Indamatic optional

pp.

1 COMBI-275 DRAWER 506
- Drawer 506
- Runner 506
- Front fixing brackets 506

2 COMBI-440 DRAWER 507
- Drawer 507
- Runner 507
- Front fixing brackets 508
- Pan drawer accessories 508
- Cutlery Tray 509

3 COMBI-480 DRAWER 510
- Drawer 510
- Runner 511
- Front fixing brackets 511
- Pan drawer accessories 512
- Cutlery Tray 512
- Accessories 513
- COMBI-480 INDAmatic 514

1 COMBI-275 DRAWER

Drawer

COMBI-275 Drawer.

Module	White Ral 9001	
175	680.417.006	25
200	680.420.005	
250	680.425.001	
300	680.430.004	
350	680.435.000	
400	680.440.003	

Runner

Runner.

Lenght	Extension loss PS	White Ral 9001	
275	50	788.116.000	100

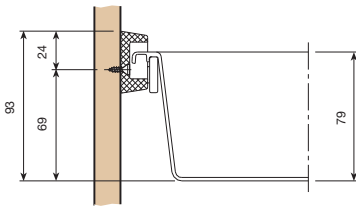

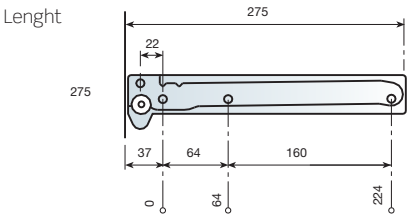

Front fixing brackets

Adjustable front fixing brackets.

	White Ral 9001	
	685.000.002	100

Reference consists of a complete set of fixing brackets.



Adjustable front fixing brackets, 15 mm with wings.

	White Ral 9001	
	685.200.003	100

Reference consists of a complete set of fixing brackets.

Module	F
175	37
200	62
250	112
300	162
350	212
400	262

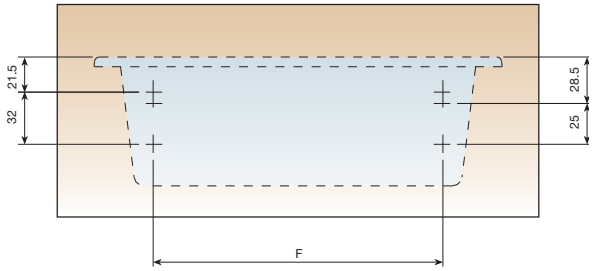

NOTE
To fit front coupler with wings, 30 mm. Must be added to figure F.

2 COMBI-440 DRAWER

Drawer

COMBI-440 Drawer.

Module	White Ral 9001	Beige Ral 1015	
300	680.330.000	680.330.464	
350	680.335.003	680.335.460	
400	680.340.006	680.340.463	25
450	680.345.002	680.345.466	
500	680.350.005	680.350.462	
600	680.360.004	680.360.461	

COMBI-440 KIT-4 Drawer.

Module	White Ral 9001	Beige Ral 1015	
300	681.430.002	681.430.466	
350	681.435.005	681.435.462	
400	681.440.001	681.440.465	1
450	681.445.004	681.445.461	
500	681.450.000	681.450.464	
600	681.460.006	681.460.463	

Each box contains 4 drawers with their corresponding runners, front fixing brackets and screws.

COMBI-440 KIT-5 Drawer.

Module	White Ral 9001	Beige Ral 1015	
300	681.530.006	681.530.463	
350	681.535.002	681.535.466	
400	681.540.005	681.540.462	1
450	681.545.001	681.545.465	
500	681.550.004	681.550.461	
600	681.560.003	681.560.460	

Each box contains 5 drawers with their corresponding runners, front fixing brackets and screws.

Module	Width	Length	Height
300	250	435	79
350	300		
400	350		
450	400		
500	450		
600	550		

Runners

Runners for 15÷16 mm end panel.

Ext. loss	White Ral 9001	Beige Ral 1015	
90	789.216.002	789.216.466	100

Runners for 18÷19 mm end panel.

Ext. loss	White Ral 9001	Beige Ral 1015	
90	789.219.001	789.219.465	100

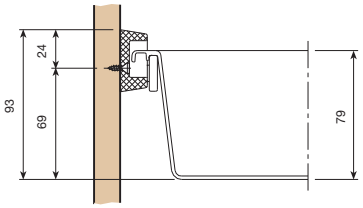

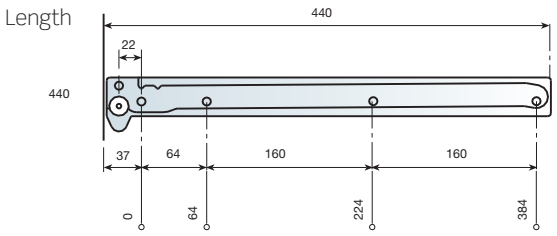

Drawer front fixing brackets

Adjustable front fixing bracket.

White Ral 9001	Beige Ral 1015	
685.000.002	685.000.466	100

Reference consists of a complete set of fixing brackets.



(Tool-free)

Adjustable front fixing bracket, 15 mm with wings.

White Ral 9001	Beige Ral 1015	
685.200.003	685.200.460	100

Reference consists of a complete set of fixing brackets.

Module	F
300	162
350	212
400	262
450	312
500	362
600	462

NOTE
To fit front fixing bracket with wings "B", 30 mm. must be added to figure F.

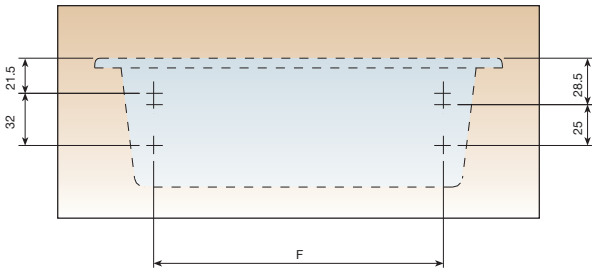

Pan drawer accessories

COMBI-440 Pan drawer frame.

Module	L	Chrome	
300	230	745.230.124	
350	280	745.235.120	
400	330	745.240.123	20
450	380	745.245.126	
500	430	745.250.122	
600	530	745.260.121	

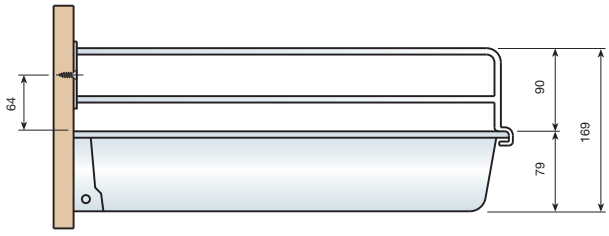



Cutlery Tray

Cutlery trays designed for COMBI drawer widths. This cutlery tray comes in two versions: fitted on all four sides, for all modules, and with a lateral flap for drawers from modules 350 and 450 upwards, offering greater versatility as they may be used with a range of models.

COMBI-440 Cutlery tray.

Module	White Ral 9001	Beige Ral 1015	Measurements	
			Length Width Height	
300	687.130.006	687.130.463	391 206 45	25
350	689.035.001	689.035.465	391 256 45	20
400	687.140.005	687.140.462	391 306 45	25
450	689.045.000	689.045.464	391 356 45	20
500	689.050.003	689.050.460	391 406 45	20
600	689.060.002	689.060.466	391 506 45	20

Without flap. Adjustable to any drawer module.

COMBI-440 Cutlery tray, with flap.

Module	White Ral 9001	Beige Ral 1015	
350	687.135.002	687.135.466	25
450	687.145.001	687.145.465	

Cutlery trays with flap for drawer modules from 350 and 450 respectively.

3 COMBI-480 DRAWER

Drawer

COMBI-480 Drawer.

Module	White Ral 9001	Metallic grey	
300	681.030.000	681.030.313	
350	681.035.003	681.035.316	
400	681.040.006	681.040.312	25
450	681.045.002	681.045.315	
500	681.050.005	681.050.311	
600	681.060.004	681.060.310	

In boxes of 25 units.

COMBI-480 KIT-4 Drawer.

Module	White Ral 9001	Gris Metalizado	
300	681.130.004	681.130.310	
350	681.135.000	681.135.313	
400	681.140.003	681.140.316	1
450	681.145.006	681.145.312	
500	681.150.002	681.150.315	
600	681.160.001	681.160.314	

Each box contains 4 drawers with their corresponding runners, front fixing brackets and screws.

COMBI-480 KIT-5 Drawer.

Module	White Ral 9001	Metallic grey	
300	681.230.001	681.230.314	
350	681.235.004	681.235.310	
400	681.240.000	681.240.313	1
450	681.245.003	681.245.316	
500	681.250.006	681.250.312	
600	681.260.005	681.260.311	

Each box contains 5 drawers with their corresponding runners, front fixing brackets and screws.

Runners

Runner for 15÷16mm. end panel.

Ps	White Ral 9001	Metallic grey	
90	788.316.001	788.316.314	100

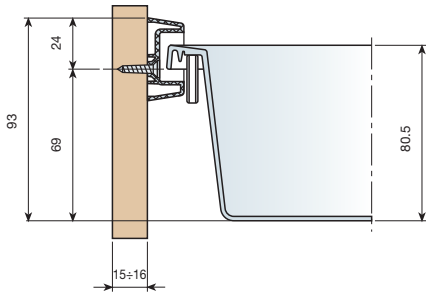

Lenght

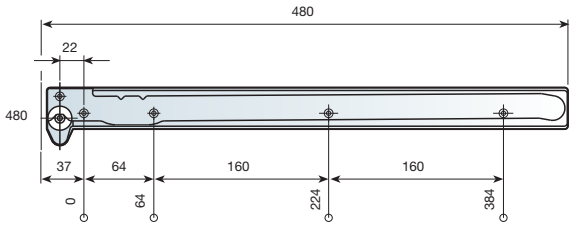

Front fixing brackets

Adjustable front fixing fixing brackets.

	White Ral 9001	Metallic grey	
	685.000.002	685.000.315	100

Reference consists of a complete set of fixing brackets.

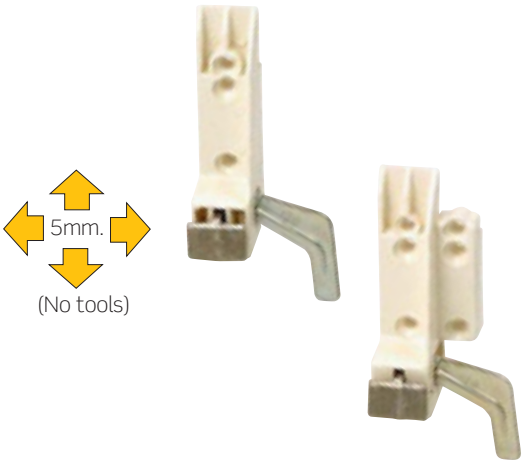

Adjustable front fixing brackets, 15mm with wings.

	White Ral 9001	Metallic grey	
	685.200.003	685.200.316	100

Reference consists of a complete set of brackets.

Module	F
300	162
350	212
400	262
450	312
500	362
600	462

NOTE
To fit front fixing bracket with wings "C", 30mm. must be added to figure F.

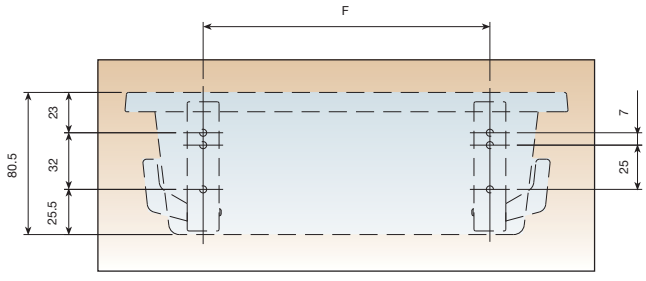

Pan drawer accessories

COMBI-480 Pan drawer frame.

Module	L	Chrome	
300	230	745.330.121	
350	280	745.335.124	
400	330	745.340.120	20
450	380	745.345.123	
500	430	745.350.126	
600	530	745.360.125	

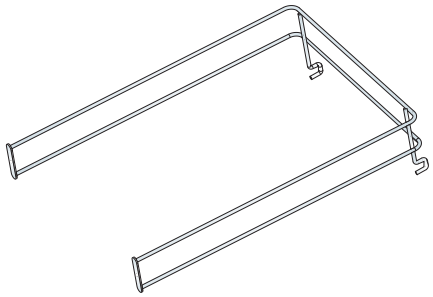

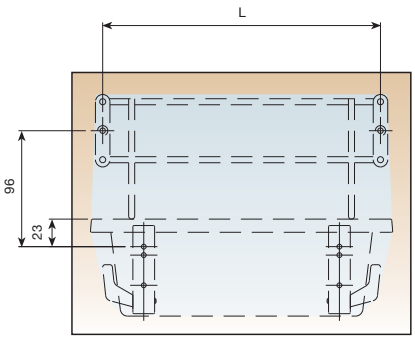

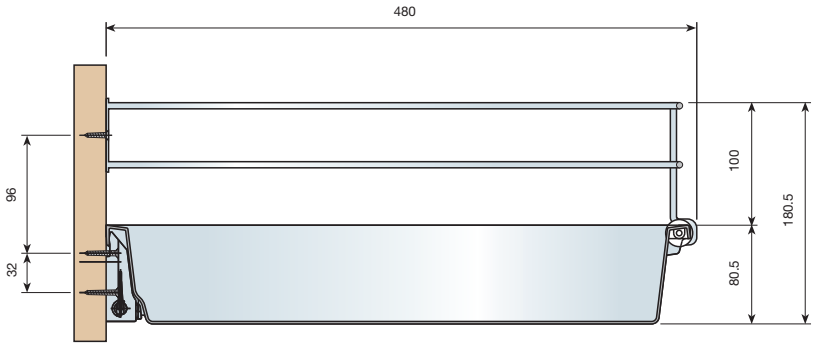

Cutlery Trays

Specially designed for **COMBI** drawer. Available in two versions: Adjusted to every module from 300 to 600 and with lateral flap, adaptable to modules from 350 and from 450. Injection moulded with a very resistant impactproof material, obtaining very uniform and strong walls.

COMBI-480 Cutlery tray.

Module	White Ral 9001	Metallic grey	
300*	687.930.003	687.930.316	
350	687.635.001	687.635.314	
400*	687.940.002	687.940.315	20
450	687.645.000	687.645.313	
500	687.650.003	687.650.316	
600	687.660.002	687.660.315	

* In boxes of 25 units.

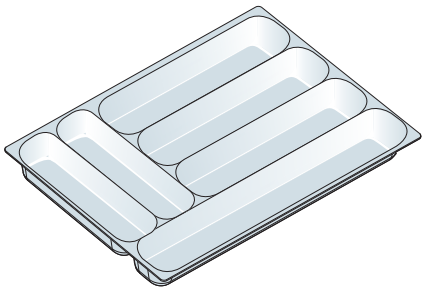

COMBI-480 Cutlery tray, with flap.

Module	White Ral 9001	Metallic grey	
350	687.935.006	687.935.312	25
450	687.945.005	687.945.311	

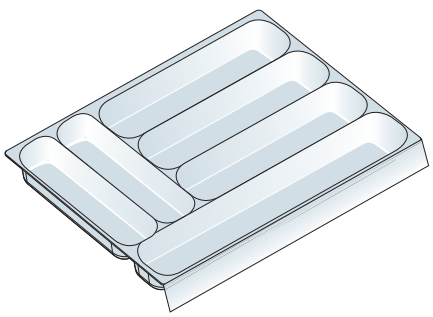

Accessories: *non-slip mat*

Non-slip mat for all drawers, particularly pan drawers, to prevent utensils from slipping and scratching the base. It may be cut directly from the roll according to the drawer's measurements.

Non-slip mat.

Grey	443.050.300	1

Supplied in rolls of 20m. Long x 500mm. Wide.
For orders over 100 units, these mats may be supplied to measure.

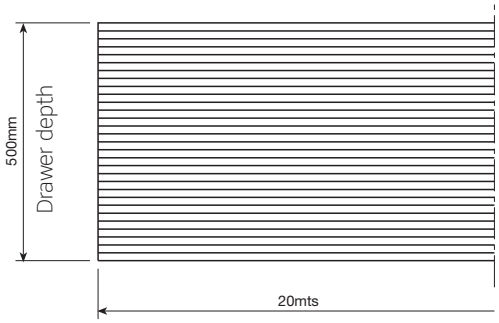

To cut to the width of the drawer

COMBI-480 INDAMATIC

INDAMATIC set for COMBI-480 drawer

White	Ral 9001	198.900.004	50
Grey	Ral 7040	198.900.310	

Each reference consists of one soft-close device and one fixing bracket.

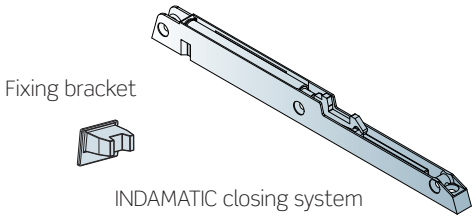

INDAmatic
gradual closing

COMBI-480 Drawer with INDAMATIC cavity.

Module	White Ral 9001	Metallic grey	
300	683.230.004	683.230.310	
350	683.235.000	683.235.313	
400	683.240.003	683.240.316	25
450	683.245.006	683.245.312	
500	683.250.002	683.250.315	
600	683.600.001	683.260.314	

In boxes of 25 units.

COMBI-480 KIT-4 Drawer with INDAMATIC cavity.

Module	White Ral 9001	Gris Metalizado	
300	686.330.002	686.330.315	
350	686.335.005	686.335.311	
400	686.340.001	686.340.314	1
450	686.345.004	686.345.310	
500	686.350.000	686.350.313	
600	686.360.006	686.360.312	

Each box contains 4 drawers with their corresponding runners, front fixing brackets and screws.

COMBI-480 KIT-5 Drawer with INDAMATIC cavity.

Module	White Ral 9001	Metallic grey	
300	686.430.006	686.430.312	
350	686.435.002	686.435.315	
400	686.440.005	686.440.311	1
450	686.445.001	686.445.314	
500	686.450.004	686.450.310	
600	686.460.003	686.460.316	

Each box contains 5 drawers with their corresponding runners, front fixing brackets and screws.

> Runners

Runner for 15÷16mm. end panel.

Ps	White Ral 9001	Metallic grey	
90	788.316.001	788.316.314	100

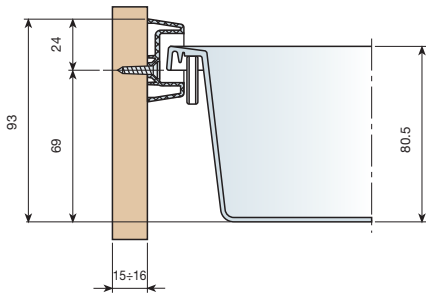

Lenght

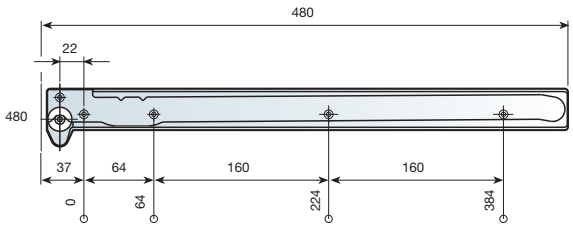

> Front fixing brackets

Adjustable front fixing fixing brackets.

	White Ral 9001	Metallic grey	
	685.000.002	685.000.315	100

Reference consists of a complete set of fixing brackets.

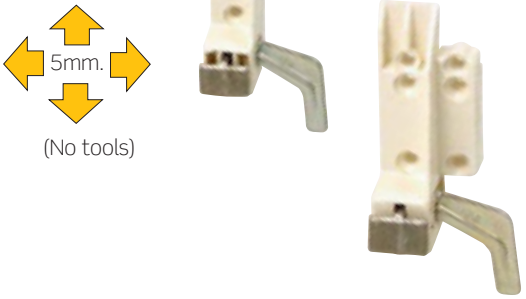

Adjustable front fixing brackets, 15mm with wings.

	White Ral 9001	Metallic grey	
	685.200.003	685.200.316	100

Reference consists of a complete set of brackets.

Module	F
300	162
350	212
400	262
450	312
500	362
600	462

NOTE
To fit front fixing bracket with wings "C", 30mm. must be added to figure **F**.

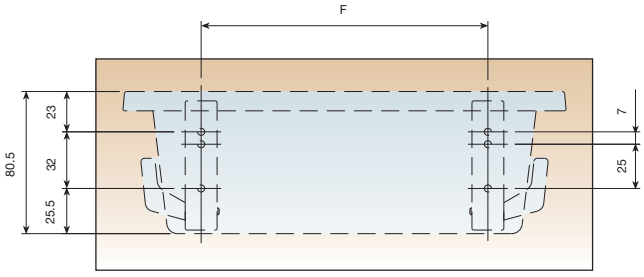

Assembly

Fixing method to the side panel

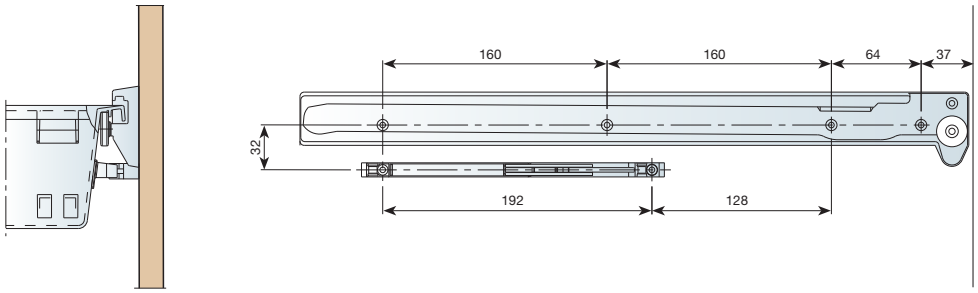

Fixing bracket assembly

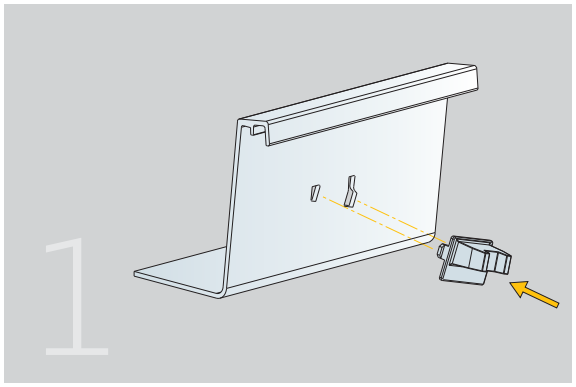

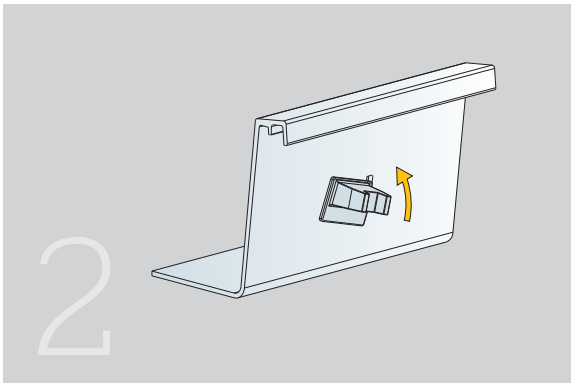

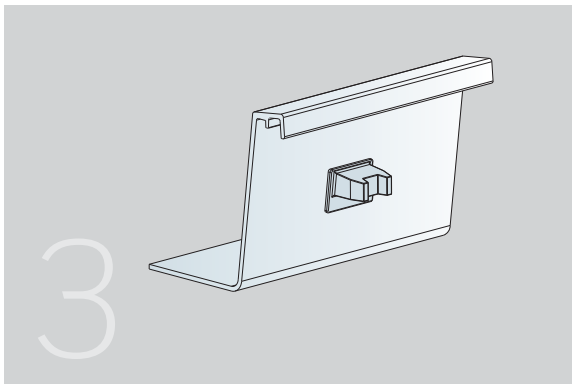

NOTE
The Indamatic gradual soft closing system is installed on the right side of the drawer.

BARANDILLA
Pan drawer

pp.

1 BARANDILLA PAN DRAWER 518

- Components 518
- Runner 518
- Centerer for drawer fronts 518

1 **BARANDILLA** PAN DRAWER

Components

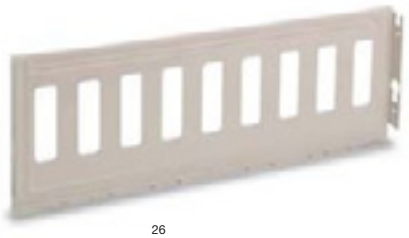

Barandilla drawer side.

Length	White Ral 9001	
430	745.043.806	10
480	745.048.802	

Supplied with fixing screws and washers.



Runner

GACELA runner with self-closing system.

Length	White Ral 9001	
430	760.043.804	100
480	760.048.800	

Centerer for drawer fronts

Centerer for fronts.

White	731.000.001	2.500

Fixing screw M4 x 22.

Zinc-coated	957.022.032	2.500

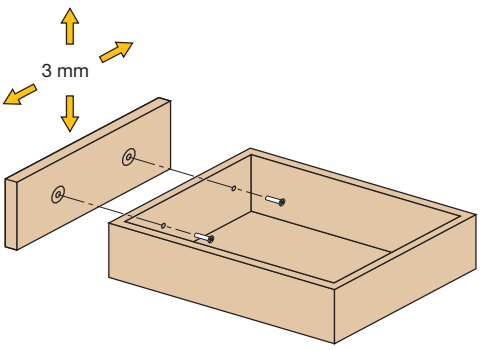

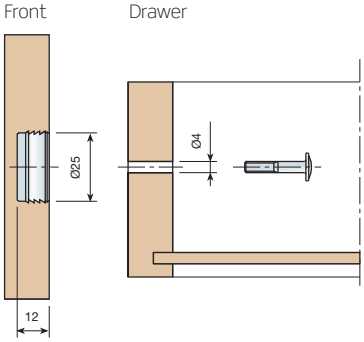

INDA-matic
gradual closing

UNDER-OVEN
Drawer

This drawer has been designed for making the most of the free space under the oven and behind the plinth. For 600mm module and with three adjustments. Indamatic soft close optional.

pp.

1 DRAWER 520

2 TECHNICAL DATA 521

1 DRAWERS

This drawer has been designed for making the most of the free space under the oven and behind the plinth. For 600mm module and with three adjustments.

KIT-5 Under-oven drawer.

Module (mm)	Leg mm	Grey Ral 7040	White Ral 9001	
600	100-140	681.960.311	681.960.005	1
600	140-220	681.965.314	681.965.001	

Reference consists of 5 drawers, with their corresponding runners, front. Fixing brackets, and the bag containing 4 bases and 4 legs.

KIT-5 Under-oven drawer with **Indamatic**.

Module (mm)	Leg mm	Grey Ral 7040	White Ral 9001	
600	100-140	681.760.310	681.760.004	1
600	140-220	681.765.313	681.765.000	

Reference consists of 5 drawers, with their corresponding runners, front fixing brackets, and the bag containing 4 bases and 4 legs.

INDAmatic
gradual closing

Mat for **UNDER-OVEN** drawer.

Module (mm)	Grey Ral 7037	
600	443.260.300	20

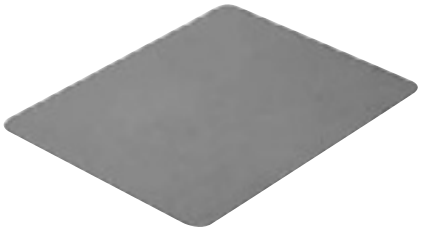

Components

MARC runner

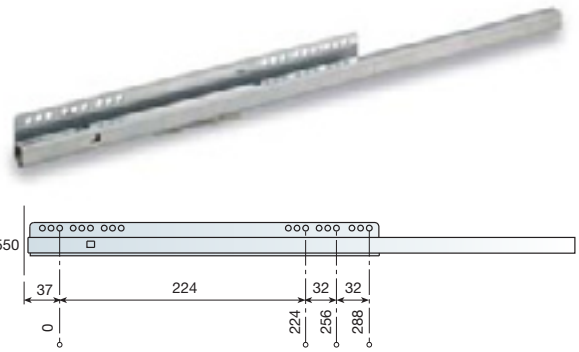

Leg

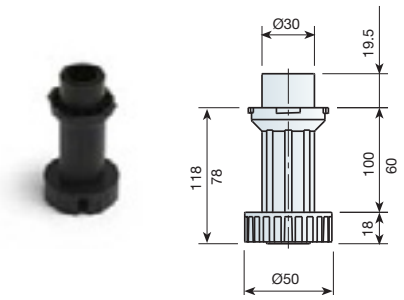

Drawer front coupler

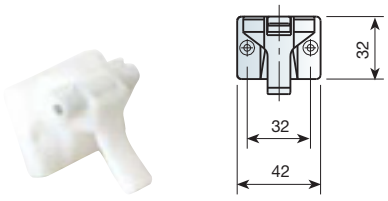

Adaptor

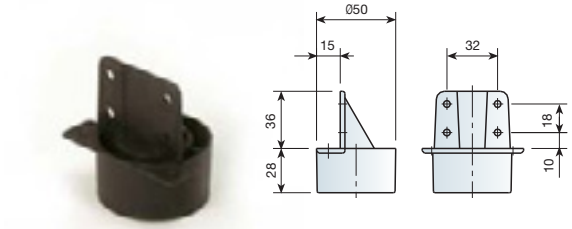

2 TECHNICAL DATA

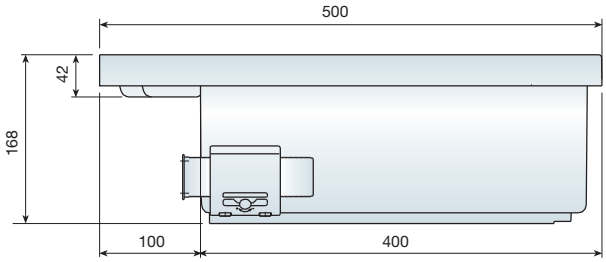

Fixing of The base

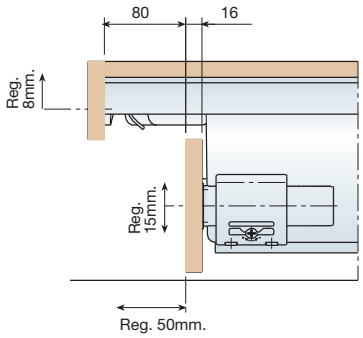

(No tools)

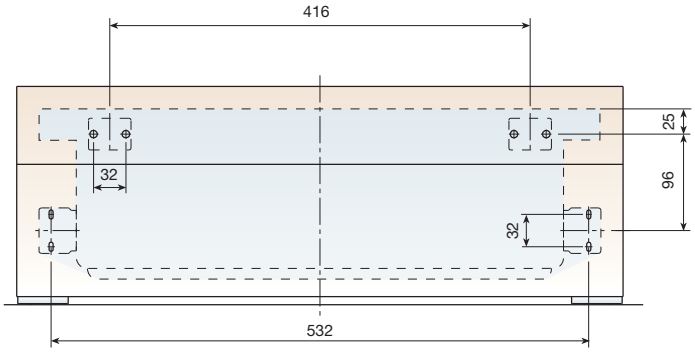

INDAmatic
gradual closing

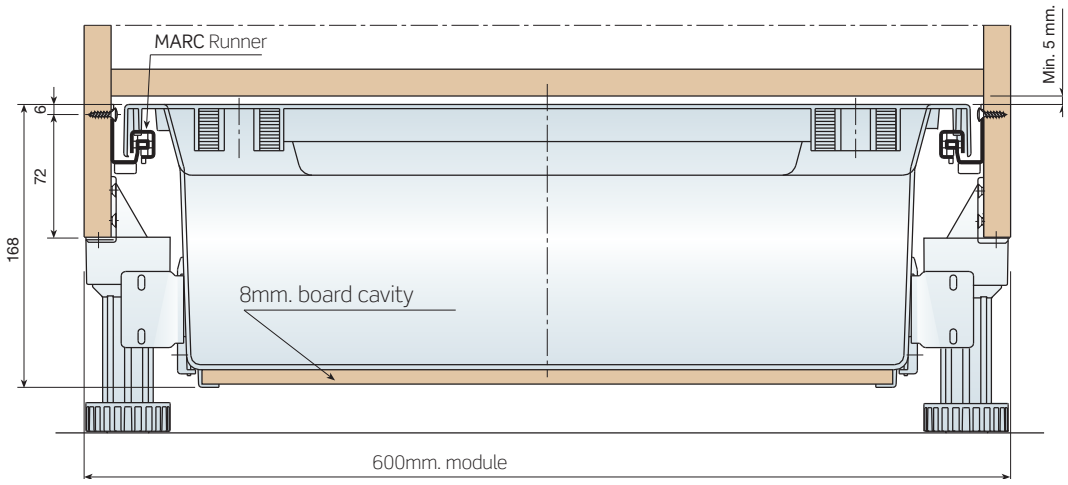

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

SUPRAPLEX
SUPRAKIT
Drawers

The made to measure metal drawer

The great variety of sizes currently on the market has led us to develop this highly versatile drawer, covering an immense number of possibilities in both depth, ranging from 250 to 800mm, and width, varying from 175 to 1,200mm with SUPRAKIT, which is supplied in 3 pieces, width sizes of even below 175mm are offered.

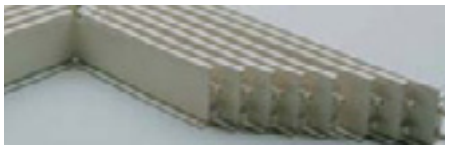

These 3 heights enable the different needs arising in the furniture industry to be catered for: the low 75mm drawer, the medium-sized 107mm drawer and the high 139mm drawer.

The environmentally conscious solution

Made in steel, the drawers are 100% recyclable. Furthermore, they only need a 3mm thick base, which means an important wood saving.

Good Stacking

There are great savings in storage and transport, as the drawers are stackable and take up little space.

The ideal colour

The great variety of designs and finishes means that INDAUX presents these 5 colours to meet the different trends in today's furniture. For longer runs, we can even supply any other specific colour required.



> White Ral 9001

> Black Ral 9005

> Silver grey



> White Ral 9003

> Grey Ral 7040



> OAK

Accurate fitting

Equipped with a simple mechanism, which allows fitting the front plate to the sidewall with a simple lever. Depending on the width of the drawer, the manufacturer may fit some supports to secure the base to the front. This is all achieved in just one drilling action, avoiding the classic groove on the front plate.

Many accessories

The versatility of this drawer allows its use in any kind of furniture, such as kitchen, occasional, bedroom, office.... You will always find the necessary accessories to complete your furniture. Trays, pencil holders, filing cabinet accessories, pan drawer extenders, cutlery trays... are always available.

SUPRAPLEX / **SUPRAKIT**
Easy manual assembly

SUPRAPLEX

1

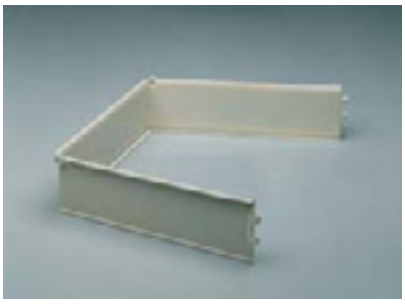

Simply fold the metal piece into a U.

2

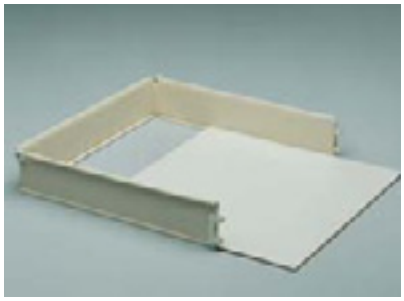

Fit the base into the drawer channel.

3

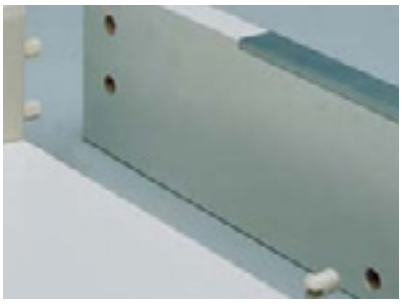

Fit the front onto the fixing dowels.

4

Turn 180° and the SUPRAPLEX drawer will be assembled.

5

This drawer front fixing bracket will allow a vertical adjustment of +/-2mm.

Very simple and easy to assemble, as no tools or machinery are required.

SUPRAKIT

1

Just fit the ribs of the three pieces manually.

2

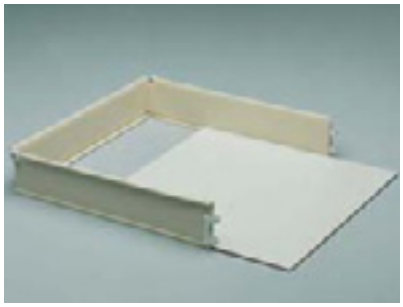

Fit the base into the drawer channel.

3

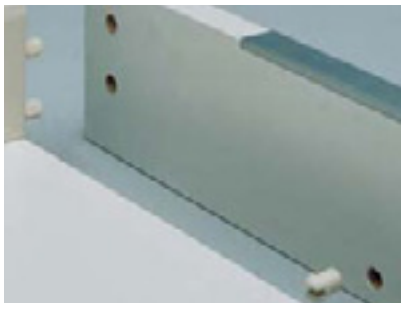

Fit the front onto the fixing dowels.

4

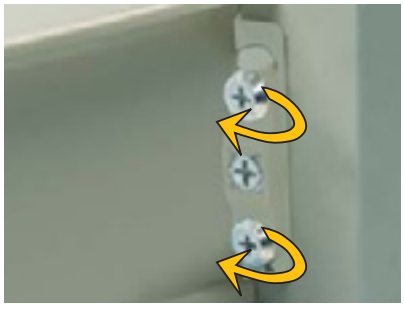

Turn 180° and the SUPRAKIT drawer will be assembled.

5

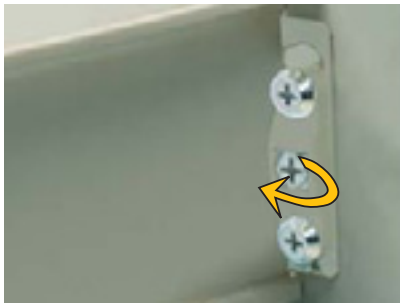

This drawer front fixing bracket will allow a vertical adjustment of +/-2mm.

INDAmatic
gradual closing

SUPRAPLEX
SUPRAKIT

Drawers

An entry-price to metal drawer concept with multiple possibilities and fast tool free assembly: SUPRAPLEX, a single foldable piece. SUPRAKIT, 3 pieces to be manually assembled. Indamatic soft close option.

pp.

1 SUPRAPLEX DRAWER 540

- Drawers 540
- Runners 542
- SUPRAPLEX standard kitchen 543
- SUPRAPLEX standard office 544
- Support 545
- SUPRAPLEX Indamatic window ..... INDAmatic 546
- SUPRAPLEX Indamatic independent ..... INDAmatic 548

2 SUPRAKIT drawers 549

- Drawers 550
- Runners 551
- Support 552
- Adaptor for wooden backs 552
- SUPRAKIT Indamatic independent ..... INDAmatic 553

3 PAN DRAWER ACCESSORIES 554


4 OFFICE ACCESSORIES 555

- Filing drawer 555
- Pen tray 555
- Interior tray 557
- Divider 557
- Central locking 558
- Anti-tilt device 559

5 TECHNICAL DATA 560

1 SUPRAPLEX DRAWER

SUPRAPLEX: Drawers

Drawers made from painted steel and which fold manually. They are made to measure according to the client's requirements. No tools are required for their assembly and they are easily stacked. They are also 100% recyclable.

75, 107 y 139mm. SUPRAPLEX Drawers

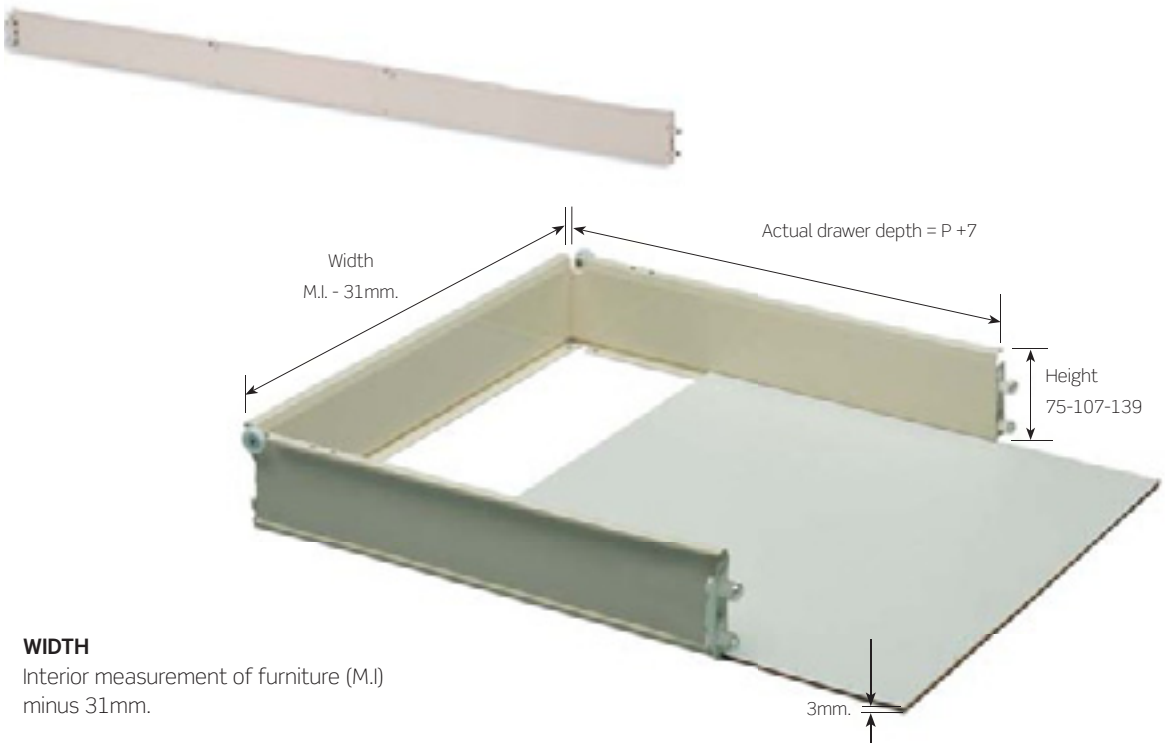

WIDTH
Interior measurement of furniture (M.I) minus 31mm.

ACTUAL DRAWER DEPTH
Nominal Drawer Depth (P) + 7mm.

SAMPLE ORDER FOR **SUPRAPLEX**

If, for example, you require 400 white drawers, 480 mm deep, 369 mm wide and 75 mm high, you should place your order in the following way:

Quantity	Reference	Width
400 supraplex drawers	665.480.001	369mm.
400 sets of runners	672.148.002	

SUPRAPLEX: Drawers

SUPRAPLEX 75 drawers.

drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey Ral 9006	Oak	
250	665.250.003	665.250.132	665.250.025	665.250.316	665.250.810	665.250.095	
270	665.270.001	665.270.130	665.270.023	665.270.314	665.270.815	665.270.093	
300	665.300.005	665.300.134	665.300.020	665.300.311	665.300.812	665.300.090	
350	665.350.000	665.350.136	665.350.022	665.350.313	665.350.814	665.350.092	
400	665.400.002	665.400.131	665.400.024	665.400.315	665.400.816	665.400.094	25
450	665.450.004	665.450.133	665.450.026	665.450.310	665.450.811	665.450.096	
480	665.480.001	665.480.130	665.480.023	665.480.314	665.480.815	665.480.093	
500	665.500.006	665.500.135	665.500.021	665.500.312	665.500.813	665.500.091	
550	665.550.001	665.550.130	665.550.023	665.550.314	665.550.815	665.550.093	



Minimum order of 200 drawers per reference. Please specify the drawer width when ordering.

SUPRAPLEX 107 drawers.

drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey Ral 9006	Oak	
250	666.250.001	666.250.130	666.250.023	666.250.314	666.250.815	666.250.093	
270	666.270.006	666.270.135	666.270.021	666.270.312	666.270.813	666.270.091	
300	666.300.003	666.300.132	666.300.025	666.300.316	666.300.810	666.300.095	
350	666.350.005	666.350.134	666.350.020	666.350.311	666.350.812	666.350.090	
400	666.400.000	666.400.136	666.400.022	666.400.313	666.400.814	666.400.092	25
450	666.450.002	666.450.131	666.450.024	666.450.315	666.450.816	666.450.094	
480	666.480.006	666.480.135	666.480.021	666.480.312	666.480.813	666.480.091	
500	666.500.004	666.500.133	666.500.026	666.500.310	666.500.811	666.500.096	
550	666.550.006	666.550.135	666.550.021	666.550.312	666.550.813	666.550.091	



Minimum order of 200 drawers per reference. Please specify the drawer width when ordering.

SUPRAPLEX 139 drawers.

drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey Ral 9006	Oak	
250	667.250.006	667.250.135	667.250.021	667.250.312	667.250.813	667.250.091	
270	667.270.004	667.270.133	667.270.026	667.270.310	667.270.811	667.270.096	
300	667.300.001	667.300.130	667.300.023	667.300.314	667.300.815	667.300.093	
350	667.350.003	667.350.132	667.350.025	667.350.316	667.350.810	667.350.095	
400	667.400.005	667.400.134	667.400.020	667.400.311	667.400.812	667.400.090	25
450	667.450.000	667.450.136	667.450.022	667.450.313	667.450.814	667.450.092	
480	667.480.004	667.480.133	667.480.026	667.480.310	667.480.811	667.480.096	
500	667.500.002	667.500.131	667.500.024	667.500.315	667.500.816	667.500.094	
550	667.550.004	667.550.133	667.550.026	667.550.310	667.550.811	667.550.096	



Minimum order of 200 drawers per reference. Please specify the drawer width when ordering.

NOTES
When placing an order, customers should provide the measurements of the back and side of the drawer.
In this regard it is important to bear in mind what is meant by these two dimensions.

SUPRAPLEX: Runners

GACELA Runner.

Nominal drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey Ral 9006	Oak	
250	672.125.005	672.125.134	672.125.020	672.125.311	672.125.812	672.125.090	
270	672.127.002	672.127.131	672.127.024	672.127.315	672.127.816	672.127.094	
300	672.130.001	672.130.130	672.130.023	672.130.314	672.130.815	672.130.093	
350	672.135.004	672.135.133	672.135.026	672.135.310	672.135.812	672.135.096	
400	672.140.000	672.140.136	672.140.022	672.140.313	672.140.814	672.140.092	100
450	672.145.003	672.145.132	672.145.025	672.145.316	672.145.810	672.145.095	
480	672.148.002	672.148.131	672.148.024	672.148.315	672.148.816	672.148.094	
500	672.150.006	672.150.135	672.150.021	672.150.312	672.150.813	672.150.091	
550	672.155.002	672.155.131	672.155.024	672.155.315	672.155.816	672.155.094	

Minimum order of 200 sets of runners per reference.
With these references the profiles are packed separtely in two boxes containing 100 units each.

GACELA Full extension runner.

Nominal drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey Ral 9006	Oak	
250	653.725.004	653.725.133	653.725.026	653.725.310	653.725.811	653.725.096	
270	653.727.001	653.727.130	653.727.023	653.727.314	653.727.815	653.727.093	
300	653.730.000	653.730.136	653.730.022	653.730.313	653.730.814	653.730.092	
350	653.735.003	653.735.132	653.735.025	653.735.316	653.735.810	653.735.095	
400	653.740.006	653.740.135	653.740.021	653.740.312	653.740.813	653.740.091	100
450	653.745.002	653.745.131	653.745.024	653.745.315	653.745.816	653.745.094	
480	653.748.001	653.748.130	653.748.023	653.748.314	653.748.815	653.748.093	
500	653.750.005	653.750.134	653.750.020	653.750.311	653.750.812	653.750.090	
550	653.755.001	653.755.130	653.755.023	653.755.314	653.755.815	653.755.093	

Minimum order of 200 sets of runners per reference. Reference consists of 2 S-profiles an 2 U-profiles. U-profiles are packed separately in boxes of 100 runners and S-profiles are packed separately in boxes of 50 runners.

Runners for 75, 107, and 139mm
SUPRAPLEX drawers.

SUPRAPLEX: Standard kitchen drawers and runners

SUPRAPLEX 75 Kitchen drawer (Actual drawer depth = 487mm.).

Module (16 mm. side)	SUPRAPLEX 75	SUPRAPLEX 107	
300	672.730.004	672.830.001	
350	672.735.000	672.835.004	
400	672.740.003	672.840.000	25
450	672.745.006	672.845.003	
500	672.750.002	672.850.006	
600	672.760.001	672.860.005	

Minimum order of 200 drawers per reference. 25 drawers per box.

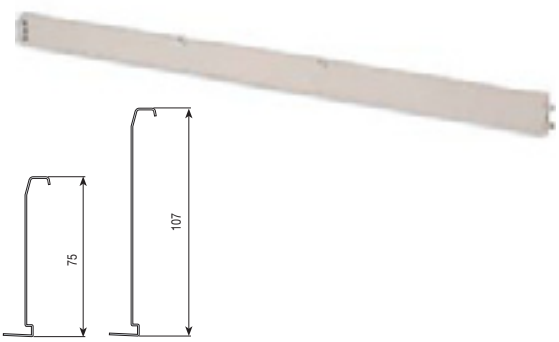

GACELA Runner (Actual drawer depth = 487mm.).

	White Ral 9001	
Normal	672.148.002	100
Full extension	653.748.000	

Minimum order of 200 sets of runners per reference.
In these references the profiles are packed separately in two boxes of100 units.

Cutlery tray (Actual drawer depth = 487mm.).

Module (16 mm. side)	White Ral 9001	
300	687.430.004	
350	687.435.000	
400	687.440.003	20
450	687..445.006	
500	687.450.002	
600	687.460.001	

Minimum order of 200 sets of runners per reference.

Module

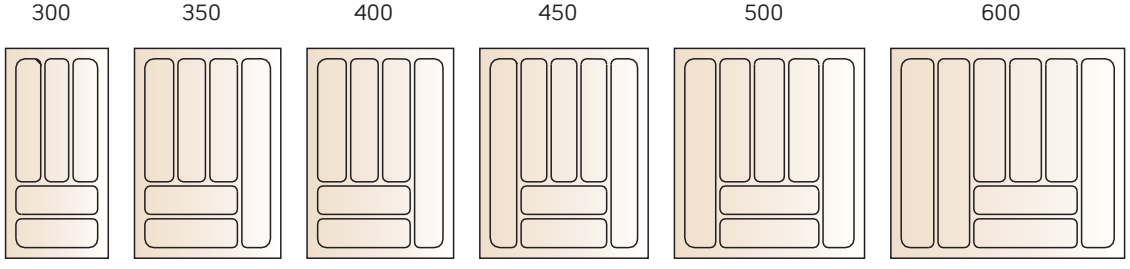

SUPRAPLEX: Standard office drawers and runners

SUPRAPLEX 75 Office drawer (Actual drawer depth = 507mm.).

Interior width: 392 mm	Grey Ral 7040	Black Ral 9005	
SUPRAPLEX 75	672.439.316	672.439.025	
SUPRAPLEX 107	672.539.313	672.539.022	25
SUPRAPLEX 139	672.639.310	672.639.026	

Interior width: 425mm			
SUPRAPLEX 75	672.442.315	672.442.024	
SUPRAPLEX 107	672.542.312	672.542.021	25
SUPRAPLEX 139	672.642.316	672.642.025	

Minimum order of 200 drawers per reference. 25 units. per box.

Gacela runner, (Actual drawer depth = 507mm.).

	Grey Ral 7040	Black Ral 9005	
Normal	672.150.312	672.150.021	
Full extension	672.750.311	672.750.020	100

Minimum order 200 sets of runners. In these references profiles are packed separately into two cases of 100 units.

SUPRAPLEX: Support

Support.

10mm. Drilling diameter		
White Ral 9001	748.400.004	
White Ral 9003	748.400.133	
Black Ral 9005	748.400.026	1000
Grey Ral 7040	748.400.310	
Oak	748.400.096	

For drawer widths of more than 500mm, it is advisable to use more than one support. Delivered in boxes of 1000 units.

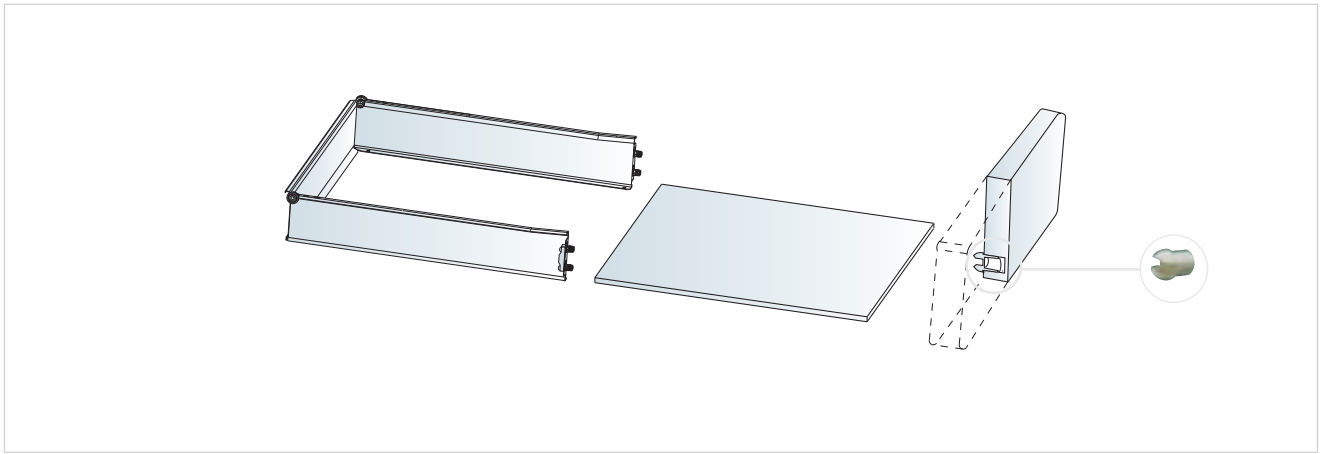

SUPRAPLEX INDAMATIC window

INDAMATIC set for SUPRAPLEX drawer

White	Ral 9001	197.400.000	
White	Ral 9003	197.400.136	
Black	Ral 9005	197.400.022	50
Grey	Ral 7040	197.400.313	
Oak	Ral 9005	197.400.092	

Each reference consists of one soft-close device and one catch.

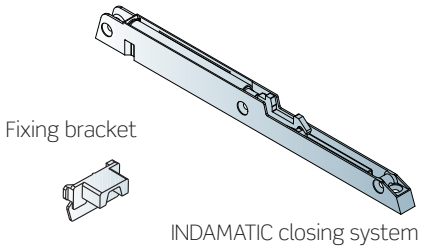

INDA-matic
gradual closing

SUPRAPLEX 75 drawers with indamatic cavity.

drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey Ral 9006	Oak	
250	665.825.005	665.825.134	665.825.020	665.825.311	665.825.812	665.825.090	
270	665.827.002	665.827.131	665.827.024	665.827.315	665.827.816	665.827.094	
300	665.830.001	665.830.130	665.830.023	665.830.314	665.830.815	665.830.093	
350	665.835.004	665.835.133	665.835.026	665.835.310	665.835.811	665.835.096	
400	665.840.000	665.840.136	665.840.022	665.840.313	665.840.814	665.840.092	25
450	665.845.003	665.845.132	665.845.025	665.845.316	665.845.810	665.845.095	
480	665.848.002	665.848.131	665.848.024	665.848.315	665.848.816	665.848.094	
500	665.850.006	665.850.135	665.850.021	665.850.312	665.850.813	665.850.091	
550	665.855.002	665.855.131	665.855.024	665.855.315	665.855.816	665.855.094	



Minimum order of 200 drawers per reference. Please specify the drawer width when ordering.

SUPRAPLEX 107 drawers with indamatic cavity.

drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey Ral 9006	Oak	
250	666.825.003	666.825.132	666.825.025	666.825.316	666.825.810	666.825.095	
270	666.827.000	666.827.136	666.827.022	666.827.313	666.827.814	666.827.092	
300	666.830.006	666.830.135	666.830.021	666.830.312	666.830.813	666.830.091	
350	666.835.002	666.835.131	666.835.024	666.835.315	666.835.816	666.835.094	
400	666.840.005	666.840.134	666.840.020	666.840.311	666.840.812	666.840.090	25
450	666.845.001	666.845.130	666.845.023	666.845.314	666.845.815	666.845.093	
480	666.848.000	666.848.136	666.848.022	666.848.313	666.848.814	666.848.092	
500	666.850.004	666.850.133	666.850.026	666.850.310	666.850.811	666.850.096	
550	666.855.000	666.855.136	666.855.022	666.855.313	666.855.814	666.855.092	



Minimum order of 200 drawers per reference. Please specify the drawer width when ordering.

Assembly

Fixing method to the side panel

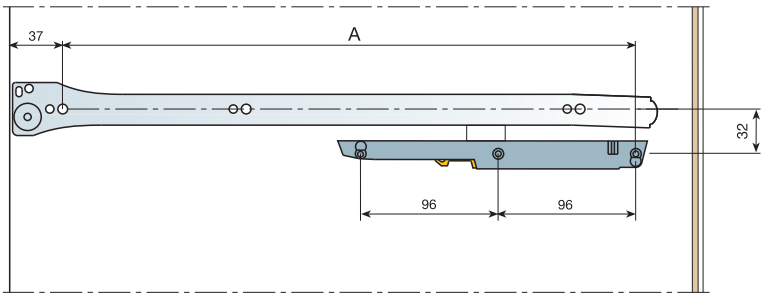

Drawer Length	A
250	203
270	223
300	253
350	303
400	353
450	403
480	433
500	453
550	503

Fixing method to the drawer

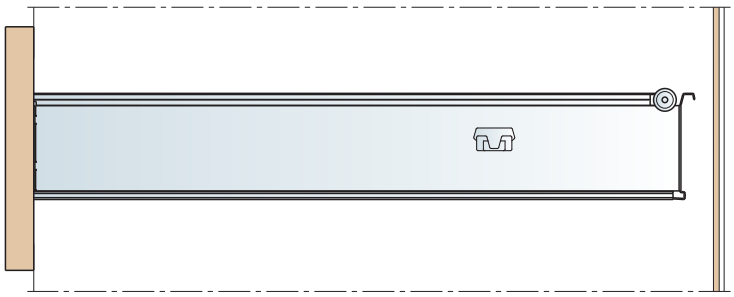

Fixing bracket assembly

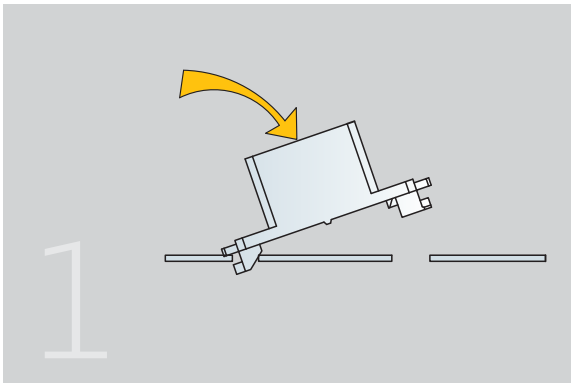

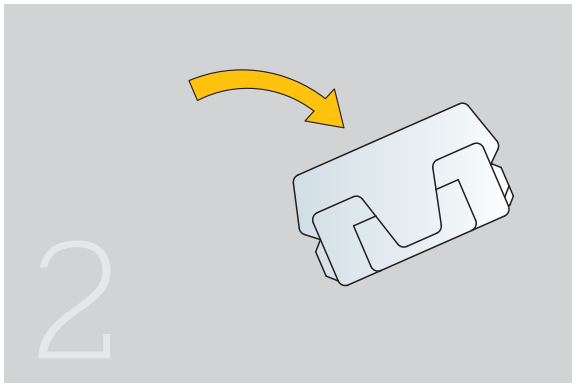

SUPRAPLEX INDAMATIC independent

INDAMATIC set for SUPRAPLEX and SUPRAKIT drawers

White	Ral 9001	198.800.000	50
White	Ral 9003	198.800.136	
Black	Ral 9005	198.800.022	
Grey	Ral 7040	198.800.313	
Oak		198.800.092	

Each reference consists of one soft-close device and one pin.



INDAMATIC closing system

Fixing bracket

INDA-matic
gradual closing

Assembly

Fixing method to the side panel

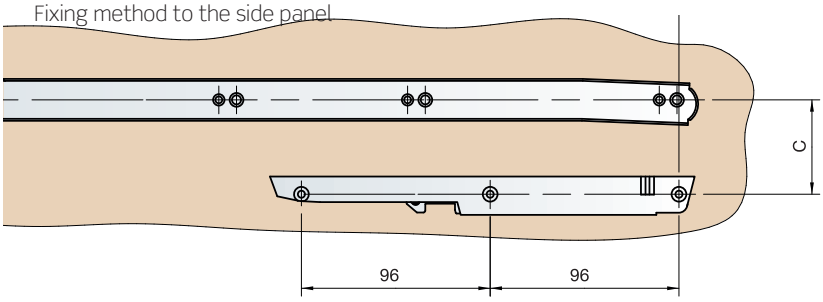

Drawer Length	A	B
250	203	118.5
270	223	138.5
300	253	168.5
350	303	218.5
400	353	268.5
450	403	318.5
480	433	348.5
500	453	368.5
550	503	418.5

Drawer Height	C
75	48
107	80
139	112

Fixing method to the drawer

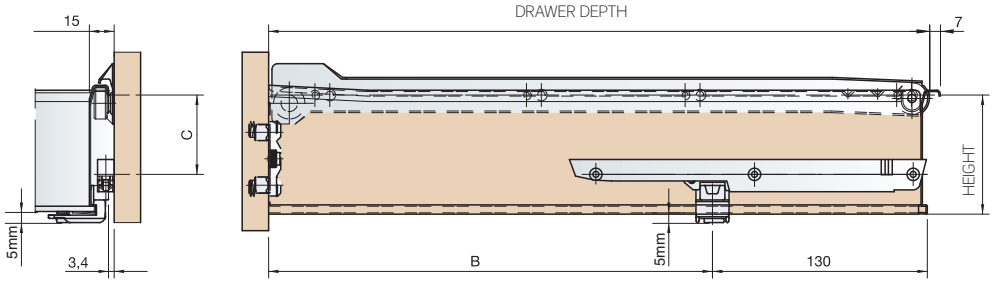

Fixing bracket assembly

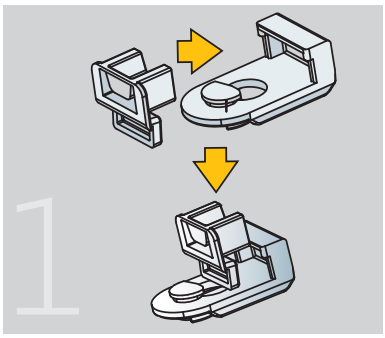

Place the fixing bracket onto the metal support.

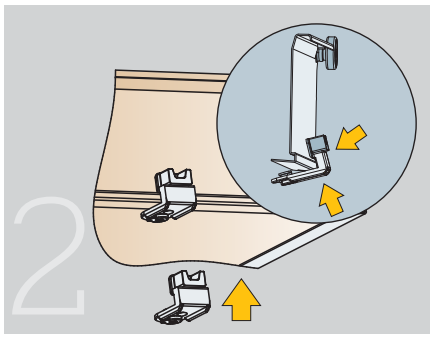

Place the set onto the inferior wing of the drawer.

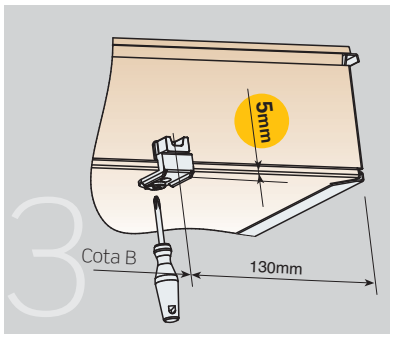

Position it on the wing and screw on

2 SUPRAKIT DRAWER

SUPRAKIT: Drawers

Drawers in three pieces and made from painted steel. They are made to measure according to the client's requirements. No tools are required for their assembly and they are easily stacked. They are also 100% recyclable

75, 107 and 139 mm SUPRAKIT drawers

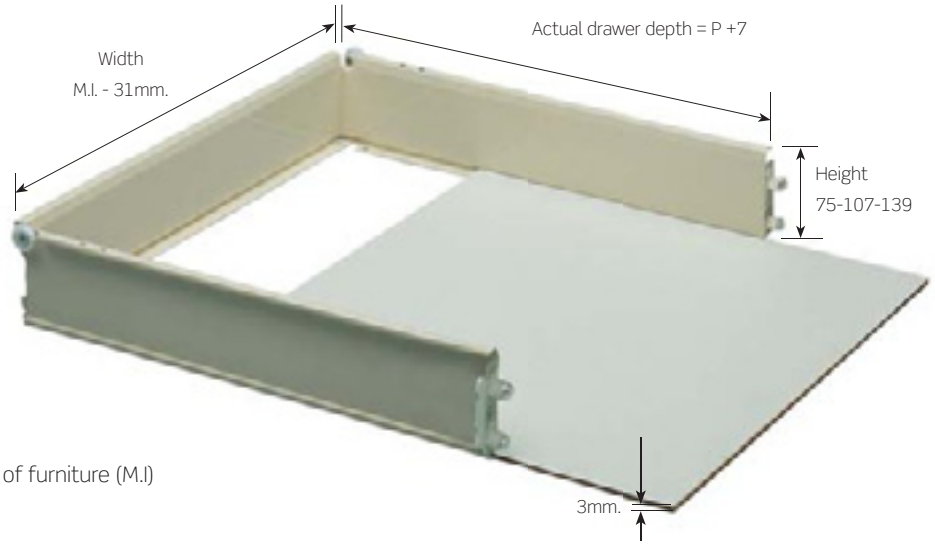

WIDTH
Interior measurement of furniture (M.I) minus 31mm.

ACTUAL DRAWER DEPTH
Nominal Drawer Depth (P) + 7mm.

SAMPLE ORDER FOR **SUPRAKIT**

If, for example, you require 400 white drawers, 480mm deep, 369mm wide and 75mm high, you should place your order in the following way:

Quantity	Reference	Width
400 sets of sides	668.148.003	
400 backs	669.000.006	369mm.
400 sets of runners	672.148.002	

SUPRAKIT: Drawers

SUPRAKIT 75 drawers.

Drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey	Oak	
250	668.125.006	668.125.135	668.125.021	668.125.312	668.125.813	668.125.091	
270	668.127.003	668.127.132	668.127.025	668.127.316	668.127.810	668.127.095	
300	668.130.002	668.130.131	668.130.024	668.130.315	668.130.816	668.130.094	
350	668.135.005	668.135.134	668.135.020	668.135.311	668.135.812	668.135.090	
400	668.140.001	668.140.130	668.140.023	668.140.314	668.140.815	668.140.093	25
450	668.145.004	668.145.133	668.145.026	668.145.310	668.145.811	668.145.096	
480	668.148.003	668.148.132	668.148.025	668.148.316	668.148.810	668.148.095	
500	668.150.000	668.150.136	668.150.022	668.150.313	668.150.814	668.150.092	
550	668.155.003	668.155.132	668.155.025	668.155.316	668.155.810	668.155.095	
Back	669.000.006	669.000.135	669.000.021	669.000.312	669.000.813	669.000.091	40



Minimum order of 400 sets of sides (left side + right side) and 200 backs per reference. Please specify the width of the back when ordering.

SUPRAKIT 107 drawers.

Drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey	Oak	
250	668.225.003	668.225.132	668.225.025	668.225.316	668.225.810	668.225.095	
270	668.227.000	668.227.136	668.227.022	668.227.313	668.227.814	668.227.092	
300	668.230.006	668.230.135	668.230.021	668.230.312	668.230.813	668.230.091	
350	668.235.002	668.235.131	668.235.024	668.235.315	668.235.816	668.235.094	
400	668.240.005	668.240.134	668.240.020	668.240.311	668.240.812	668.240.090	25
450	668.245.001	668.245.130	668.245.023	668.245.314	668.245.815	668.245.093	
480	668.248.000	668.248.136	668.248.022	668.248.313	668.248.814	668.248.092	
500	668.250.004	668.250.133	668.250.026	668.250.310	668.250.811	668.250.096	
550	668.255.000	668.255.136	668.255.022	668.255.313	668.255.814	668.255.092	
Back	670.000.004	670.000.133	670.000.026	670.000.310	670.000.811	670.000.096	40



Minimum order of 400 sets of sides (left side + right side) and 200 backs per reference. Please specify the width of the back when ordering.

SUPRAKIT 139 drawers.

Drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey	Oak	
250	668.325.000	668.325.136	668.325.022	668.325.313	668.325.814	668.325.092	
270	668.327.004	668.327.133	668.327.026	668.327.310	668.327.811	668.327.096	
300	668.330.003	668.330.132	668.330.025	668.330.316	668.330.810	668.330.095	
350	668.335.006	668.335.135	668.335.021	668.335.312	668.335.813	668.335.091	
400	668.340.002	668.340.131	668.340.024	668.340.315	668.340.816	668.340.094	25
450	668.345.005	668.345.134	668.345.020	668.345.311	668.345.812	668.345.090	
480	668.348.004	668.348.133	668.348.026	668.348.310	668.348.811	668.348.096	
500	668.350.001	668.350.130	668.350.023	668.350.314	668.350.815	668.350.093	
550	668.355.004	668.355.133	668.355.026	668.355.310	668.355.811	668.355.096	
Back	671.000.002	671.000.131	671.000.024	671.000.315	671.000.816	671.000.094	40



Minimum order of 400 sets of sides (left hand + right hand) and 200 backs per reference. Indicate the width of the back when placing your order. Sides packed in boxes of 25 units and backs packed in boxes of 40 units.

NOTES

When placing an order, customers should provide the measurements of the back and side of the drawer.
In this regard it is important to bear in mind what is meant by these two dimensions.

SUPRAKIT: Runners

GACELA Runner.

Nominal drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey	Oak	
250	672.125.005	672.125.134	672.125.020	672.125.311	672.125.812	672.125.090	
270	672.127.002	672.127.131	672.127.024	672.127.315	672.127.816	672.127.094	
300	672.130.001	672.130.130	672.130.023	672.130.314	672.130.815	672.130.093	
350	672.135.004	672.135.133	672.135.026	672.135.310	672.135.812	672.135.096	
400	672.140.000	672.140.136	672.140.022	672.140.313	672.140.814	672.140.092	100
450	672.145.003	672.145.132	672.145.025	672.145.316	672.145.810	672.145.095	
480	672.148.002	672.148.131	672.148.024	672.148.315	672.148.816	672.148.094	
500	672.150.006	672.150.135	672.150.021	672.150.312	672.150.813	672.150.091	
550	672.155.002	672.155.131	672.155.024	672.155.315	672.155.816	672.155.094	

Minimum order of 200 sets of runners per reference. With these references the profiles are packed separtely in two boxes containing 100 units each.

GACELA Full extension runner.

Nominal drawer depth	White Ral 9001	White Ral 9003	Black Ral 9005	Grey Ral 7040	Silver grey	Oak	
250	653.725.004	653.725.133	653.725.026	653.725.310	653.725.811	653.725.096	
270	653.727.001	653.727.130	653.727.023	653.727.314	653.727.815	653.727.093	
300	653.730.000	653.730.136	653.730.022	653.730.313	653.730.814	653.730.092	
350	653.735.003	653.735.132	653.735.025	653.735.316	653.735.810	653.735.095	
400	653.740.006	653.740.135	653.740.021	653.740.312	653.740.813	653.740.091	100
450	653.745.002	653.745.131	653.745.024	653.745.315	653.745.816	653.745.094	
480	653.748.001	653.748.130	653.748.023	653.748.314	653.748.815	653.748.093	
500	653.750.005	653.750.134	653.750.020	653.750.311	653.750.812	653.750.090	
550	653.755.001	653.755.130	653.755.023	653.755.314	653.755.815	653.755.093	

Minimum order of 200 sets of runners per reference. Reference consists of 2 S-profiles an 2 U-profiles. U-profiles are packed separately in boxes of 100 runners and S-profiles are packed separately in boxes of 50 runners.

Runners for 75, 107, and 139mm SUPRAKIT drawers.

SUPRAKIT: Support

Support.

10 mm. Drilling diameter		
White Ral 9001	748.400.004	
White Ral 9003	748.400.133	
Black Ral 9005	748.400.026	1000
Grey Ral 7040	748.400.310	
Oak	748.400.096	

For drawer widths of more than 500mm, it is advisable to use more than One support. Delivered in boxes of 1000 units.

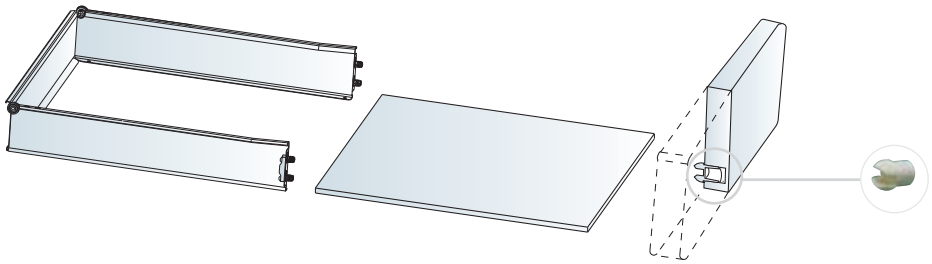

SUPRAKIT: Adaptor for wooden backs

Adaptor for wooden back for **SUPRAKIT** drawer.

	Zinc plated	
SUPRAKIT 75	736.075.034	
SUPRAKIT 107	736.107.035	200
SUPRAKIT 139	736.139.036	

This adaptor enables you to solve any emergency to achieve any drawer width. Note: for modules larger than 500mm, it is recommended that 3 or more adaptors be used. Delivered in boxes of200 units.

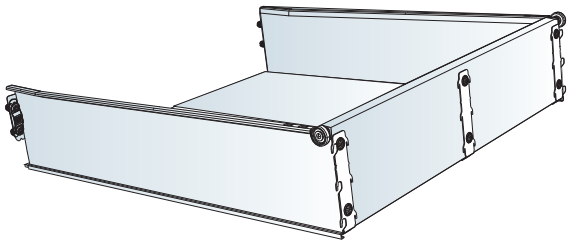

M.I. = Interior measurement of the furniture.
Width = M.I. - 31mm.
P=Nominal Depth of the drawer.

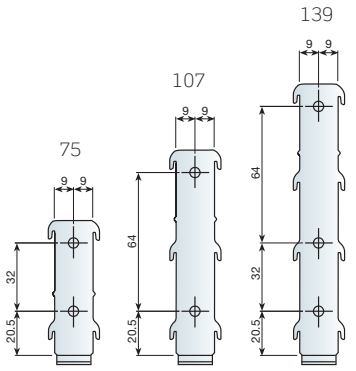

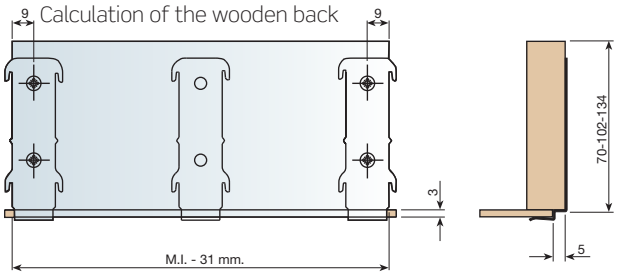

Calculation of base for drawer with wooden back



SUPRAKIT INDAMATIC independent

INDAMATIC set for **SUPRAPLEX** and **SUPRAKIT** drawers

White	Ral 9001	198.800.000	50
White	Ral 9003	198.800.136	
Black	Ral 9005	198.800.022	
Grey	Ral 7040	198.800.313	
Oak		198.800.092	

Each reference consists of one soft-close device and one pin.

INDAMATIC closing system

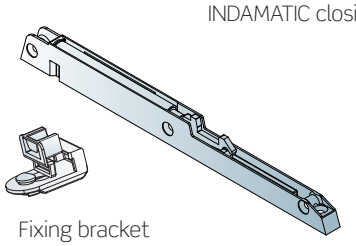

Fixing bracket

INDA-matic gradual closing

Assembly

Fixing method to the side panel

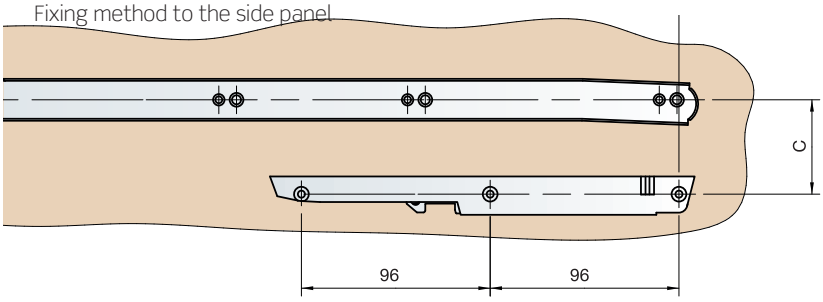

Drawer Length	A	B
250	203	118.5
270	223	138.5
300	253	168.5
350	303	218.5
400	353	268.5
450	403	318.5
480	433	348.5
500	453	368.5
550	503	418.5

Drawer Height	C
75	48
107	80
139	112

Fixing method to the drawer

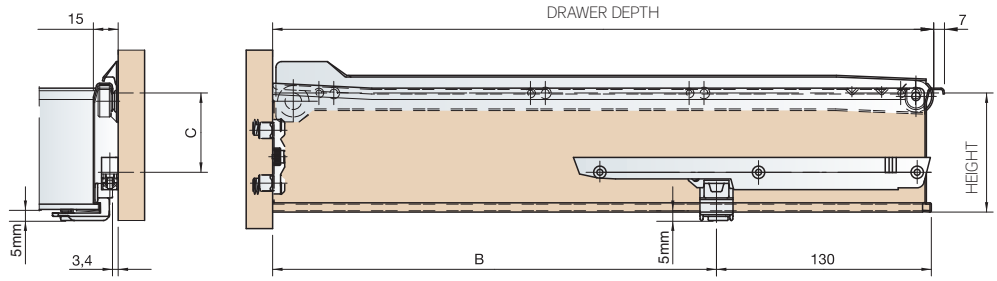

Fixing bracket assembly

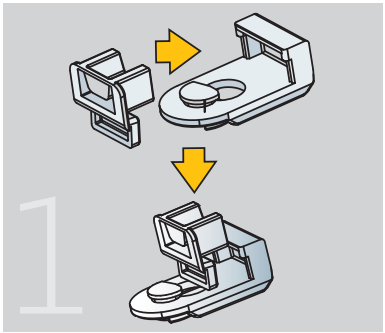

Place the fixing bracket onto the metal support.

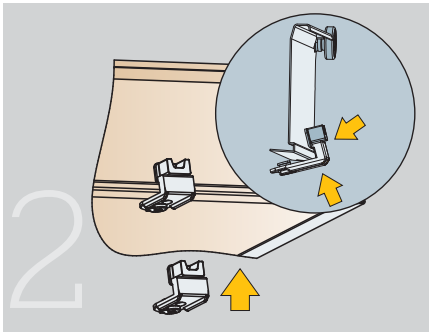

Place the set onto the inferior wing of the drawer.

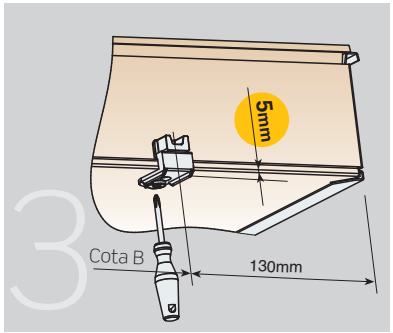

Position it on the wing and screw on

3 PAN DRAWER ACCESSORIES

Pan drawer accessories.

	White Ral 9001	
Complete drawer set	733.500.003	50

This reference includes one complete set of accessories with the following elements: 2 Ø10 front fixing devices, 2 side rails, 1 left hand back support and 1 right hand back support. The dividers can be ordered separately, depending on the number of divisions required.

NOTE
This set of accessories can be adapted to the three heights of SUPRAPLEX and SUPRAKIT.

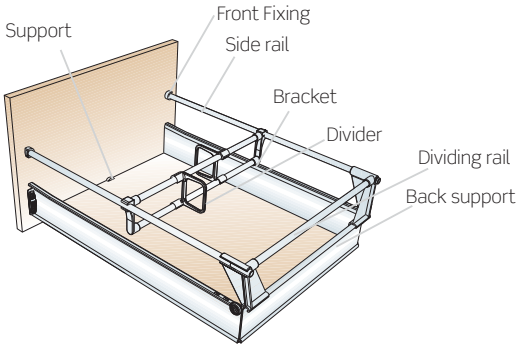

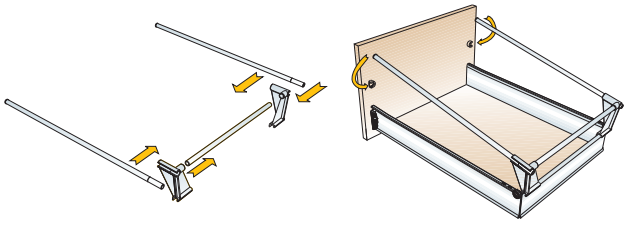

Dividing rail.

Module (16mm side)	White Ral 9001	
300	746.830.000	
350	746.835.003	
400	746.840.006	50
450	746.845.002	
500	746.850.005	
600	746.860.004	
Length 1000mm.	746.800.003	50

Bracket.

	White Ral 9001	
	732.400.001	100

Divider.

	White Ral 9001	
	748.100.006	50

Dimensions (mm.)	D	A	T
SUPRAPLEX 75	96	14	154
SUPRAPLEX 107	96	46	186
SUPRAPLEX 139	128	46	218

M.I. = Interior measurement of furniture

Drilling of the front

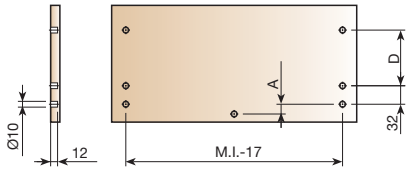





4 OFFICE ACCESSORIES

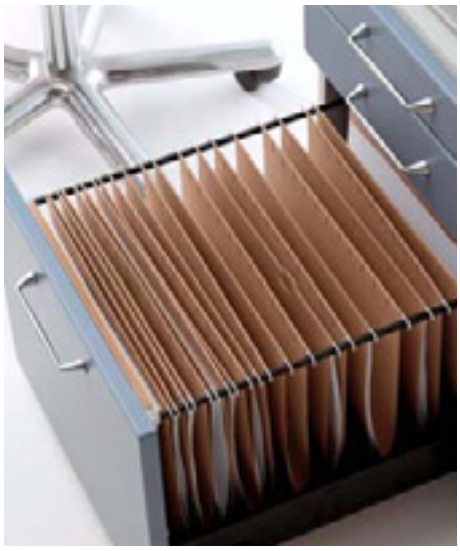

Filing drawer

Filing cabinet accessories. Nominal Drawer Depth (P): 500mm.

	Zinc-coated	Black Ral 9005	
	733.607.033	733.607.022	50

Each reference includes a complete set of accessories with the following elements: 2 Ø10 front fixing devices, 2 Ø8 side rails, 1 left hand back support an 1 right hand back support. 50 units per box.

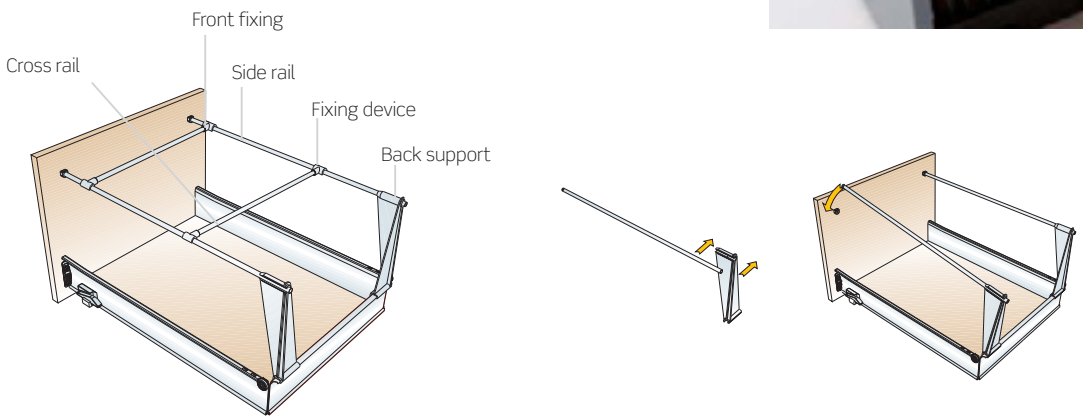

Cross rail set for filing cabinet.

	Zinc-coated	Black Ral 9005	
	733.807.034	733.807.023	200

1 cross rail and 2 fixing devices per reference.



A (mm.)	M.I.=392mm.	M.I.=425mm.
Din a4/Letter	330	330
Folio	-	366
Legal	-	386

Drilling of the front

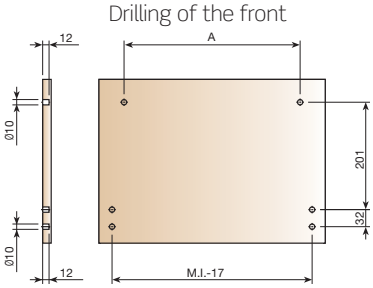





M.I. = Interior measurement of furniture (392 or 425)

Pen tray

Pen tray.

Drawer depth	Grey Ral 7040	Black Ral 9005	
500	662.800.316	662.800.025	25

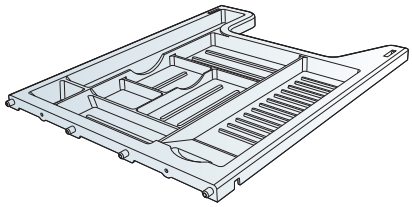

Pen tray runners.

Interior Modulation	Zinc-coated	
392	779.392.751	25
425	779.425.754	

With these references, the runners are packed separately in two boxes containing 25 units each.



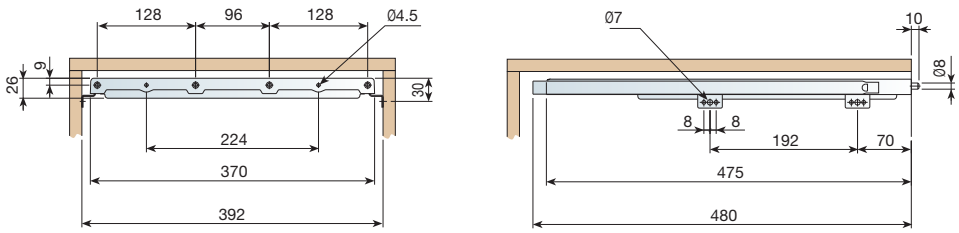

Interior tray

Adjustable interior tray.

	Grey Ral 7040	Black Ral 9005	
1 unit.	735.900.314	735.900.023	25

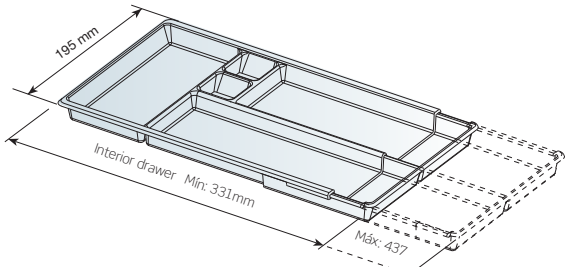

Interior tray.

Interior width	Grey Ral 7040	Black Ral 9005	
380	735.380.310	735.380.026	
392	735.392.313	735.392.022	25
425	735.425.316	735.425.025	

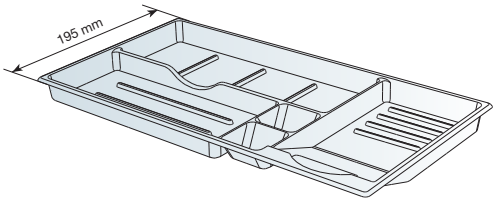

Divider

Divider.

Interior Modulation	Grey Ral 7040	Black Ral 9005	
392	734.239.310	734.239.026	25

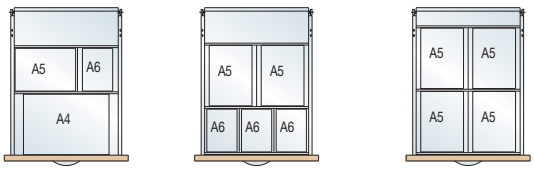

Cross divider.

L = Length	Grey Ral 7040	Black Ral 9005	
160	734.516.311	734.516.020	125
220	734.522.316	734.522.025	

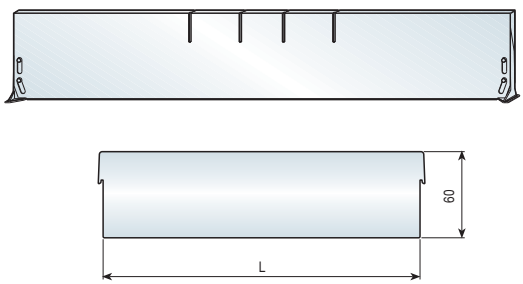

Central locking

Central locking.

	Nickel plated	
	662.600.061	50



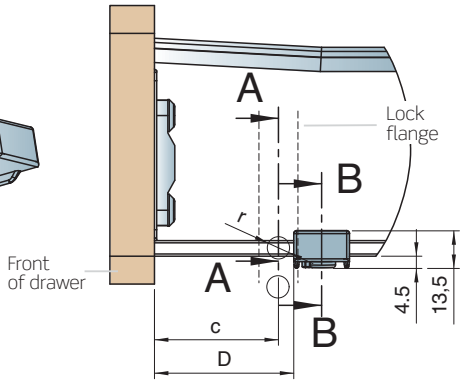

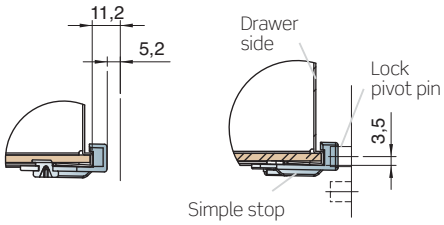

D = c + r + 1

c = Distance from front to centre of closing strip.

r = Radius of lock dowel.

For large production runs, drawer sides can be delivered pre-drilled as per specifications, ready to insert the central lock and anti-tilt device.

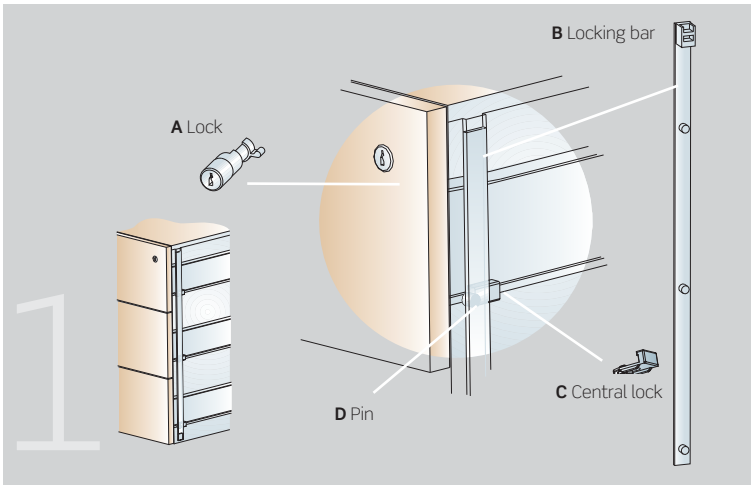

Closed pedestal. With the central lock (**C**), the opening of drawers is impeded by the pins (**D**) of the locking bar (**B**).

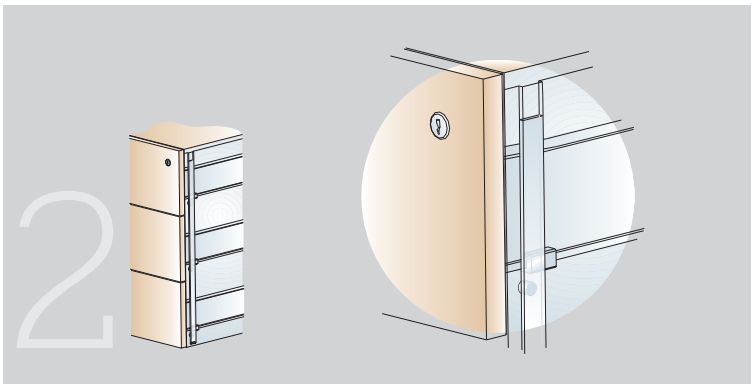

Open pedestal. Turning the key (**A**) makes the locking bar (**B**) move downwards. Drawers can be opened without being impeded by the pins (**D**).

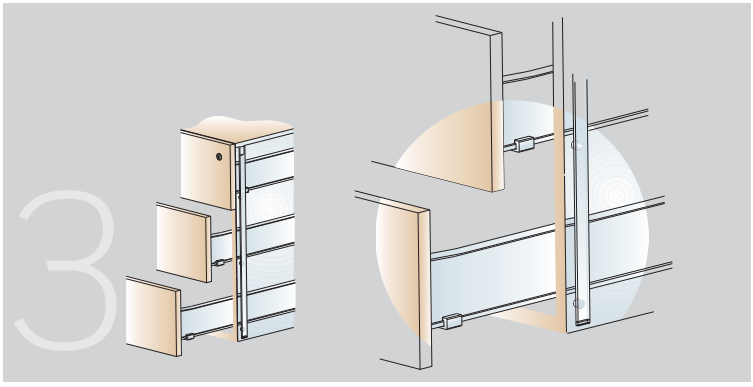

The opening of one drawer is not dependent on the locking bar (**B**), so all the drawers can be opened at the same time.

Anti-tilt device







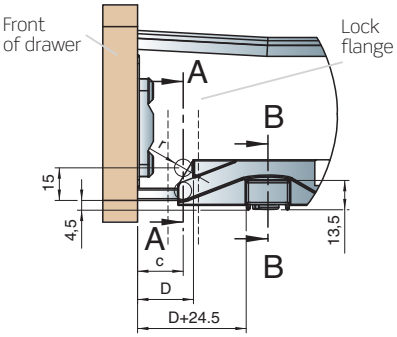

Anti- tilt device.

	Black Ral 9005	
	662.700.021	50

The anti-tilt device is an accessory of the central locking system and cannot be fitted without it. The anti-tilt device is fitted to the central locking system before being fitted to the drawer. 50 units per box.

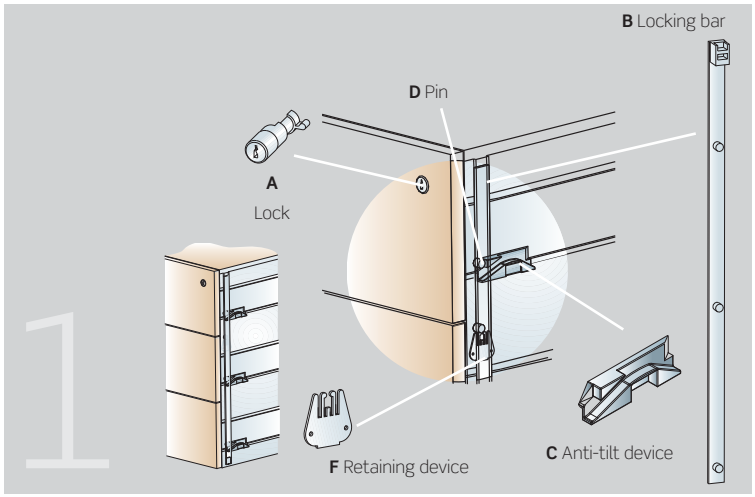

Closed pedestal. With the anti-tilt device (**C**), the opening of drawers is impeded by the pins (**D**) of the locking bar (**B**).

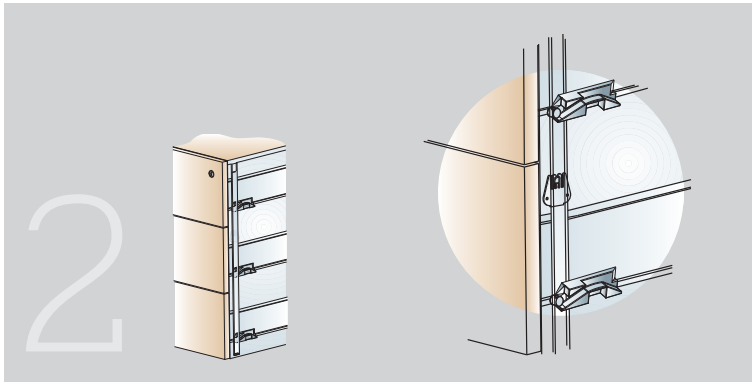

Open pedestal. Turning the key (**A**) makes the locking bar (**B**) move downwards. Drawers can be opened without being impeded by the pins (**D**).

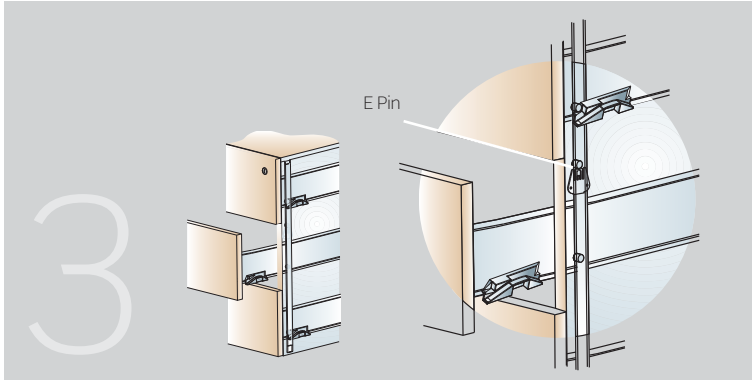

When opening one drawer, the anti-tilt device operates on one pin (**D**) moving the locking bar (**B**) upwards. The retaining device (**F**) prevents the descent of the locking bar (B) holding the pin (**E**). The rest of the drawers cannot be opened. Their respective pin (**D**) is preventing this action. When closing the drawer, the locking bar (**B**) descends allowing the opening of any drawer.

5 TECHNICAL DATA

Drilling and positioning for **GACELA** *runner.*

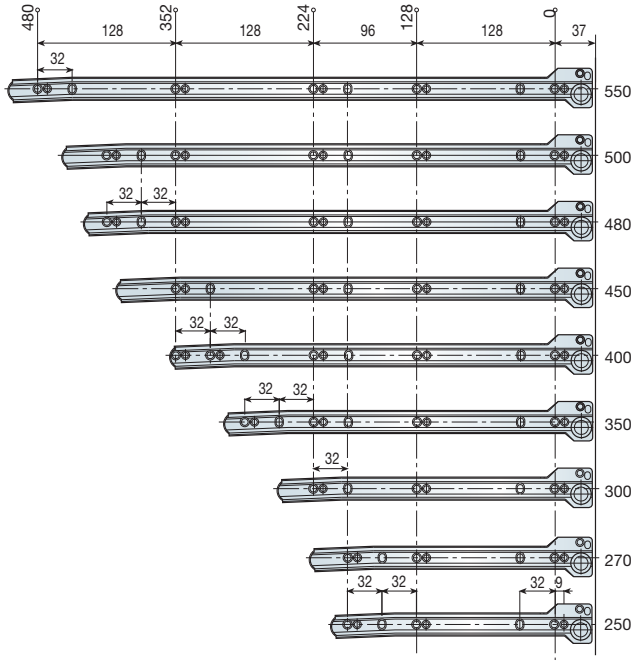

Drilling and positioning for **GACELA** *full extension runner.*

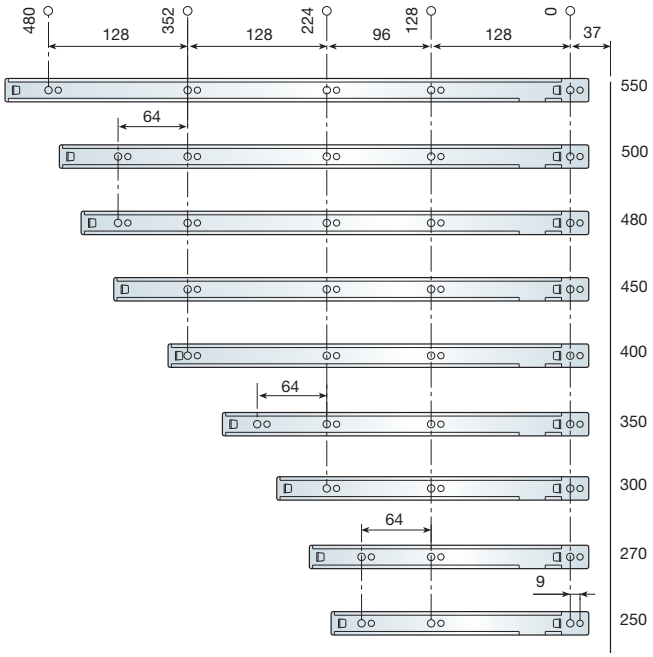



Calculation of the base

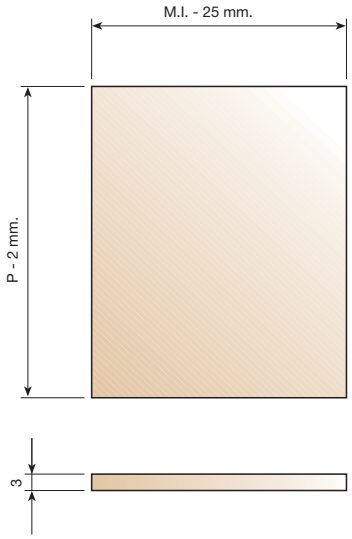

Fixing of the front

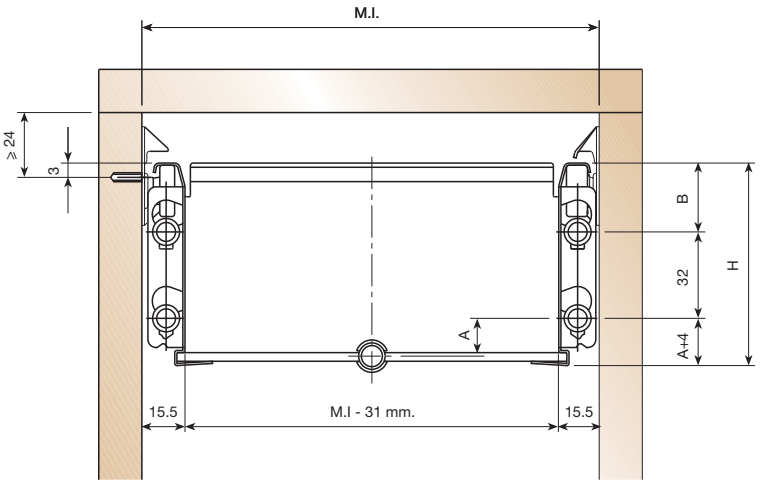

P = Nominal Drawer Depth

M.I. = Interior measurement of the furniture

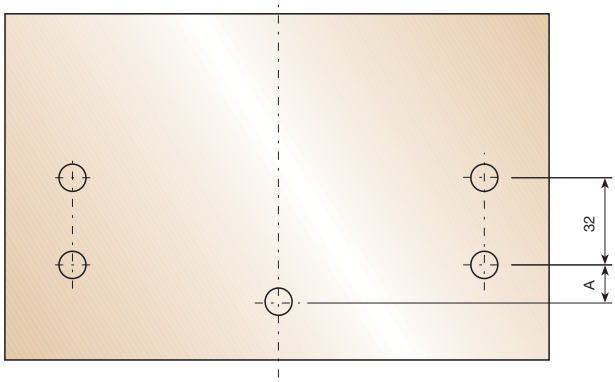

Dimensions (mm.)	H	A	B
SUPRAPLEX 75	75	14	25
SUPRAPLEX 107	107	46	25
SUPRAPLEX 139	139	46	57

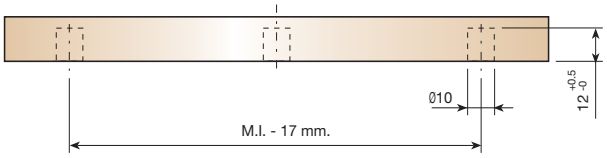

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

OFFIBOX

Metallic office drawer

Metallic office drawer

A full range.
4 drawer modules and 3 depths. 4 different compatible runners. Adjustable filing cabinet system for all paper formats.

90% height saving.
Stockable optimize transport and warehousing. about 450 drawers per pallet.

Central locking: simple, anti-tilt and double safe up to 45 kg, runners.

One-hand front hooking device approx. 2mm height adjustment by cam.

OFFIBOX

Metallic office drawer

Metallic office drawer available in 4 modules and 3 depths.
4 Different compatible runners.



pp.

1 COMPONENTS 568
- Drawers 568
- Runners 569
- Expand front hooking 569



2 ACCESSORIES 570
- For filing cabinet 570
- Pen tray 571
- Interior tray 571
- Divider 571
- Simple central locking system 572
- Central locking system with anti-tilt 575

3 TECHNICAL DATA 579



4 DRAWER ASSEMBLY 581
- Filing cabinet assembly 583
- Dividers assembly 584

1 COMPONENTS

Drawers

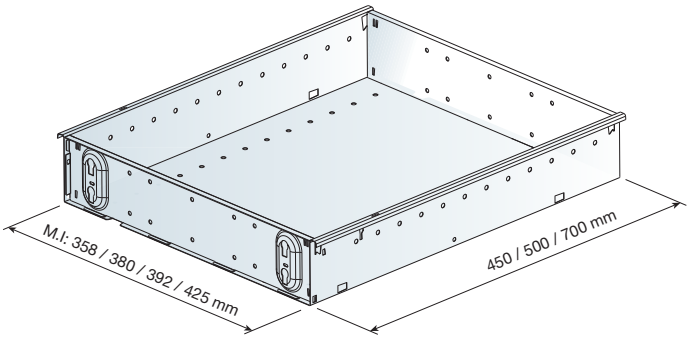

4 modules and 3 depths

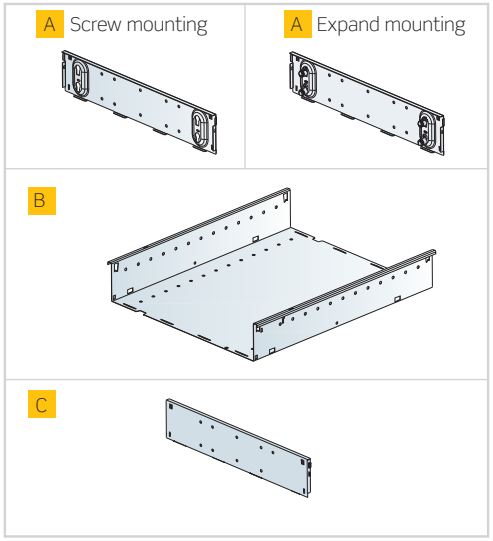

M.I Drawer = 358mm.

	Screw mounting		Expand mounting		
Depth	Grey Ral 7040	Black Ral 9011	Grey Ral 7040	Black Ral 9011	
450	650.045.314	650.045.023	651.045.312	651.045.021	450
500	650.050.310	650.050.026	651.050.315	651.050.024	450
700	650.070.315	650.070.024	651.070.313	651.070.022	350

Each ref. includes A, B and C components.

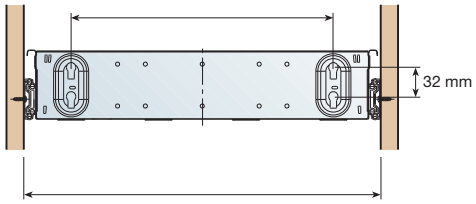

M.I = inner measurements
358 - 380 - 392 - 425mm

M.I Drawer = 380mm.

	Screw mounting		Expand mounting		
Depth	Grey Ral 7040	Black Ral 9011	Grey Ral 7040	Black Ral 9011	
450	650.145.311	650.145.020	651.145.316	651.145.025	450
500	650.150.314	650.150.023	651.150.312	651.150.021	450
700	650.170.312	650.170.021	651.170.310	651.170.026	350

Each ref. includes A, B and C components.

M.I	F
358	253
380	275
392	287
425	320

M.I Drawer = 392mm.

	Screw mounting		Expand mounting		
Depth	Grey Ral 7040	Black Ral 9011	Grey Ral 7040	Black Ral 9011	
450	650.245.315	650.245.024	651.245.313	651.245.022	450
500	650.250.311	650.250.020	651.250.316	651.250.025	450
700	650.270.316	650.270.025	651.270.314	651.270.023	350

Each ref. includes A, B and C components.

M.I Drawer = 425mm.

	Screw mounting		Expand mounting		
Depth	Grey Ral 7040	Black Ral 9011	Grey Ral 7040	Black Ral 9011	
450	650.345.312	650.345.021	651.345.310	651.345.026	450
500	650.350.315	650.350.024	651.350.313	651.350.022	450
700	650.370.313	650.370.022	651.370.311	651.370.020	350

Each ref. includes A, B and C components.

Runners: *4 compatible runners*

Ball bearing runner **CISNE-27**.

L	Ps	Zinc-plated	
450	83	778.345.751	50
500	83	778.350.753	

1 set per reference.

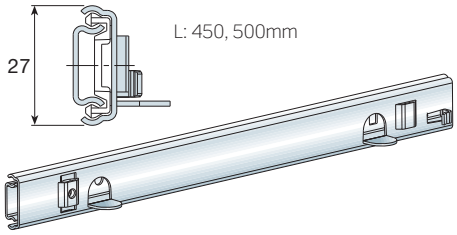

Fixing bolt for **CISNE-27**.

	Zinc-plated	
M4x7	730.507.035	1000

GACELA runner.

L	Ps	Grey Ral 7040	Black Ral 9011	
450	95	756.345.310	756.345.026	100
500	104	756.350.313	756.350.022	100
700	140	756.370.311	756.370.020	50

1 set per reference.

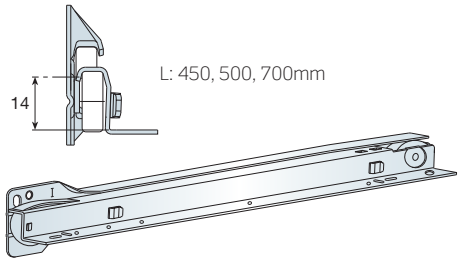

Euro-Screw for roller runners.

	Ø7	Ø7.75	
Niquel plated	952.810.062	953.610.066	5000



Ball bearing runners single extension **CISNE-35**.

L	Ps	Zinc-plated	
450	105	778.445.754	
500	125	778.450.750	20
700	175	778.470.755	

1 set of runners per reference.
Separately packed in 20 units boxes.

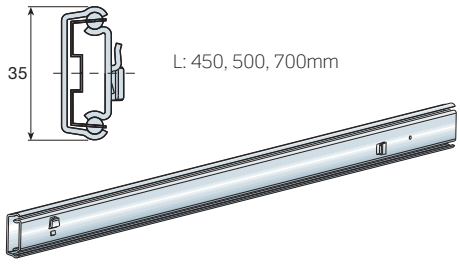

Ball bearing runners full extension **CISNE-45**.

L	Zinc-plated	
450	778.745.752	
500	778.750.755	10
700	778.770.753	

1 set of runners per reference.
Separately packed in 5 units boxes.
* For L:450 mm runner.

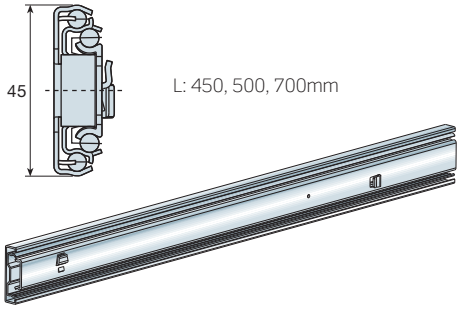

Expand front hooking

Expand front hooking.

	Grey Ral 7040	Black Ral 9011	
1 set	679.700.313	679.700.022	400

2 hooks per set.



Front fixing screws.

	Screw Ø4.5x15	Euro-screw Ø6	
Zinc-plated	955.515.035	955.313.030	1.000

2 hooks per set.

Ø4.5x15

Euro-screw Ø6

2 ACCESSORIES

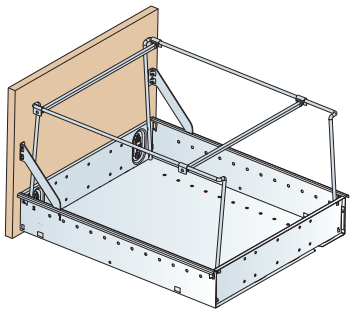

For filing cabinet

Front bracket.

	Grey Ral 7040	Black Ral 9011	
1 set	736.500.310	736.500.026	100

Each ref. has 2 brackets.



Folder rails.

Drawer depth	Grey Ral 7040	Black Ral 9011	
450	733.345.314	733.345.023	
500	733.350.310	733.350.026	25
700	733.370.315	733.370.024	

Each ref. has 2 folder rails.



Cross rails.

D: Folder sizes mm.	Grey Ral 7040	Black Ral 9011	
333	733.433.315	733.433.024	
367	733.436.314	733.436.023	25
388	733.438.311	733.438.020	

Each ref. has 2 cross rails.



M.I	D
358	333
380	333
392	333-367
425	333-367-388



Pen tray

Pen tray.

L	Grey Ral 7040	Black Ral 9011	
21	662.821.316	662.821.025	
35	662.800.316	662.800.025	25
53	662.853.310	662.853.026	

For drawer depth 500.

Pen tray runners.

Inner measurement	L	D	Zinc-plated	
380	21-35	70	779.380.755	
392	21-35	70	779.392.751	
425	21-35	70	779.425.754	
380	53	102	784.380.752	25
392	53	102	784.392.755	
425	53	102	784.425.751	

1 set per reference.



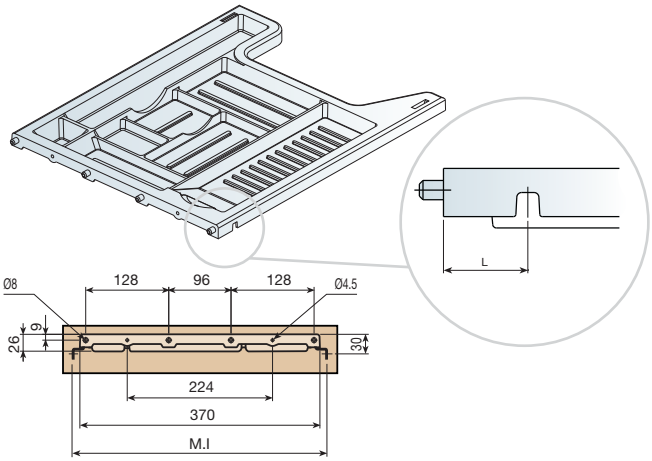



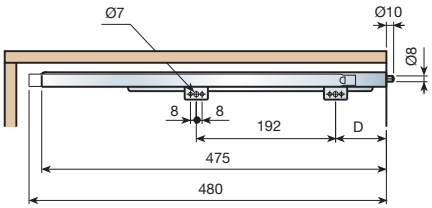

Interior tray

Adjustable interior tray.

	Grey Ral 7040	Black Ral 9011	
1 Unit.	735.900.314	735.900.023	25

Interior tray.

Inner measurement	Grey Ral 7040	Black Ral 9005	
380	735.380.310	735.380.026	
392	735.392.313	735.392.022	25
425	735.425.316	735.425.025	

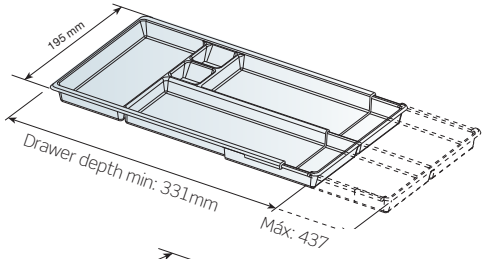

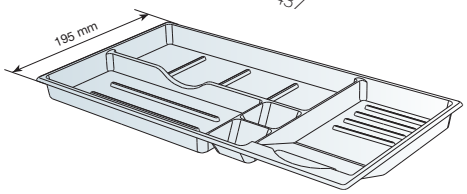

Divider

Divider.

M.I	L	Grey Ral 7040	Black Ral 9011	
358	330	734.933.312	734.933.021	
380	352	734.935.316	734.935.025	100
392	364	734.936.311	734.936.020	
425	397	734.939.310	734.939.026	

1 piece per reference.



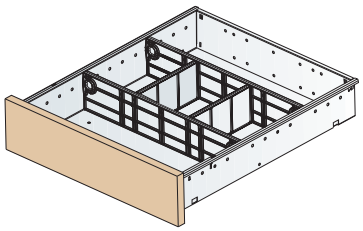

Cross divider

L	Grey Ral 7040	Black Ral 9011	
120	734.812.315	734.812.024	
149	734.814.312	734.814.021	200
212	734.821.312	734.821.021	

1 piece per reference.





Simple central locking system

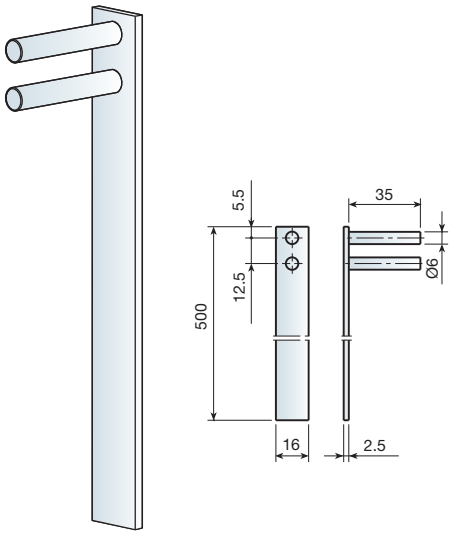

Steel bar.

	Natural	
500	202.250.101	25



Accessory bag with lock and keys.

	Black	
	272.000.024	25

Supplied in individual bags. Each bag contains 1 lock (different combinations), 1 cover and 2 keys.



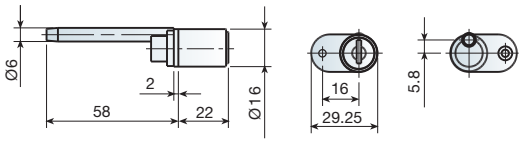

Adjustable stop.

	Natural	
	201.700.100	100



Simple central locking system

Screw-fix steel bar stop.

	Black	
	200.700.021	100





Dowel-fix steel bar stop.

	Black	
	200.400.023	100





Screw-fix lyre piece.

	Black	
	201.800.023	50





Dowel-fix lyre piece.

	Black	
	201.900.020	50



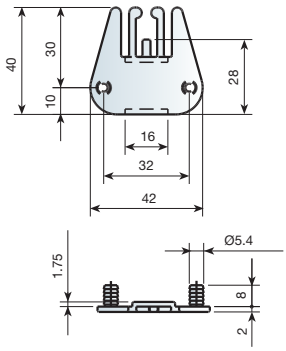

Simple central locking.

	Grey Ral 7040	Black Ral 9011	
	662.925.314	662.925.023	100





Bag of components.

	Dowel-fix	Screw-fix	
Natural	203.400.105	203.300.101	25

Each bag contains: 1 bag with (1 lock, 1 cover, 2 keys), 2 screw-fix or dowel-fix steel bar stops (depending on the reference), 4 adjustable stops, 1screw-fix or dowel-fix lyre piece (depending on the reference).

Simple central locking system

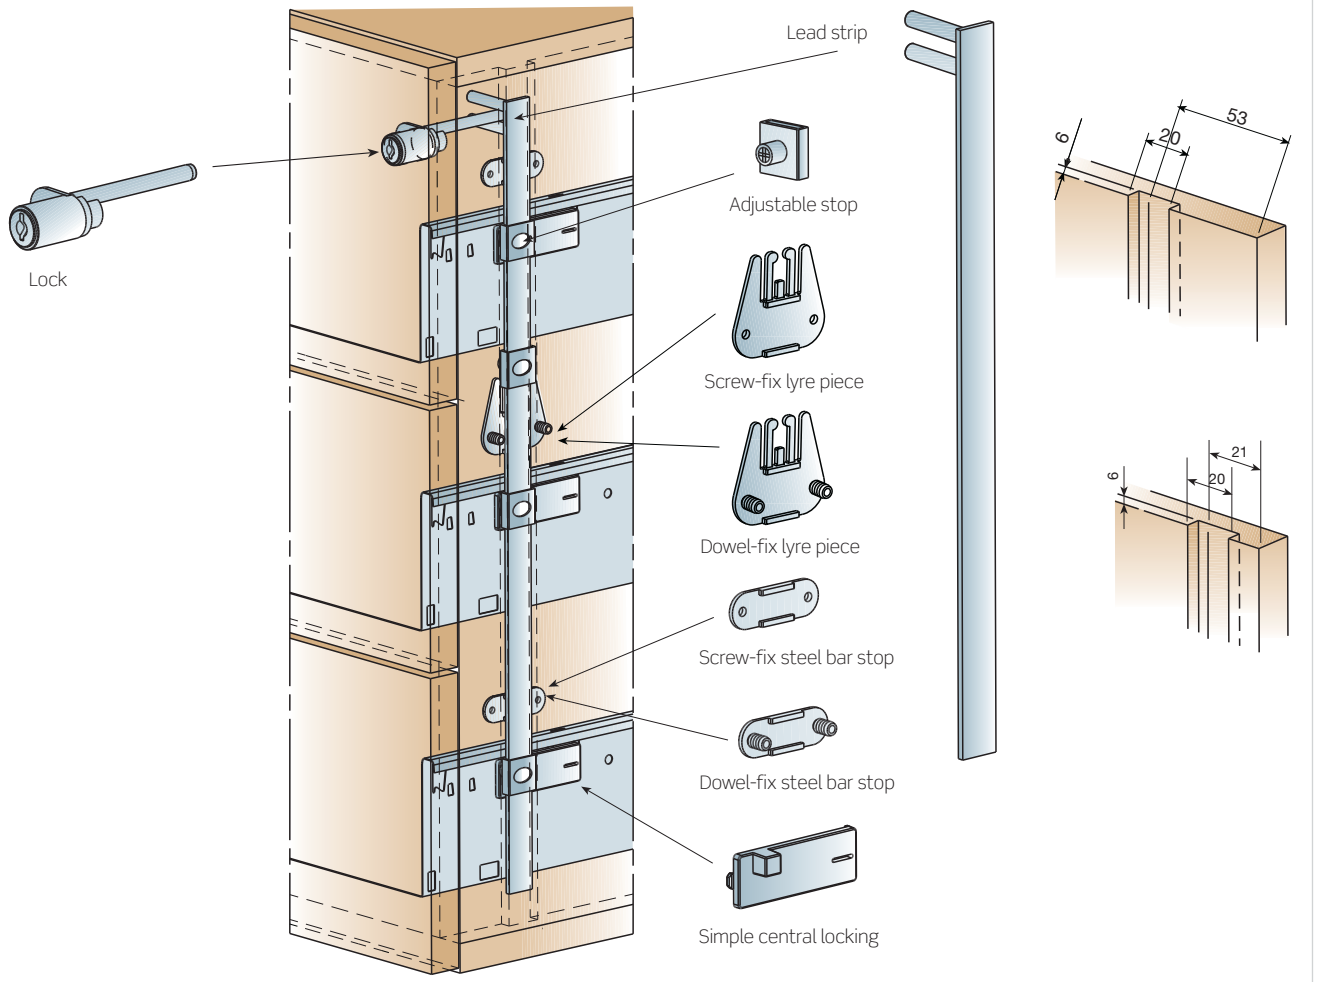

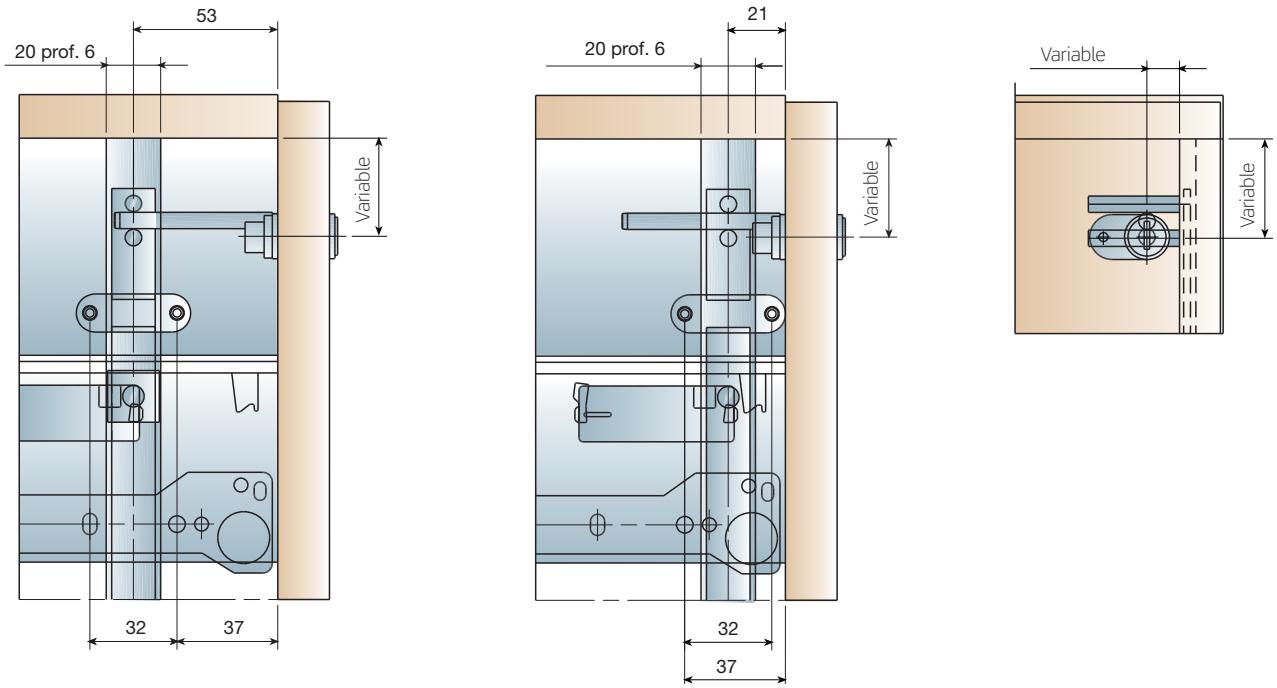

Central locking system with anti-tilt



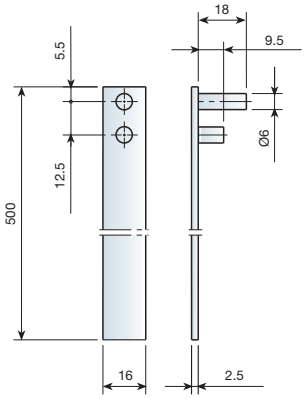

Steel bar.

Length	Natural	
500	202.150.104	25

Accesory bag with lock and keys.

Length	Black	
	272.000.024	25

Supplied in individual bags. Each bag contains 1 lock (different combinations), 1 cover and 2 keys.

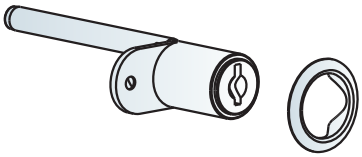







Adjustable stop.

	Natural	
	201.700.100	100

Central locking system with anti-tilt

Screw-fix steel bar stop.

Black	
200.700.021	100





Dowel-fix steel bar stop.

Black	
200.400.023	100





Screw-fix lyre piece.

Black	
201.800.023	50





Dowel-fix lyre piece.

Black	
201.900.020	50





Simple central locking with anti-tilt.

Grey Ral 740	Black Ral 9011	
662.900.313	662.900.022	100





Bag of screw-fix components.

Natural	
203.200.104	25

Each bag contains: 1 bag (1 lock, 1 cover, 2 keys), 2 screw-fix lead strip stops, 3 adjustable stops and 1 screw-fix lyre piece.

Bag of dowel-fix components.

Natural	
203.500.102	25

Each bag contains: 1 bag (1 lock, 1 cover, 2 keys), 2 dowel-fix lead strip stops, 3 adjustable stops and 1 dowel-fix lyre piece.

Central locking system with anti-tilt

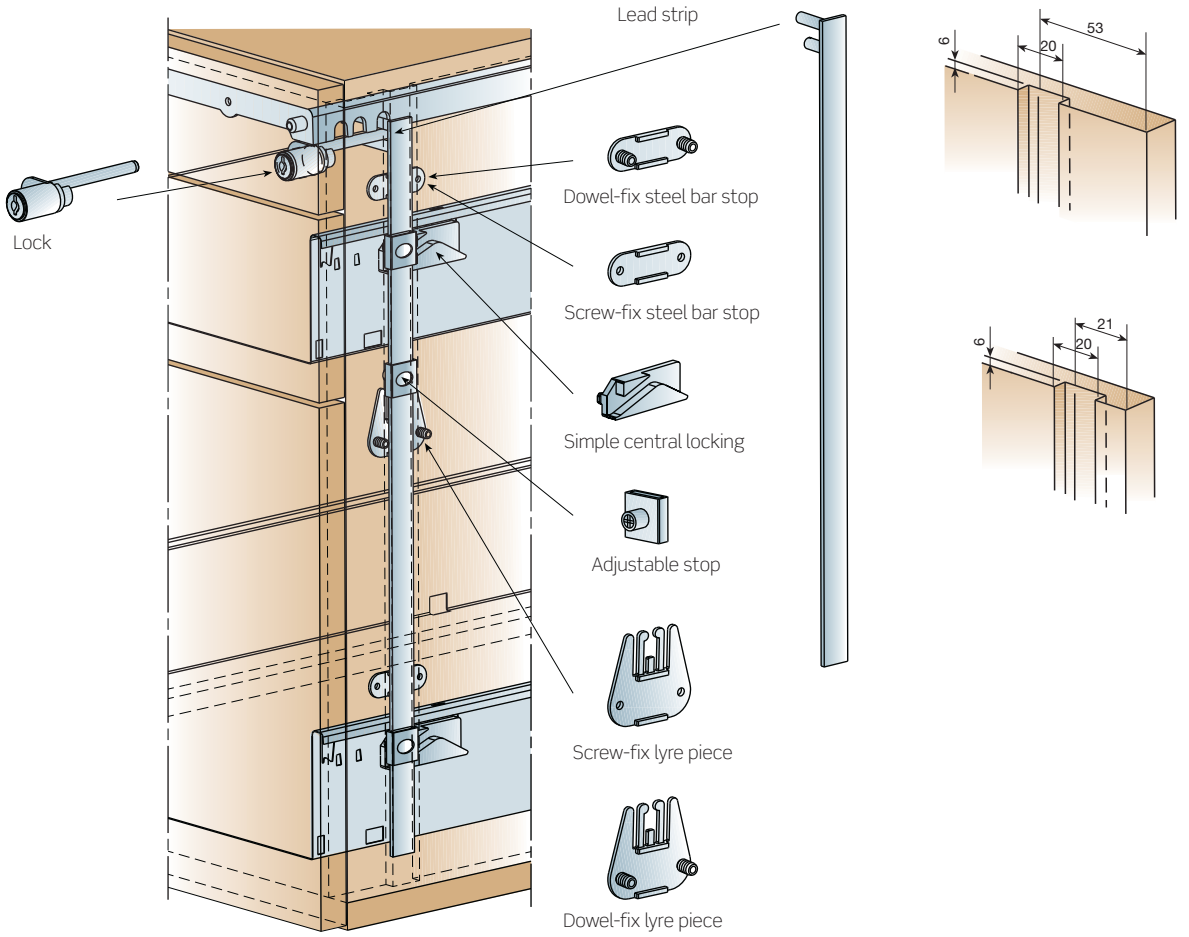

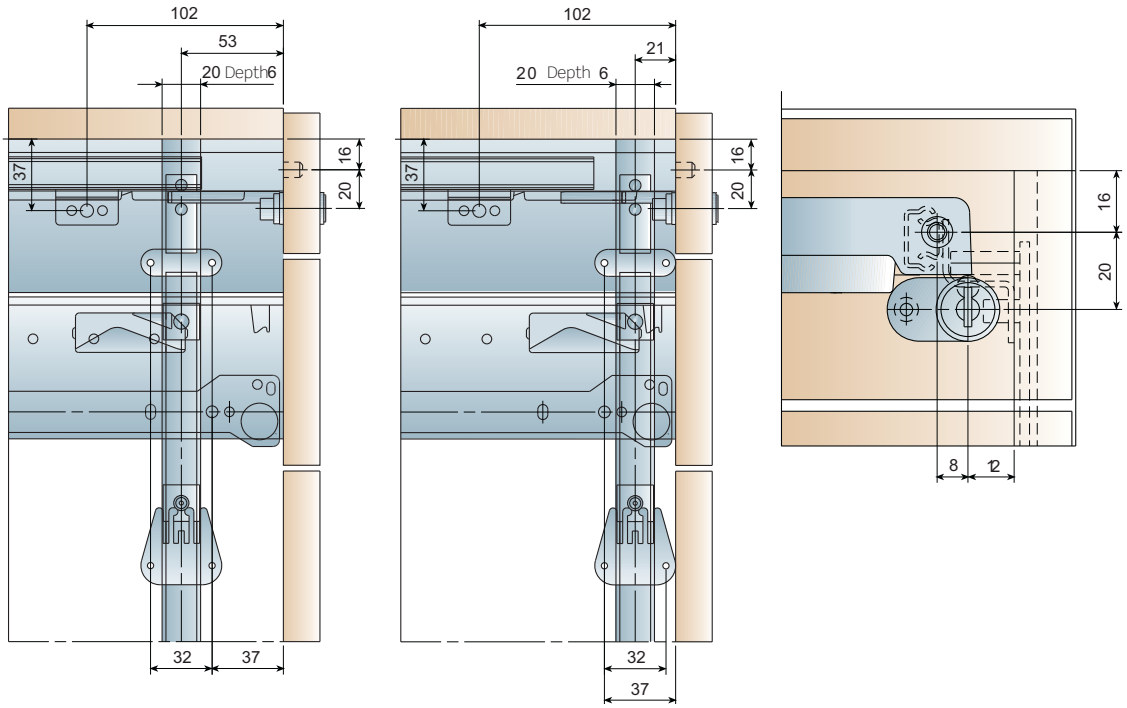

Central locking system with anti-tilt: *assembly*

"**Simple**" central locking system.

Central locking.

	Grey Ral 7040	Black Ral 9011	
Simple	662.925.314	662.925.023	1000

Check compatibility with the different lock systems on the market.

* The drawer has 3 sets of drills, for steel bars located at 21mm., 35mm., 53mm. On the front.

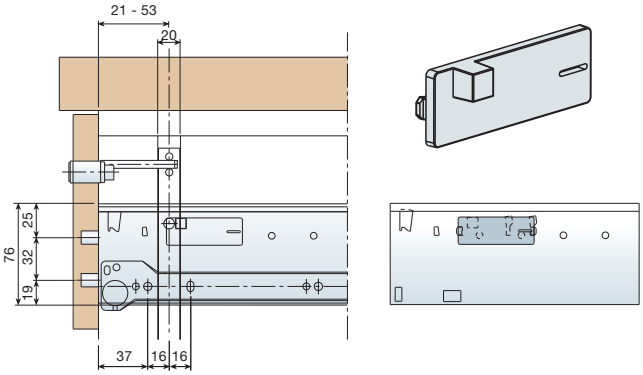

"**Simple anti-tilt**" central locking system

Central locking.

	Grey Ral 7040	Black Ral 9011	
Simple anti-tilt	662.900.313	662.900.022	1000

Check compatibility with the different lock systems on the market.

* The drawer has 3 sets of drills, for steel bars located at 21mm., 35mm., 53mm. On the front.

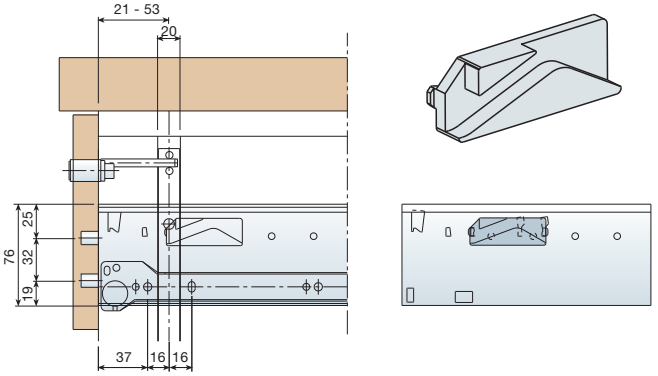

"**Double-safe anti-tilt**" central locking system

Central locking.

	Grey Ral 7040	Black Ral 9011	
Fail-safe anti-tilt	662.950.315	662.950.024	1000

Check compatibility with the different lock systems on the market.

* The drawer has 3 sets of drills, for steel bars located at 21mm., 35mm., 53mm. On the front.

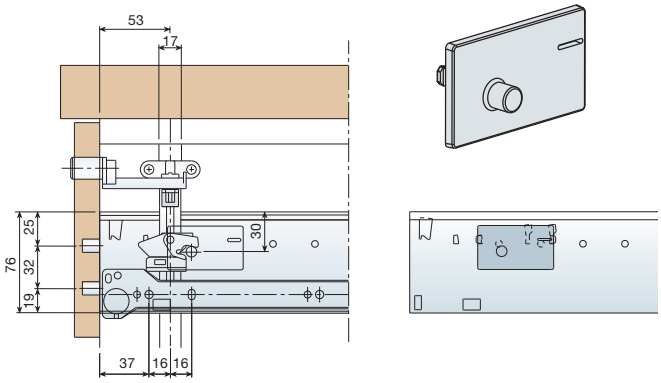

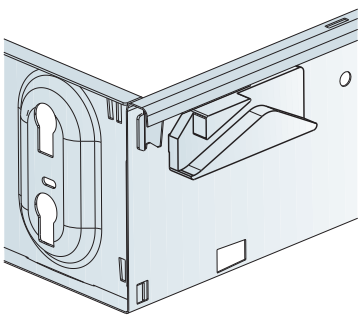

3 TECHNICAL DATA

Overall drawer dimensions

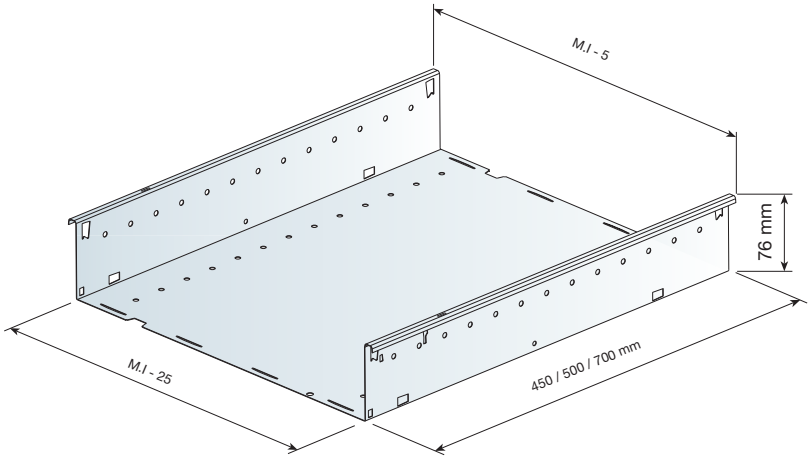

Front drilling pattern

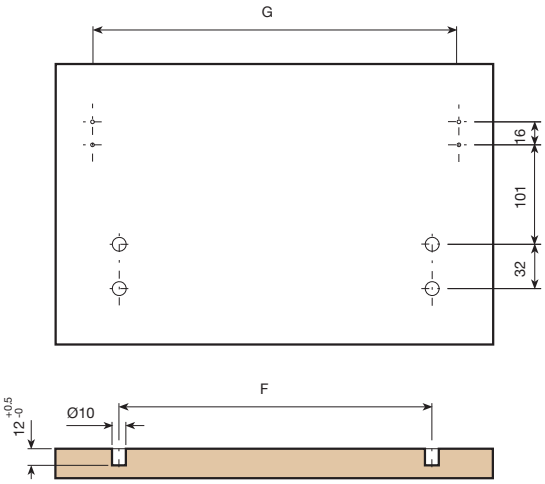

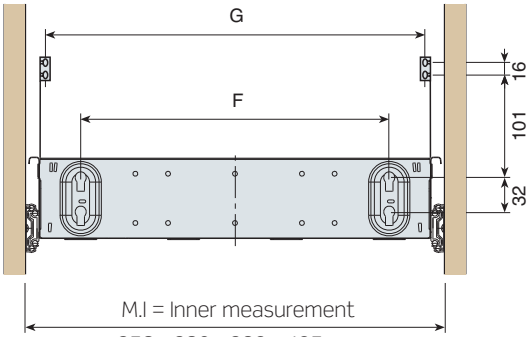

M.I = Inner measurement
358 - 380 - 392 - 425mm

M.I	F	G
358	253	323
380	275	345
392	287	357
425	320	390

Drawer stacking

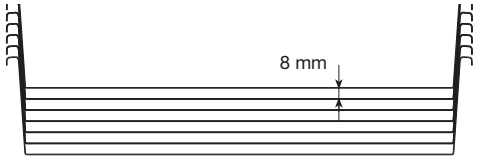

90% space saving

CISNE-27 *drilling pattern*

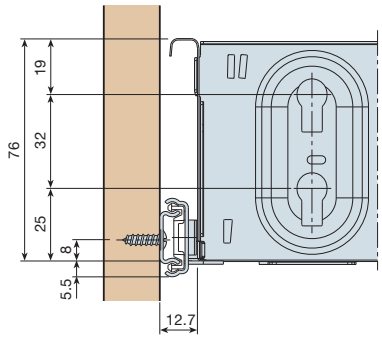

L	A
450	240.5
500	259

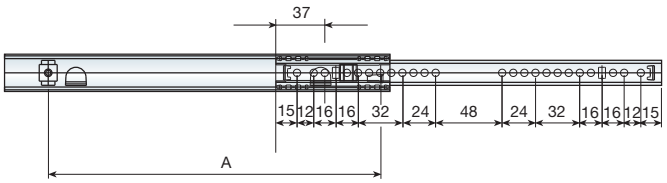

GACELA *drilling pattern*

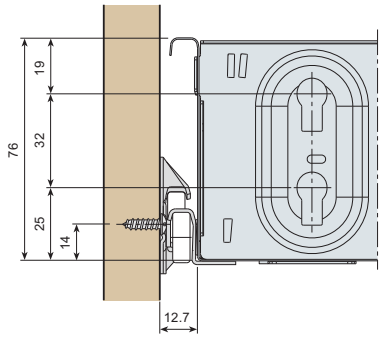

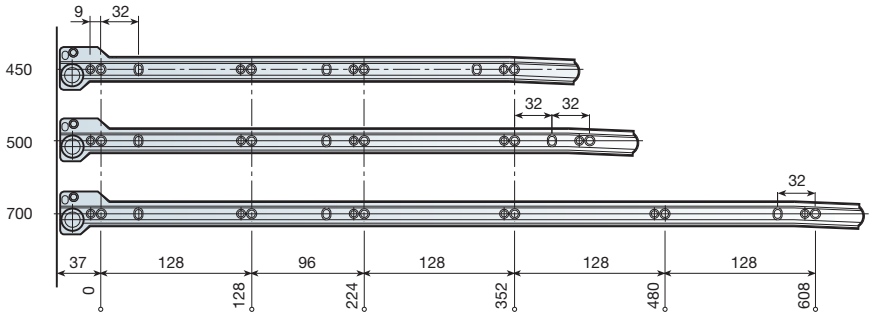

CISNE-35 *drilling pattern*

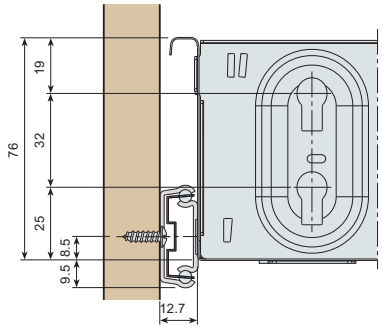

L	A	B	C	D	E
450	450	338	298	288	352
500	500	375	361	288	416
700	700	525	550	352	576

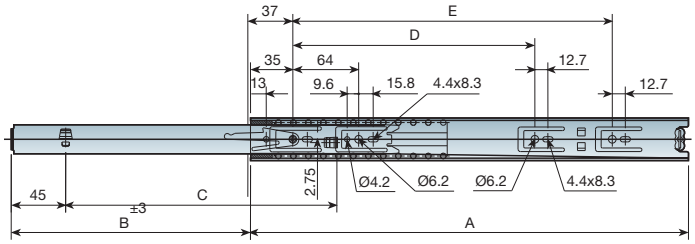

CISNE-45 *drilling pattern*

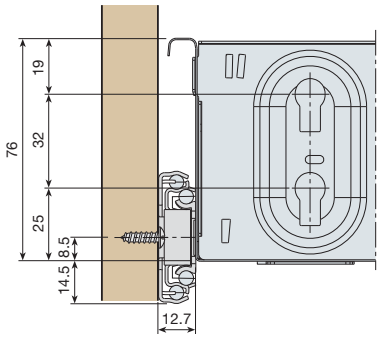

L	A	B	C	D	E
450	450	452	298	288	352
500	500	515	361	288	416
700	700	705	550	352	576

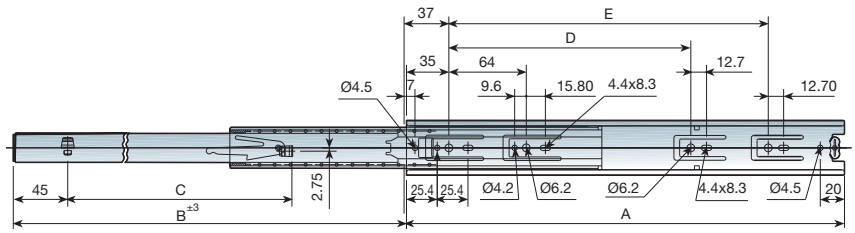

4 DRAWER ASSEMBLY

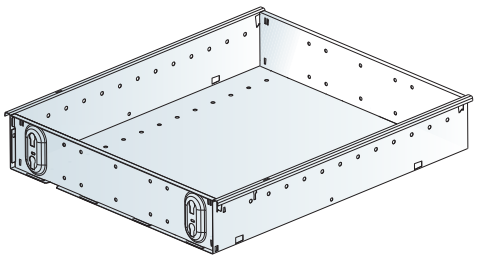

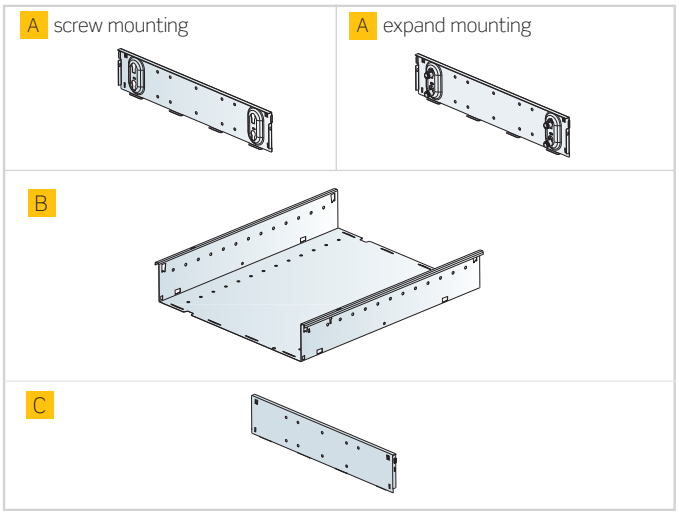

Drawer assembly

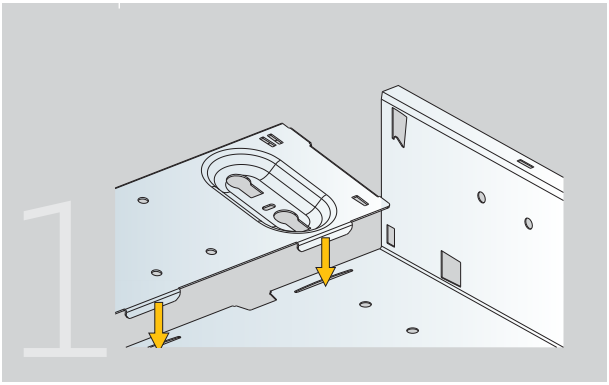

Quick and easy manual assembly.
Insert “A” drawer front tabs into the drawer cavities.

Notice:
It is not possible to mount “A” front into the “B” back or viceversa, since tabs differ.

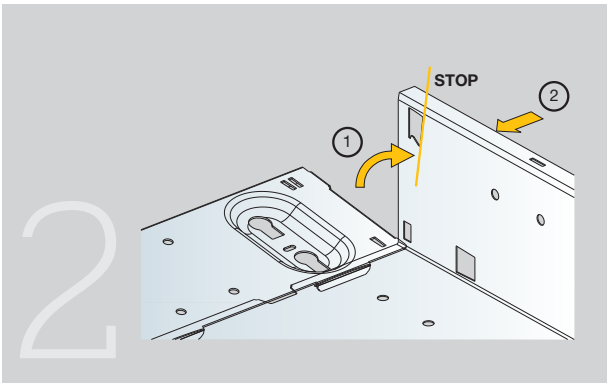

Turn the “A” front upwards until reaching to the end stop position beyond the upwards position.

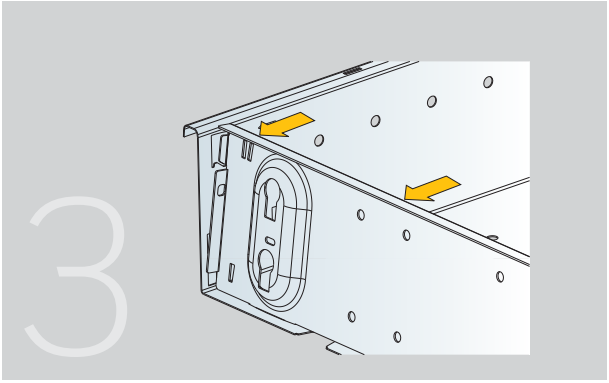

Return until clipping

“C” back to be assembled in the same way

Front drawer assembly

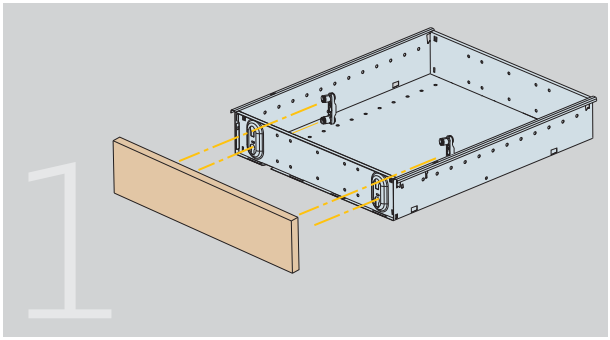

Insert the hooks on the drawer, lower them slightly and place the drawer front.

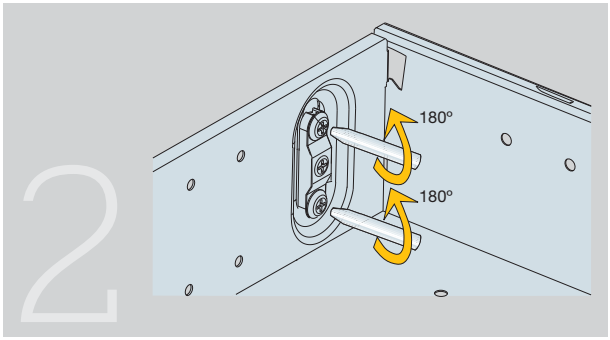

Turn the screws 180°, and the front will stay in place.

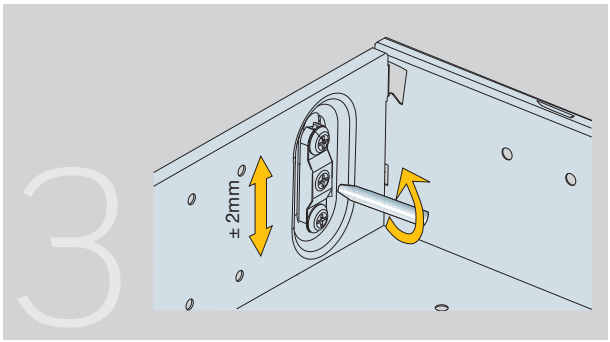

Height adjustment by cam approx. 2mm. Lateral adjustment by pressing approx 1mm (first loosen the screws).

How to assemble the hook on the front of the drawer:

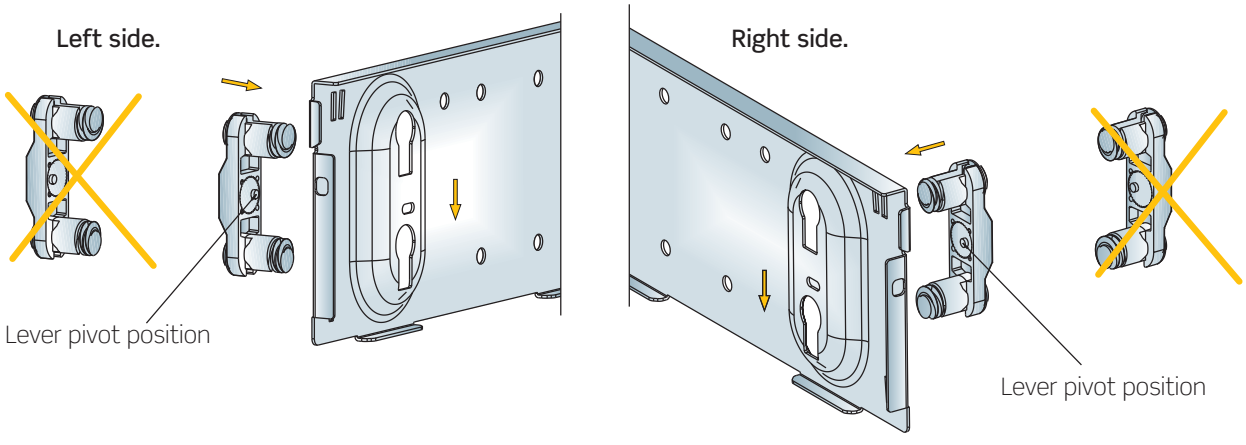

Filing cabinet assembly

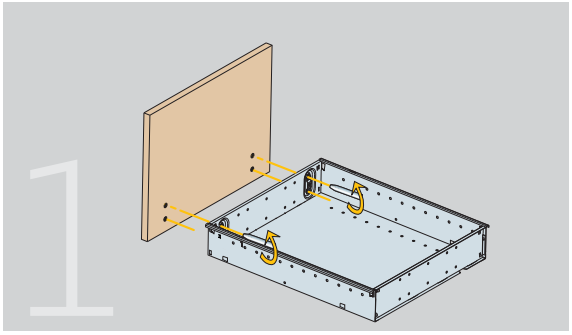

Insert the hooks on the drawer, lower them slightly and place the drawer front.

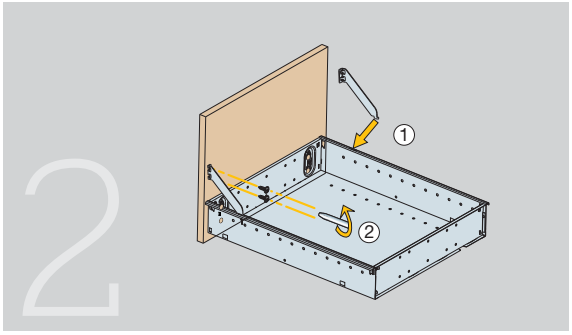

Clip on the lower part of the front bracket into the drawer side and mark the screws positions in the external front drawer. Then screw on the brackets.

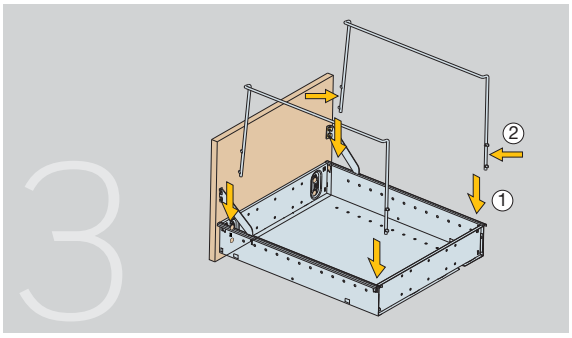

Align the folder rail with the drawer. Slightly press the rail inwards to connect the drawer.

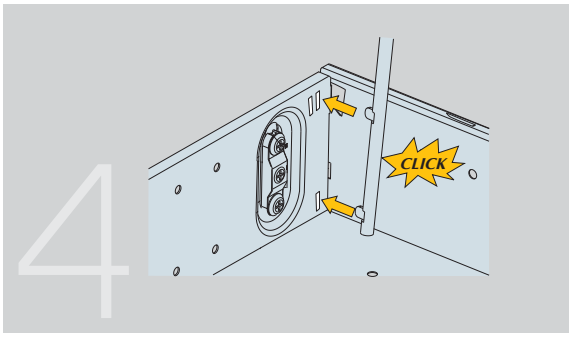

Insert the two notches of the folder rail into the cavities on the drawer. Depending on the type of folder, the notches will be placed in one cavity or the other.

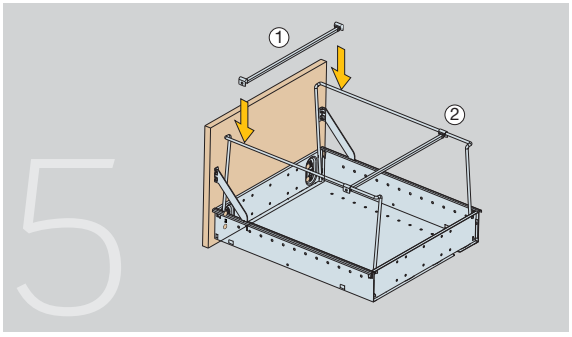

Depending on the type of folder, a cross rail will also be placed. Just press gently so that the cross rail fits perfectly into the slot.

Dividers assembly

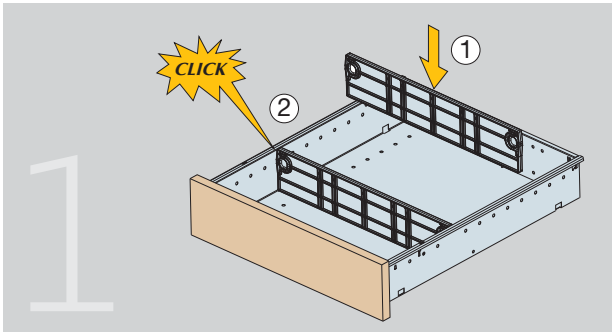

Place the cross divider, positioning the pivots on the lateral holes and the bottom of the drawer, the lateral pivots will bend inwards when pressed slightly.

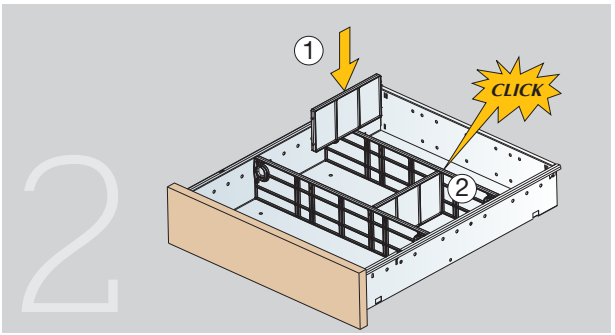

Place the longitudinal divider in line with the cross divider channels.

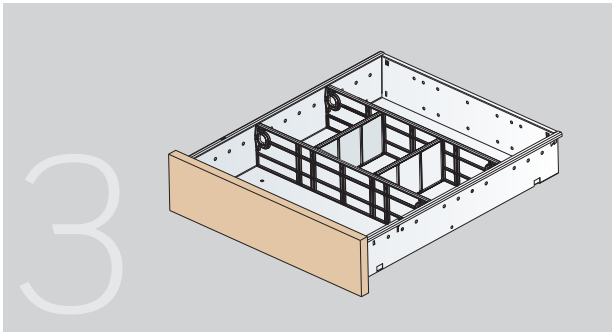

Depending on the documents to be filed, the most suitable divider will be chosen.

INDAUX
FURNITURE FITTINGS MANUFACTURER

KEYBOARD TRAYS

iMac

Keyboard tray

Indaux computer keyboard tray with ergonomic wrist rest, pencil holder, pull-out mouse support on the left and right, adjustable extension and stop.

KEYBOARD TRAY

New **Indaux** computer keyboard tray with ergonomic wrist rest, pencil holder, pull-out mouse support on the left and right, adjustable extension and stop.

pp.

1 KEYBOARD TRAY 589

2 RUNNER WITH SUPPORT AND EXTENSION STOPS 590

1 KEYBOARD TRAY

Product codes for individual packaging.

	Grey Ral 7035	
Without mouse tray	735.100.310	10
With mouse tray	735.200.314	

Minimum order: 10 trays. With these codes the following items are delivered: Keyboard tray, runners with brackets, keyboard tray slides, screws, and drilling pattern with instructions. When the mouse tray version is ordered, both the mouse tray and the slides are supplied.

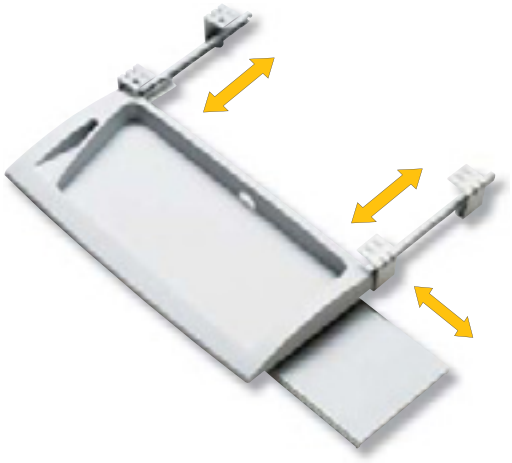

Product codes for pallets with 180 trays.

	Grey Ral 7035	
Without mouse tray	735.518.081	1
With mouse tray	735.618.085	

With these codes the following items are delivered: 180 keyboard trays, 180 Runners with brackets, 180 keyboard tray slides, 180 bags of screws, and 12 drilling patterns with instructions. When the mouse tray version is ordered, both the mouse tray and the slides are supplied.

Technical data

Keyboard tray

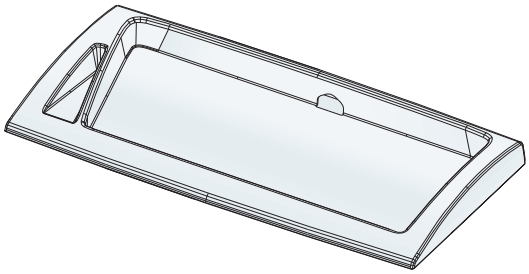

Runners for fixing to the table



Runners for fixing to the tray



Runners for mouse tray



Mouse tray



Dimensions and drilling details

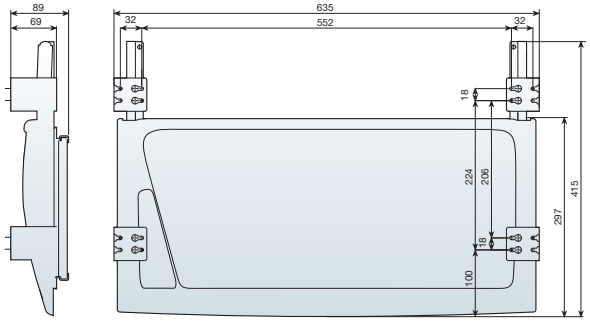

2 RUNNER WITH SUPPORT AND EXTENSION STOPS

Runner with support and extension stops.

		Gris Ral 7035	
Black	Ral 9005	756.035.825	10

This reference is packaged with the 4 profiles together, with 10 sets in each box.

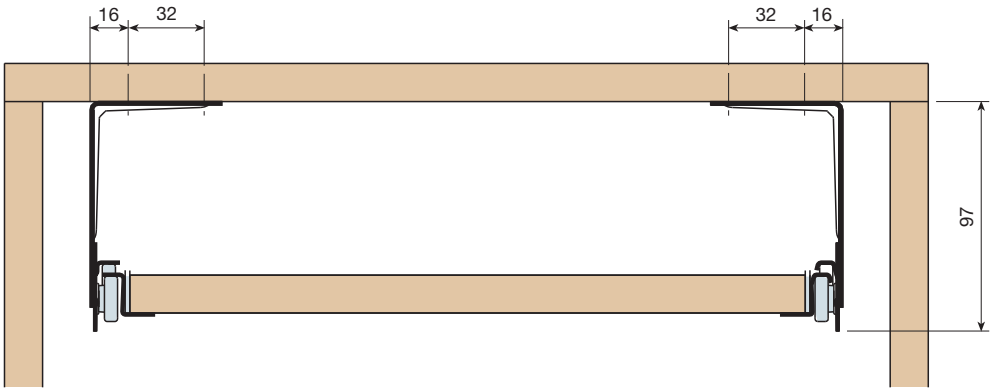

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

08

FITTINGS FOR SLIDING DOORS

Fittings for light doors 595



1. JUNIOR-0 596
2. JUNIOR-1 597
3. MINI 598
4. TALL 599
5. UPPER 600
6. DÚO 602

Fittings for hanging doors 604

1. MASTER LUX 606
2. MASTER MAS ..... INDAmatic 610
3. GHOST 614
4. SISTEMA-4 ..... INDAmatic 617

Fittings for supported doors 624

1. JUNIOR-4 626
2. JUNIOR-2 628
3. JUNIOR-3 632
4. JUNIOR-5 636
5. JUNIOR-6 ..... INDAmatic 639
6. JUNIOR-7 ..... INDAmatic 655

Fittings for coplanar doors 662

1. MAGIC 664

Fittings for folding doors 667

Fittings for interior doors 673

1. OVER 674
2. SOFT CLOSING DIVIDER DOORS ..... INDAmatic 679

Fittings for vertical doors 689

1. VERTIKAL ..... INDAmatic 691
3. SALISCENDI 40 697

Straighteners 699

1. STRAIGHTENER 1 700
2. STRAIGHTENER 3 702
3. STRAIGHTENER 4 703

Accessories 705

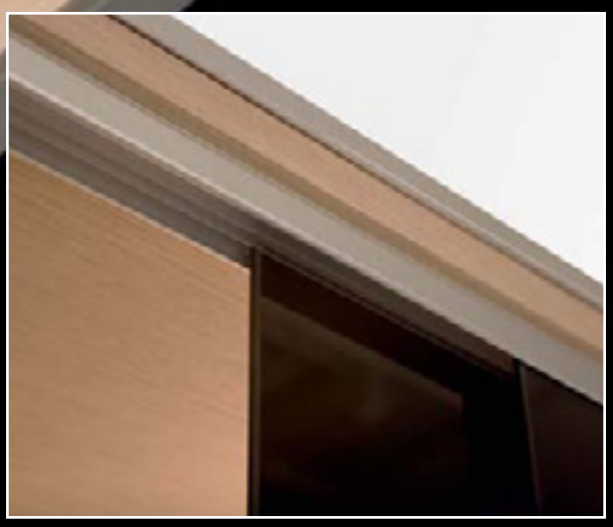

FITTINGS
FOR LIGHT DOORS



pp.

1 JUNIOR-0 596

2 JUNIOR-1 597

3 MINI 598

4 TALL 599

5 UPPER 600

6 DÚO 602

1 JUNIOR-0

Embedded upper track.

	Special length	6 m bars	
Natural	706.000.503	706.060.504	10

In 6m. Bars.

Embedded lower track.

	Special length	6 m bars	
Natural	706.100.500	706.160.501	10

In 6m. Bars.

Inner door kit.

Door	705.500.106	10

Packed in a box of 10 bags containing the upper and lower rollers necessary for one door each.



Edge track.

	Special length	6 m bars	
Natural	706.200.504	706.260.505	10

In 6m. Bars.

Outer door kit.

Door	705.600.103	10

Packed in a box of 10 bags containing the lower and upper carriages and stops necessary for one door each.



Example of an interior wooden door

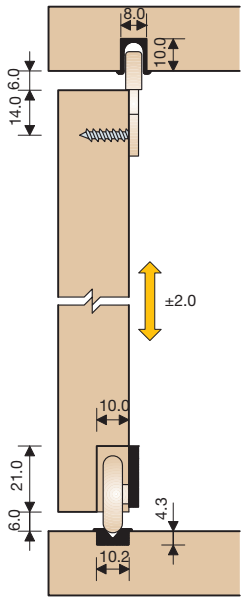

Example of an exterior aluminium door

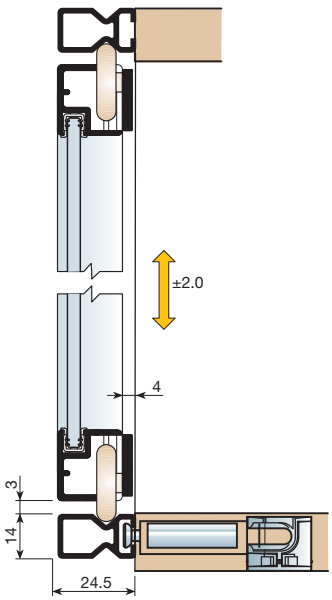

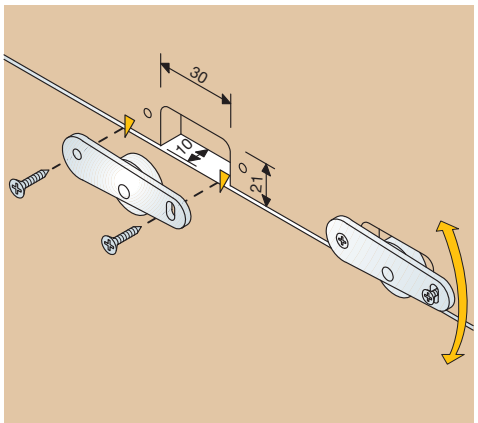

2 JUNIOR-1

Upper/lower plastic single track.

White	Ral 9003	721.006.005	25
Brown	Ral 8016	721.006.016	
Black	Ral 9005	721.006.020	
Oak	Ral 1002	721.006.193	

In 2m strips.



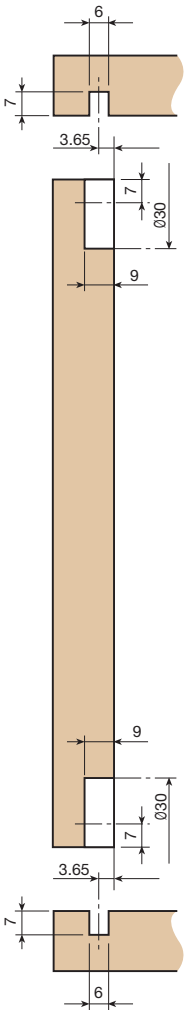

Upper guide.

Brown	Ral 8016	721.707.011	200



Lower guide.

Brown	Ral 8016	721.807.015	200



Edge stop.

White	Ral 9003	741.606.003	200
Brown	Ral 8016	741.606.014	
Black	Ral 9005	741.606.025	
Oak	Ral 1002	741.606.191	

Technical data

Light system, easy to assemble. 2mm height adjustment. 12 Kp. load capacity.

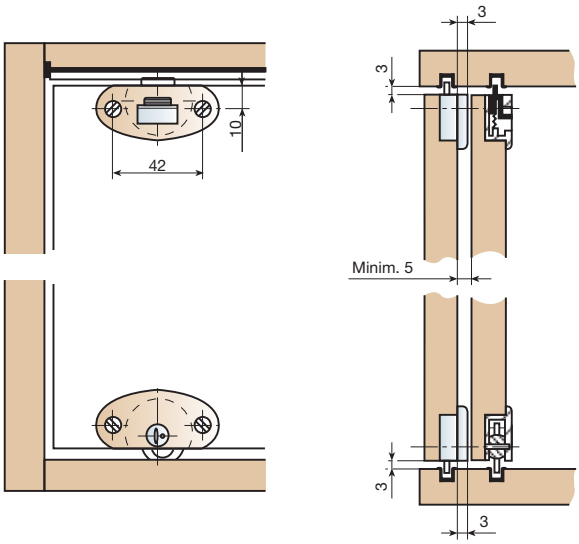

3 MINI

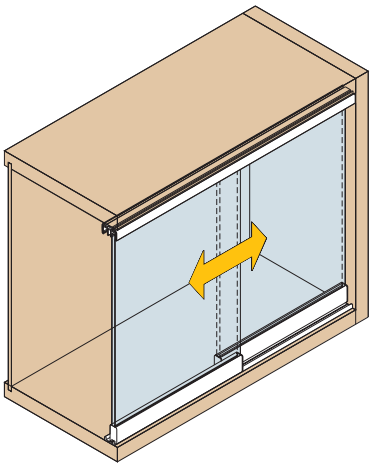

Set of tracks.

Matt silver	709.900.516	1

Each ref. Consists of 1 upper track with strip and 1 lower track.

Set of fittings for door.

Matt silver	709.700.515	1

Each ref. Consists of 1 track and 2 rollers.





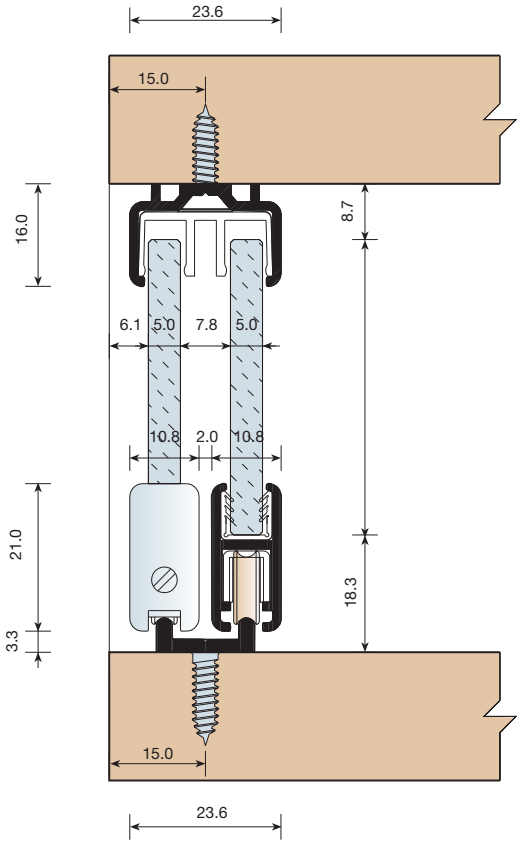

4 TALL

Bag of components.

Anodized matt silver	709.400.510	1

Each bag contains:

	Units
Glass door track A	4
Track guide B	2
Sliding track C	2
Joining bracket D	4

a

b

c

d



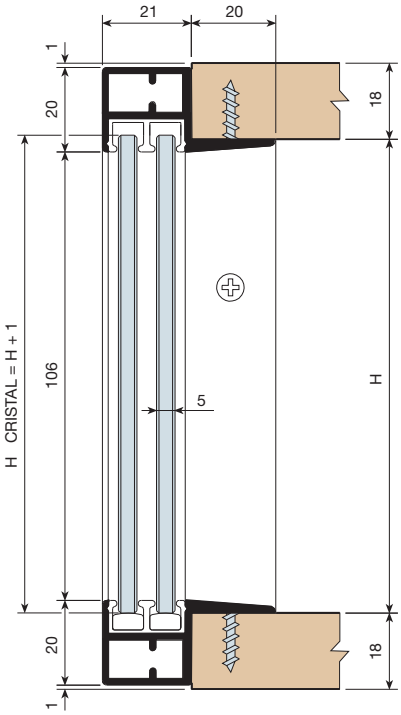

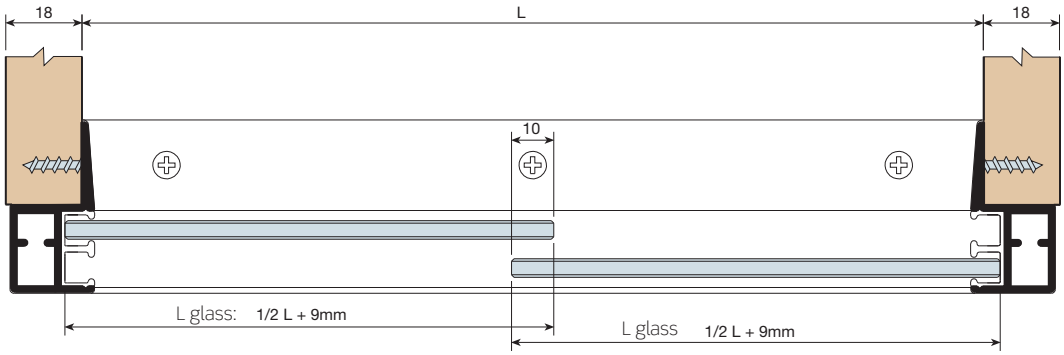

5 UPPER

Upper track.

	Cut-to-measure	3m. Bar	
Matt silver	709.500.514	709.530.511	10

Set of fittings.

1 Door	709.600.102	10

Each ref. Consists of 2 upper carriages, 2 brakes and 1 guide rail.

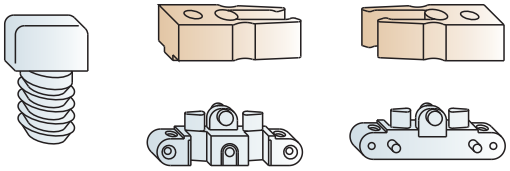

Technical data

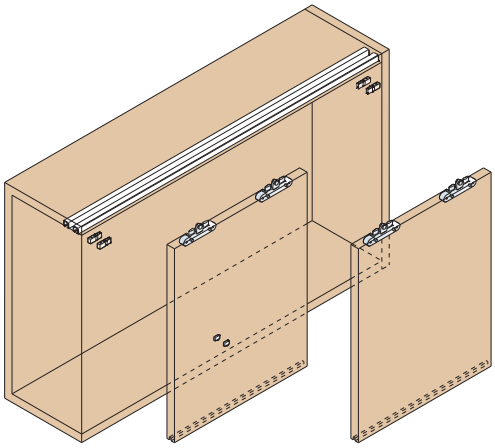

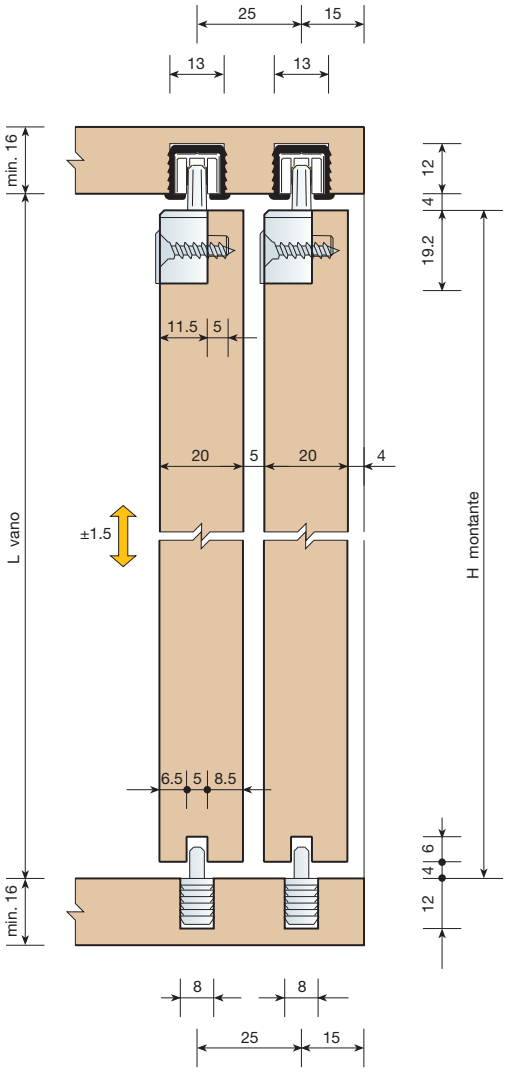

Technical data

Assembly

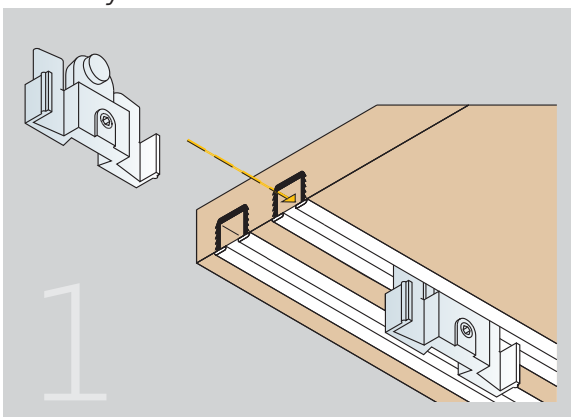

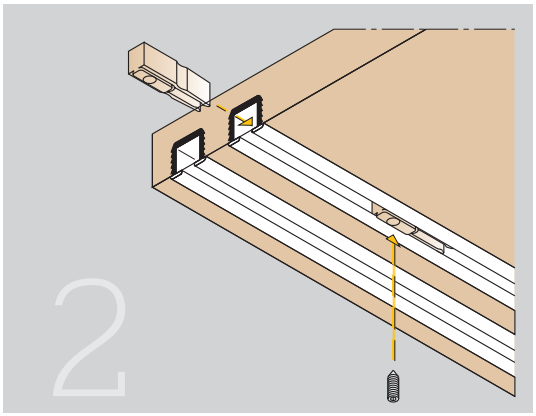

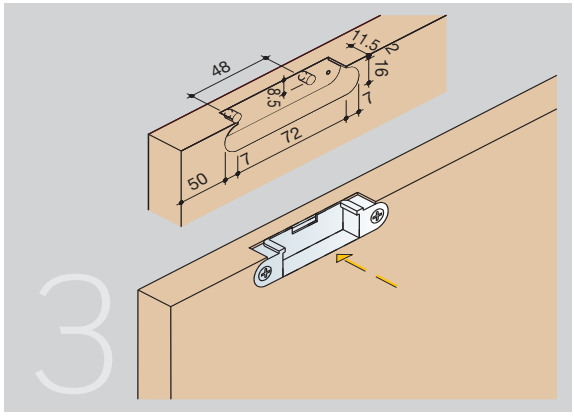

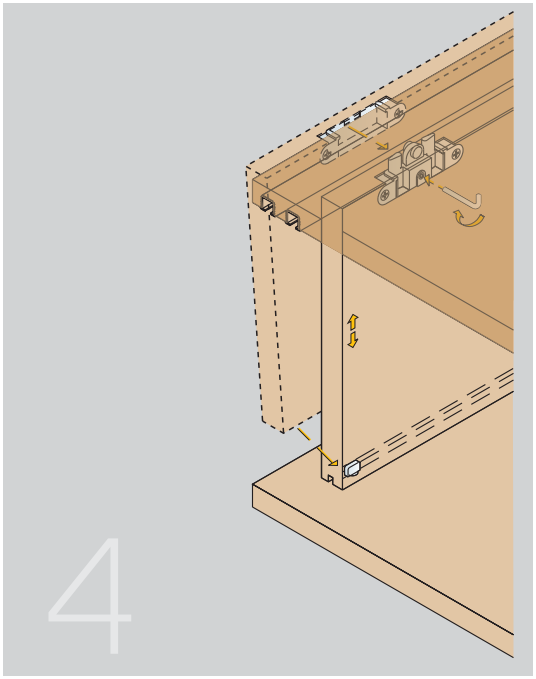

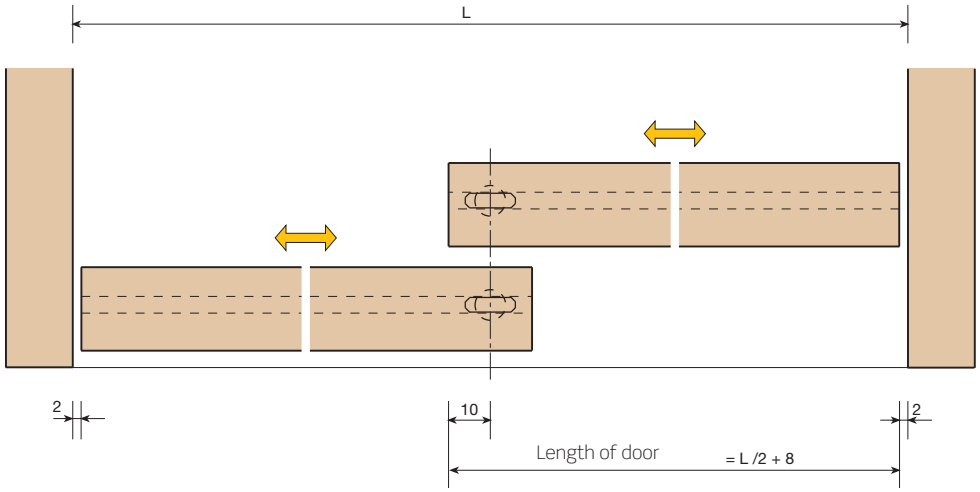

6 DÚO

Set of fittings.

Door size		
655-705	703.507.103	
755-805	703.508.105	
855-905	703.509.100	1
955-1005	703.510.102	
1155-1205	703.512.106	

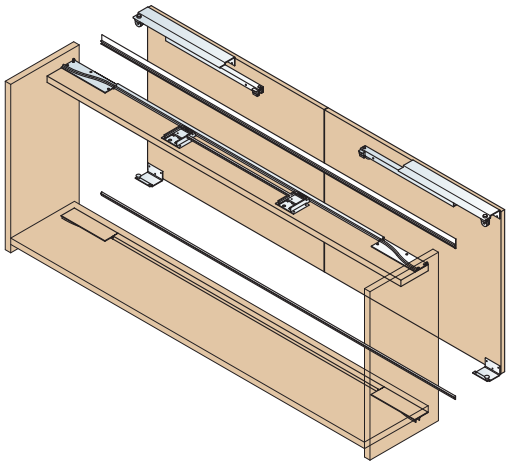

Technical data

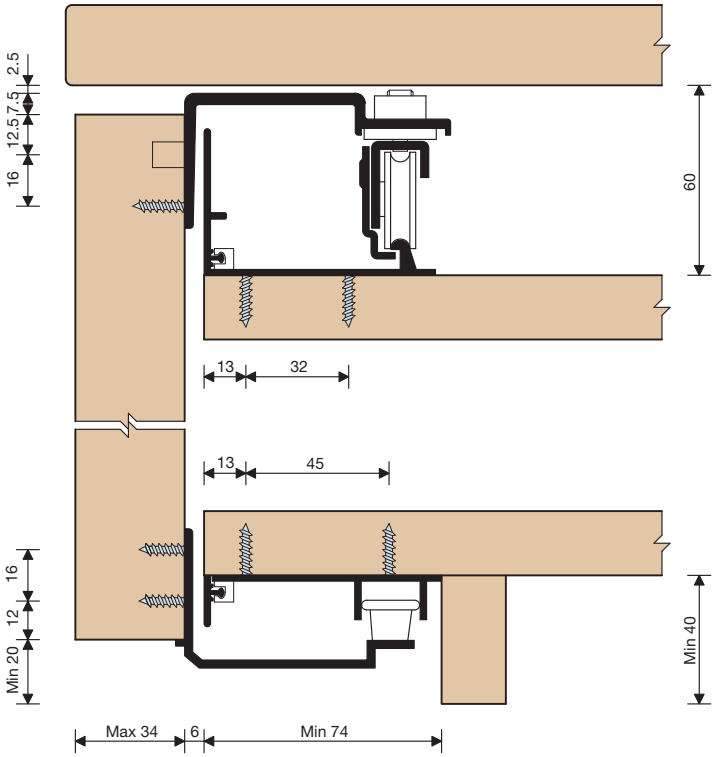

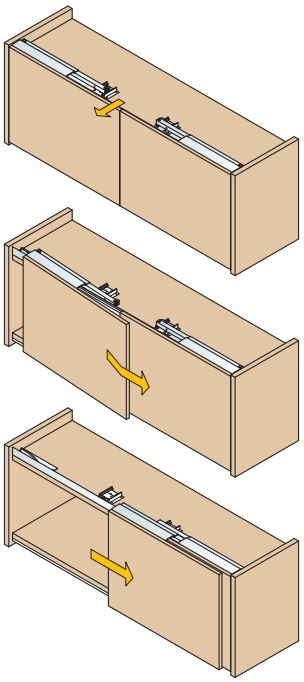

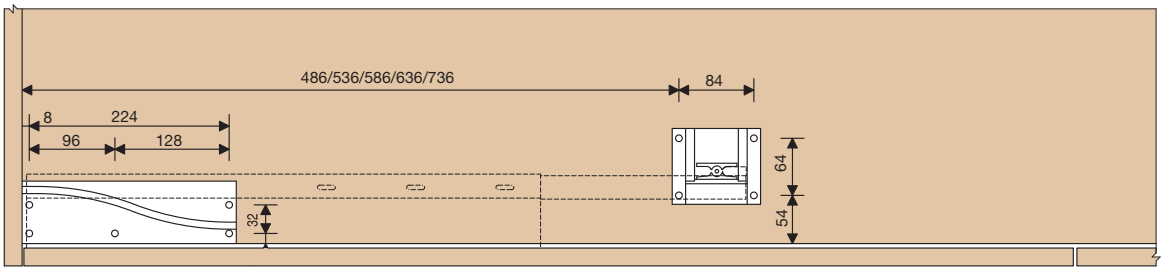

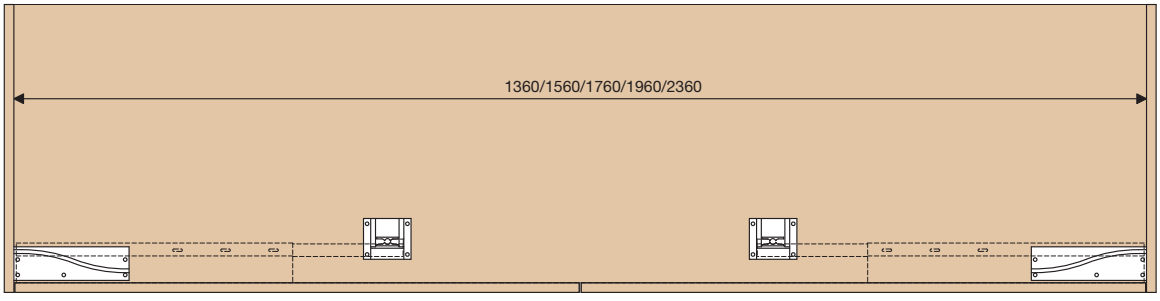

Technical data

Assembly

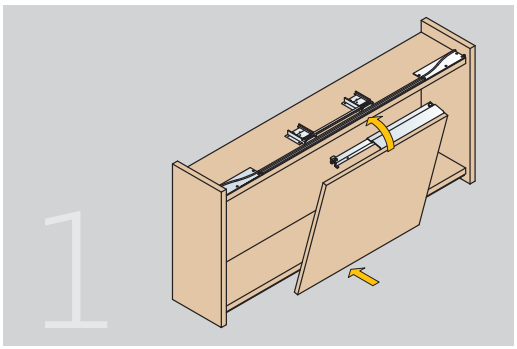

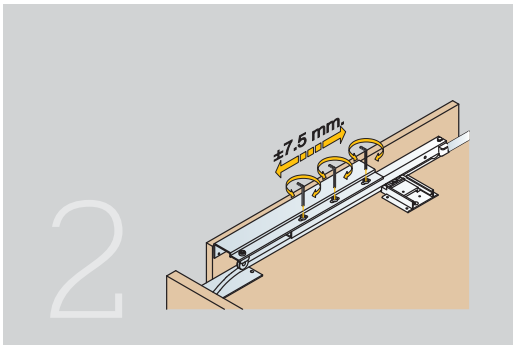

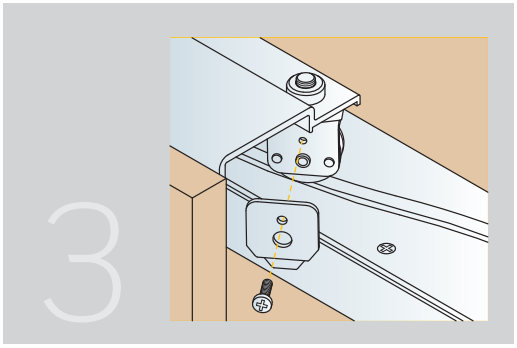

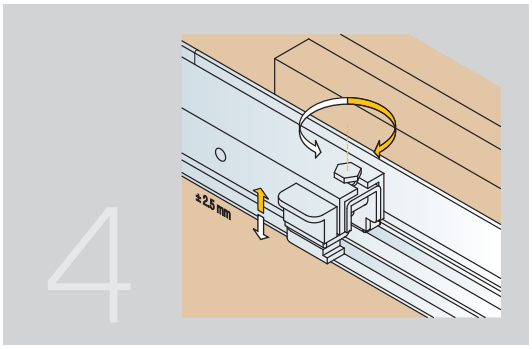

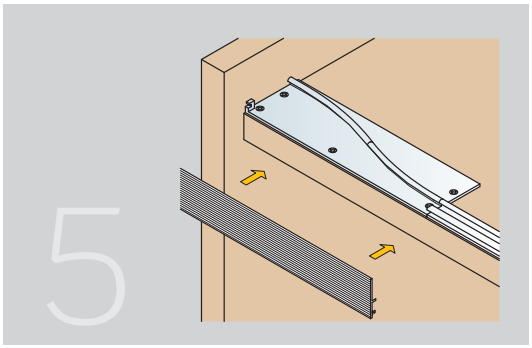

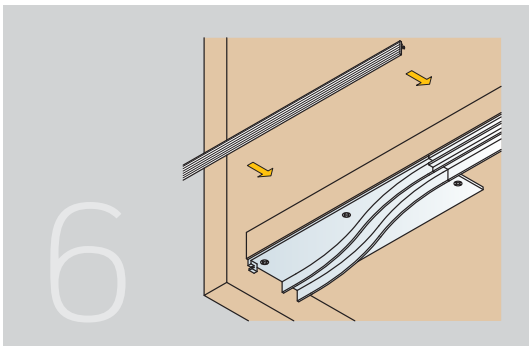

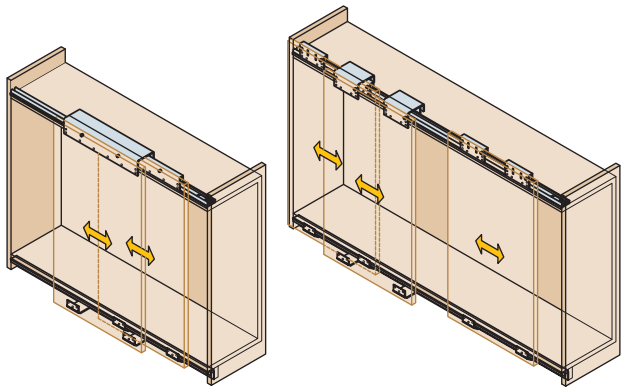

FITTINGS
FOR HANGING DOORS

Aluminium and steel fittings for hanging sliding doors.

pp.

1 MASTER LUX 606

2 MASTER MAS INDAmatic 610

3 GHOST 614

4 SISTEMA-4 INDAmatic 617

1 MASTER LUX

This aluminium system allows for 25-30-40-50mm. door thicknesses. Each fitting has two distances from the door to the floor 17 and 33mm.

Upper track.

	Cut-to-measure	6 m bars	
Natural	707.000.501	707.060.502	6

Heavy duty upper track.

	Cut-to-measure	6 m bars	
Natural	707.100.505	707.160.506	4

Lower track.

	Cut-to-measure	6 m bars	
Natural	707.300.506	707.360.500	4

Set of upper and lower track.

	Cut-to-measure	
Natural	707.200.502	1

30mm dust guard for exterior door.

Lenght		
760	704.908.142	5
860	704.909.144	
960	704.910.146	
1060	704.911.141	

MASTER LUX fitting packs.

Load	Skirting board	Interior door	Exterior 30mm.	Exterior 40mm.	Exterior 50mm.	
50Kg.	17mm.	706.900.106	706.800.102			1
	33mm.	705.100.104	705.000.100			
100Kg.	17mm.	706.910.105	706.810.101	706.840.105		
	33mm.	705.110.103	705.010.106		706.850.104	

It contains the upper and lower rollers, brakes, stops and fixing screws ø3.9 x 13 necessary for one door.

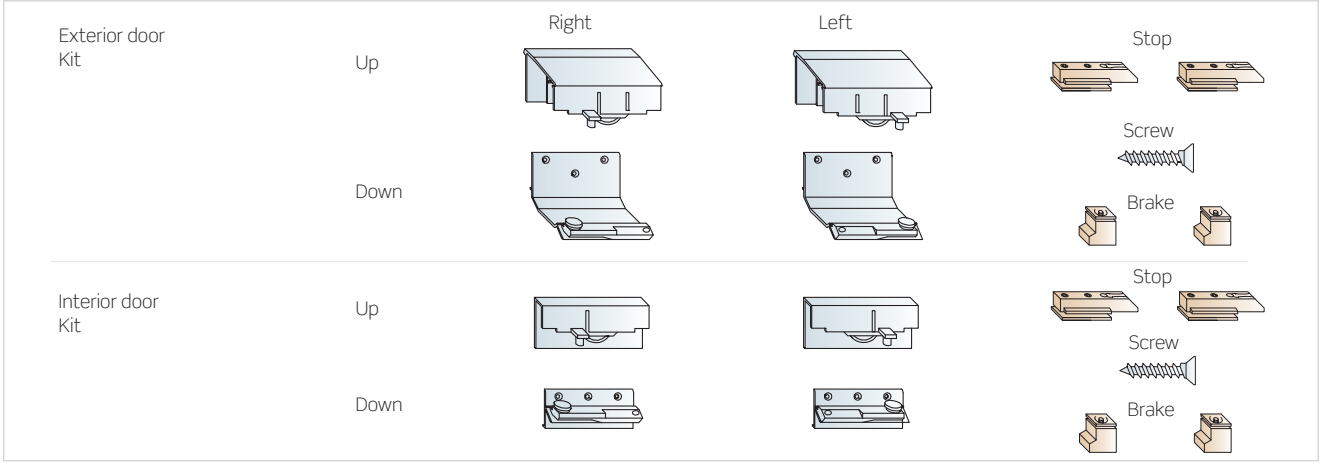

ALTER system

Aluminium track that gives continuity to the cupboard's structure when leaf doors are used alongside sliding systems.

ALTER system track.

	Cut-to-measure	
	707.400.503	10

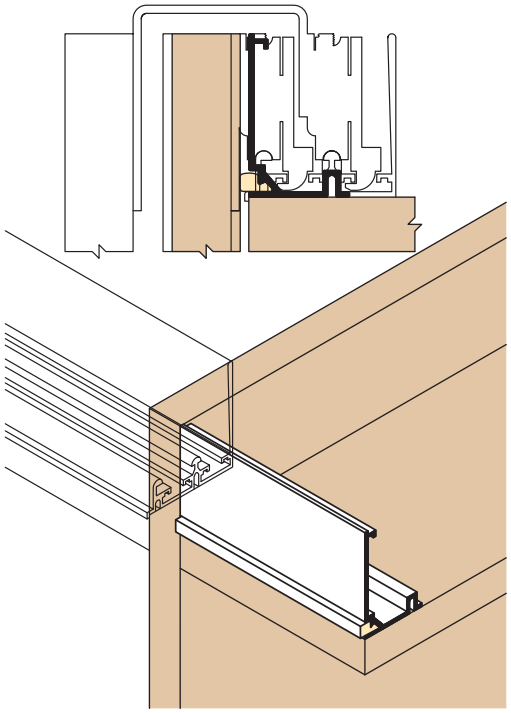

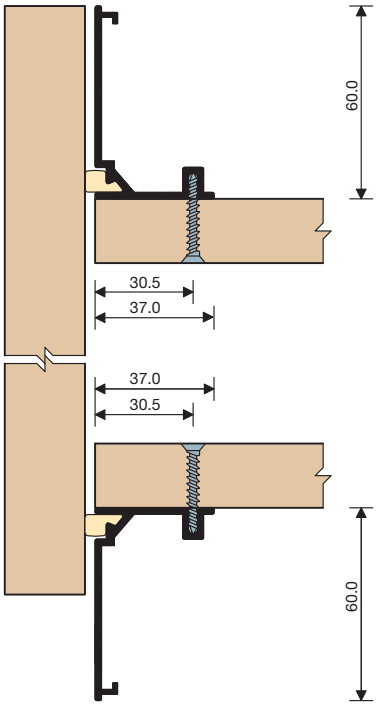

Technical data

Assembling scheme

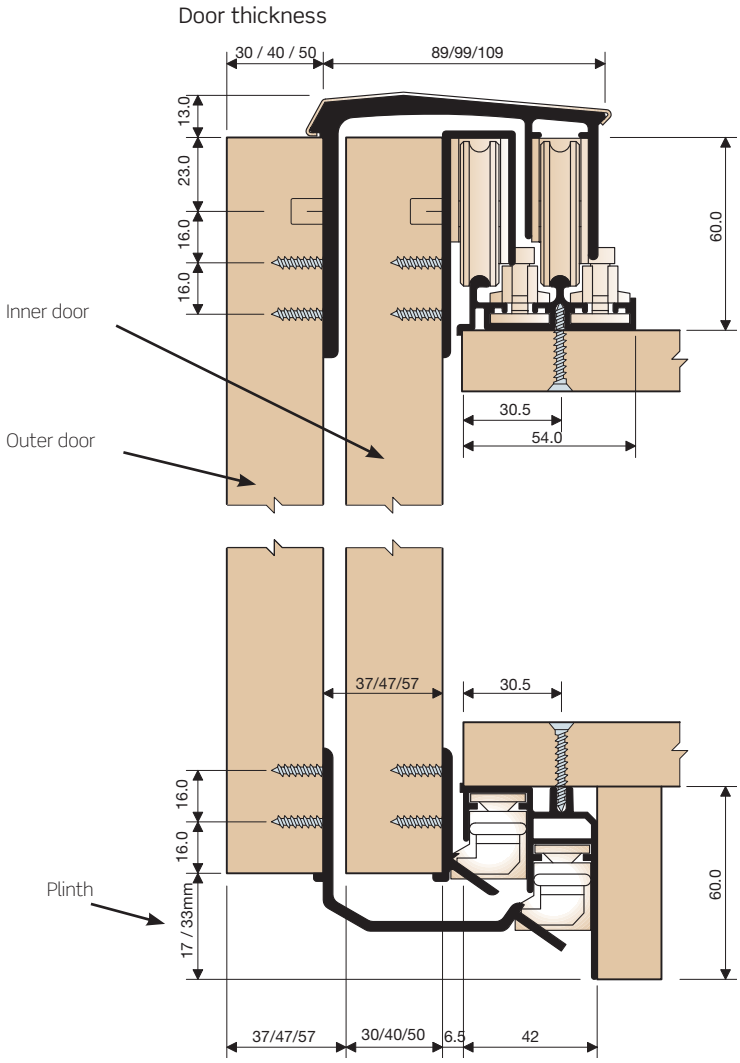

Drilling plan

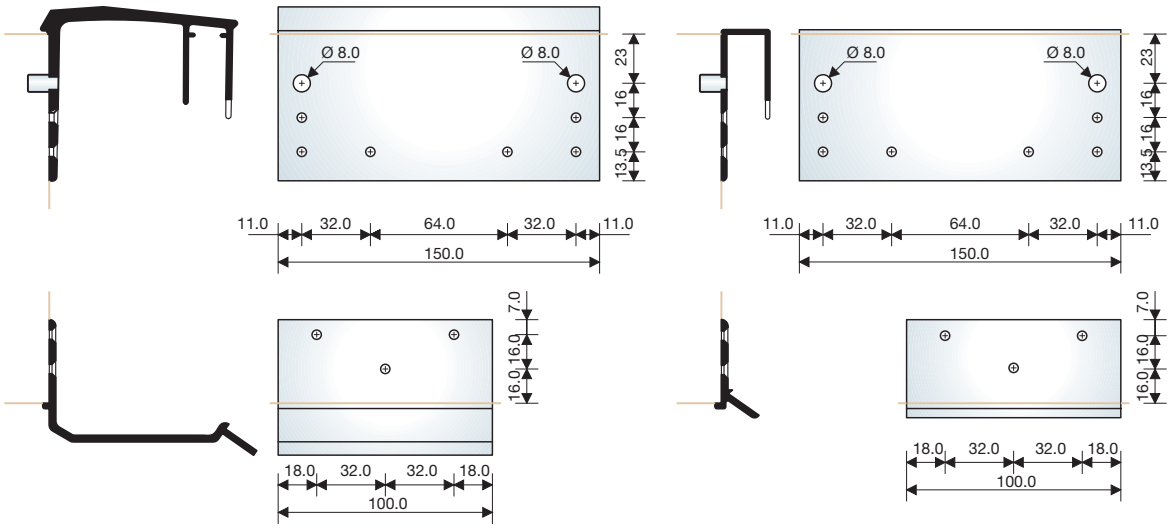

Technical data

Assembly

Place upper brakes and lower stops before mounting the track (see diagram 1 and 2). Screw tracks from inside the wardrobe first place the inner doors and then the outer doors. Place the doors in the upper track and then push them down gently so that the fitting is inserted into the lower track (see diagram 3 and 5).

Height adjustment laterally (see diagrams 4 and 6).
Fix stops and brakes once the door is mounted. Follow reverse procedure, for dismantling.

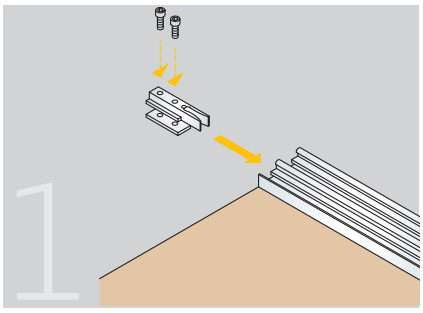

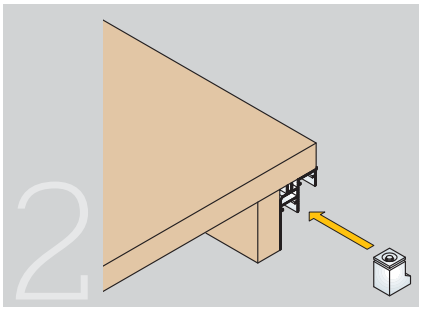

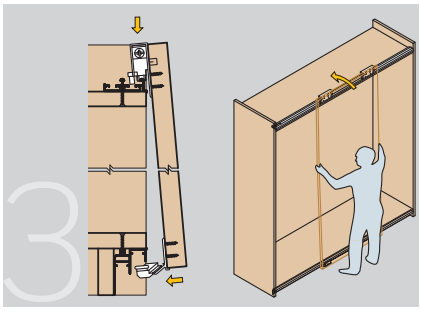

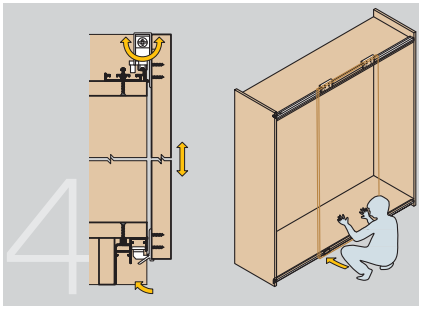

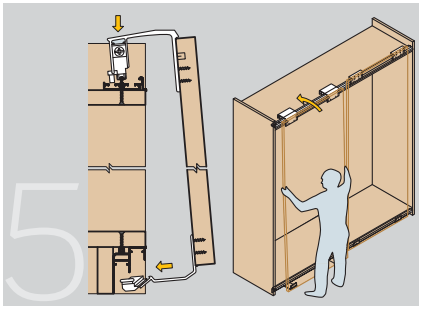

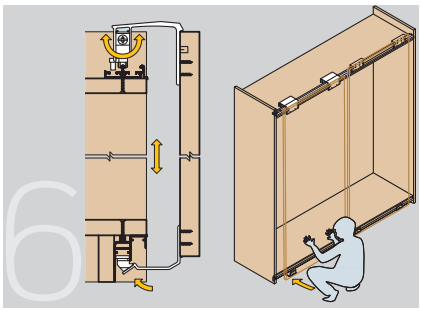

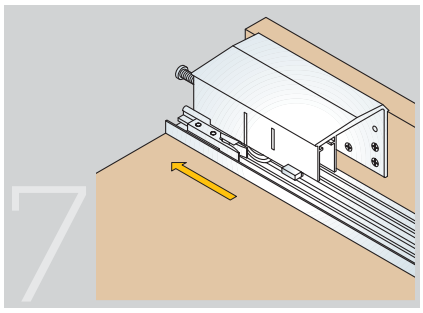

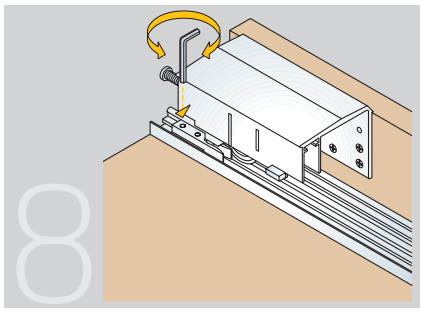

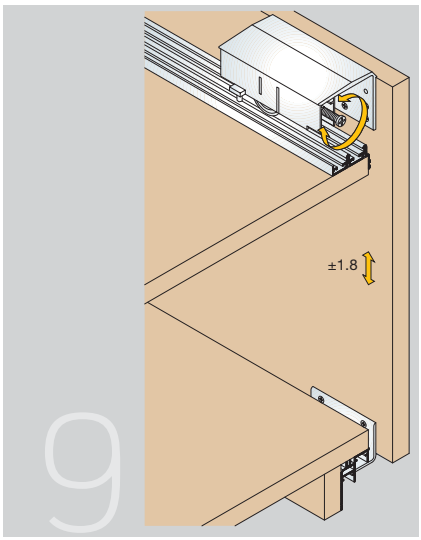

2 MASTER MAS

INDA-matic gradual closing

The aluminium system allows for 25-30-40-50mm. door thicknesses. Each fitting has two distances from the door to the floor 17 and 33mm.

Upper track.

	Cut-to-measure	6 mm. bar	
Natural	707.000.501	707.060.502	6

Heavy duty upper track.

	Cut-to-measure	6 mm. bar	
Natural	707.100.505	707.160.506	4



Lower track.

	Cut-to-measure	6 mm. bar	
Natural	707.300.506	707.360.500	4

Set of upper and lower tracks Ø16.

	Cut-to-measure	
Natural	707.200.502	1



30 mm dust guard for exterior door.

Lenght		
760	704.908.142	5
860	704.909.144	
960	704.910.146	
1060	704.911.141	

MASTER MAS set of fittings.

Load	Skirting board	Interior door	Exterior 30mm.	Exterior 40mm.	Exterior 50mm.	
50Kg.	17mm.	705.157.106	705.057.102			1
	33mm.	705.150.106	705.050.102			
100Kg.	17mm.	705.167.105	705.067.101	703.840.174		
	33mm.	705.160.105	705.060.101	701.740.174	703.850.335	

It contains the upper and lower rollers, upper self-closing, lower damper and 18 fixing screws Ø3.9 x 13 necessary for one door.

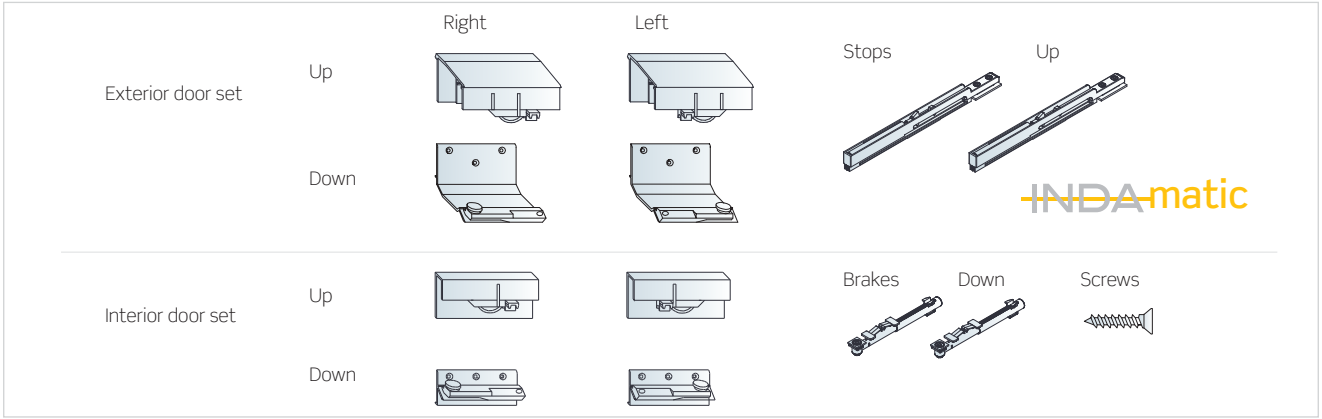

ALTER system

Aluminium track that gives continuity to the cupboard's structure when leaf doors are used alongside sliding systems.

ALTER system track.

	Cut-to-measure	
	707.400.503	10

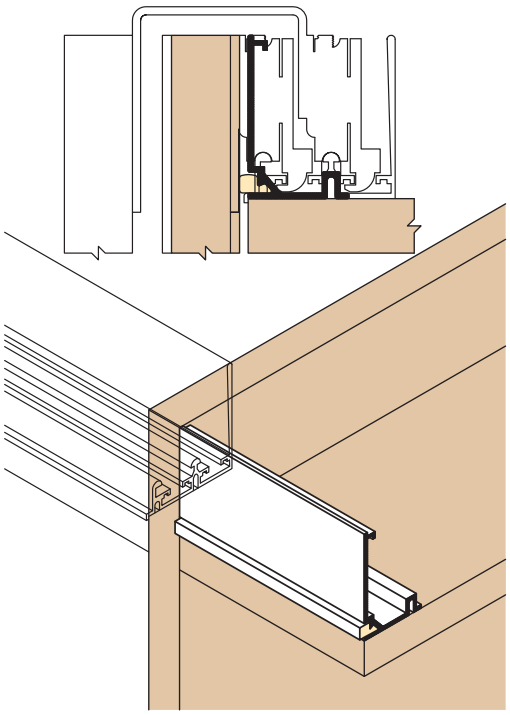

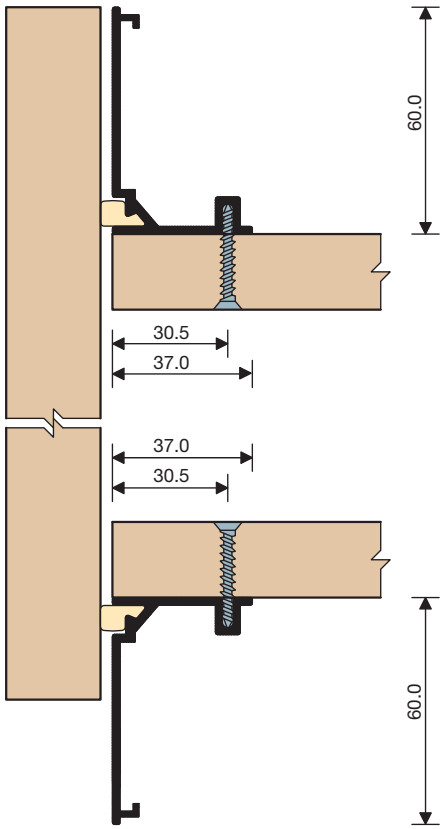

Technical data

INDAmatic
gradual closing

Assembly diagram

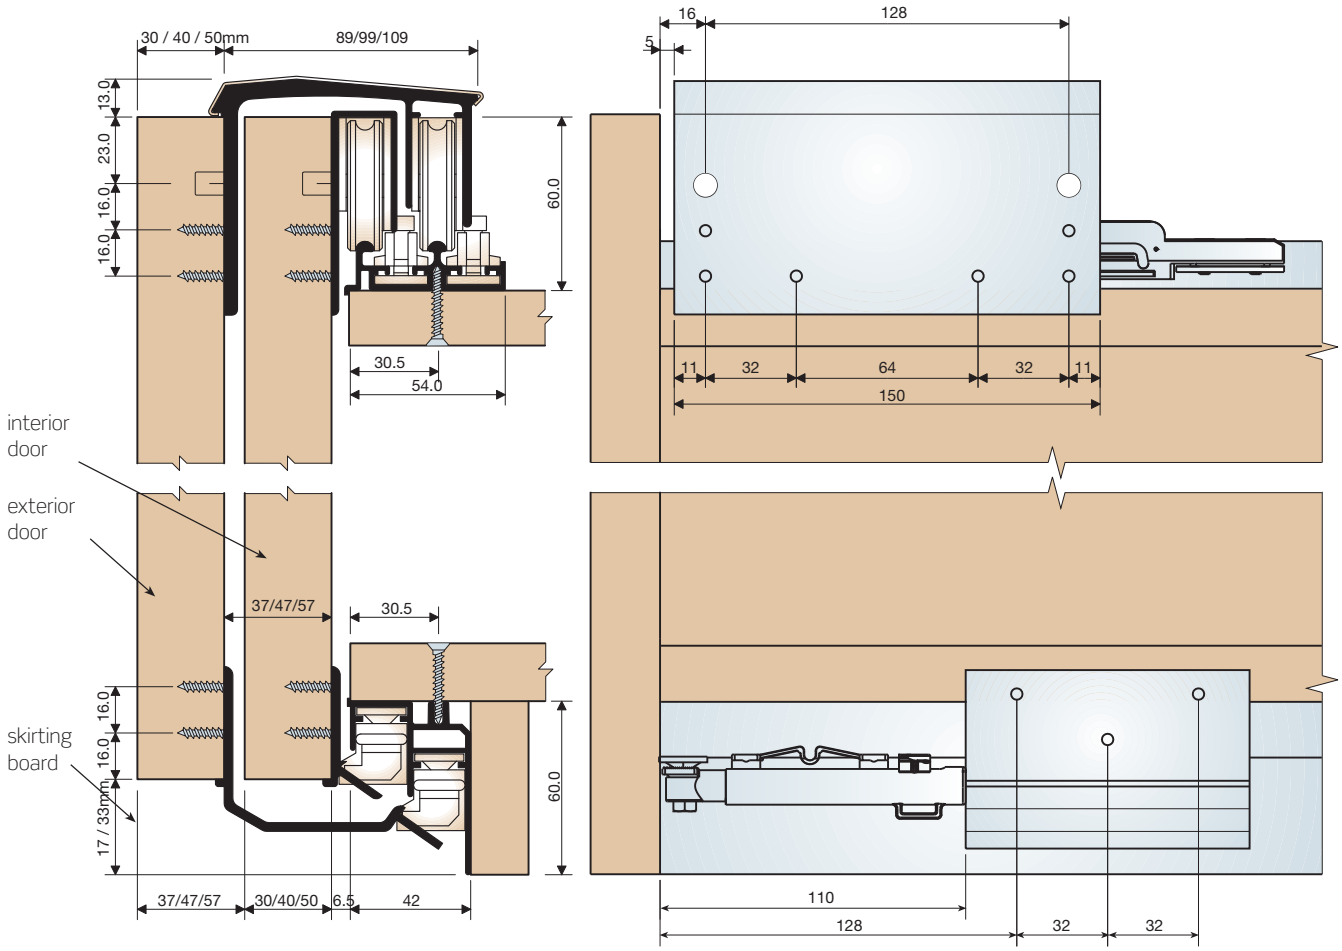

Drilling diagram

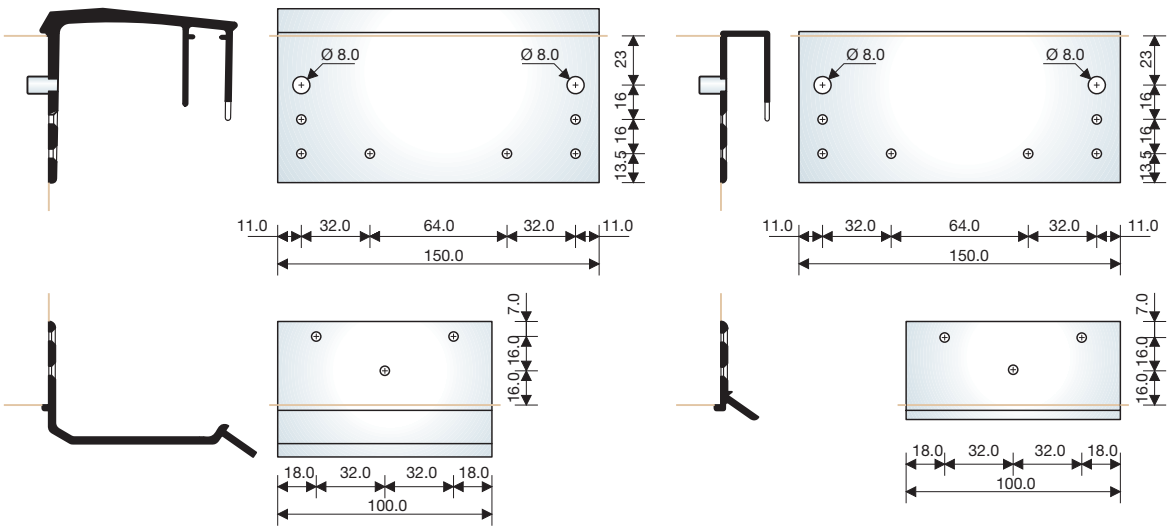

Technical data

INDAmatic gradual closing

Assembly

Assemble the upper track. Insert the indamatic self-closing system, placing the screws towards the centre of the cabinet. (Diagram 1)
Secure the self-closing system in the required position (nº.2)
Insert the lower brake, placing the screws towards the exterior of the cabinet. (nº.3) Position and fix the lower brake. (nº.4)
The doors are assembled by placing them in the upper track and then pushing them down gently until the fitting is inserted into the lower track. (nº.5, nº.6)

The doors' height is adjusted from the side. (nº.7)
Once the doors have been assembled and positioned, activate the closing device, opening and closing the door. (Nº.8)

The dismantling process is as the assembly process but in reverse. First release the lower fitting and then raise the door to remove it.

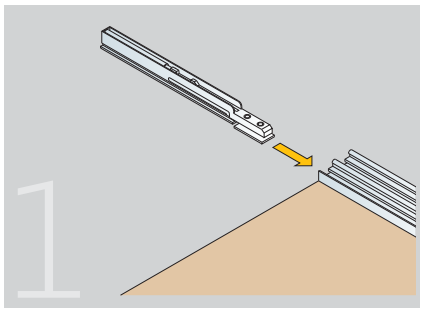

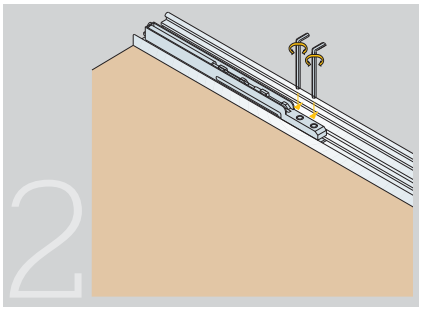

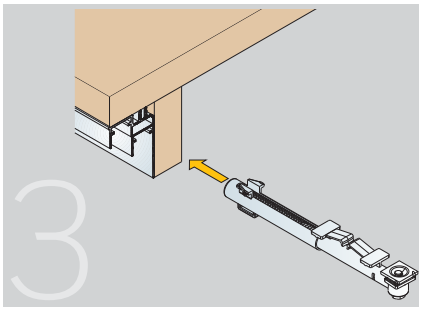

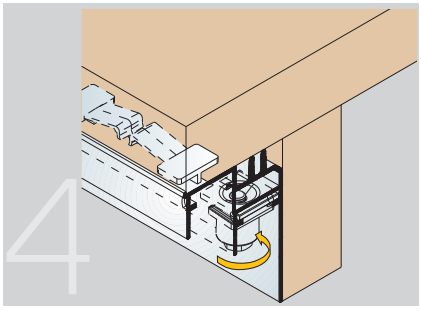

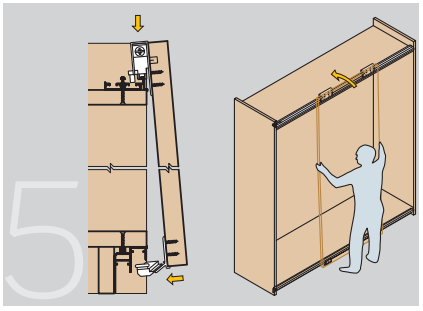

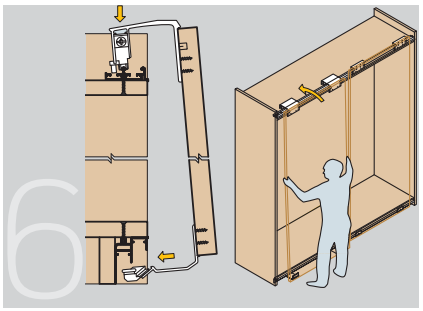

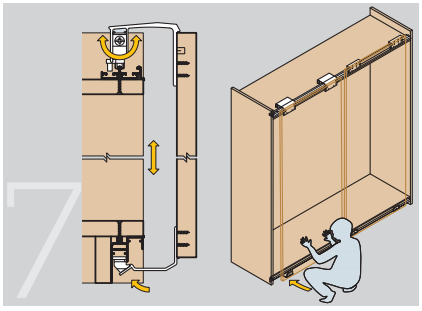

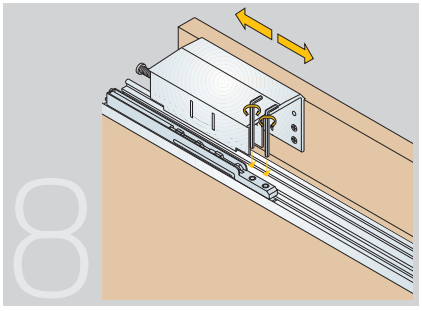

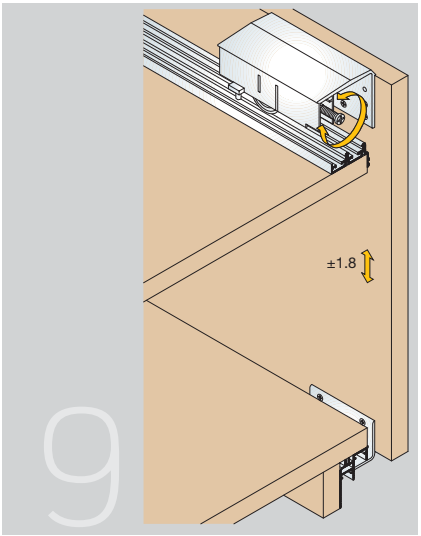

3 GHOST

Set of upper and lower tracks.

	Cut-to-measure	
Natural	707.700.501	1

Set of fittings.

1 Door	704.700.102	1

It contains 2 upper rollers and 2 lower carriages, 2 upper brakes and 2 lower brakes, 1 bag of screws necessary for one door.

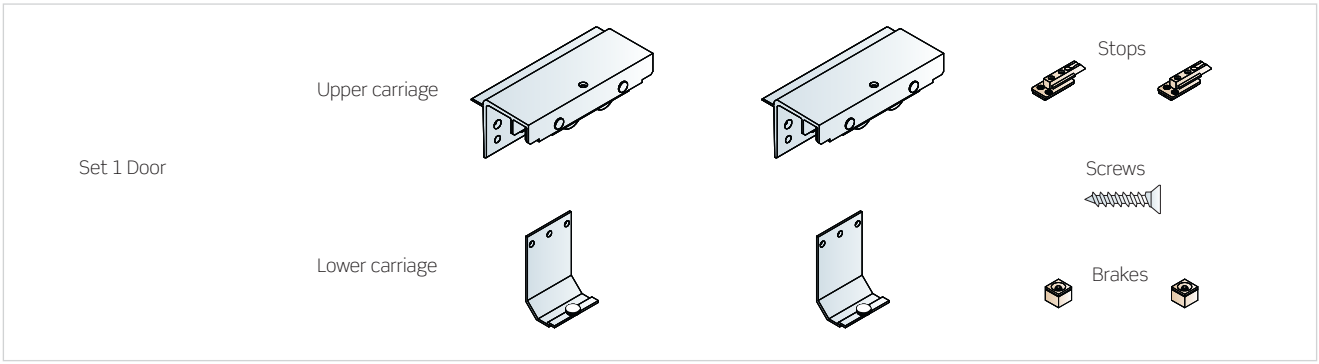

Technical data

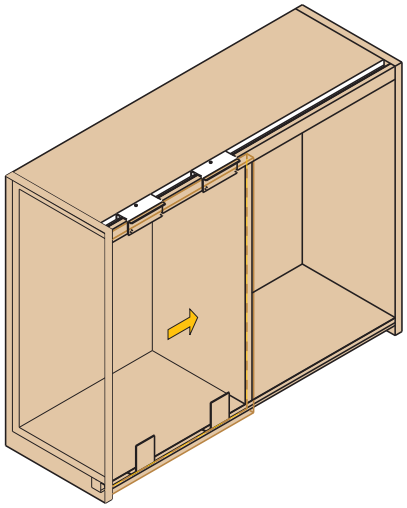

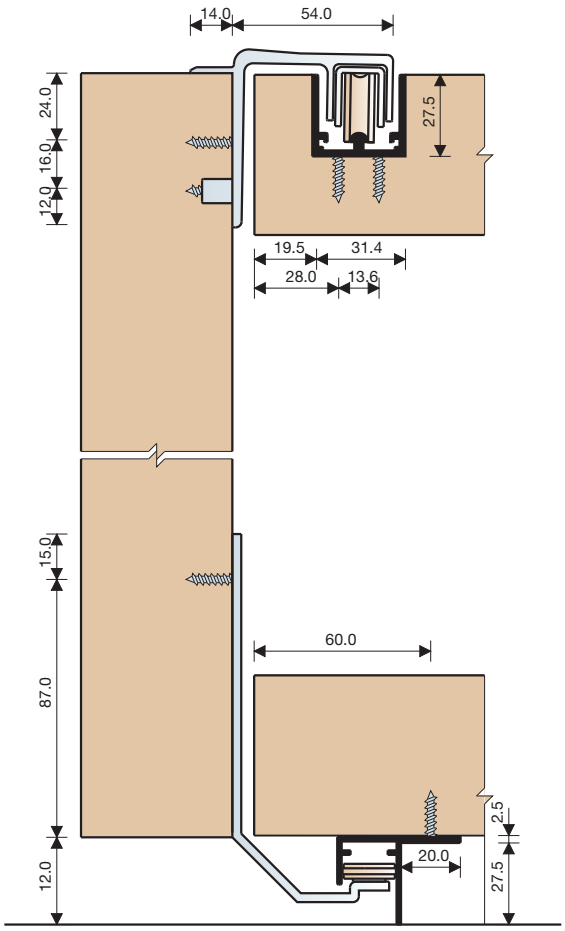

Technical data

Assembly

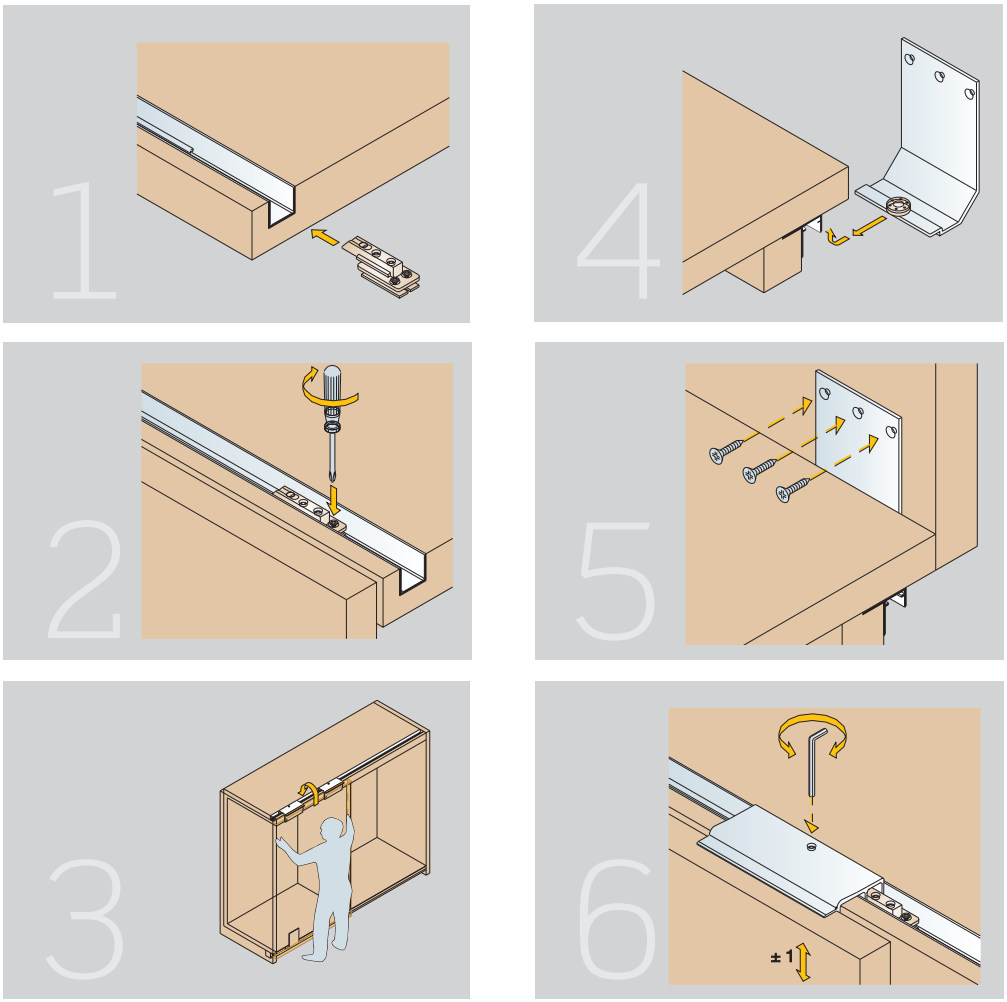

Drilling

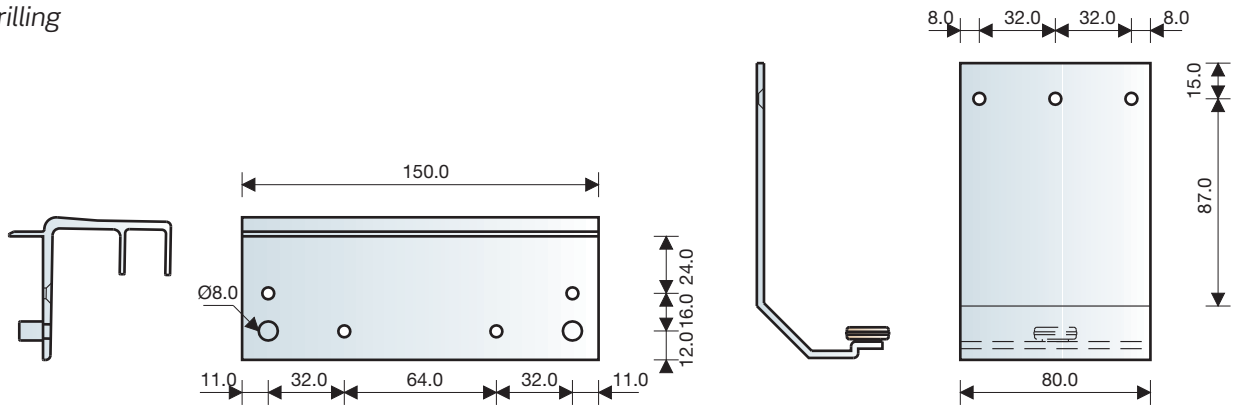

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

SISTEMA-4

Fittings for hanging doors

INDAmatic
gradual closing

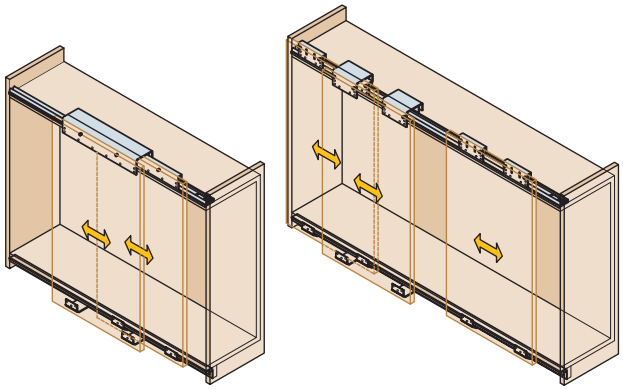

SISTEMA-4
Fittings for hanging doors

The Sistema-4 provides functionality, quality and design to the cupboard, in addition to a cushioned closing system thanks to Indamatic. A very simplified assembly is available in a wide range of finishes. Allows for door thickness of until 30mm and 50kg maximum. No tools necessary to assemble lower rollers.

pp.

1 TRACKS 620

2 TECHNICAL DATA 621

1 TRACKS

INDA-matic gradual closing

For door thickness of until 30mm. and 50kg maximum. Each fitting has a distance from the door to the floor of 33mm.

Upper track.

	Cut-to-measure	6 m. bar	
Natural	707.000.501	707.060.502	6

Heavy duty upper track.

	Cut-to-measure	6m. bar	
Natural	707.100.505	707.160.506	4



Lower track.

	Cut-to-measure	6m. bar	
Natural	707.300.506	707.360.500	4

Set of upper and lower tracks Ø16.

	Cut-to-measure	
Natural	707.200.502	1



SISTEMA-4 set of fittings.

Load	Exterior door	Interior door	
50Kg.	700.720.101	700.700.103	1

It contains 2 upper rollers, 2 lower rollers, 2 upper self-closing devices, 2 lower brakes and all necessary screws for one door.

Exterior door set

Up



Down



Lower brake



Screws

Interior door set





Upper self-closing system

INDA-matic

2 TECHNICAL DATA

INDA-matic
gradual closing

Assembling scheme

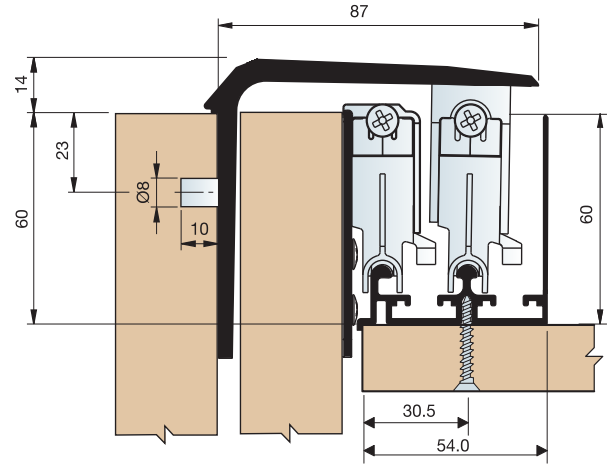

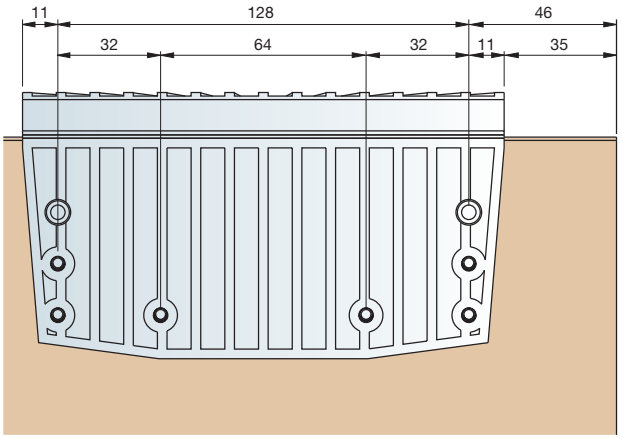

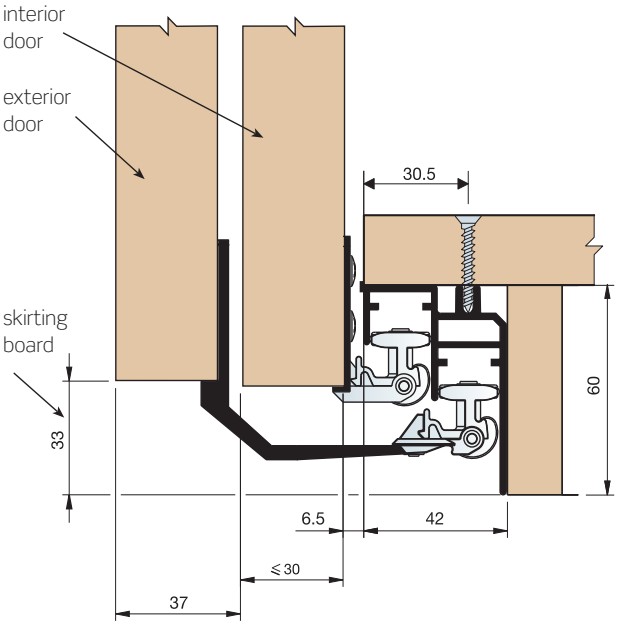

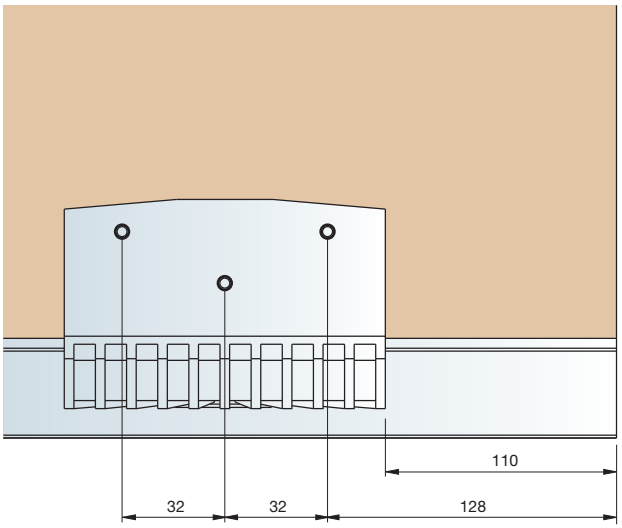

Drilling plan

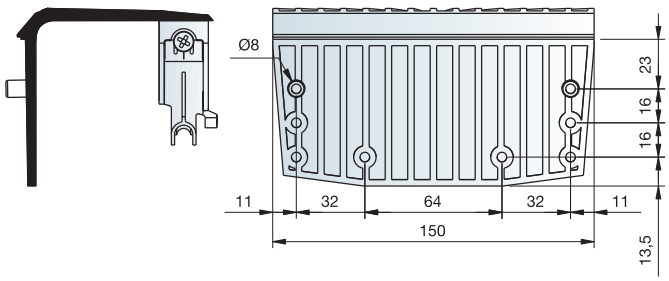

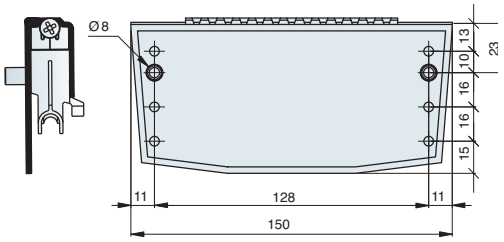

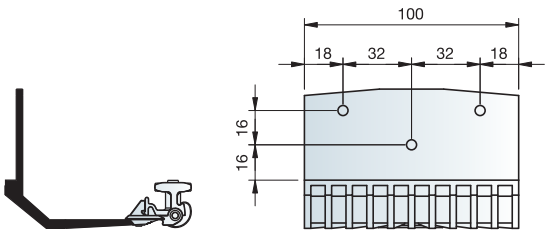

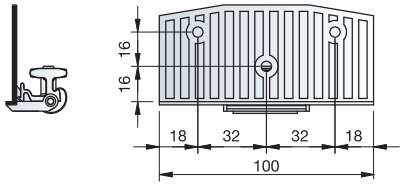

2 TECHNICAL DATA

INDAmatic gradual closing

Assembly

Assemble the upper track. Insert the INDAMATIC self-closing system, placing the screws towards the centre of the cabinet. (Diagram 1)
Secure the self-closing system in the required position (nº.2)
Insert the lower brake, placing the screws towards the exterior of the cabinet. (nº.3) Position and fix the lower brake. (nº.4)
The doors are assembled by placing them in the upper track and then pushing them down gently until the fitting is inserted into the lower track. (nº.5, nº.6)

The doors' height is adjusted from the side. (nº.7)
Once the doors have been assembled and positioned, activate the closing device, opening and closing the door. (Nº.8)

The dismantling process is as the assembly process but in reverse. First release the lower fitting and then raise the door to remove it.

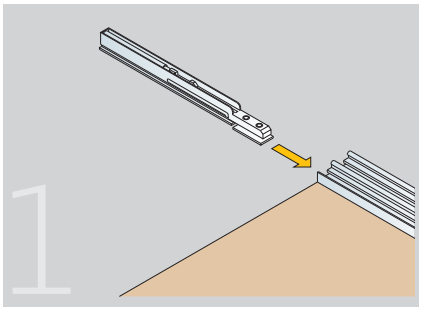

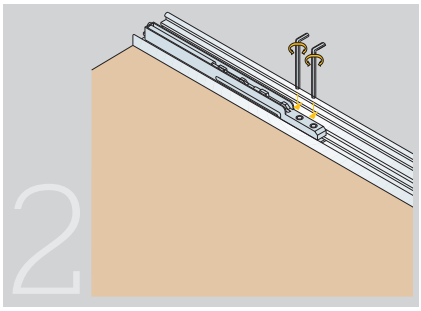

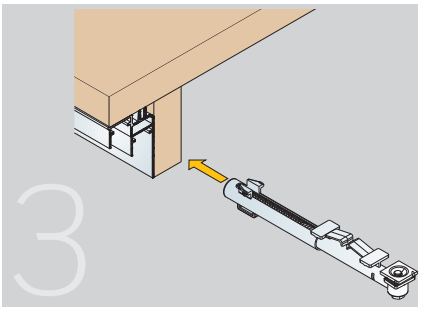

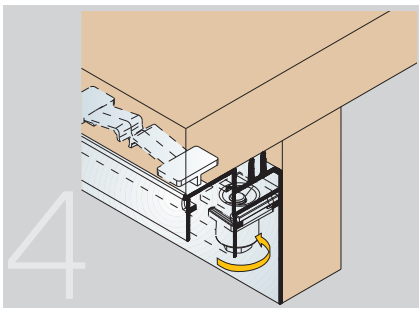

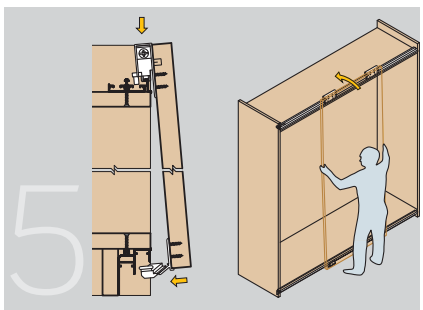

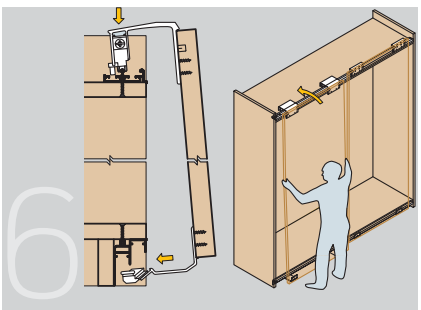

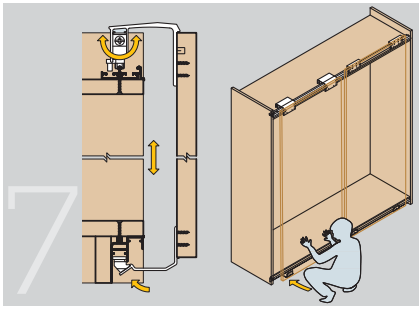

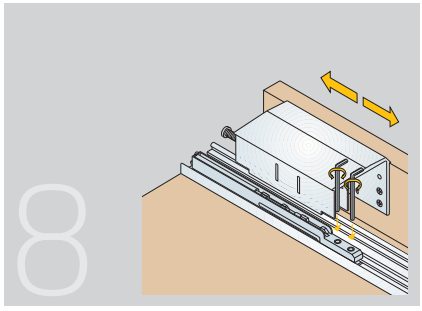

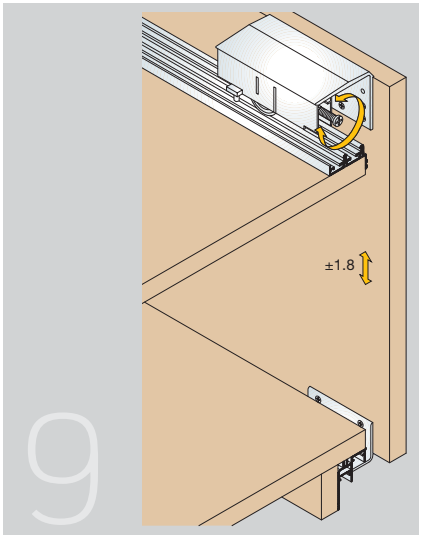

NOTES



FITTINGS
FOR SUPPORTED DOORS

Light doors in wood or aluminium. Doors up to 50 kp.
Unmachined cupboard doors. Unmachined japanese door.

pp.

1 JUNIOR-4 626

2 JUNIOR-2 628
- JUNIOR-2E 628
- JUNIOR-2S 630

3 JUNIOR-3 632
- JUNIOR-3E 632
- JUNIOR-3S 634

4 JUNIOR-5 636

5 JUNIOR-6 639
- JUNIOR-6 Clássic 642
- JUNIOR-6 Indamatic ..... INDAmatic 644

6 JUNIOR-7 ..... INDAmatic 655

1 JUNIOR-4

Single track.

Finish	2m bars	3m bars	
Silver-anodized	721.220.102	721.230.101	
Brass-anodized	721.220.780	721.230.786	10
Black-anodized	721.220.894	721.230.893	or
Golden-anodized	721.220.776	721.230.775	50
White-lacquered Ral 9010	721.220.802	721.230.801	

For other lengths, please consult.



Set of fittings for 50 kp.

Brown Ral 8016	722.500.015	100

Lower roller with steel ball-bearing mounted wheel.

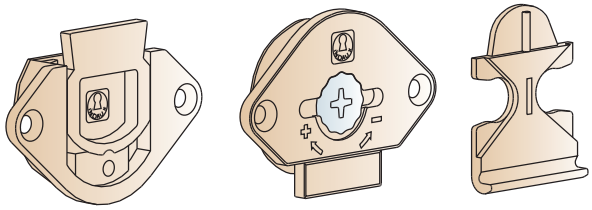

Accessories set.

White Ral 9003	716.307.001	
Brown Ral 8016	716.307.012	50
Black Ral 9005	716.307.023	
Oak Ral 1002	716.307.196	

Reference consists of 1 left-hand track stop with brake, 1 right-hand track stop with brake, 1 double left-hand track stop, 1 double right-hand track stop and 1 track stop.

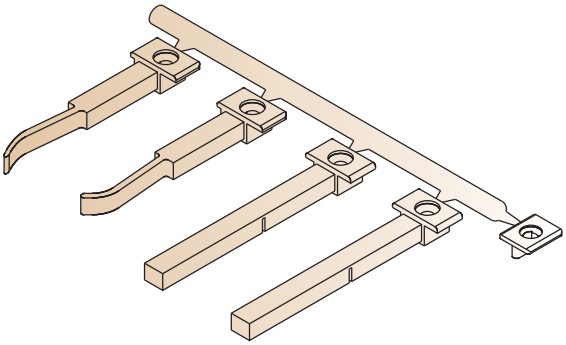



Track stop with brake left

Track stop with brake right



Double track stop left

Central stop

Double Track stop left

Assembly



2 doors

3 doors

- Track stop with brake
- Track stop
- Double track stop
- Central stop (optional)

The double track stop allows the access to the pulling profile of the inner door



To get a single track stop, just break the double track stop.



Technical data

Light and easy to fit. Lower roller with vertical adjustment. For doors up to 50 Kg.

Assembly

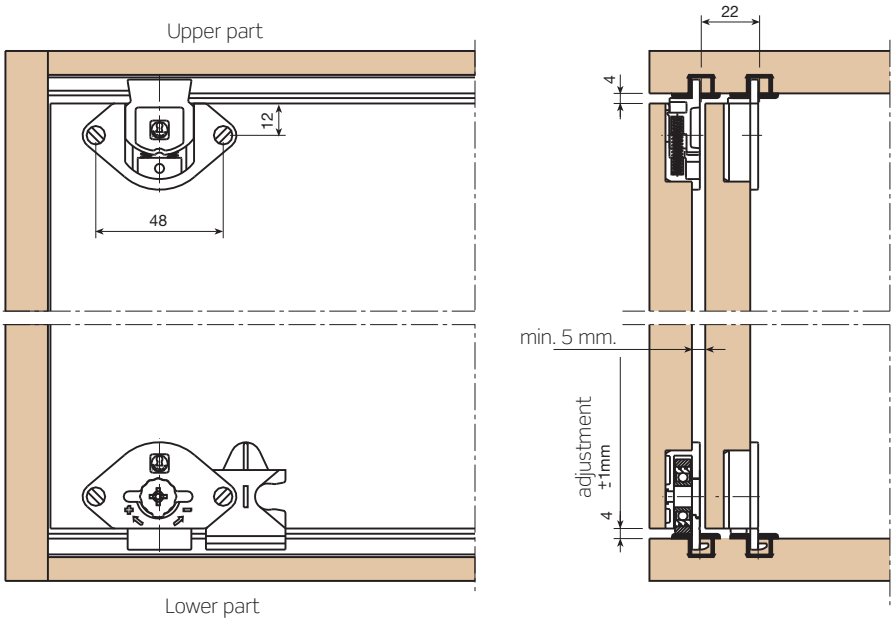

Drilling plan

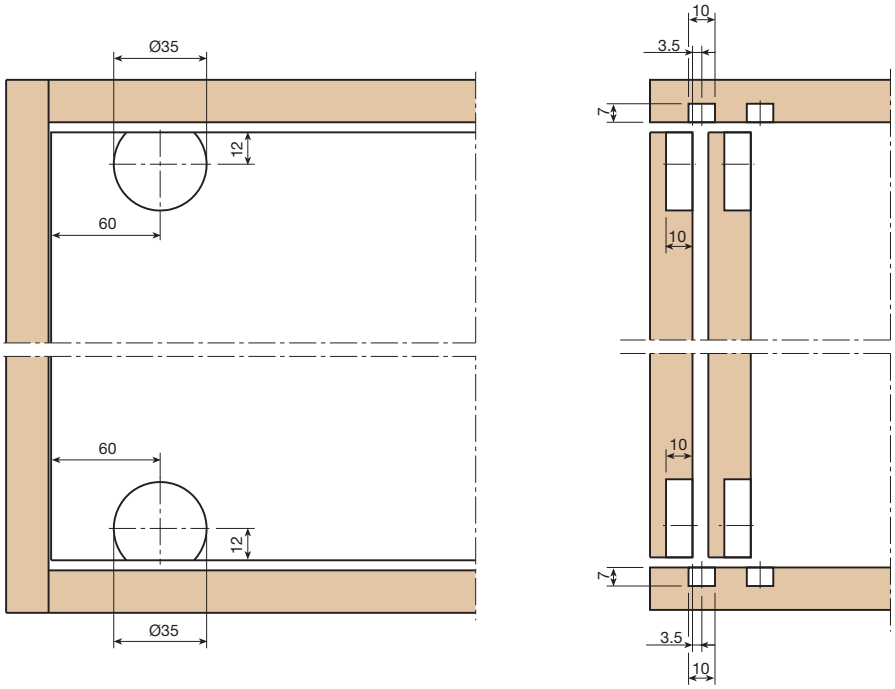

2 JUNIOR-2

JUNIOR-2E

Upper double guide track.

	4,2m bars	
Silver-anodized	711.900.103	
Brass-anodized	711.900.781	
Black-anodized	711.900.895	10
Golden-anodized	711.900.770	
White-lacquered	711.900.803	

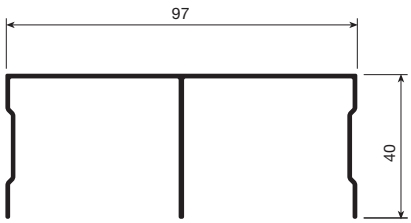

Lower double supporting track.

	4,2m bars	
Silver-anodized	711.800.106	
Brass-anodized	711.800.784	
Black-anodized	711.800.891	10
Golden-anodized	711.800.773	
White-lacquered	711.800.806	



Pulling profile (handle).

	2,6m bars	5,2m bars	
Silver-anodized		711.716.106	
Brass-anodized		711.716.784	
Black-anodized		711.716.891	
Golden-anodized		711.716.773	
White-lacquered		711.716.806	
Beech coated, not varnished	712.916.864		10
Pine Valsain coated, not varnished	712.916.875		
Oak coated, not varnished	712.916.901		
Oak coated, varnished	712.916.912		
Sapeli coated, varnished	712.916.923		
Sapeli coated, not varnished	712.916.934		
Cherry coated, not varnished	712.916.945		



Edge profile.

	2m bars	
Silver-anodized	711.500.101	
Brass-anodized	711.500.786	
Black-anodized	711.500.893	20
Golden-anodized	711.500.775	
White-lacquered	711.500.801	



Bag of components Mod. JUNIOR 2-E.

Load	2 doors	3 doors	
50Kg.	702.220.105	702.330.101	10

Profiles manufactured in aluminium. Complete components for 2 or 3 doors. Please give reference number for tracks and components bag when ordering.


Upper roller


Upper track stop


Bottom roller

JUNIOR-2E: *Technical data*

Offered as a system for the construction industry, using walls, floor and ceiling, but can also be mounted in cabinets. Upper guides to be screwed to the door's inner face. Upper guides slide along the upper track. The lower roller has steel ball-bearing mounted wheel, and allows 9mm adjustment.

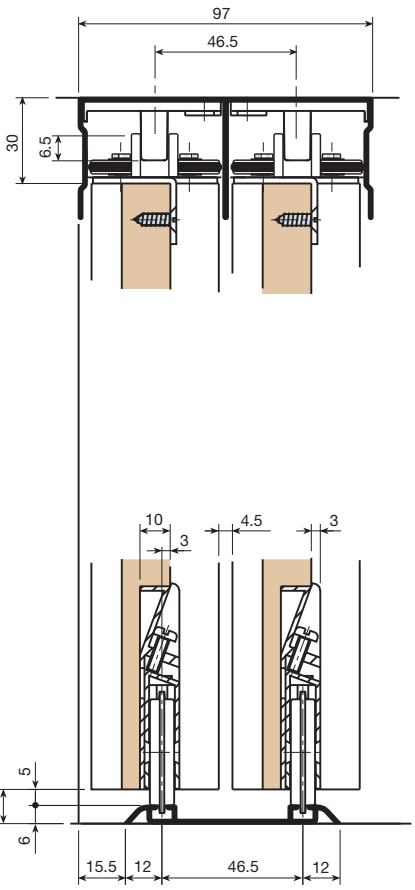

Upper view



Lower view



Pulling profile 16 mm. panel

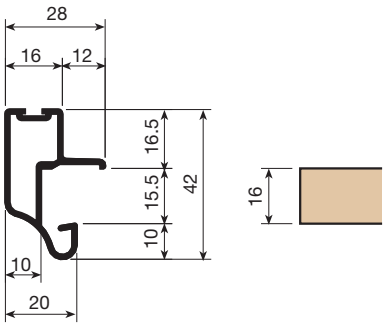

Fittings housing

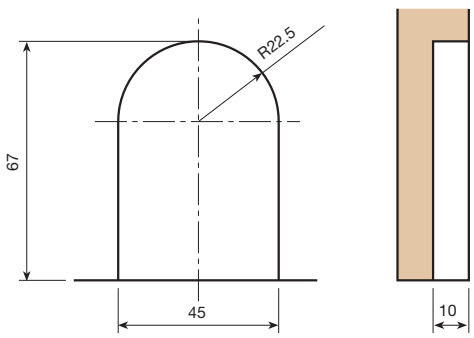

JUNIOR-2S

Upper double guide track.

	4,2m bars	
Silver-anodized	711.900.103	
Brass-anodized	711.900.781	
Black-anodized	711.900.895	10
Golden-anodized	711.900.770	
White-lacquered	711.900.803	

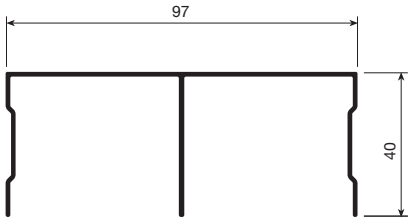

Lower double supporting track.

	4,2m bars	
Silver-anodized	711.800.106	
Brass-anodized	711.800.784	
Black-anodized	711.800.891	10
Golden-anodized	711.800.773	
White-lacquered	711.800.806	



Pulling profile (handle).

	2,6m bars	5,2m bars	
Silver-anodized		711.716.106	
Brass-anodized		711.716.784	
Black-anodized		711.716.891	
Golden-anodized		711.716.773	
White-lacquered		711.716.806	
Beech coated, not varnished	712.916.864		10
Pine Valsain coated, not varnished	712.916.875		
Oak coated, not varnished	712.916.901		
Oak coated, varnished	712.916.912		
Sapeli coated, varnished	712.916.923		
Sapeli coated, not varnished	712.916.934		
Cherry coated, not varnished	712.916.945		



Edge profile.

Length of the Bars	2m bars	
Silver-anodized	711.500.101	
Brass-anodized	711.500.786	
Black-anodized	711.500.893	20
Golden-anodized	711.500.775	
White-lacquered	711.500.801	



Bag of components Mod. JUNIOR 2-S.

Load	2 doors	3 doors	
50Kp.	702.010.105	702.020.104	10

Profiles manufactured in aluminium. Complete components for 2 or 3 doors. Please give reference number for tracks, profiles and components when ordering.



Upper track stop



Upper roller



JUNIOR-2S: *Technical data*

Offered as a system for the construction industry, using walls, floor and ceiling, but can also be mounted in cabinets. Upper guides to be screwed to the door's inner face. Upper guides slide along the upper track. The lower roller has steel ball-bearing mounted wheel, and allows 9mm adjustment.

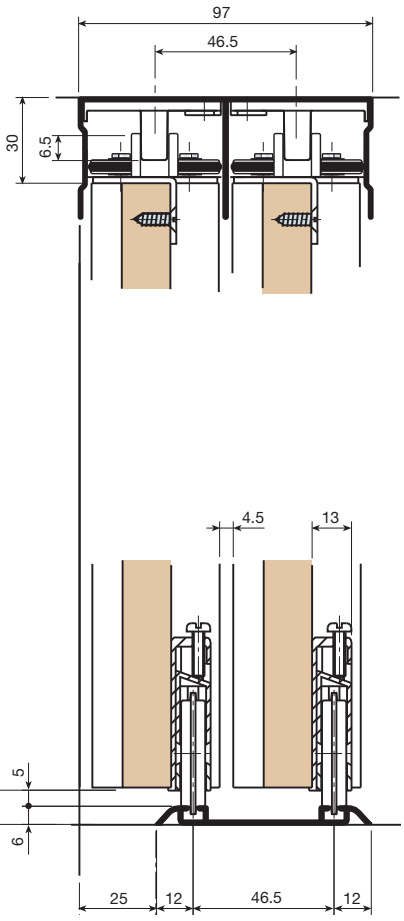

Upper view



Lower view



Pulling profile 16mm panel

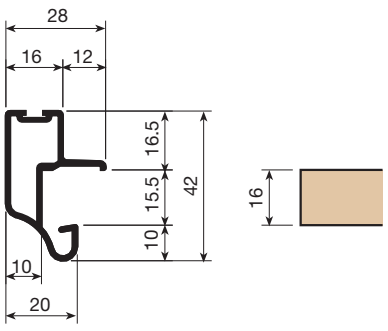

3 JUNIOR-3

JUNIOR-3E

Guide track.

	6m. bars	
Silver-anodized	721.160.101	
Brass-anodized	721.160.786	
Black-anodized	721.160.893	20
Golden-anodized	721.160.775	
White-lacquered	721.160.801	



Pulling profile.

	2.6M. Bars	5.2m. bars	
Silver-anodized		711.716.106	
Brass-anodized		711.716.784	
Black-anodized		711.716.891	
Golden-anodized		711.716.773	
White-lacquered		711.716.806	
Beech coated, not varnished	712.916.864		10
Pine Valsain coated, not varnished	712.916.875		
Oak coated, not varnished	712.916.901		
Oak coated, varnished	712.916.912		
Sapeli coated, varnished	712.916.923		
Sapeli coated, not varnished	712.916.934		
Cherry coated, not varnished	712.916.945		



Edge profile.

	2m. bars	
Silver-anodized	711.500.101	
Brass-anodized	711.500.786	
Black-anodized	711.500.893	20
Golden-anodized	711.500.775	
White-lacquered	711.500.801	



Set of fittings for 50kp.

Load	2 Doors	3 Doors	
50Kp.	701.800.105	701.900.102	10

This fitting is supplied complete for 2 or 3-door cupboards and wardrobes, with all the parts in one bag. The 2-door bag contains 4 upper guide brackets, 4 lower rollers and 4 stops. The 3-door bag contains 6 upper guide brackets, 6 lower rollers and 4 stops. Profiles and tracks are made of aluminium.
When placing your order, please specify the reference for the upper and lower track profiles, pulling profile, end profile and the bag containing the rest of the fittings.



Upper roller



Upper brake stop



Lower roller



Intermediate stop

JUNIOR-3E: *Technical data*

This system is designed for use in construction, for ceilings and floors and wall to wall. It can also be used in cupboards and wardrobes, depending on the design. Guides are placed on the upper portion of the door which serve to guide it along the upper track. The lower part has a highly accurate rolling system that can be adjusted up to 9 mm, which helps to compensate for uneven floor surfaces and false brackets.

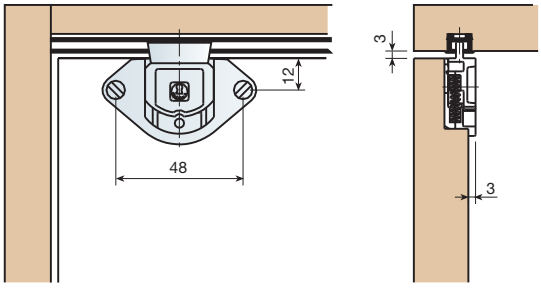

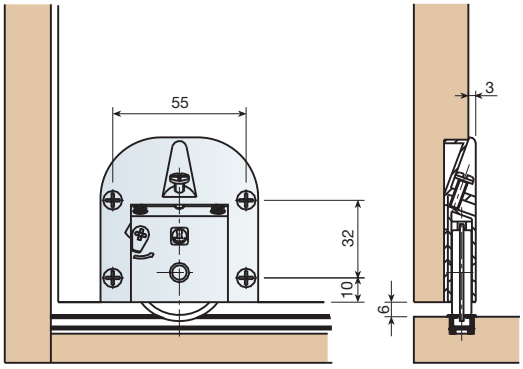

Pulling profile for 16mm panel.



Fittings plan

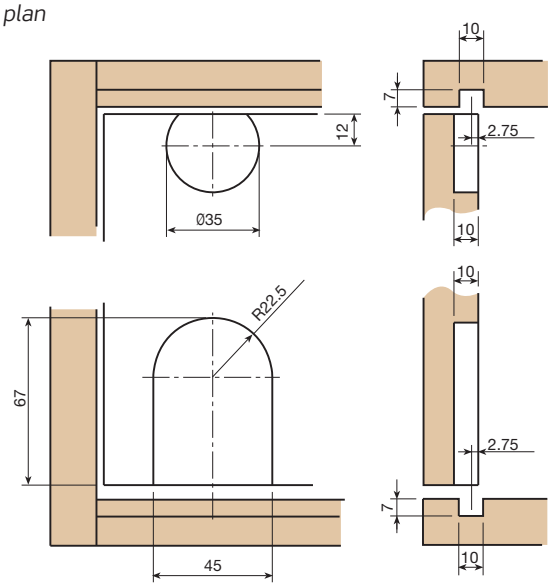

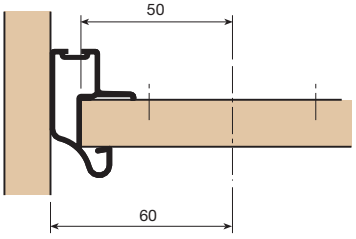

Door with handle

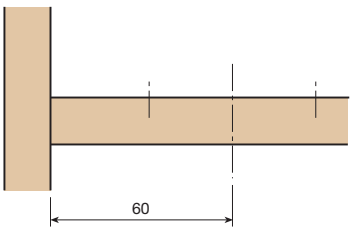

Door without handle

JUNIOR-3S

Guide track.

	6m. bars	
Silver-anodized	721.160.101	
Brass-anodized	721.160.786	
Black-anodized	721.160.893	20
Golden-anodized	721.160.775	
White-lacquered	721.160.801	



Pulling profile.

	2.6m. Bars	5.2m. bars	
Silver-anodized		711.716.106	
Brass-anodized		711.716.784	
Black-anodized		711.716.891	
Golden-anodized		711.716.773	
White-lacquered		711.716.806	
Beech coated, not varnished	712.916.864		10
Pine Valsain coated, not varnished	712.916.875		
Oak coated, not varnished	712.916.901		
Oak coated, varnished	712.916.912		
Sapeli coated, varnished	712.916.923		
Sapeli coated, not varnished	712.916.934		
Cherry coated, not varnished	712.916.945		



Edge profile.

	2b. mars	
Silver-anodized	711.500.101	
Brass-anodized	711.500.786	
Black-anodized	711.500.893	20
Golden-anodized	711.500.775	
White-lacquered	711.500.801	



Set of fittings for 50kp.

Load	2 Doors	3 Doors	
50Kp.	702.101.105	702.102.100	10

This fitting is supplied complete for 2 or 3-door cupboards and wardrobes, with all the parts in one bag. The 2-door bag contains 4 upper guide brackets, 4 lower rollers and 4 stops. The 3-door bag contains 6 upper guide brackets, 6 lower rollers and 4 stops. Profiles and tracks are made of aluminium.
When placing your order, please specify the reference for the upper and lower track profiles, pulling profile, end profile and the bag containing the rest of the fittings.



Upper roller



Upper brake stop



Lower roller



Intermediate stop

JUNIOR-3S: *Technical data*

This system is designed for use in construction, for ceilings and floors and wall to wall. It can also be used in cupboards and wardrobes, depending on the design. Guides are placed on the upper portion of the door which serve to guide it along the upper track. The lower part has a highly accurate rolling system that can be adjusted up to 9 mm, which helps to compensate for uneven floor surfaces and false brackets.

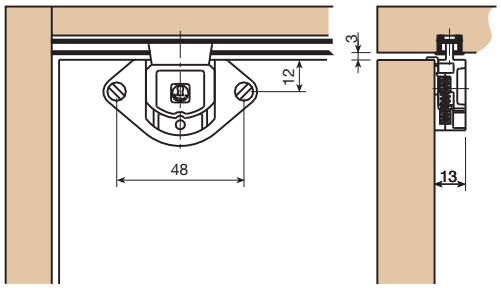

Pulling profile for 16mm panel.



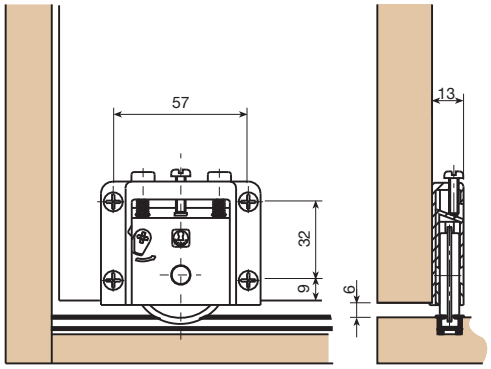

Fittings plan

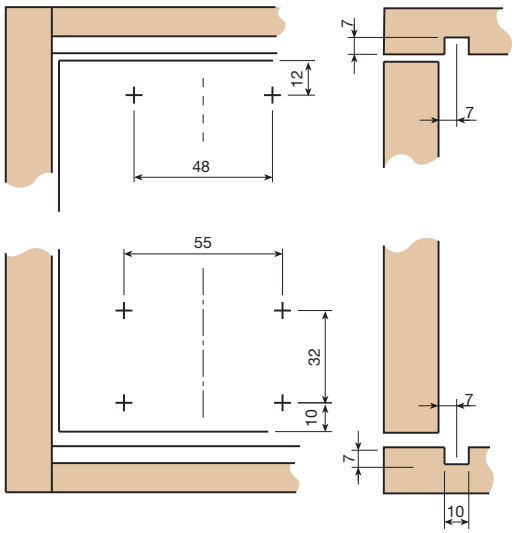

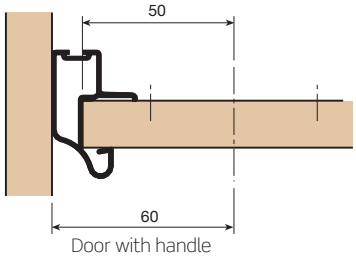

Door with handle

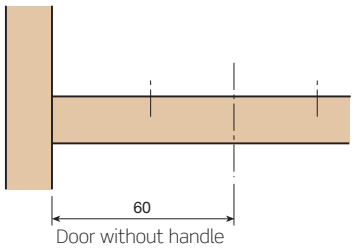

Door without handle

4 JUNIOR-5

Upper track.

	6m. bars	
Silver-anodized	713.200.106	
Black-anodized	713.200.891	10
White-lacquered	713.200.806	



Lower track.

	6m. bars	
Silver-anodized	713.100.102	
Black-anodized	713.100.894	10
White-lacquered	713.100.802	



Upper and lower door track profile.

	6b. mars	
Silver-anodized	713.300.103	
Black-anodized	713.300.895	10
White-lacquered	713.300.803	



Pulling profile.

	5.2b. mars	
Silver-anodized	713.400.100	
Black-anodized	713.400.892	10
White-lacquered	713.400.800	



Set of fittings for 40kp.

Load	2 Doors	3 Doors	
40Kp.	702.600.102	702.700.106	10

This fitting is supplied complete for 2 or 3-door cupboards and wardrobes, with all the parts in one bag. The 2-door bag contains 4 upper guide tracks, 4 lower rollers and 2 upper positioners. The 3-door bag contains 6 upper guide tracks, 6 lower rollers and 3 lower positioners.
Profiles and tracks are made of aluminium.
When placing your order, please specify the reference for the upper and lower track profiles, pulling profile, end profile and the bag containing the rest of the fittings.


Upper guide track


Upper positioner

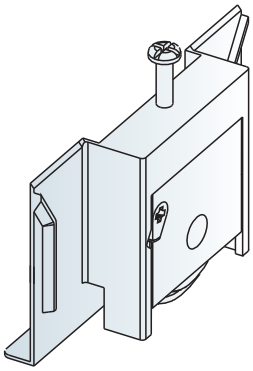
Lower roller

Technical data

The main features of this system are:
› Needs no screws for assembly.
› No need to drill holes for the fittings.
› Very simple assembly, handles, edge profiles, sheave and tracks are assembled just by pressing.
› The door retention system is totally adjustable and can be positioned in any point along the track.

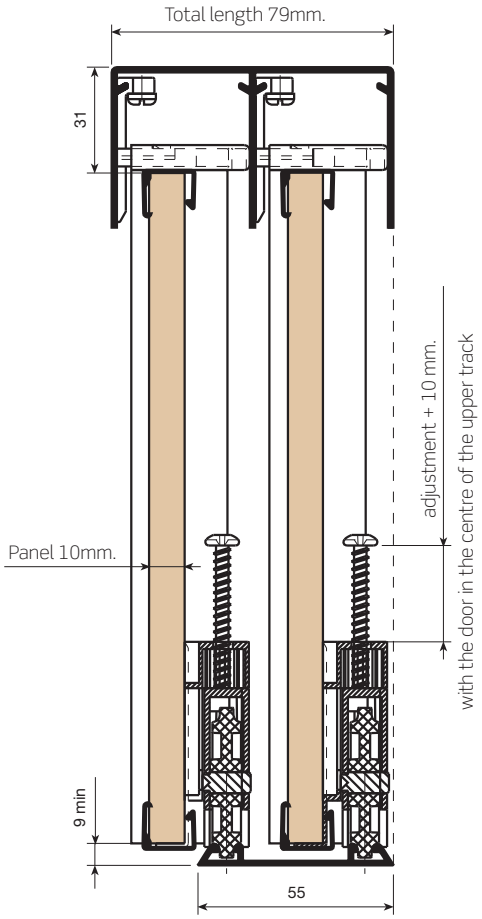

Pulling profile for 10mm panel



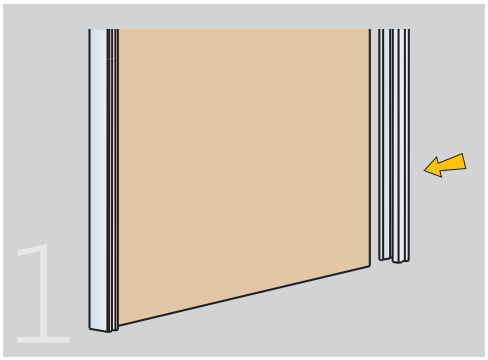

Place the pulling profile
Note door height= space - 40mm.

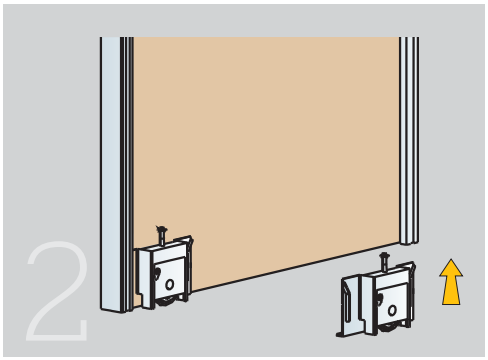

Insert the lower rollers.

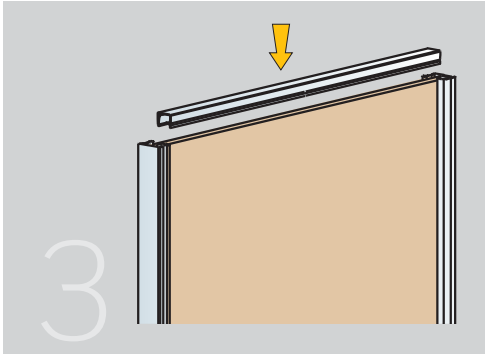

Insert the upper and lower track profiles.
Note: length of the upper and lower track profilesa=door width - 30mm.

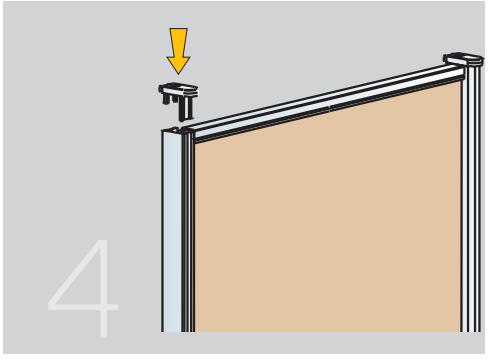

Insert the upper guides.

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

JUNIOR-6

Furniture fittings for supported sliding doors

INDA-matic
gradual closing

JUNIOR-6
Fittings for supported sliding doors

The JUNIOR-6 is the right product for those installations where any size is possible, whether contract or renovation. Its design has been carefully studied to provide an easy installation of the wardrobe and adaptation without any special fitting.

This should be the reason for choosing a top quality wardrobe with multiple options, finishes, models, or runner systems.

The JUNIOR-6 Indamatic version represents the ultimate in wardrobe quality.

Without a doubt, it surpasses other alternatives on the market and could only come from INDAUX's innovative R&D division.

pp.

1 JUNIOR-6 SLIDING DOOR SYSTEMS 642

JUNIOR-6 Classic

The standard version is easily assembled and stands out due to its soft and light but efficient closing mechanism.

References 642
Assembly 643

JUNIOR-6 INDAMATIC

Improved, even smoother runners, thanks to their lower bearings and their triple running points which prevent unwanted door movement. But above all it is known for its automatic and cushioned gradual soft closing.

References 644
Assembly 645

JUNIOR-6 for inclined ceilings

References 646
Assembly 647

2 JUNIOR-6 DOOR RANGE 648

16mm door 648

16mm thick wooden door with aluminium handle.

10mm door 650

10mm thick wooden or glass door with aluminium handle profile.

Japanese door 652

10mm thick Japanese wooden or glass door. Available with 3 to 6mm combined chipboard or glass with an aluminium handle profile.

1 JUNIOR-6 SLIDING DOORS SYSTEMS

JUNIOR-6 Classic

The standard version is easily assembled and stands out due to its soft and light but efficient closing mechanism.

Double upper track.

4.2m bars		
Silver-anodized	714.142.100	10
Matt silver-anodized	714.142.516	
Brass-anodized	714.142.785	
Black-anodized	714.142.892	
Golden-anodized	714.142.774	
White-lacquered RAL 9010	714.142.800	



Lower track.

4.2m bars	Single*	Double	
Silver-anodized	714.342.101	714.242.104	10 or 20*
Matt silver-anodized	714.342.510	714.242.513	
Brass-anodized	714.342.786	714.242.782	
Black-anodized	714.342.893	714.242.896	
Golden-anodized	714.342.775	714.242.771	
White-lacquered	714.342.801	714.242.804	

Double



Single



Bag of components.

50 kp. load	2 door	3 door	
	704.502.105	704.503.100	10

Each bag contains.

		2 door	3 door
A	Upper track stop	4 units	4 units
B	Top roller	4 units	6 units
C	Bottom roller	4 units	6 units
D	Door positioner		1 unit

A



B



C



D



JUNIOR-6 Classic

Assembly

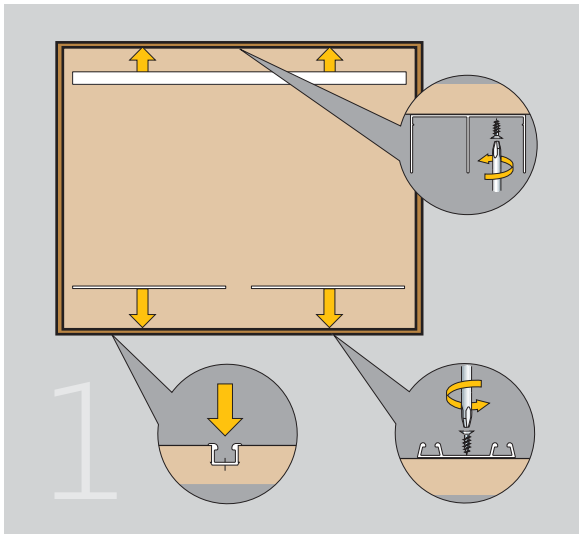

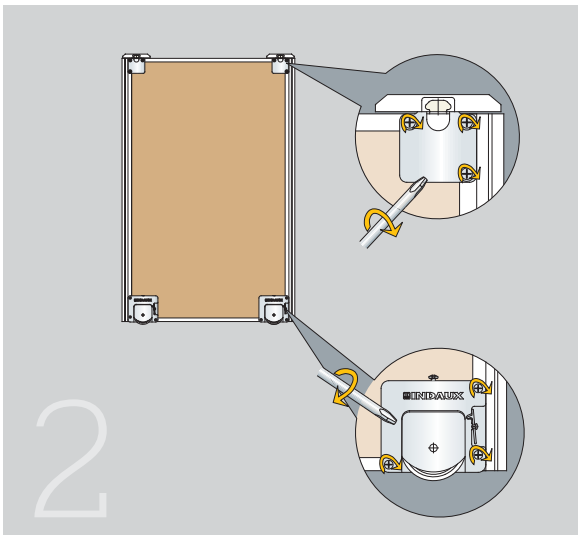

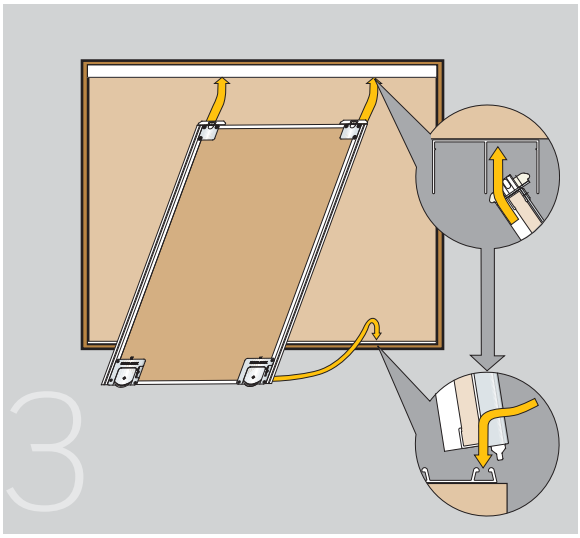

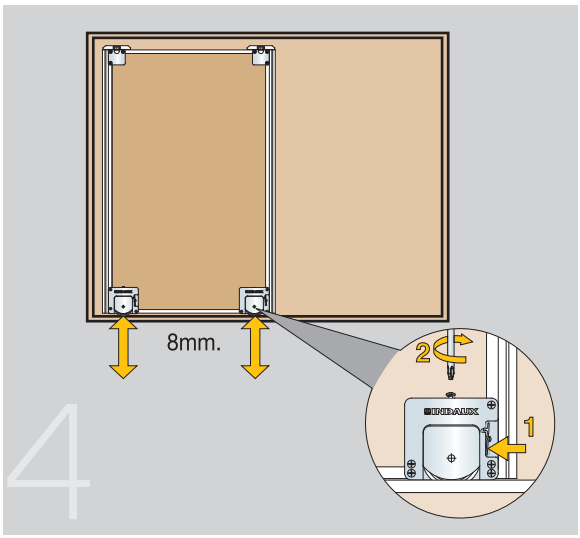

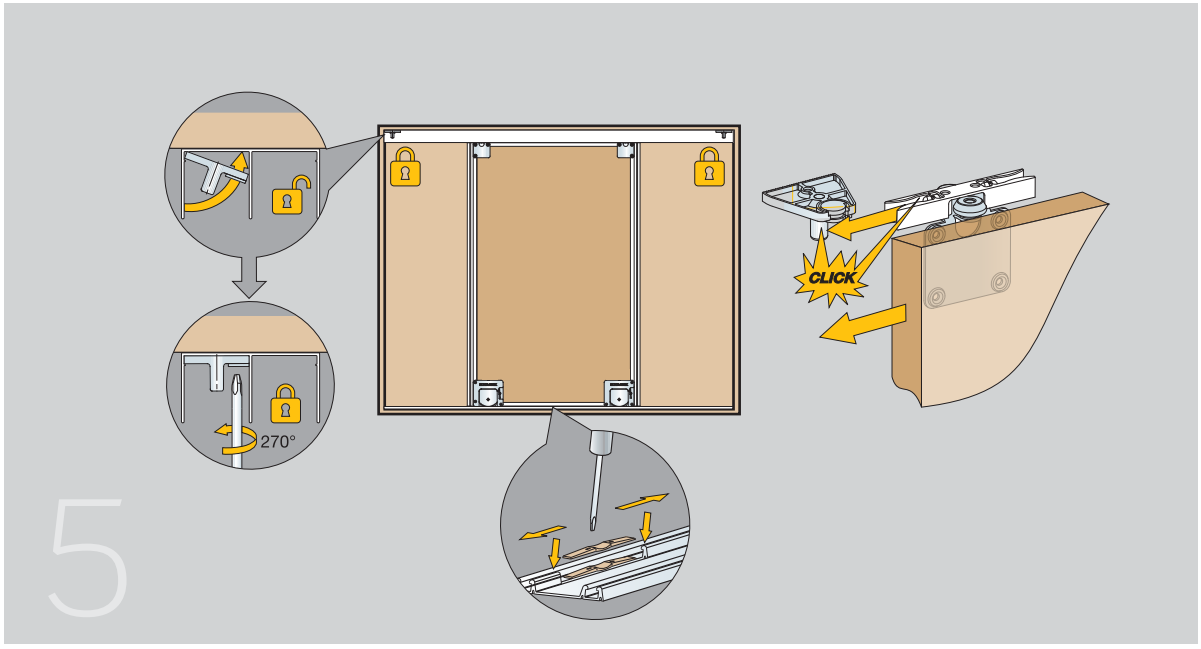

JUNIOR-6 INDAMATIC

INDAmatic gradual closing

Improved, even smoother runners, thanks to their lower bearings and their triple running points which prevent unwanted door movement. But above all it is known for its automatic and cushioned gradual soft closing.

Double upper track.

4.2m bars	INDAMATIC	
Silver-anodized	715.542.100	10
Matt silver-anodized	715.542.516	
Brass-anodized	715.542.785	
Black-anodized	715.542.892	
Golden-anodized	715.542.774	
White-lacquered Ral 9010	715.542.800	



Lower track.

4.2m bars	Single*	Double	
Silver-anodized	714.342.101	714.242.104	10 or 20*
Matt silver-anodized	714.342.510	714.242.513	
Brass-anodized	714.342.786	714.242.782	
Black-anodized	714.342.893	714.242.896	
Golden-anodized	714.342.775	714.242.771	
White-lacquered	714.342.801	714.242.804	







Bag of components.

50 kp. load	2 door	3 door	
	704.402.101	704.403.103	5

Each bag contains.

		2 door	3 door
A	Cushioned automatic gradual closing INDAMATIC	4 units	4 units
B	r/h top roller	2 units	3 units
C	l/h top roller	2 units	3 units
D	bottom roller	4 units	6 units
E	door positioner		1 unit

INDAmatic gradual closing

A



B



C



D



E



JUNIOR-6 INDAMATIC

INDAmatic gradual closing

Assembly

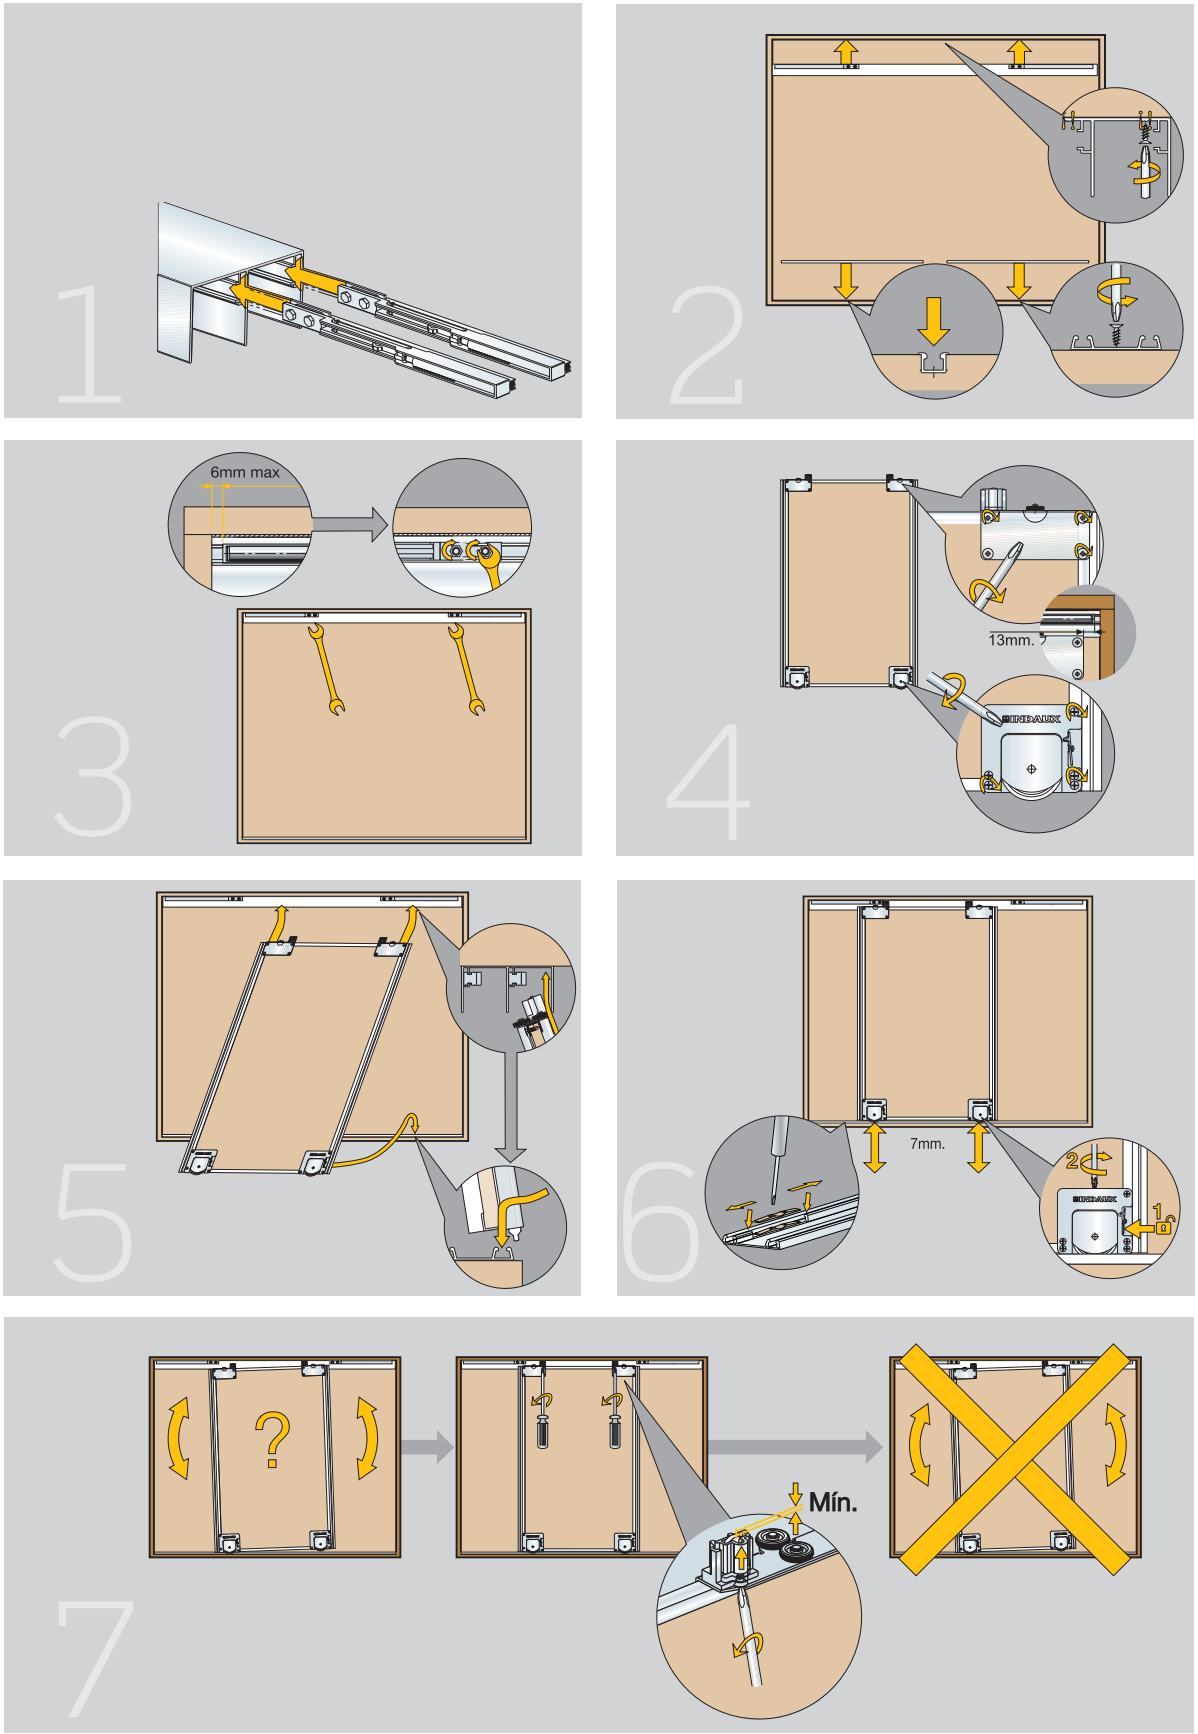

JUNIOR-6 for inclined ceilings

For use in sliding doors on inclined ceilings, the upper runners are substituted by intermediate runners mounted on the lateral profiles of the door.

Intermediate profile

1.45 m bar	717.215.516	1



Intermediate profile clamp

Grey Ral-7040	723.100.313	50



Interior door components

Zinc-plated	710.800.101	1

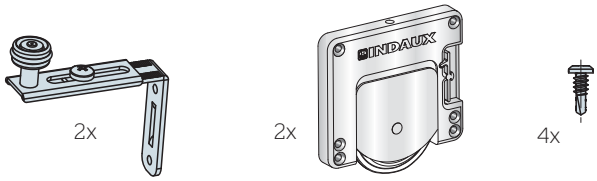

Exterior door components

Zinc-plated	710.810.100	1

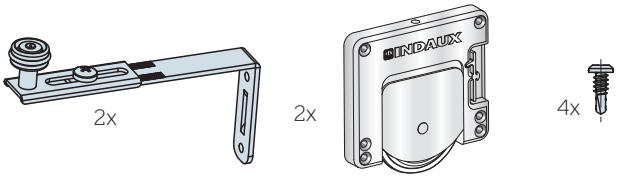

The rollers will roll along intermediate profiles mounted on the shelves. The full length doors maintain the normal rollers on the upper track.

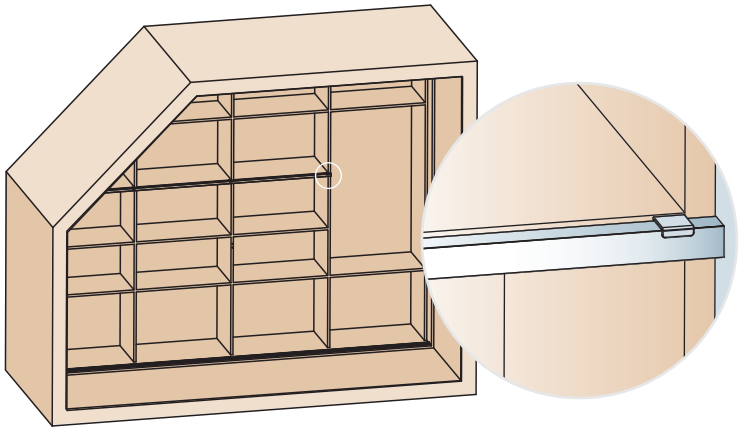

The shelf door distance is adjustable to 28mm.

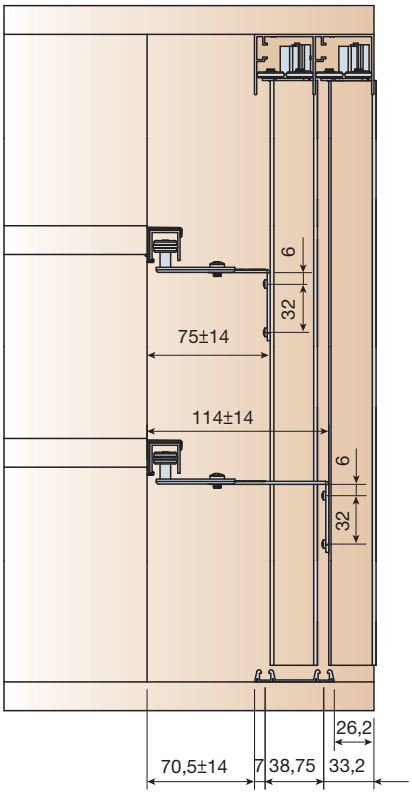

JUNIOR-6 for inclined ceilings

3 door cupboard,
and 1 is inclined.

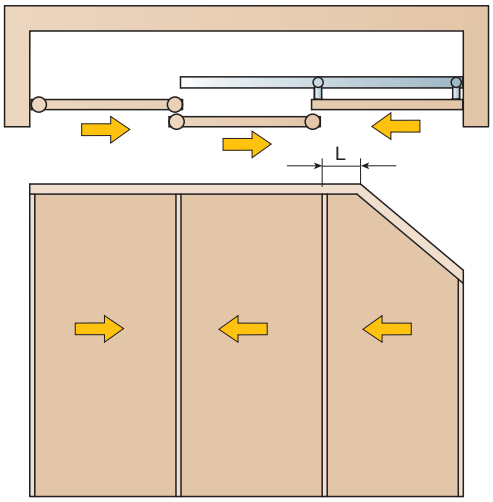

4 door cupboard,
and 2 are inclined.

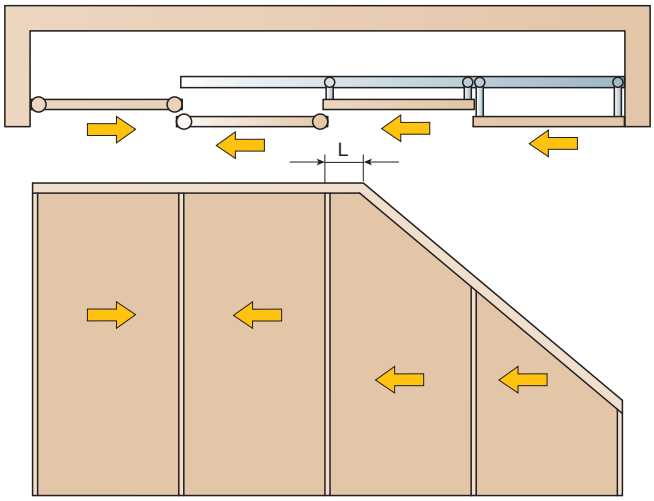

Doors with a partially inclined cut:

- If L > 260mm. the two upper rollers can be put on the cut door.
- If L < 260mm. two intermediate rollers will have to be used.

In the case where more than one door uses intermediate rollers, both doors can use the same intermediate rail, or each can use tracks at different heights, depending on the ceiling's angle of inclination and the width of the doors.

Overhang aligned with
the groove of the profile
and fixed with 2 screws.

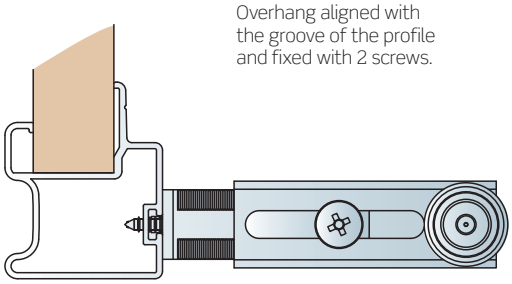

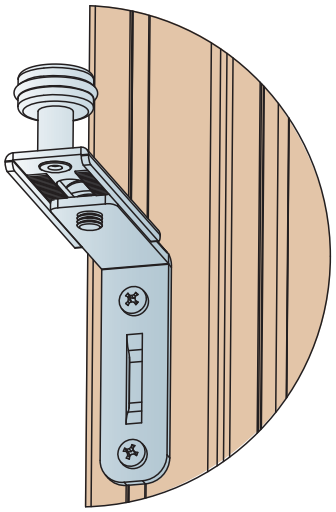

2 JUNIOR-6 door range

16mm door

16mm thick wooden door with aluminium handle.

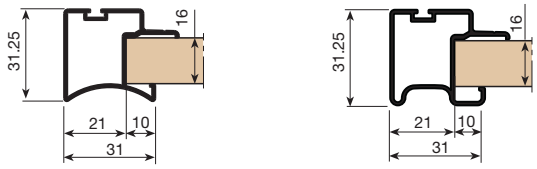

16mm handle profile.

	2,6m. bars	5,2m. bars	INDAMATIC 2,6m. bars	INDAMATIC 5,2m. bars	
Silver-anodized		714.652.105		715.452.102	
Matt silver-anodized		714.652.514		715.452.511	
Brass-anodized		714.652.783		715.452.780	
Black-anodized		714.652.890		715.452.894	
Golden-anodized		714.652.772		715.452.776	
White-lacquered		714.652.805		715.452.802	
Beech coated, not varnished	714.626.861		715.426.865		
Beech coated, melamine	714.626.415		715.426.412		
Pine valsain coated, not varnished	714.626.872		715.426.876		10
Pine valsain coated, melamine	714.626.441		715.426.445		
Oak coated, not varnished	714.626.905		715.426.902		
Oak coated, melamine	714.626.721		715.426.725		
Sapeli coated, not varnished	714.626.931		715.426.935		
Sapeli coated, melamine	714.626.732		715.426.736		
Coated, not varnished cherry	714.626.942		715.426.946		
Cherry coated, melamine	714.626.883		715.426.880		

Dust strip.

Size	Roll	Grey	
5.5mm x 10mm	250m.	753.110.105	1



The dust strip should be cut according to the door's length. A standard 250M roll length is supplied.

Assembly

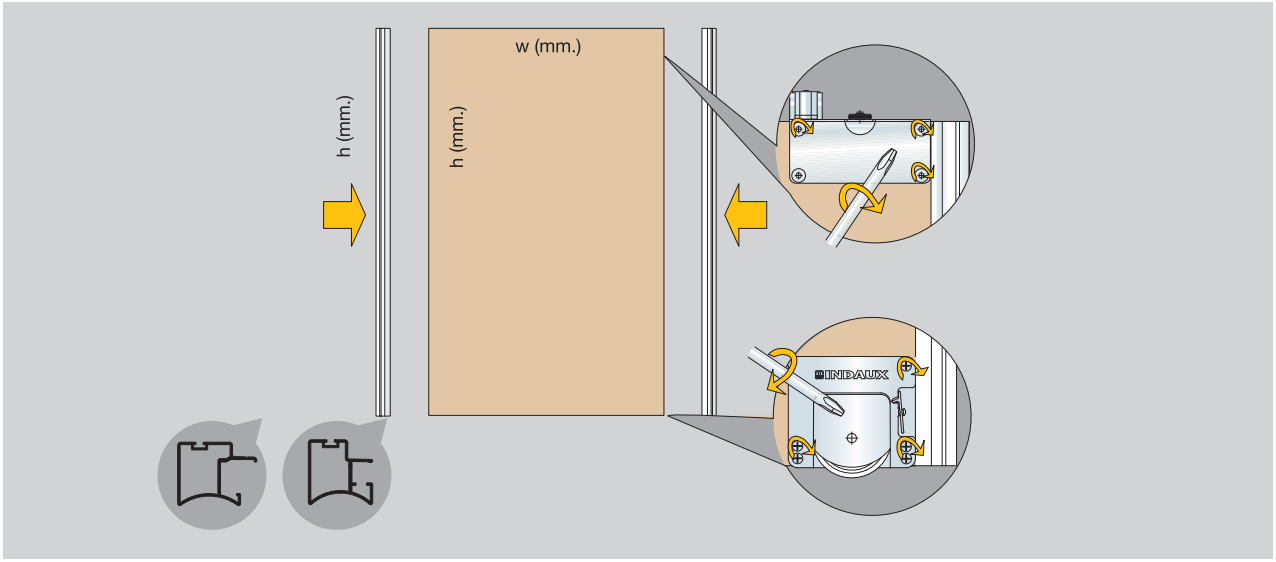

16mm door

Technical data

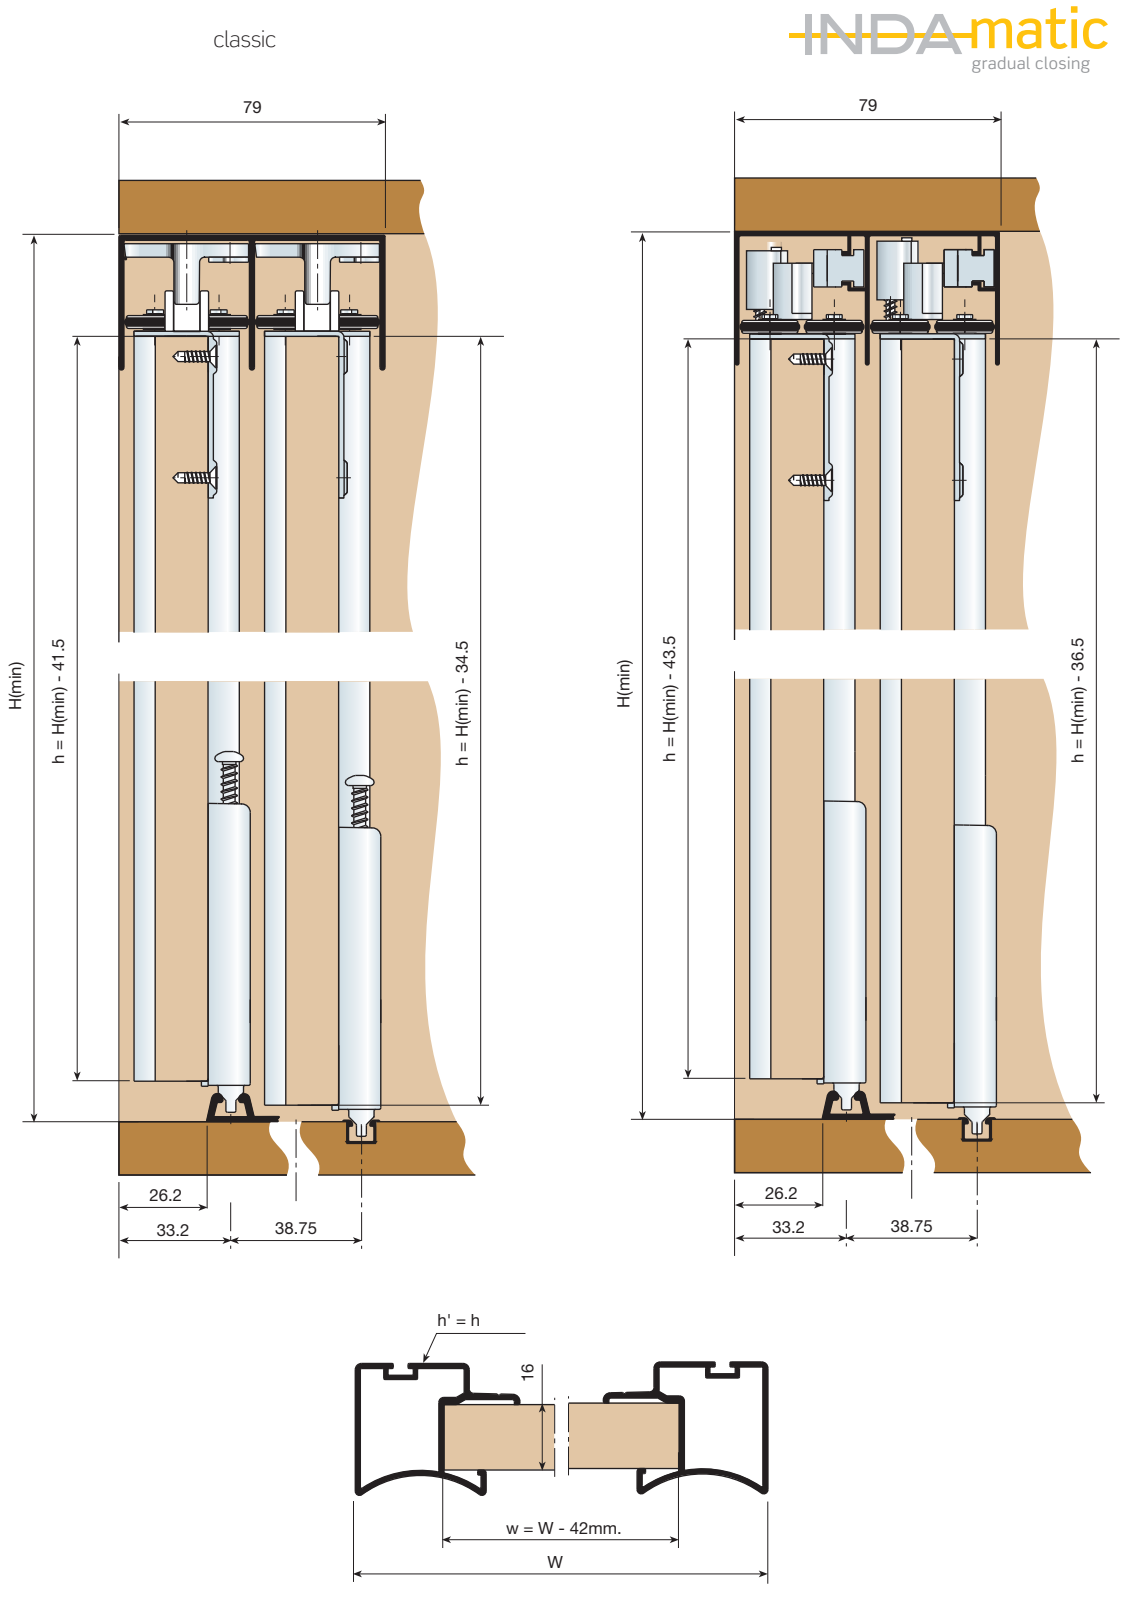

10mm door

10mm thick wooden or glass door with aluminium handle profile.

Profile







Wide handle profile for 10mm.

	2,6m. bars	5,2 m. bars	2,6m. bars	5,2 m. bars	
Silver-anodized		714.552.101		715.352.105	
Matt silver-anodized		714.552.510		715.352.514	
Brass-anodized		714.552.786		715.352.783	
Black-anodized		714.552.893		715.352.890	
Golden-anodized		714.552.775		715.352.772	
White-lacquered		714.552.801		715.352.805	
Beech-coated, not varnished	714.526.864		715.326.861		
Beech-coated, melamine	714.526.411		715.326.415		10
Pine valsain coated, melanine	714.526.875		715.326.872		
Pine valsain coated, not varnished	714.526.444		715.326.441		
Oak coated, not varnished	714.526.901		715.326.905		
Oak coated, melanine	714.526.724		715.326.721		
Sapeli coated, not varnished	714.526.934		715.326.931		
Sapeli coated, melamine	714.526.735		715.326.732		
Cherry coated, not varnished	714.526.945		715.326.942		
Cherry coated, melamine	714.526.886		715.326.883		

10mm Edge profile.

	2m. bars	
Silver-anodized	714.820.105	
Matt silver-anodized	714.820.514	
Brass-anodized	714.820.783	
Black-anodized	714.820.890	
Golden-anodized	714.820.772	
White-lacquered	714.820.805	
Beech-coated, not varnished	714.820.864	
Beech-coated, melamine	714.820.411	40
Pine valsain coated, melanine	714.820.875	
Pine valsain coated, not varnished	714.820.444	
Oak coated, not varnished	714.820.901	
Oak coated, melanine	714.820.724	
Sapeli coated, not varnished	714.820.934	
Sapeli coated, melamine	714.820.735	
Cherry coated, not varnished	714.820.945	
Cherry coated, melamine	714.820.886	

Narrow handle for 10mm.

	5.2m bars	
Matt silver-anodized	716.452.516	10



Supplied in Matt silver-anodized, if needed it can be manufactured in other finishes.

Narrow handle profile for 10mm

	5.2m bars	
Shiny silver-anodized	713.952.105	10
Matt silver-anodized	713.952.514	



Dust strip.

Size	Roll	Grey	
5.5mm x 10mm	250m.	753.110.105	1



The dust strip should be cut according to the door's length. A standard 250m roll length is supplied

Assembly

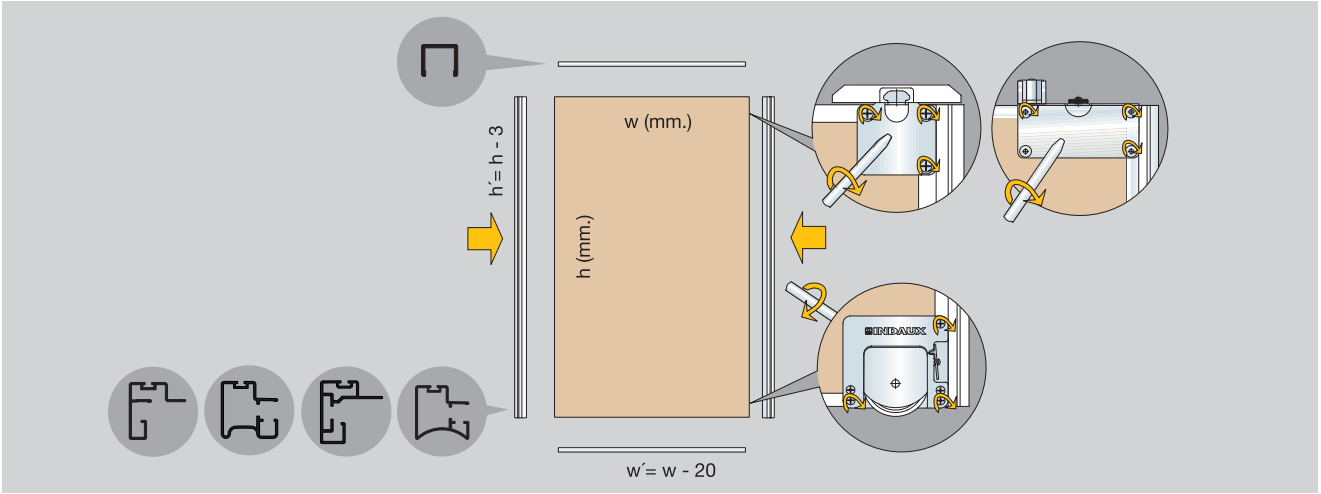

10mm door

Technical data

classic

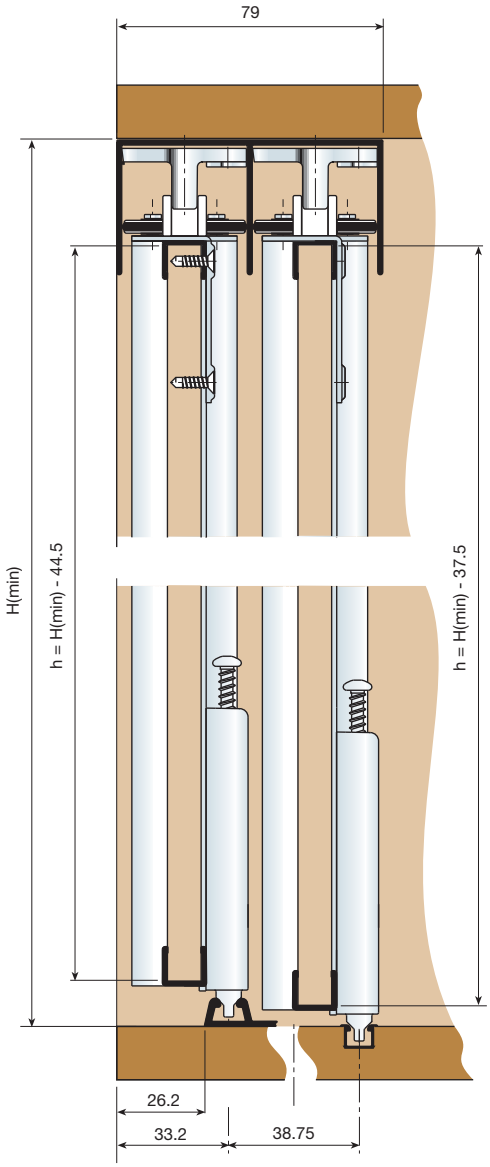

INDA-matic
gradual closing

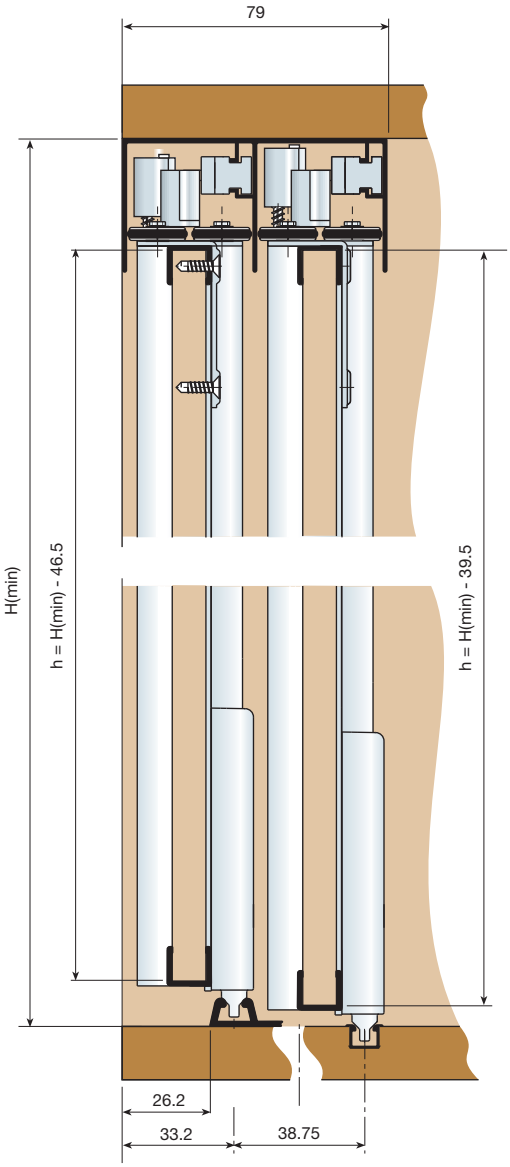

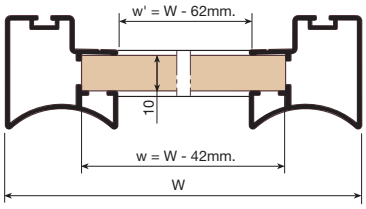

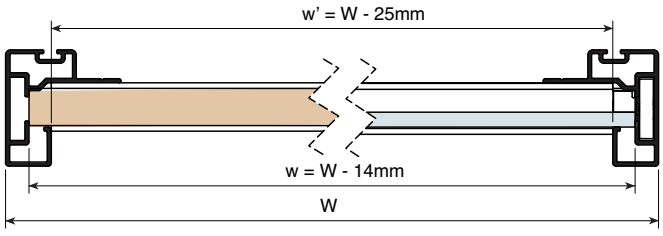

Japanese door

Japanese wooden chipboard or glass 10, 6, 5, 4 and 3mm combined doors with aluminum handle profile. A variety of combinations is possible; all profiles are reversible offering many combinations. Here are just a few examples.

10mm chipboard or glass profiles





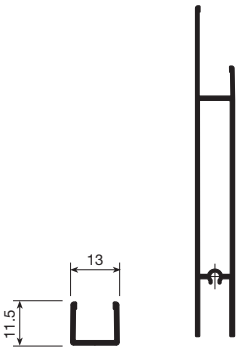

Handle profile.

	2,6m. bars	5,2m. bars	2,6m. bars	5,2 m. bars	
Silver-anodized		714.552.101		715.352.105	
Matt silver-anodized		714.552.510		715.352.514	
Brass-anodized		714.552.786		715.352.783	
Black-anodized		714.552.893		715.352.890	
Golden-anodized		714.552.775		715.352.772	
White-lacquered		714.552.801		715.352.805	
Beech coated, not varnished	714.526.864		715.326.861		
Beech coated, melamina	714.526.411		715.326.415		10
Pine valsain coated, not varnished	714.526.875		715.326.872		
Pine valsain coated, melamine	714.526.444		715.326.441		
Oak-coated, not varnished	714.526.901		715.326.905		
Oak-coated, melamine	714.526.724		715.326.721		
Sapeli coated, not varnished	714.526.934		715.326.931		
Sapeli coated, melamine	714.526.735		715.326.732		
Cherry coated, not varnished	714.526.945		715.326.942		
Cherry coated, melamine	714.526.886		715.326.883		

Upper and/or lower high and low finishing profile.

	11,5mm	110mm	
	2m. bars		
Silver-anodized	714.820.105	715.020.106	
Matt silver-anodized	714.820.514	715.020.515	
Brass-anodized	714.820.783	715.020.784	
Black-anodized	714.820.890	715.020.891	
Golden-anodized	714.820.772	715.020.773	
White-lacquered	714.820.805	715.020.806	
Beech coated, not varnished	714.820.864	715.020.865	
Beech coated, melamina	714.820.411	715.020.412	20
Pine valsain coated, not varnished	714.820.875	715.020.876	
Pine valsain coated, melamine	714.820.444	715.020.445	
Oak-coated, not varnished	714.820.901	715.020.902	
Oak-coated, melamine	714.820.724	715.020.725	
Sapeli coated, not varnished	714.820.934	715.020.935	
Sapeli coated, melamine	714.820.735	715.020.736	
Cherry coated, not varnished	714.820.945	715.020.946	
Cherry coated, melamine	714.820.886	715.020.880	

A 110mm profile is sufficient to hide the wheel when using glass in the lower or upper panel

Narrow handle profile.

	5.2m bars	
Shiny silver-anodized	713.952.105	10
Matt silver-anodized	713.952.514	



Rubber glass gasket.

Glass	Size	Roll	Translucent	
3 & 5mm.	5 x 7mm.	250m.	753.503.310	1
4 & 6mm.	4 x 6mm.	250m.	753.504.312	

1 roll per box

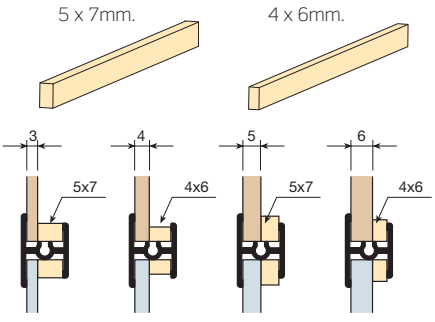

Dust strip.

Size	Roll	Grey	
5.5mm. x 10mm.	250m.	753.110.105	1

The dust strip should be cut according to the door's length. A standard 250m roll length is supplied



Japanese door

10mm divider profile.

	2m. bars	
Silver-anodized	714.920.102	
Matt silver-anodized	714.920.511	
Brass-anodized	714.920.780	
Black-anodized	714.920.894	
Golden-anodized	714.920.776	
White-lacquered	714.920.802	
Beech coated, not varnished	714.920.861	
Beech coated, melamine	714.920.415	
Valsain pine, not varnished	714.920.872	20
Valsain pine, melamine	714.920.441	
Oak coated, not varnished	714.920.905	
Oak coated, melamine	714.920.721	
Sapeli coated, not varnished	714.920.931	
Sapeli coated, melamine	714.920.732	
Cherry coated, not varnished	714.920.942	
Cherry coated, melamine	714.920.883	



Assembly bag for 2-door wardrobe.

50 kp. load	2 dividers	3 dividers	
	704.602.102	704.603.104	20



Assembly bag for 2 doored cupboard / narrow profile.

	2 dividers	3 dividers	
	700.602.103	700.603.105	20



Each bag contains fittings for two doors.

2 Profile	3 dividers (or 3- 2 profile doors)
8 units	12 units

Each box contains 20 bags. Each bag is sufficient for 2 doors.

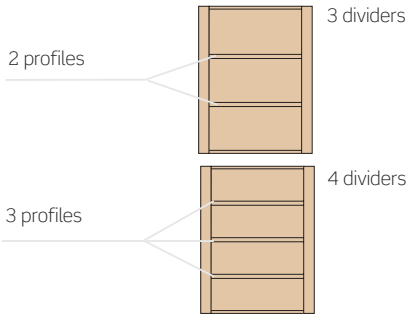

Assembly

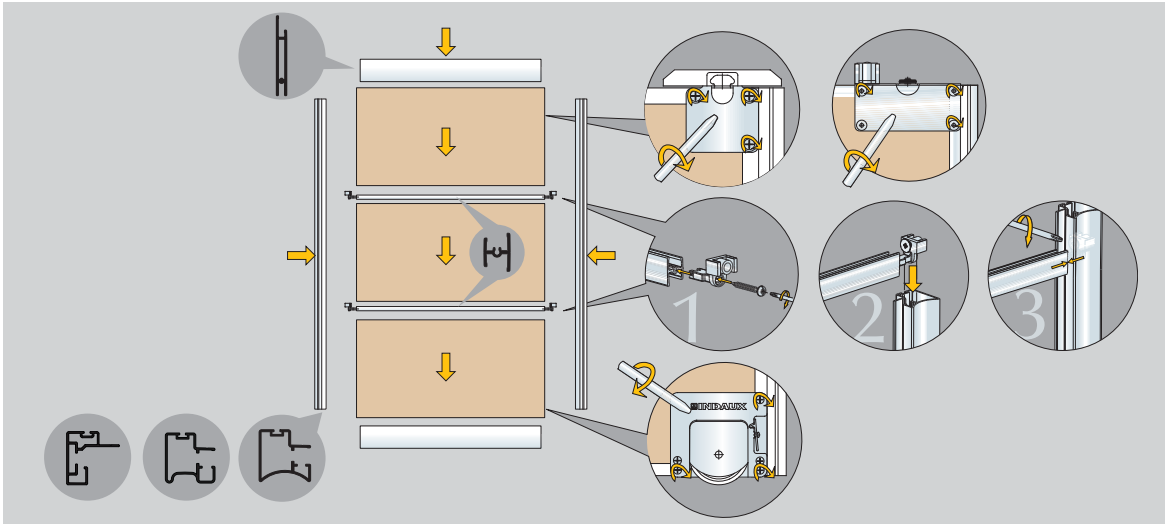

Japanese door

Assembly

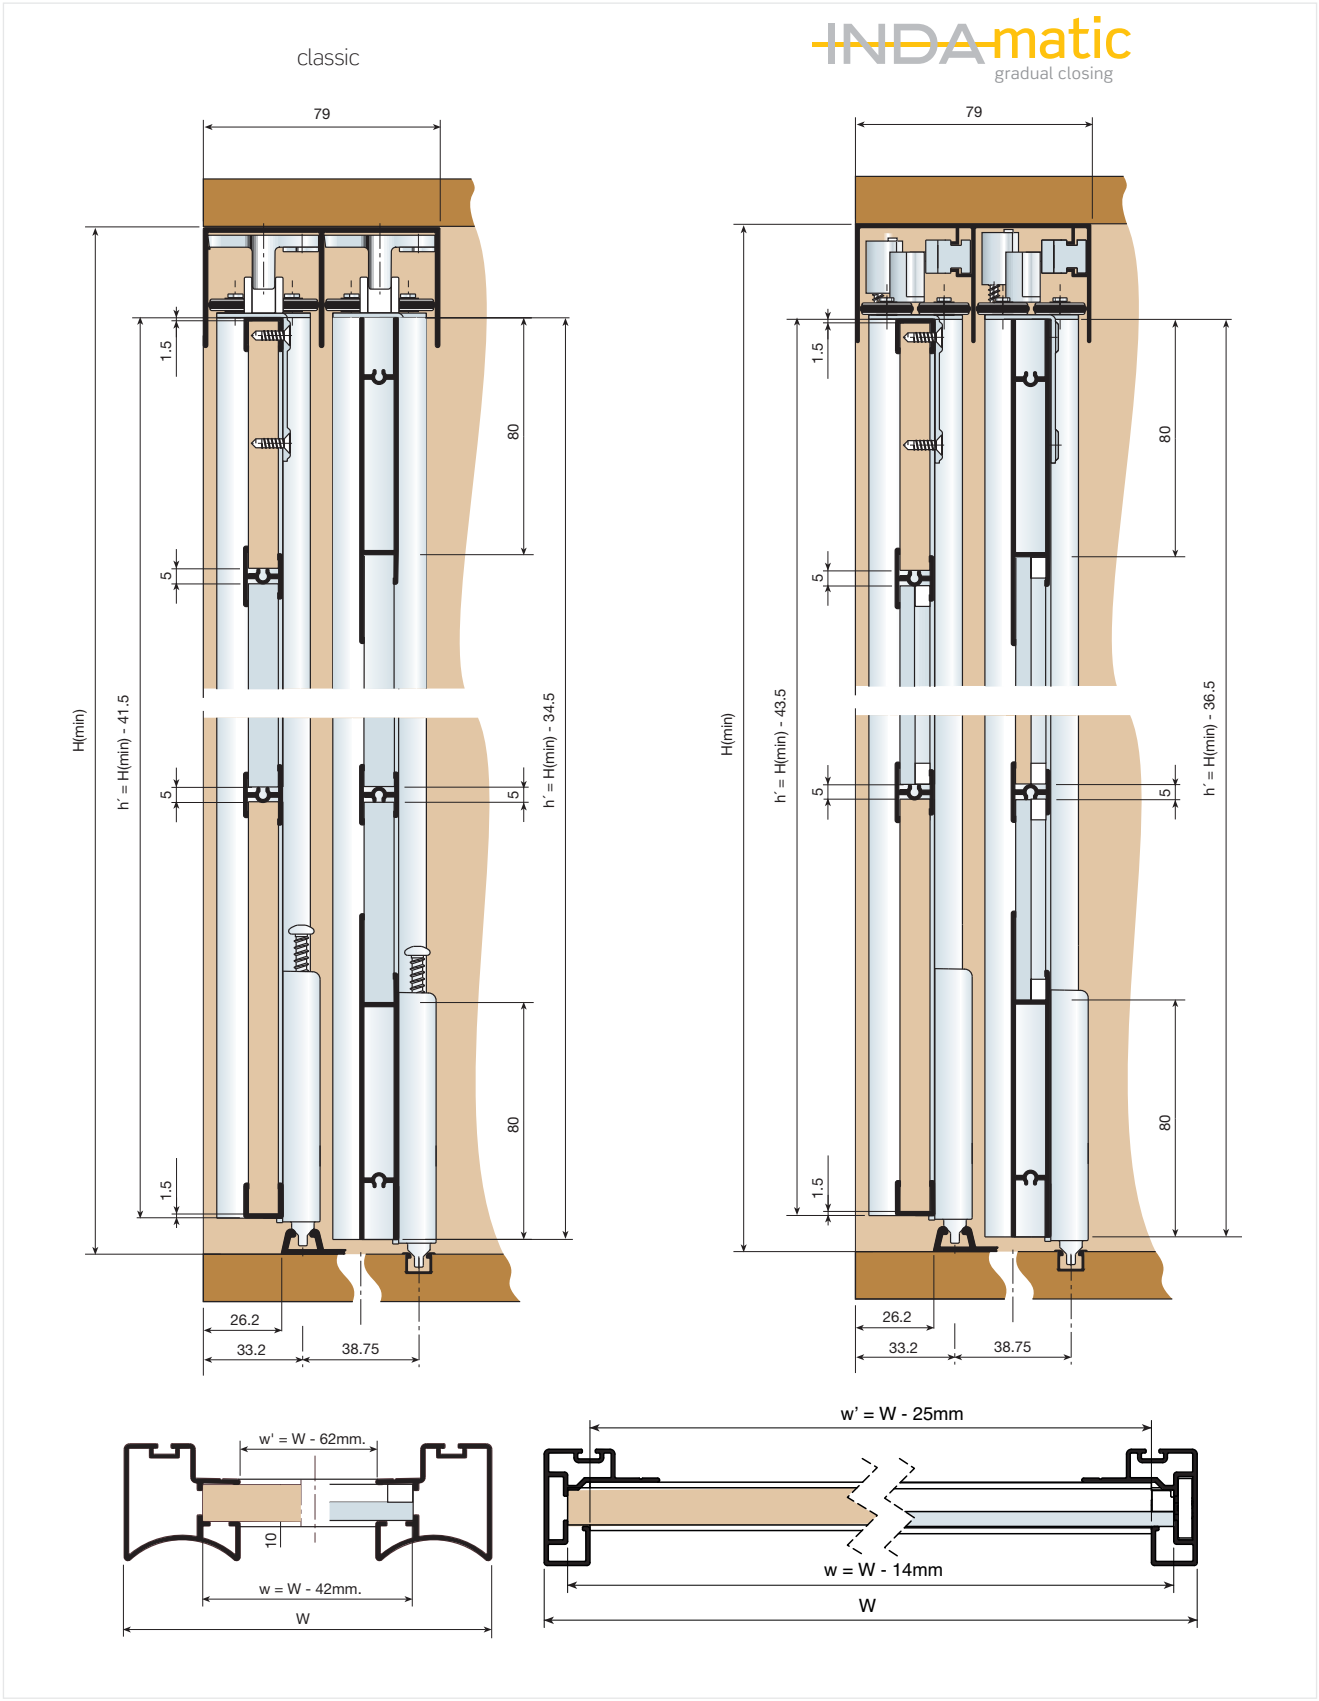

INDAUX
FURNITURE FITTINGS MANUFACTURER

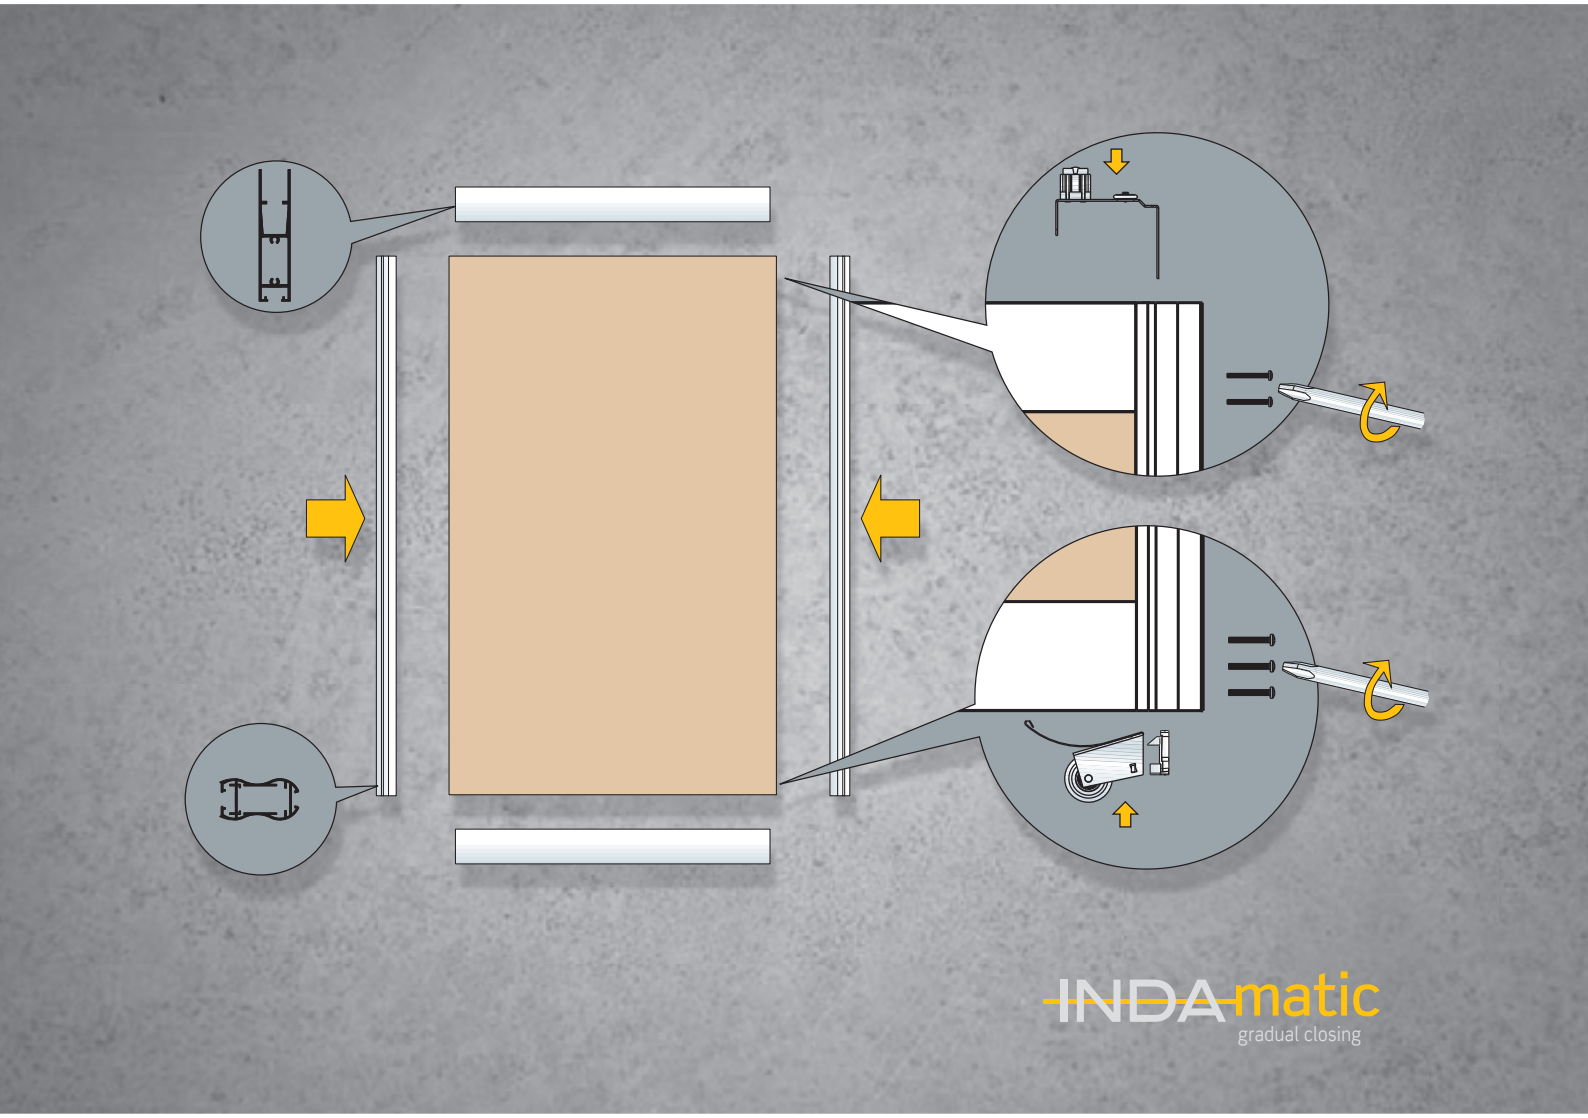

JUNIOR-7

Furniture fittings for supported sliding doors

INDA-matic
gradual closing

JUNIOR-7
Fittings for supported sliding doors

Fittings for custom-made cupboard doors. Its main feature is that it has a concealed lower carriage, which makes it a highly versatile fitting that is ideal for use in cupboards or even interior doors.

JUNIOR-7 allows you to cover cupboards and shelving units with wooden, glass or mirrored sliding doors, and it even enables you to easily construct dressing rooms and partitions to separate spaces. These functions also come with Indamatic, the cushioned self-closing system by Indaux.

The JUNIOR-7 fittings range is suitable for custom-made installations and they have been designed to make assembly easier, adapting to the cupboard without the need for any special machining.

1 JUNIOR-7 SLIDING DOOR SYSTEMS 657

2 JUNIOR-7 DOOR RANGE 659

1 JUNIOR 7 SLIDING DOORS SYSTEM

INDAmatic gradual closing

JUNIOR-7 INDAMATIC

Fitted with **Indamatic**, the cushioned closing system by indaux and running on a concealed carriage, provides this custom-made dressing room door with a enhanced and smoother look.

Double upper track.

4.2m bars	INDAMATIC	
Silver-anodized	715.542.100	
Matt silver-anodized	715.542.516	10
White-lacquered RAL 9010	715.542.800	



Lower track.

4.2m bars	Single	Double	
Silver-anodized	714.342.101	714.242.104	10
Matt silver-anodized	714.342.510	714.242.513	
White-lacquered Ral 9010	714.342.801	714.242.804	







Bag of components.

50 kp. load	2 door	3 door	
	703.902.102	703.903.104	5

Each bag contains.

		2 door	3 door
A	Cushioned automatic gradual closing INDAMATIC	4 units	4 units
B	r/h top roller	2 units	3 units
C	l/h top roller	2 units	3 units
D	bottom roller	4 units	6 units
E	door positioner		1 unit
F	roller support bracket	4 units	6 units

A



B



C



D

E



F



JUNIOR-7 Indamatic

INDAmatic gradual closing

Assembly

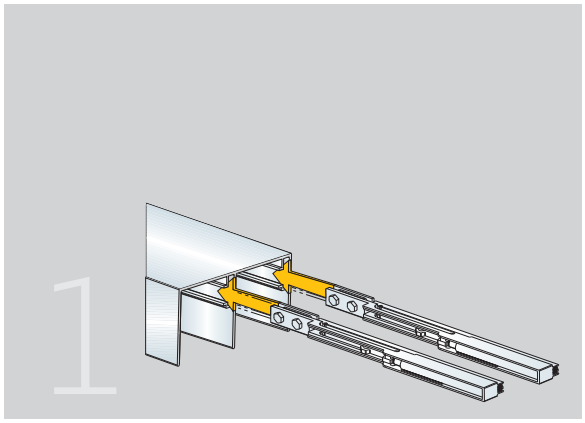

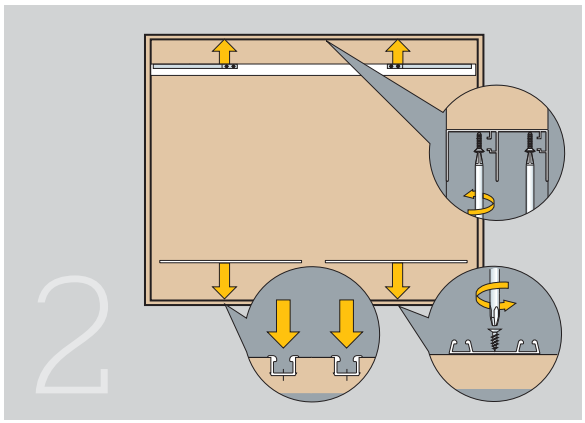

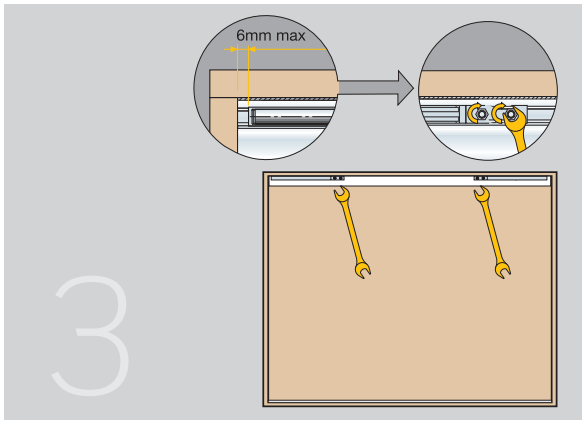

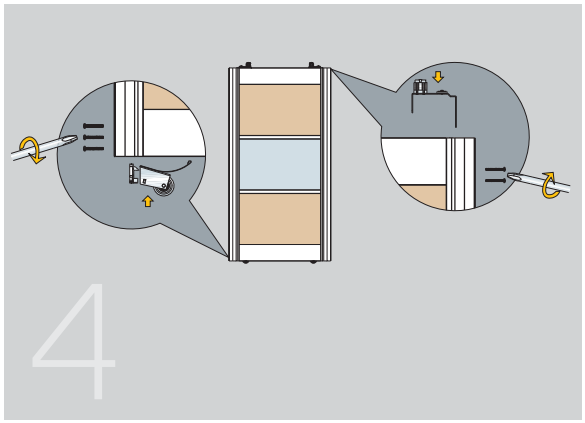

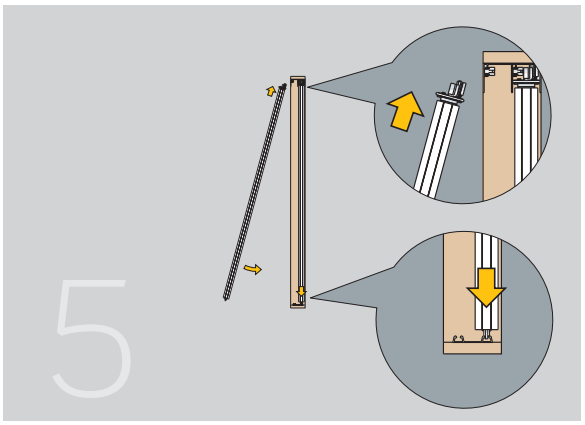

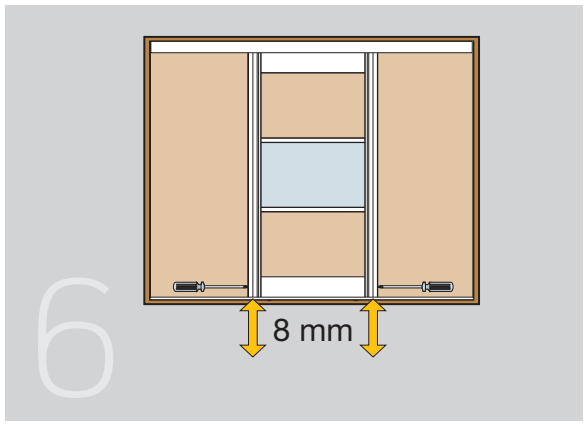

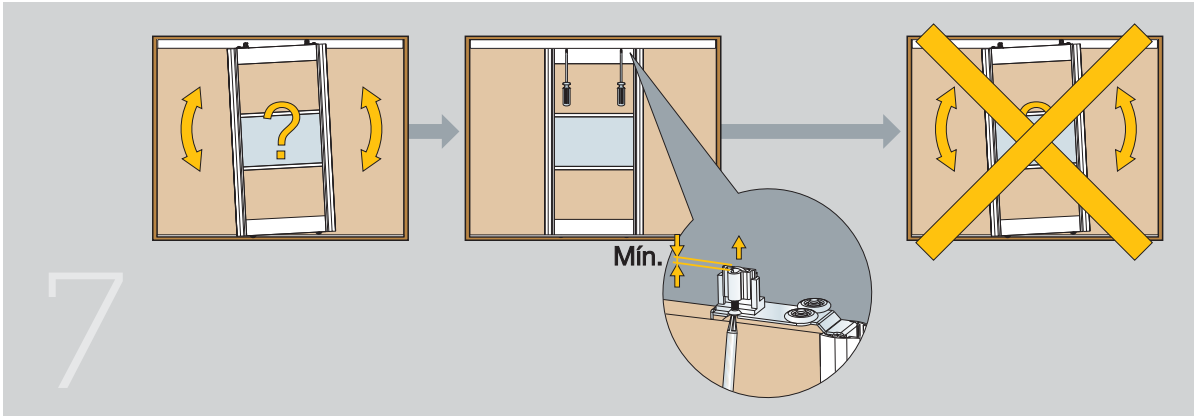

2 JUNIOR 7 DOOR RANGE

10mm door

Each door is made up of 2 handle profiles and 2 upper and lower frame profiles. The door can have one or several dividers. In the case of several dividers, separating profiles will be required. The profiles are prepared for 10mm. wood, when using glass, use the adjuster profile which allows for 4 to 6mm. glass.

10mm pulling profile (handle).

	2,6m. bars	5,2m. bars	
Silver-anodized		714.752.102	
Matt silver-anodized		714.752.511	10
White-lacquered Ral 9010		714.752.802	



Upper and lower profile.

	2m. bars	
Glossy silver-anodized	715.620.102	
Matt silver-anodized	715.620.511	10
White lacquered Ral 9010	715.620.802	



Fixing joint glass.

	4mm.	6mm.	8mm.	
Transparent	753.230.310	753.260.311	753.280.312	50

3m bars.

Rubber cap profile for handle.

	2.6m. bars	
White Ral 9010	715.926.002	
Black Ral 9005	715.926.024	20
Grey Ral 7040	715.926.315	

Japanese door

10mm divider profile.

	2m. bars	
Silver-anodized	715.220.100	
Matt silver-anodized	715.220.516	20
White-lacquered Ral 9010	715.220.800	



10mm door

Profiles and board cutting lengths

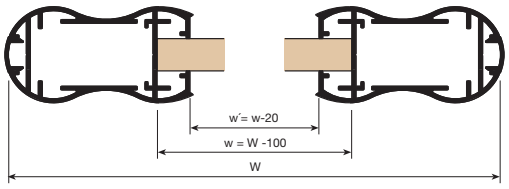

Machining lengths for the handle profile



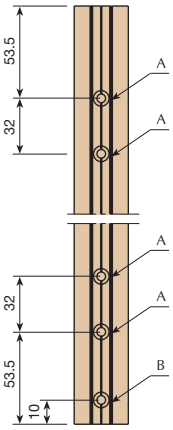

a: cavity for fixing the door frame.

b: cavity for fixing the door's lower roller.

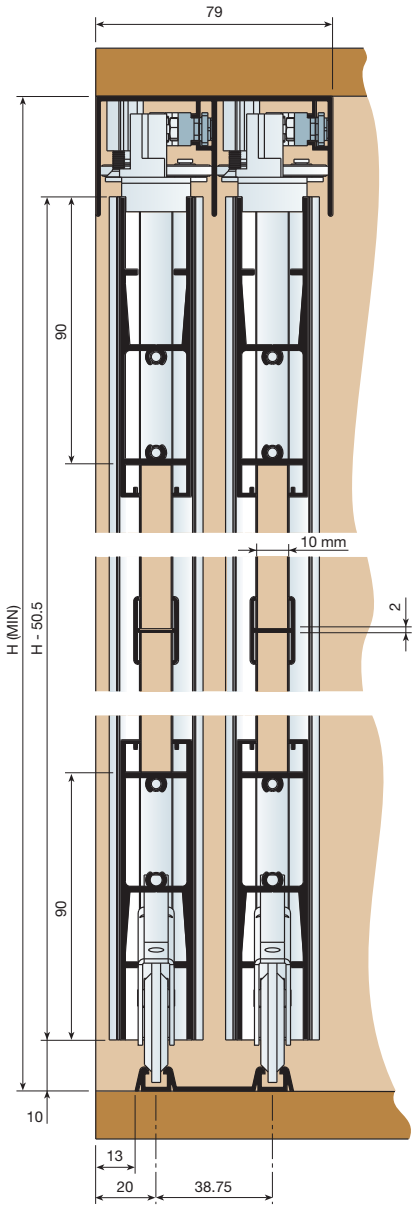

Regulation 8mm.

Assembly

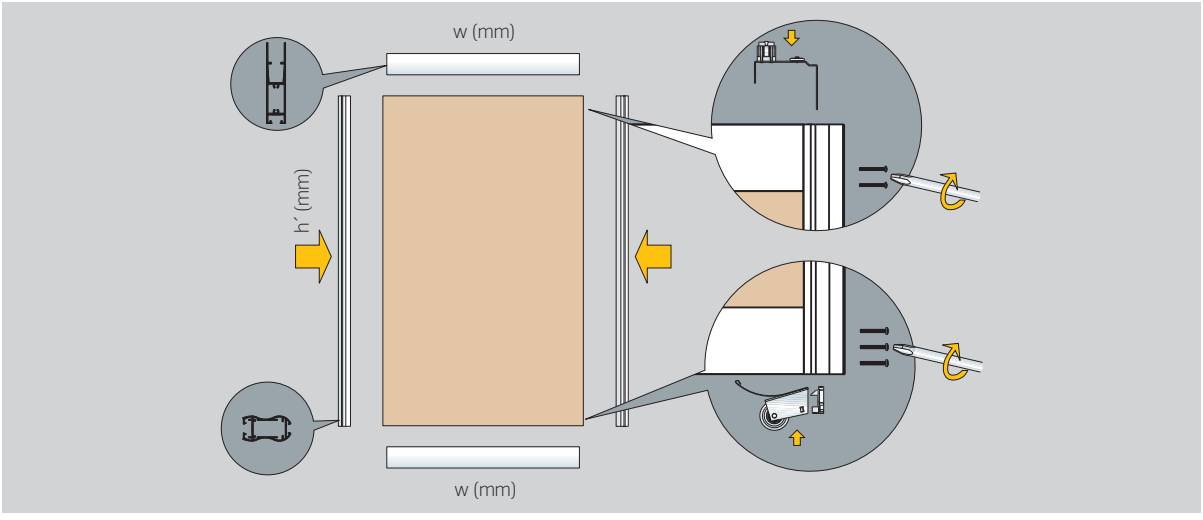

Japanese door

Profiles and board cutting lengths

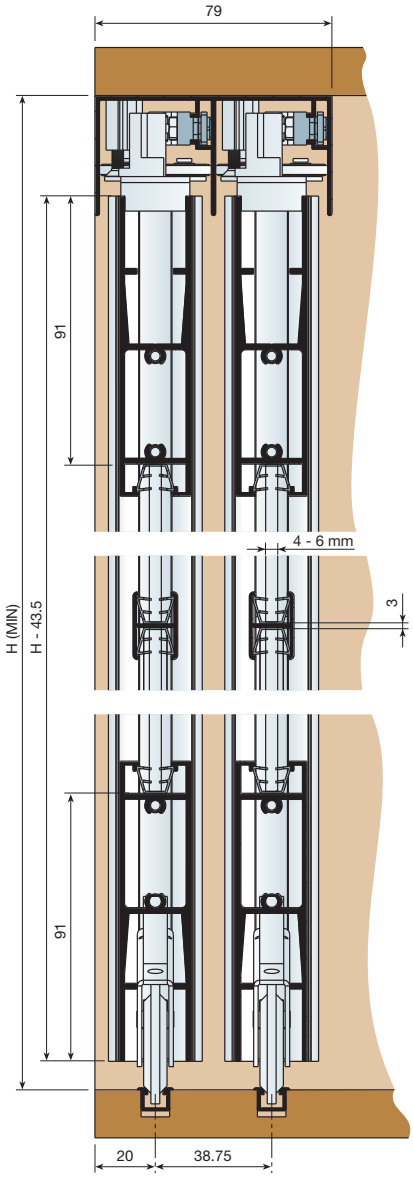

Assembly

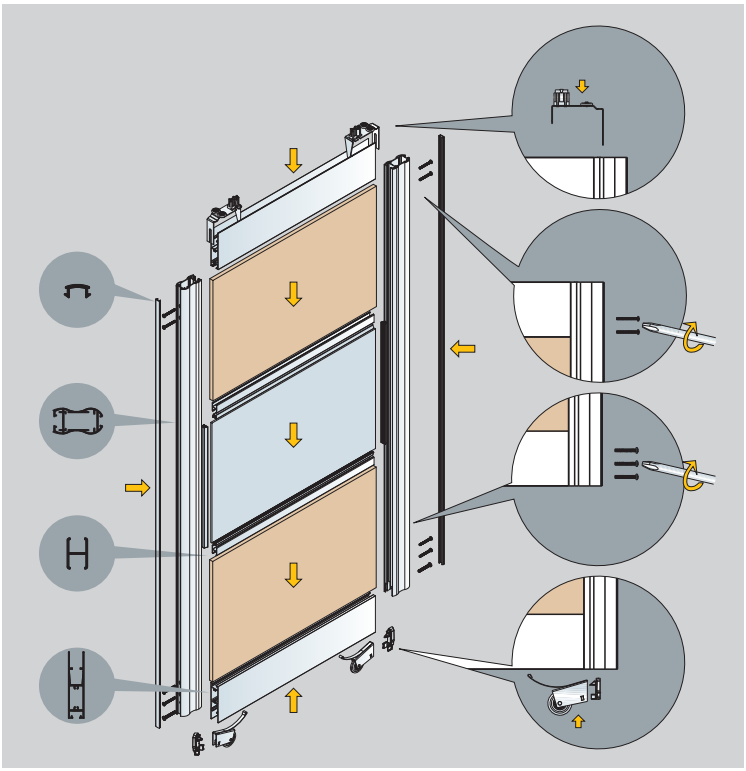

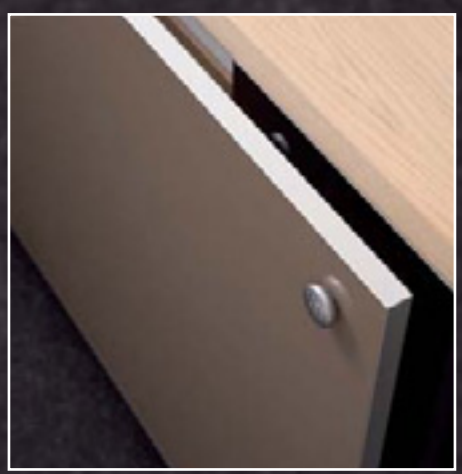

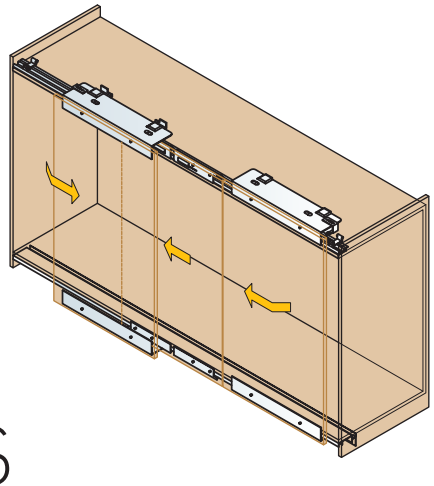

FITTINGS
FOR COPLANAR DOORS

For cabinets and cupboards.
For auxiliary units

pp.

1 MAGIC 664

1 MAGIC

Set of upper and lower track profiles.

Length	2.200mm.	3.000mm.	
Anodized silver	706.322.503	706.330.505	1

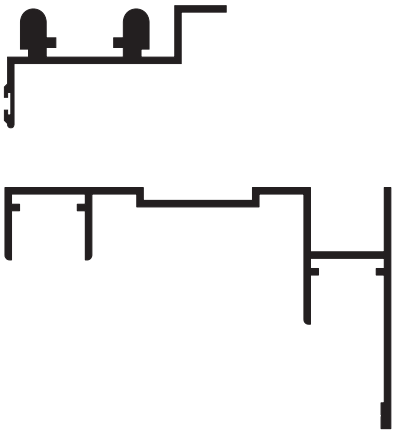

Set of fittings.

Length of door	700-800mm.	900-1.000mm.	
2 Doors	705.270.101	705.290.106	1
3 Doors	705.370.105	705.390.103	



Aluminium door.

Anodized matt silver	147.900.513	1

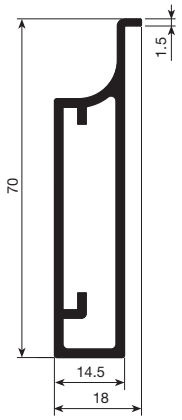

TECHNICAL DATA

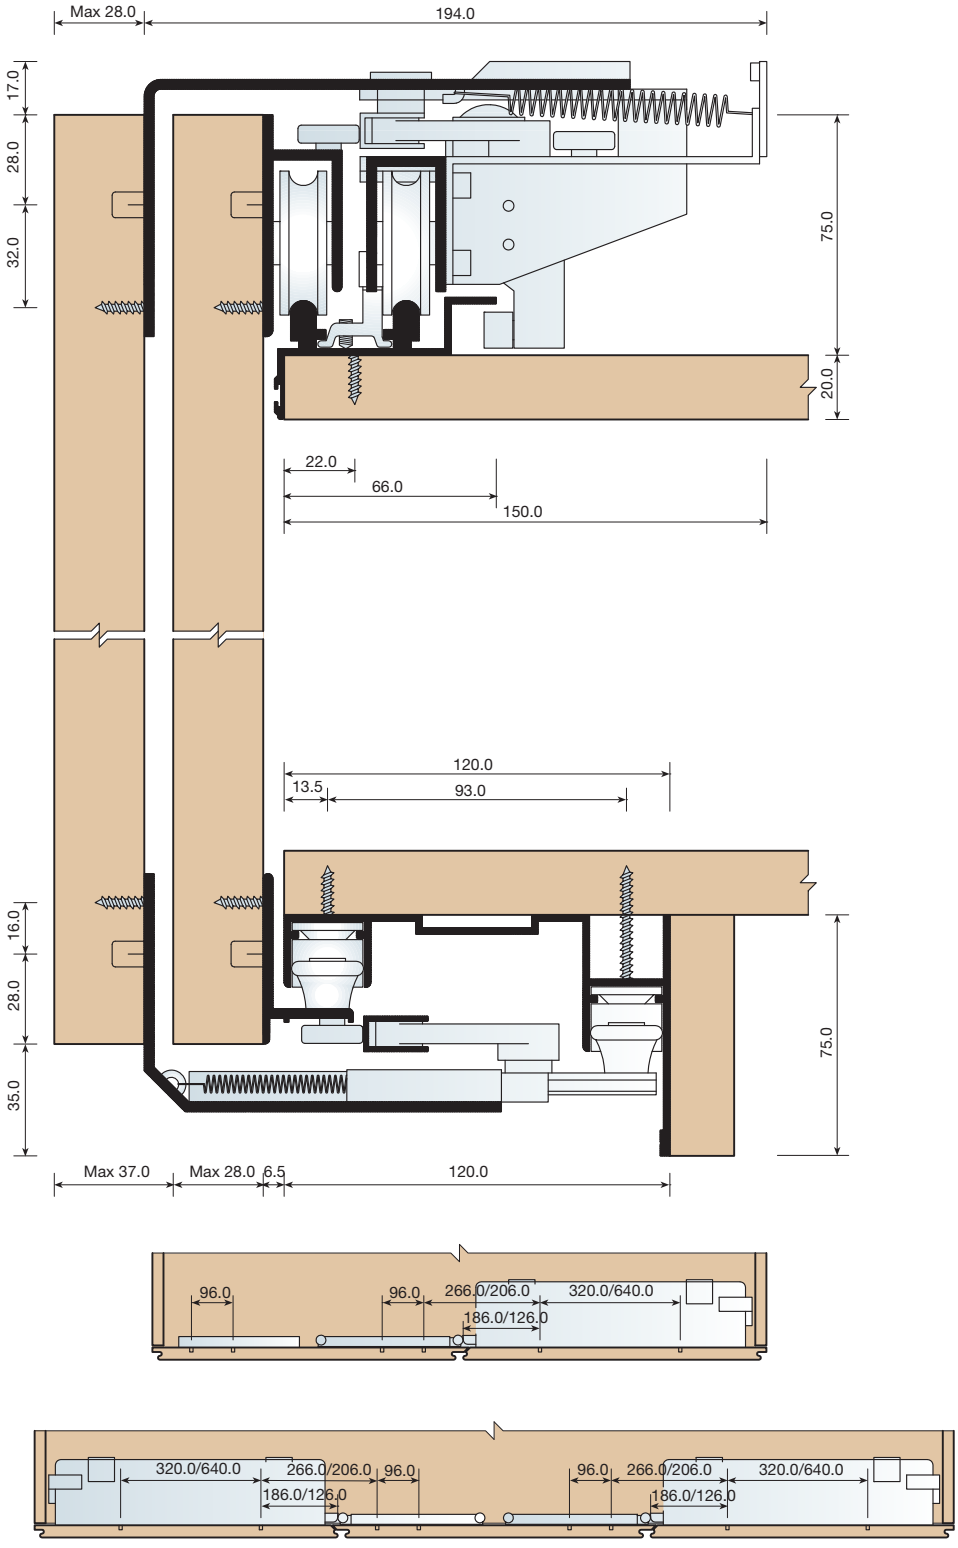

TECHNICAL DATA

Assembly

1

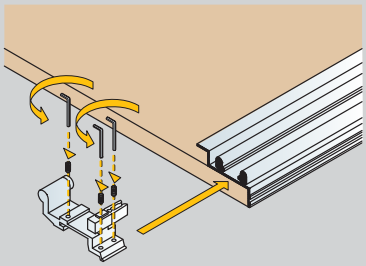

2

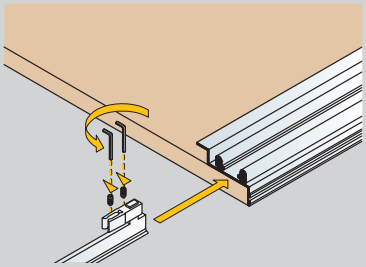

3



4



5

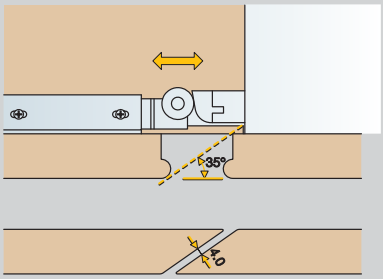

6



7



8



9



10



FITTINGS
FOR FOLDING DOORS

Aluminium or wooden door cupboards.

pp.

1 FOLDING DOOR SYSTEM 667

- Track profiles and rollers 668
- Hinges 669
- Technical data 670

1 FOLDING DOOR SYSTEM

Track profiles and rollers

Upper track.

	2 m bars	6 m bars	
Silver-anodized	710.920.103	710.960.106	10
Natural	710.920.501	710.960.504	



Top roller.

Fix in	Wood	Aluminium	
	344.020.025	344.040.023	50

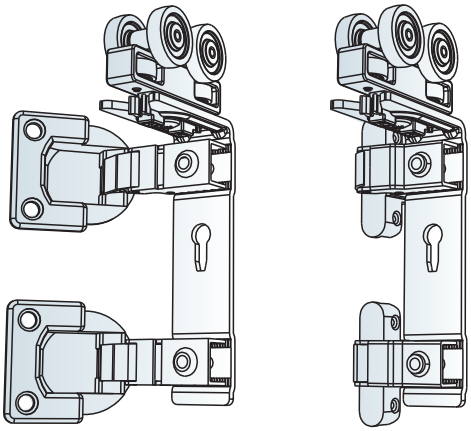

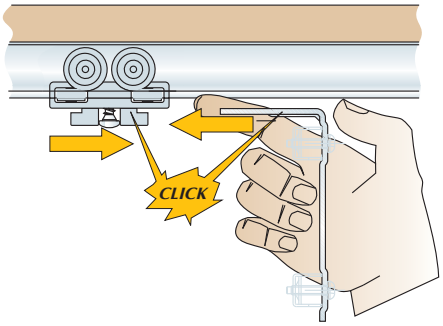

Lower guide.

	2m bars	
Silver-anodized	711.500.101	10
Natural	711.500.506	



Lower roller.

Fixed to	Wood	Aluminiun	
	343.706.064	344.406.064	50

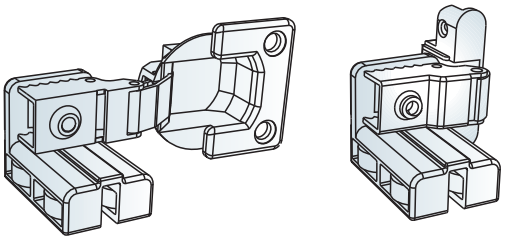

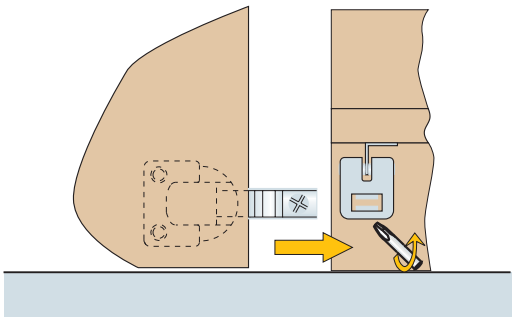

Hinges

Hinge aluminium-aluminium.

Nickel-plated	344.130.065	50



Hinge wood-aluminium.

Nickel-plated	344.140.064	50



Hinge aluminium-wood.

Nickel-plated	344.150.063	50



Hinge wood-wood.

Zamak		
Nickel-plated	344.100.061	50



Hinge wood-wood.

Nylon		
Black Ral 9005	344.110.023	150
Grey Ral 7040	344.110.314	



Technical data

Door combinations.



Aluminium - Aluminium

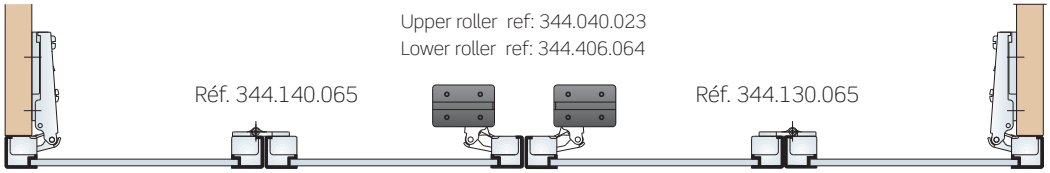

Wood - Aluminium

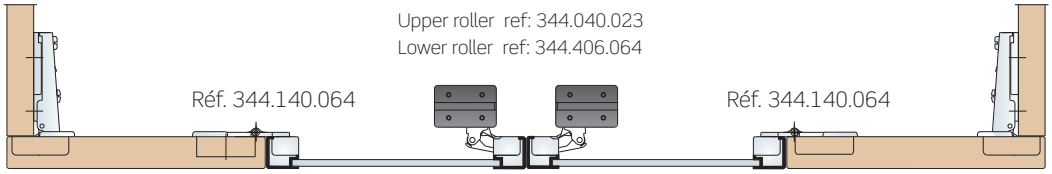

Aluminium - Wood

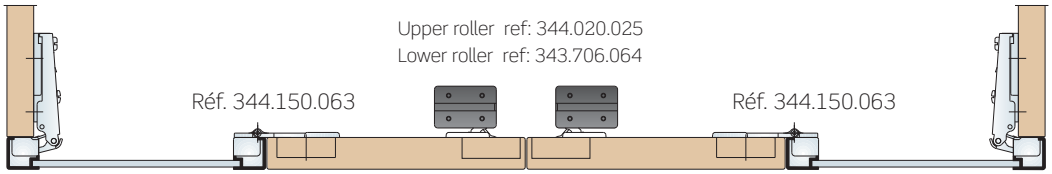

Wood - Wood (Zamak hinge)

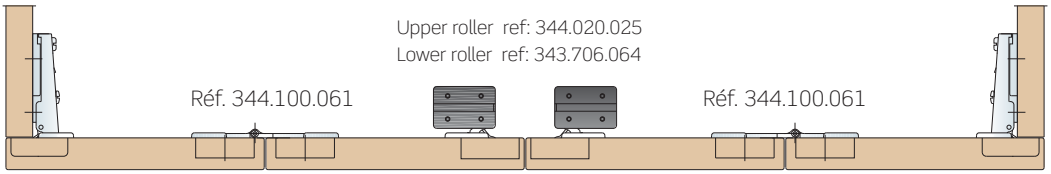

Wood - Wood (Nylon hinge)

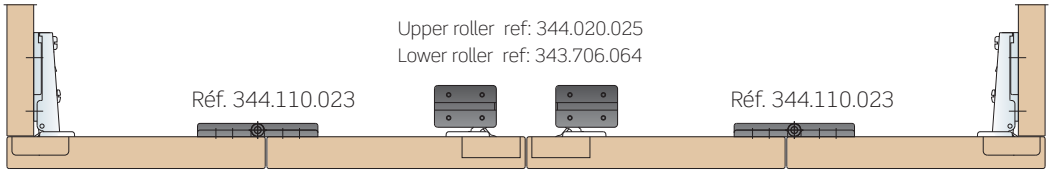

Technical data

Drilling plane

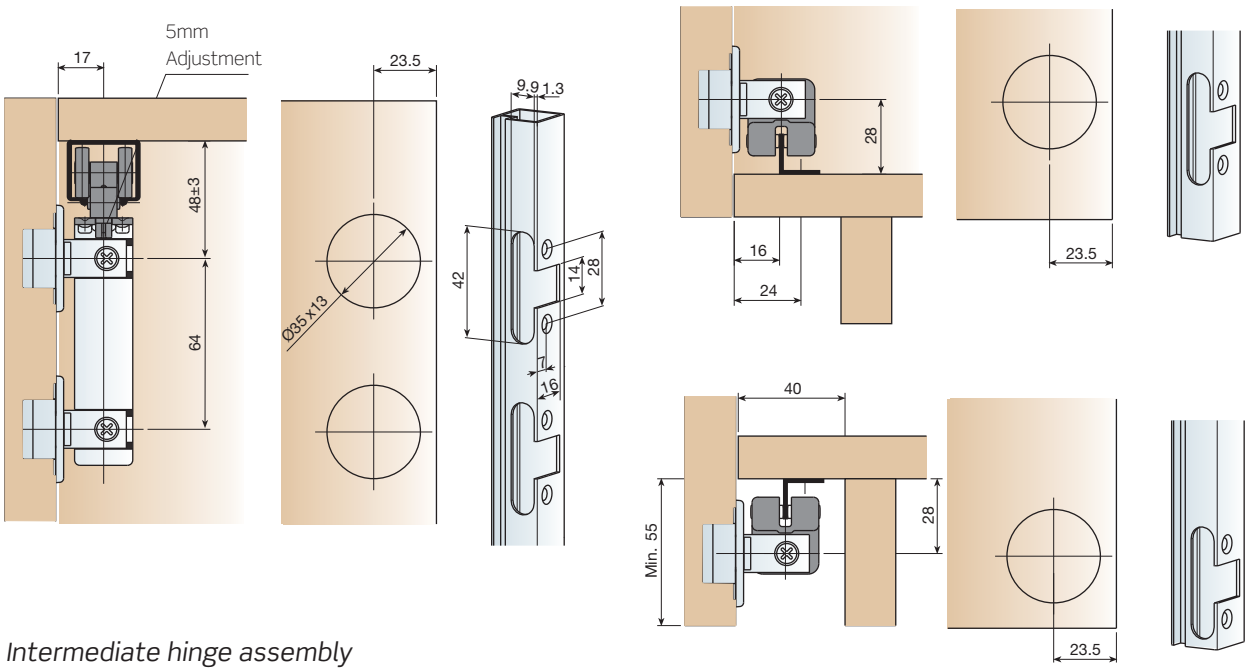

Intermediate hinge assembly

ZAMAK Hinges

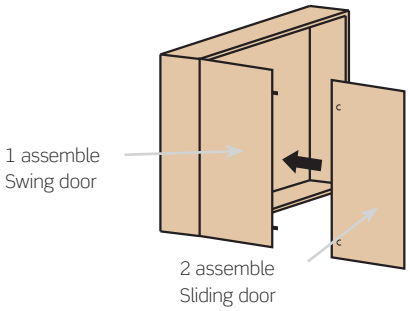

NYLON Hinge

Place sliding door intermediate hinges over the swing door hinges.

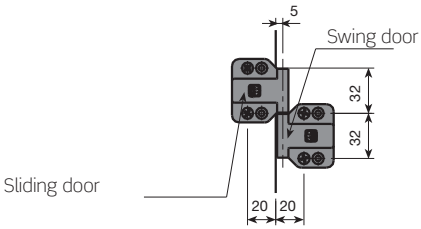

View from inside

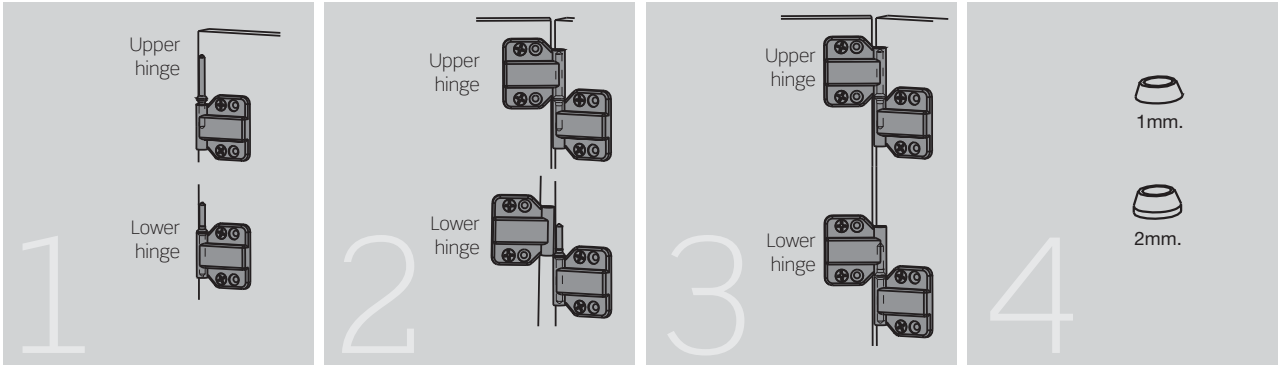

Place shafts:
Insert the shortest side of the shaft in the upper hinge. Insert the longest side of the shaft in the lower hinge.

Place sliding door:
Only the upper hinge must be inserted in the shaft.

Assemble the door:
Guiding yourself by the upper hinge shaft, lift the door until lower hinges align with their shaft. When the door falls, it automatically fits into place.

Adjustments:
Please use washers provided.

NOTES

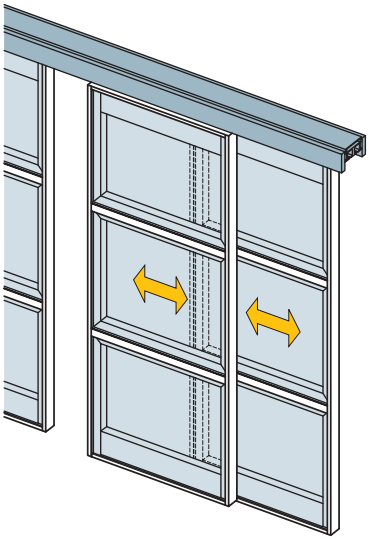

FITTINGS
FOR INTERIOR DOORS

Room divider doors:
Aluminium or wooden doors.

pp.

1 OVER 674

2 SOFT CLOSING DIVIDER DOORS INDA-matic 679

1 OVER

Upper track profile.

	Cut to measure	6m. Bars	
Anodised Silver	706.600.101	706.660.102	4



Single upper track profile to be used with wooden covering.

	Cut to measure	
Anodised Silver	709.310.103	1



Double upper track profile to be used with wooden covering.

	Cut to measure	
Anodised Silver	709.320.102	1

Door fitting set.

	Single	Double	
Upper fixing	705.403.101	705.401.104	10
Side fixing		705.402.106	

Consist of two upper rollers, two brakes and one lower guide rail.
Quantity for 10 doors.

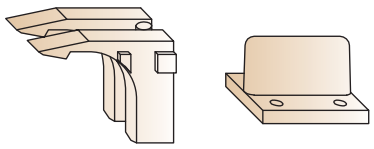


Upper fixing
Single rolle


Upper fixing.
Double roller

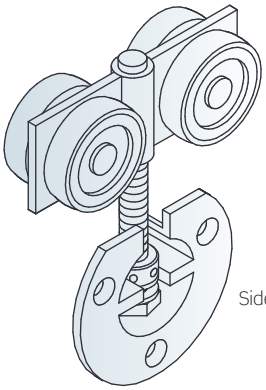
Side fixing

Assembly

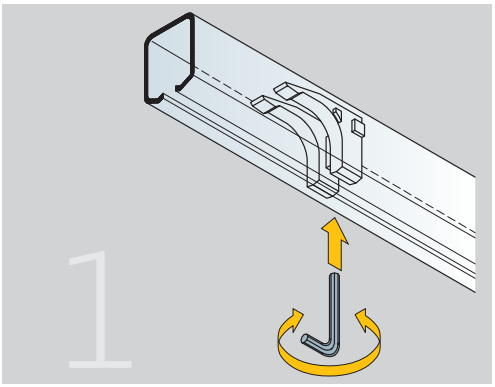

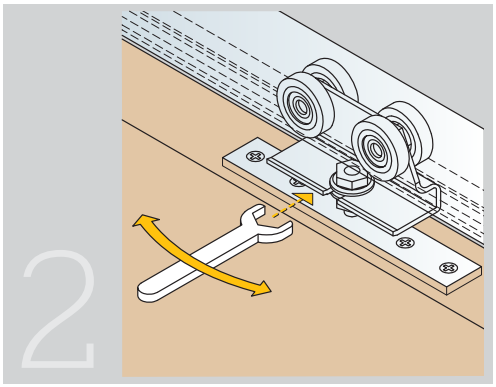

Technical data

Roller for unmachined door.

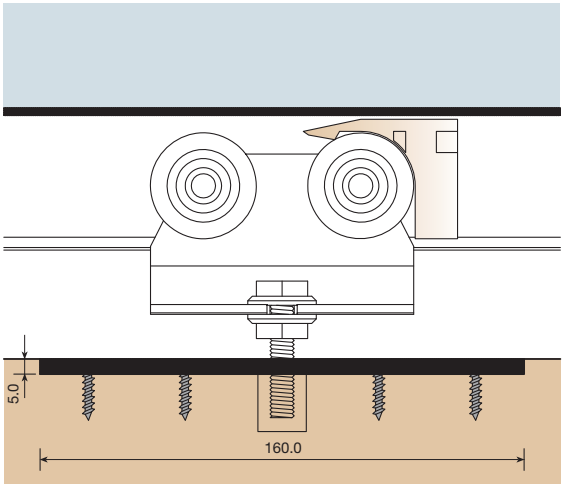

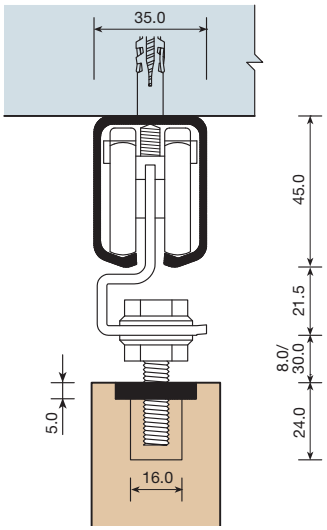

Roller for unmachined door.

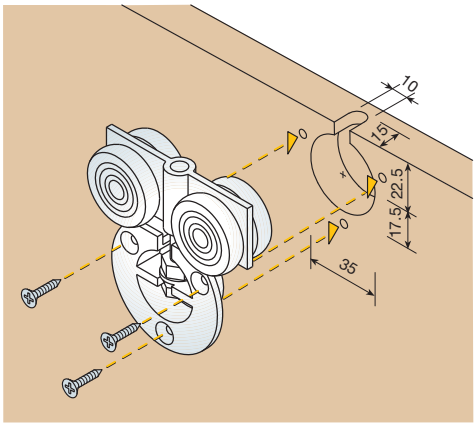

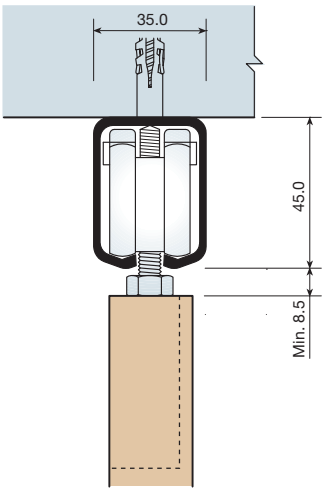

Lower part

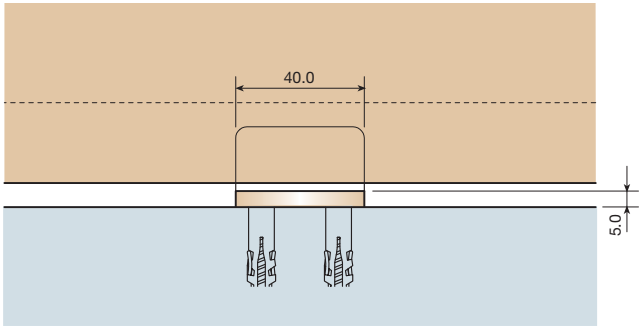



Technical data for wooden covering

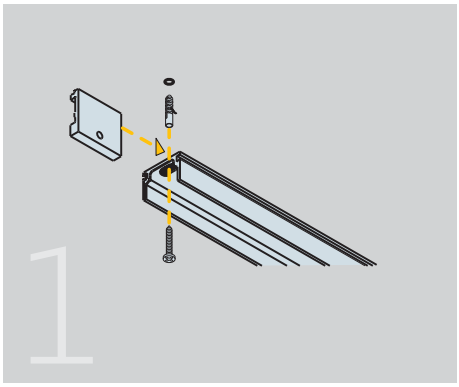

Fix the supporting track profile to the ceiling and insert the rail's safety plate.

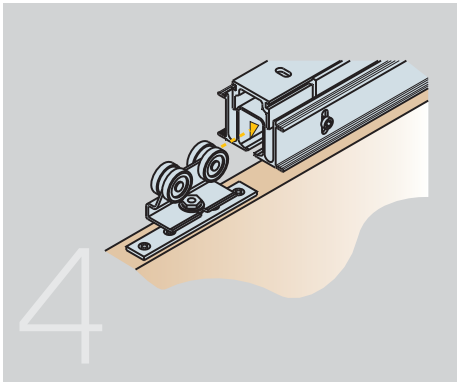

Couple the door to the rollers inserted into the rails and adjust the height.

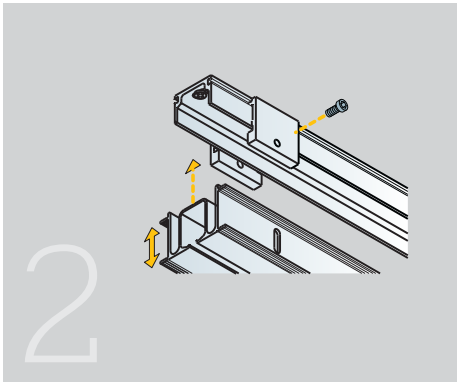

Fix the rail to the safety plate and adjust the height.

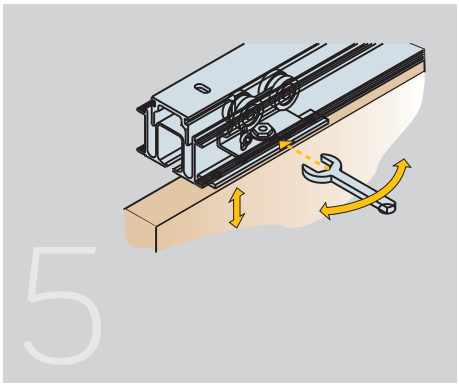

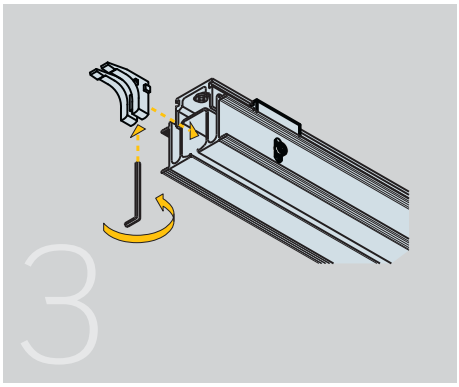

Insert the stop and block. Sliding doors.

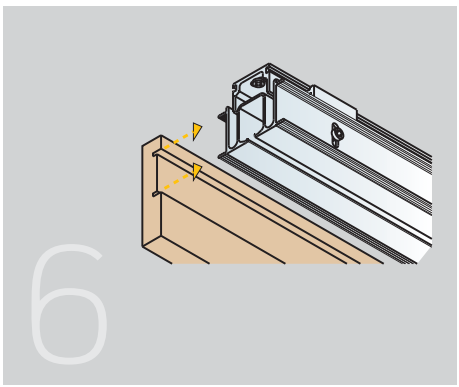

Insert the wooden cover over the rail.

Profile technical data for wooden covering

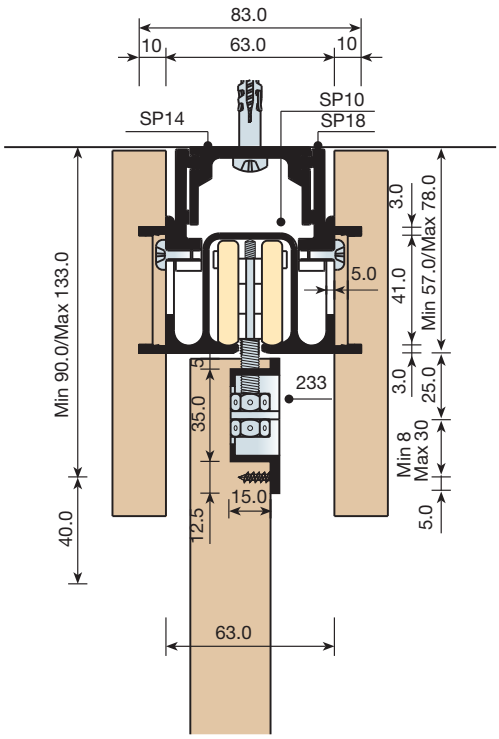

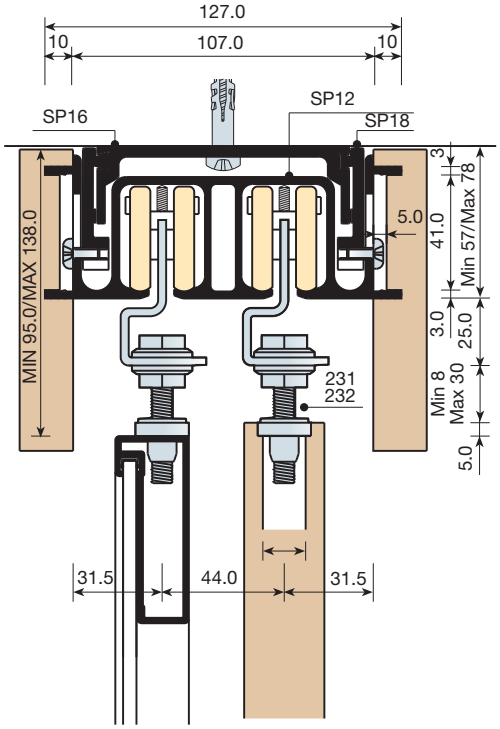

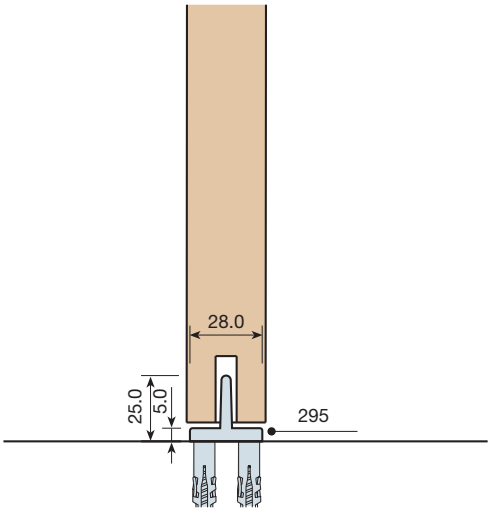

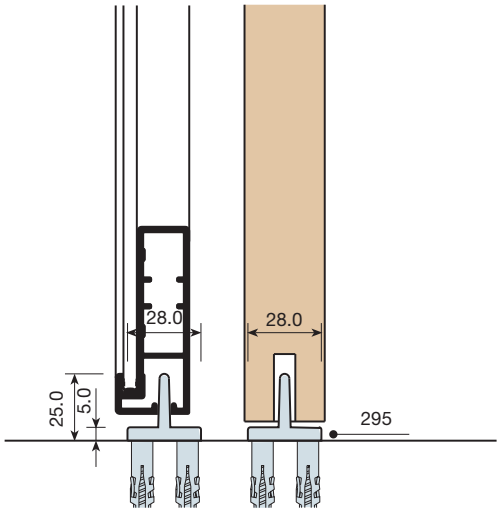

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

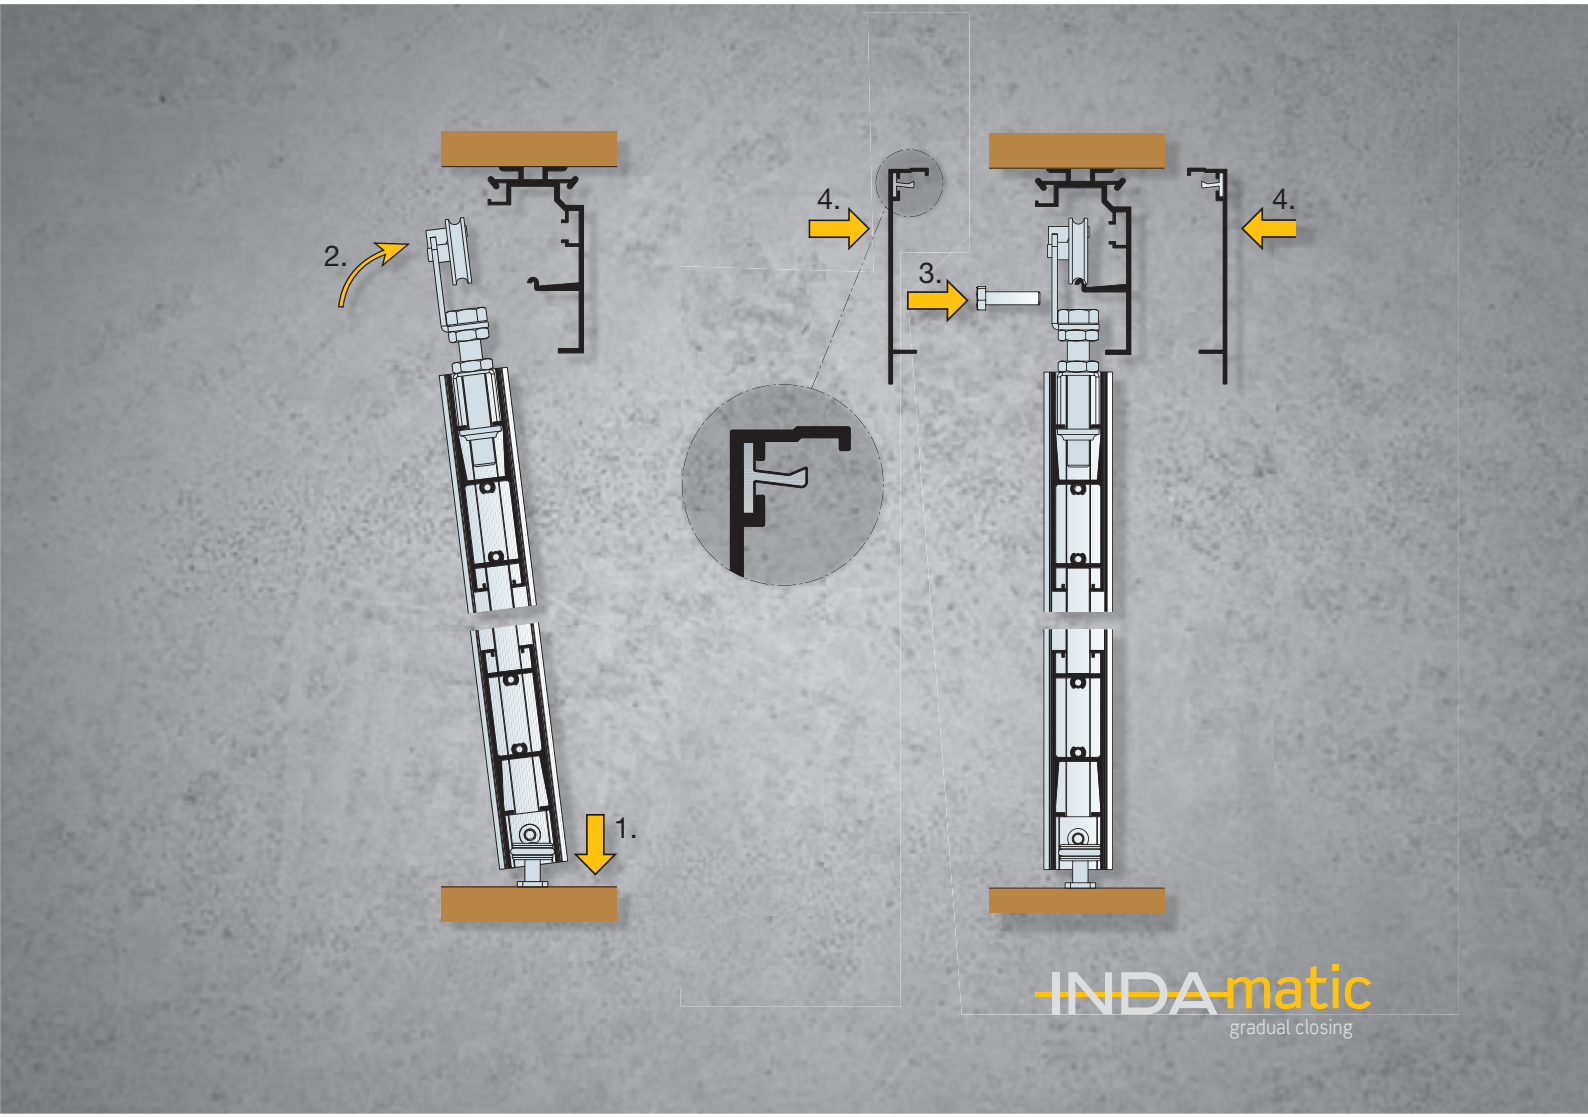

SOFT CLOSING
DIVIDER DOORS

INDAmatic
gradual closing

SOFT CLOSING
DIVIDER DOORS

INDAUX now offers a new system of fittings for sliding interior doors with, gradual closing. This system is ideal for separating spaces and rooms, and it can be used to create dressing rooms, play areas, small offices at home, etc. It can be used with wood or glass doors with aluminium handle profile, and a wide range of door assembly possibilities.

pp.

1 INTERIOR DOORS WITH INDAMATIC 681
- Profiles 681
- Components 682
- Technical data 683

2 WOODEN INTERIOR DOORS WITH INDAMATIC 686
- Profiles 686
- Technical data 687

1 DIVIDER DOORS WITH INDAMATIC

Profiles

10mm handle profile.

	2.6m. bars	5.2m. bars	
Silver-anodised		714.752.102	
Matt silver-anodised		714.752.511	10
White lacquered		714.752.802	



Upper and lower profile for 10mm.

	2m. bars	
Silver-anodised	715.620.102	
Matt silver-anodised	715.620.511	10
White lacquered	715.620.802	



Glass gasket.

	4 mm.	6 mm.	8 mm.	
Transparent	753.230.310	753.260.311	753.280.312	50

3m bars.

Ruber seal for handle profile.

	2.6m. bars	
White Ral 9010	715.926.002	
Grey Ral 7040	715.926.315	20
Black Ral 9005	715.926.024	

Upper track profile.

	6,1m. bars	
Natural	715.760.500	
Matt silver-anodised	715.760.511	8
White lacquered	715.760.802	



Upper track cover profile.

	6,1m. bars	
Silver-anodised	715.860.106	
Matt silver-anodised	715.860.515	8
White lacquered	715.860.806	



Profiles

10mm. divider profile.

	2m. bars	
Silver-anodized	715.220.100	
Matt silver-anodized	715.220.516	20
White lacquered	715.220.800	



Components

Bag of components.

	1 door	
	703.400.106	5

Each bag contains:

		1 door
A	INDAMATIC self-closing with mechanism	1 part
B	Upper roller	2 parts
C	Lower floor runner	1 part
D	Screws	8 parts
E	Track cover support clip	2 parts
F	Profile cover	4 parts

INDAmatic
gradual closing

A 

B 

C

D

E 

F

Technical data

Profiles and board cutting lengths

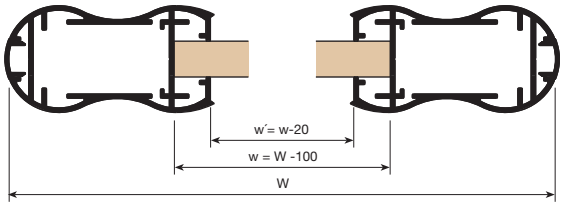

Machining lengths for the handle profile

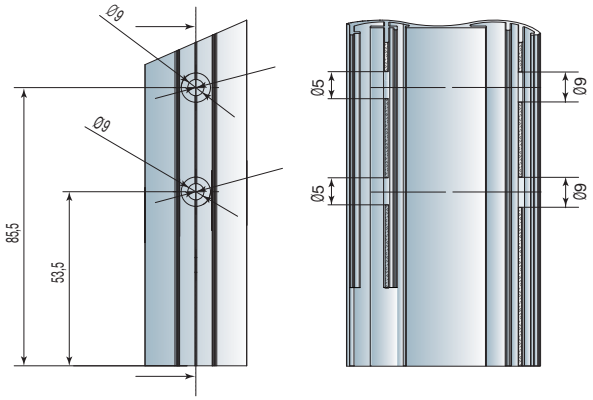

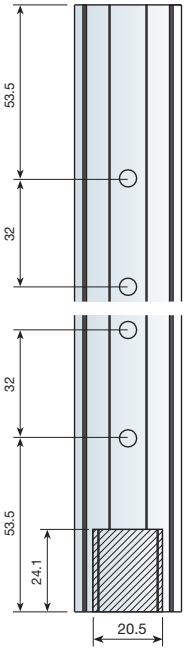



Drilling area

Door profiles assembly

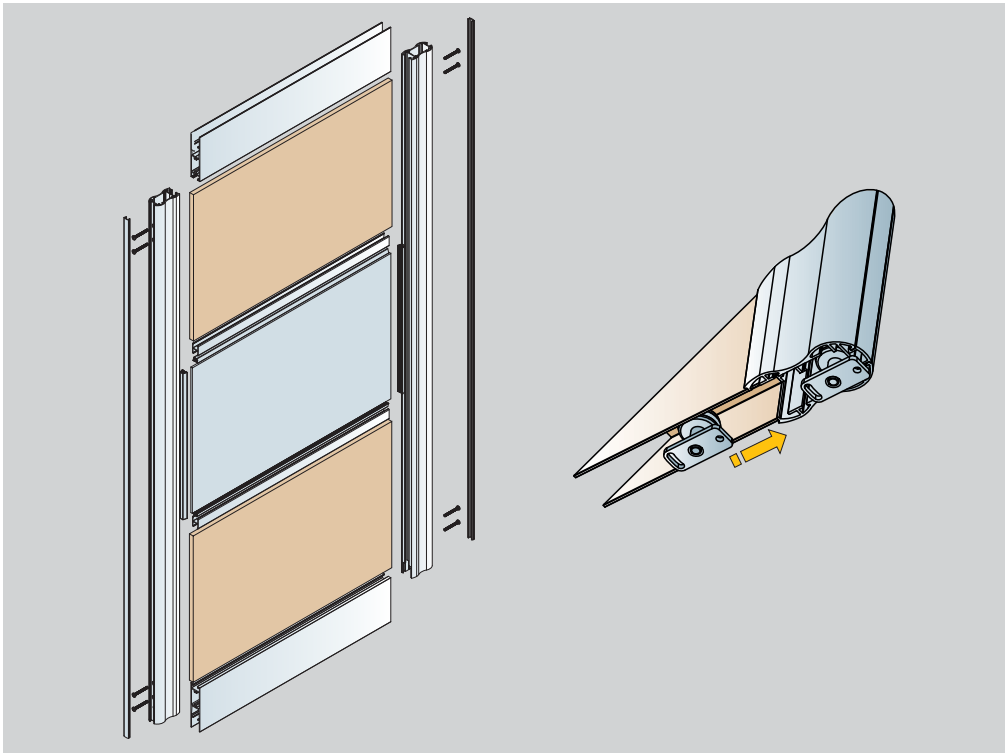

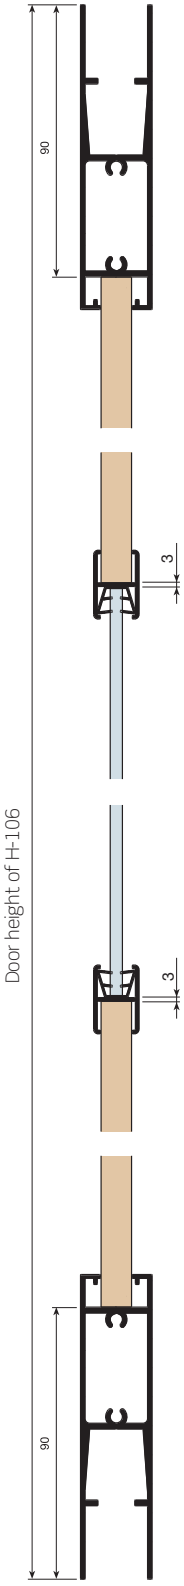

Technical data

Fitting assembly

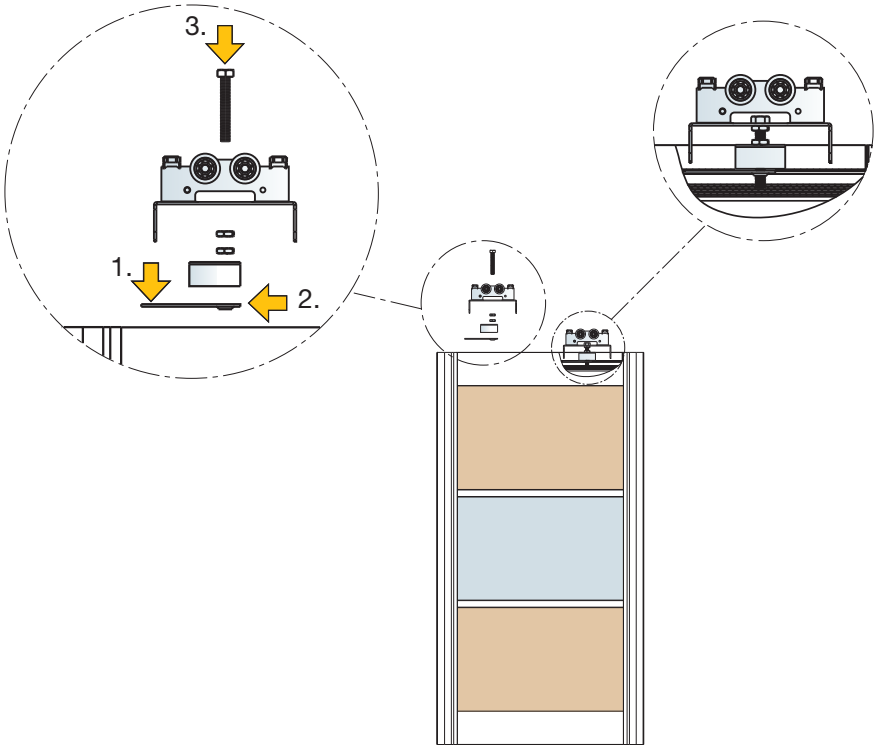

Door assembly

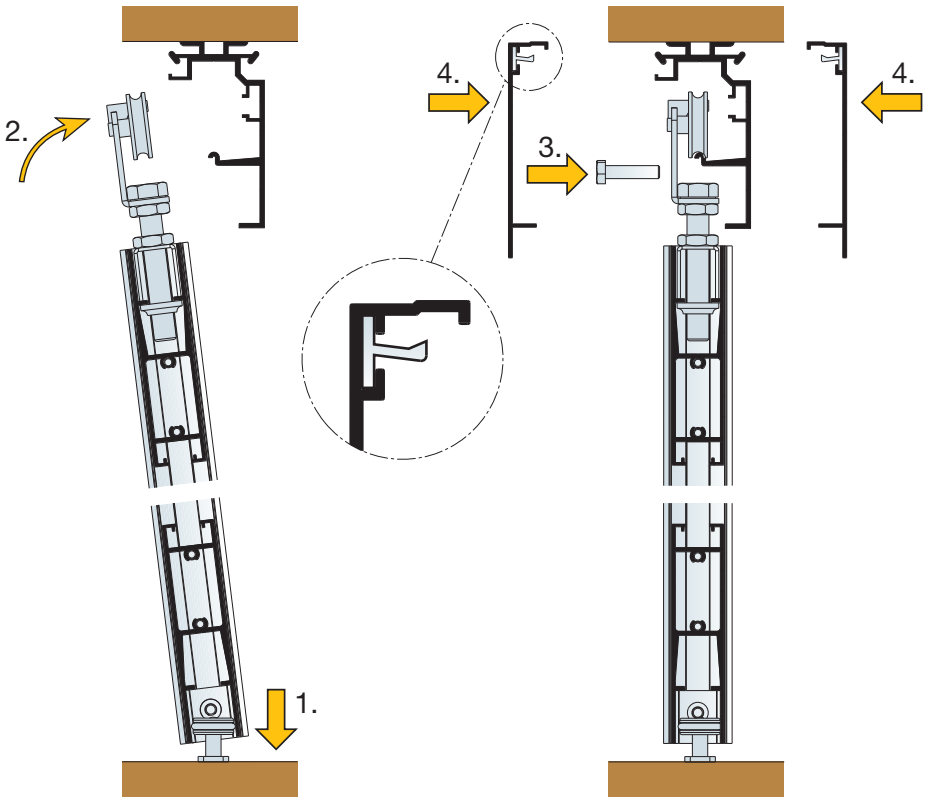

Technical data

Door assembly options



One door / one profile

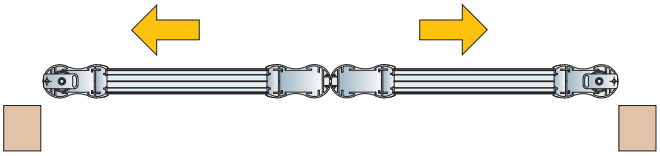

Two doors / one profile

Assembly options: 3 doors

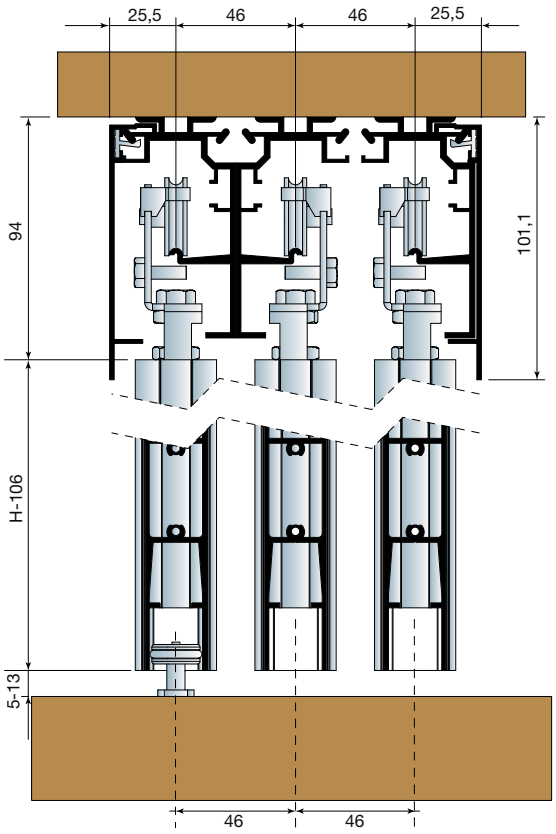

2 WOODEN DIVIDER DOORS WITH INDAMATIC

Profiles

Upper track profile

	6m. bars	
Natural	715.760.500	
Matt silver-anodised	715.760.511	8
White Lacquered	715.760.802	



Upper track cover profile

	6m. bars	
Silver-anodised	715.860.106	
Matt silver-anodised	715.860.515	8
White lacquered	715.860.806	



Bag of components

	1 door	
	705.700.100	5

Each bag contains:

		1 door
A	INDAMATIC self-closing with mechanism	2 parts
B	Upper roller	2 parts
C	Upper roller fixing screw	4 parts
D	Nut for fixing screw	4 parts
E	Lower profile guiding screw	1 parts
F	Track cover support clip	2 parts
G	Profile cover	2 parts

INDAmatic
gradual closing

A 

B 

C

D

E 

F 

G 

Technical data

Machining lengths for the door

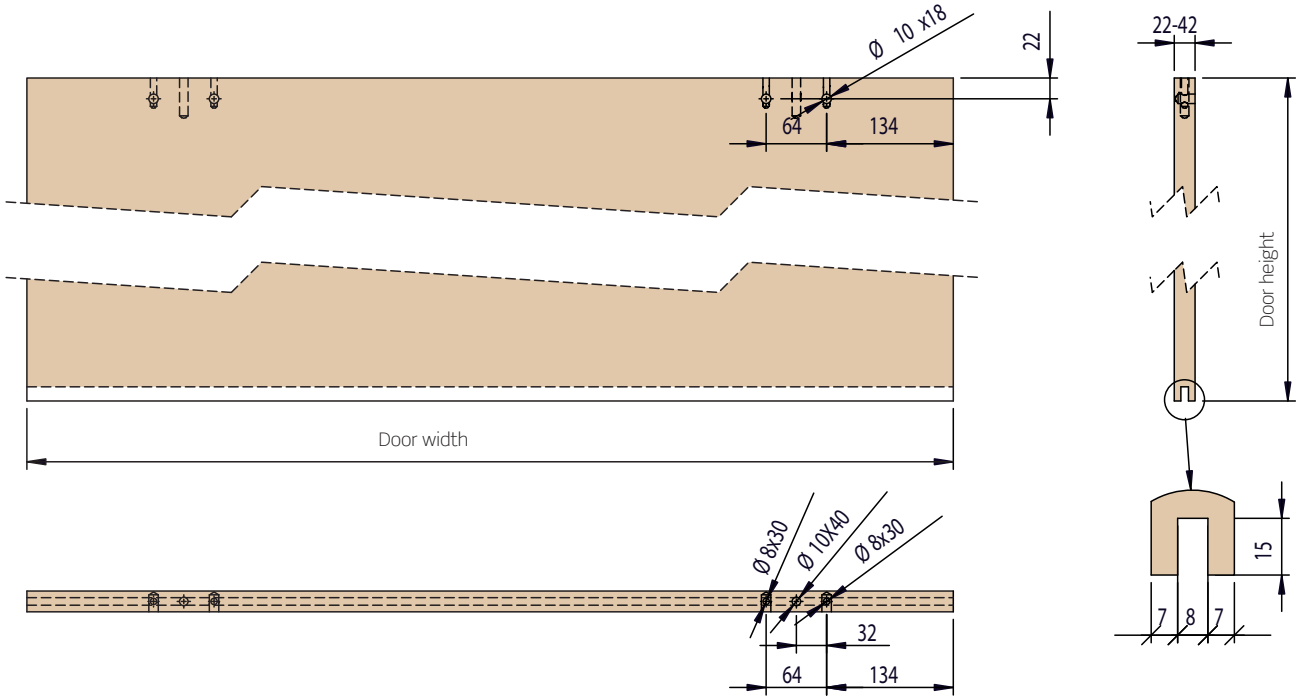

Door profiles assembly

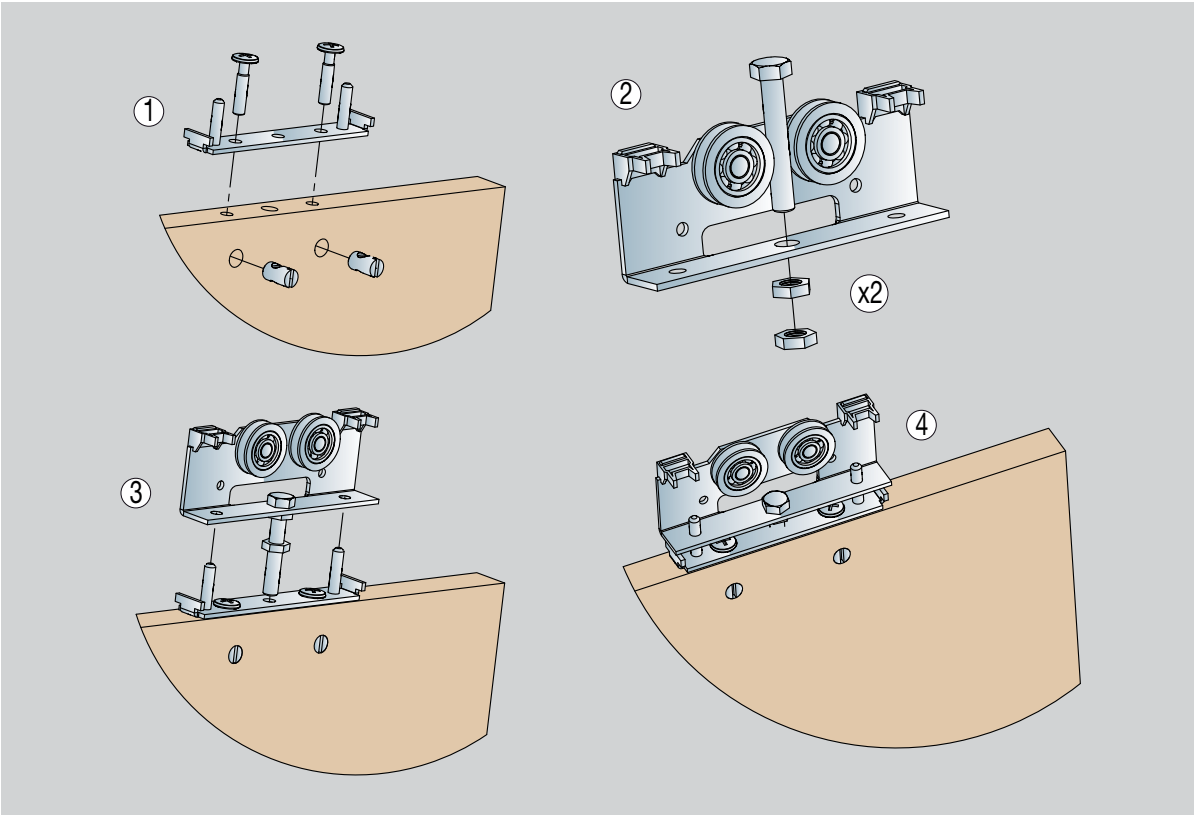

Technical data

Door assembly options



Two doors / one profile



One door / one profile

Door assembly options

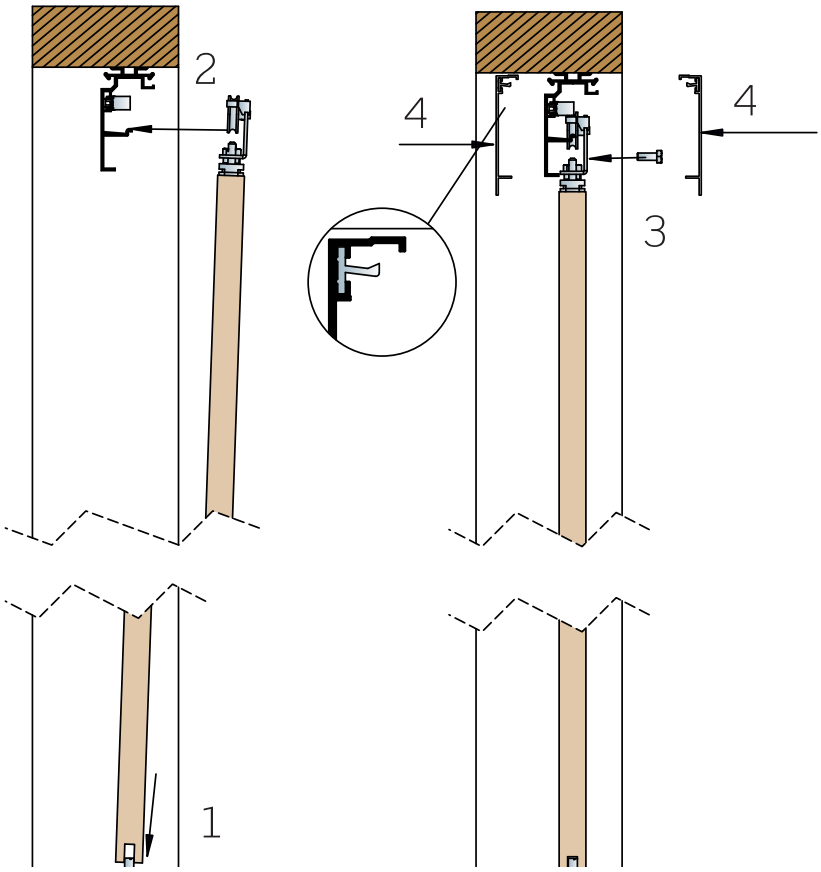

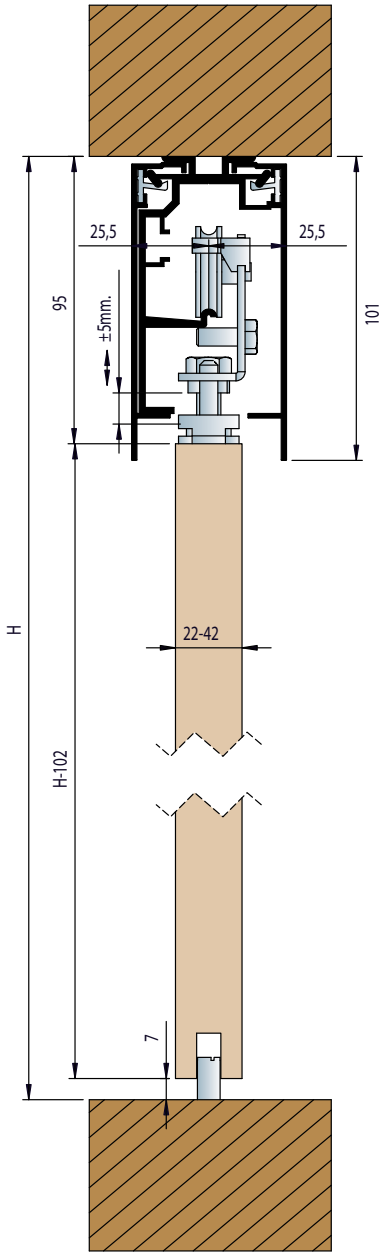

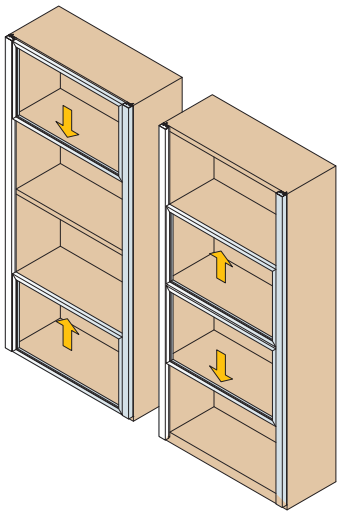

FITTINGS
FOR VERTICAL DOORS

Fittings for vertical sliding doors: for 600 and 700mm high hanging units.
For 1250mm to 2000mm vertical units hanging units

pp.

1 VERTIKAL ..... INDAmatic 691

2 SALISCENDI 40 697

INDAmatic
gradual closing

VERTIKAL

System for synchronised vertical doors

Synchronised vertical opening system for 548, 600 and 700mm high modules, with the gradual soft closing system Indamatic incorporated. Total access to the interior of the cabinet. Aluminium-anodized finish.

pp.

1 VERTIKAL 692

- Vertikal 1/2 692
- Vertikal 2/3 693
- Technical data 694
- Assembly 695

1 VERTIKAL

Vertikal 1/2

The height of the doors is half the height of the module. The upper door must weigh the same as the lower one, including the handle. For 600 and 700mm high modules. This system incorporates soft closing and latches and cushioned opening of the doors. Maximum width of the door 1800mm.

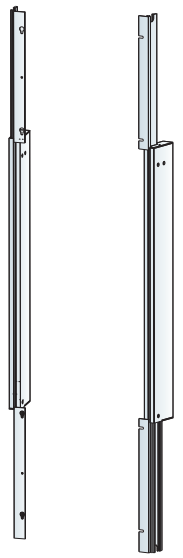

Vertical opening system. Synchronised opening.

Height of unit	INDAMATIC	
600	700.860.101	1
700	700.870.100	

Supplied with the tightening bolt so that it may be assembled in the module.

Technical data - self closing system incorporated

INDAmatic
gradual closing

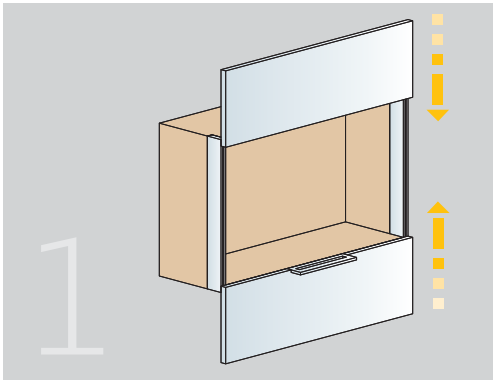

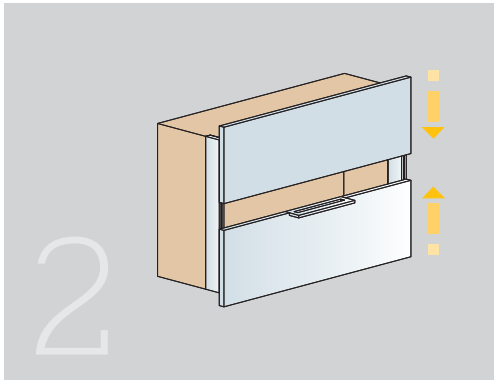

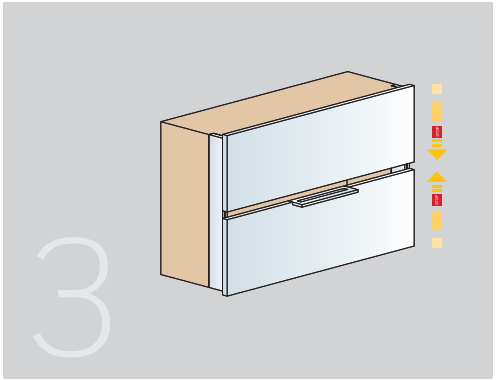

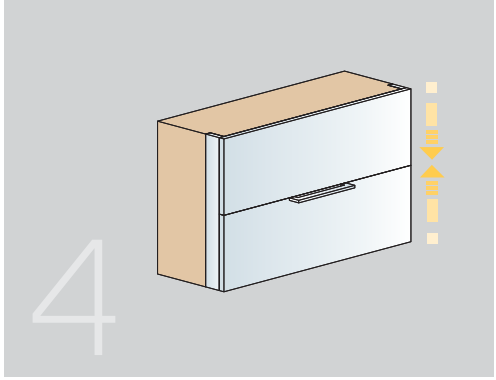

Vertikal 2/3

The height of the upper doors is double that of the lower ones. The lower door must weigh double that of the upper one, including the handle. For 600 and 700mm high modules. This system incorporates soft closing and latches and cushioned opening of the doors. Maximum width of the door 1800mm.

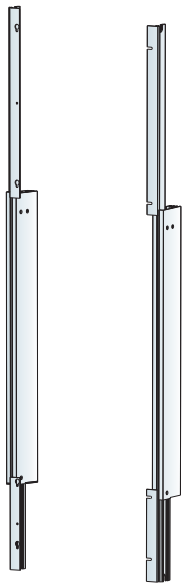

Vertical opening system. Synchronised opening.

Height of unit	INDAMATIC	
548	700.955.102	
600	700.960.105	1
700	700.970.104	

Supplied with the tightening bolt so that it may be assembled in the module.

Technical data - self closing system incorporated

INDAmatic
gradual closing

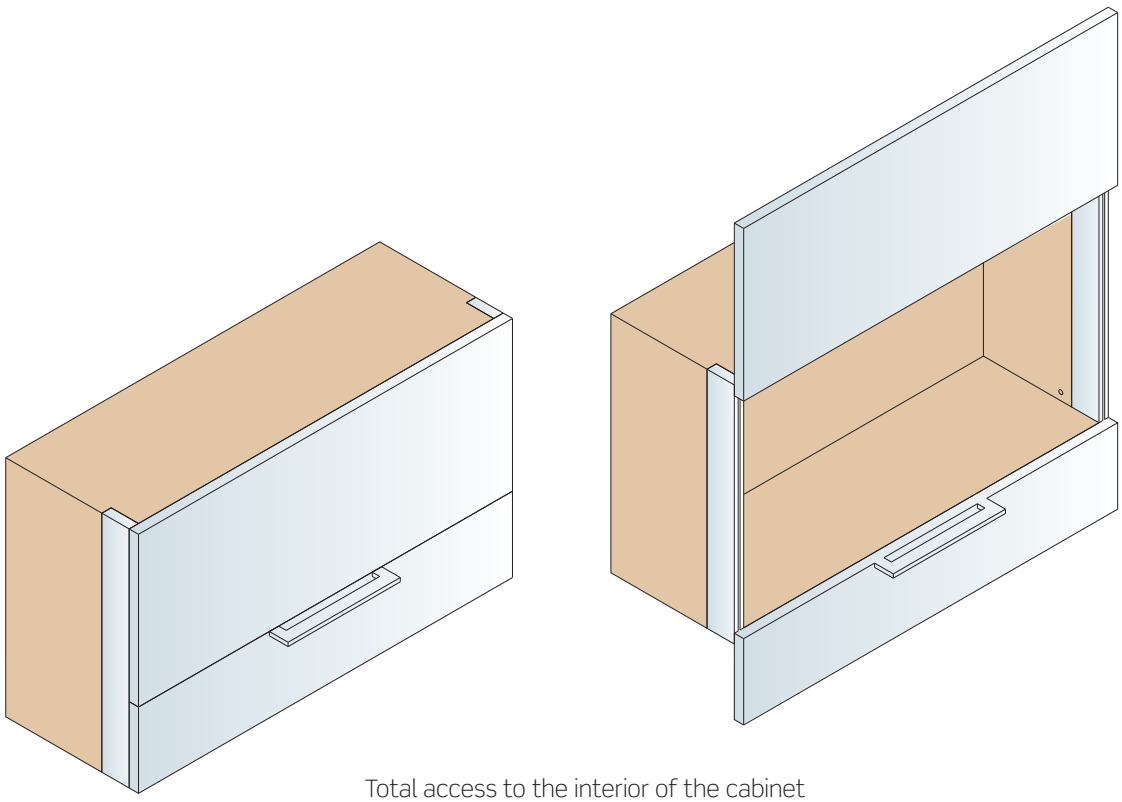

Total access to the interior of the cabinet

Technical data

Vertikal fitting “1/2”

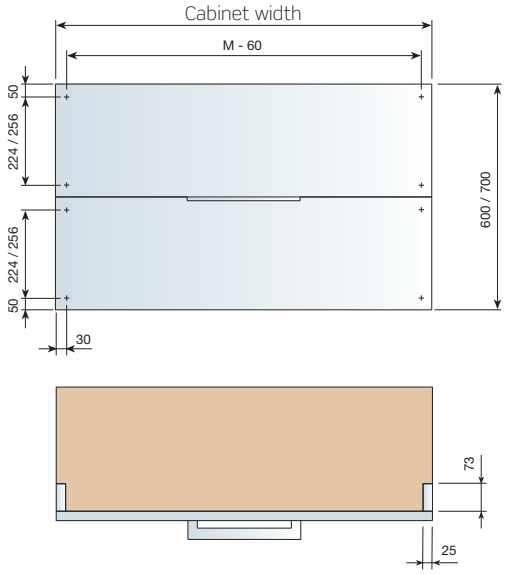

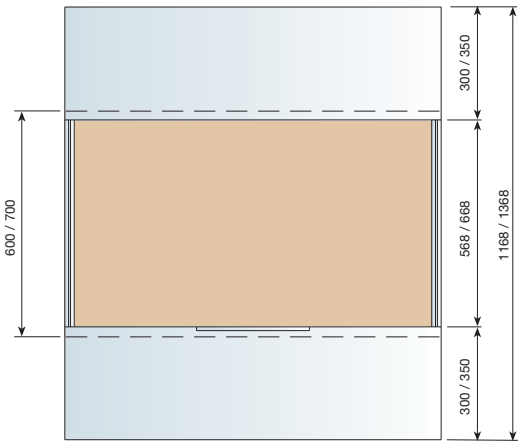

Vertikal fitting “2/3”

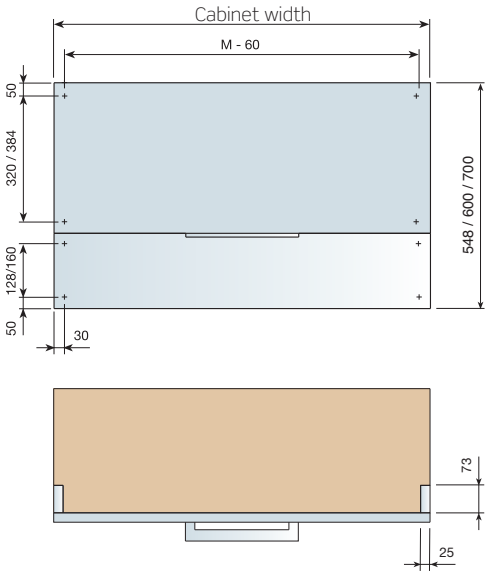

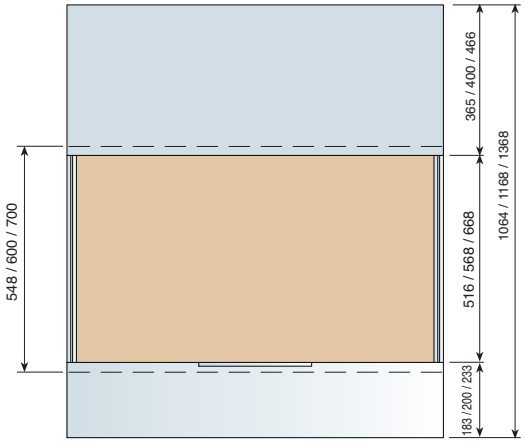

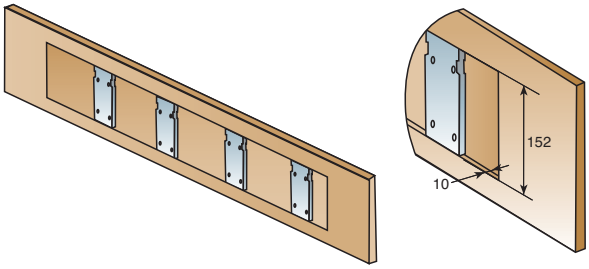

The lower front must weigh twice as the upper front.
Counterweights are supplied.

Assembly

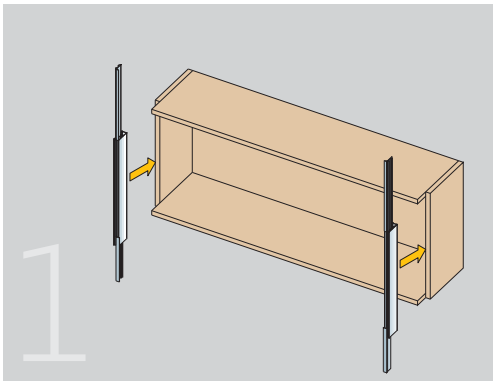

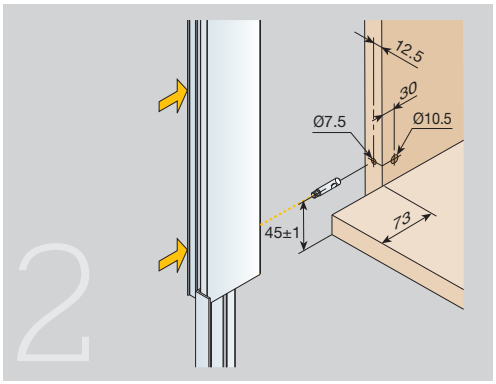

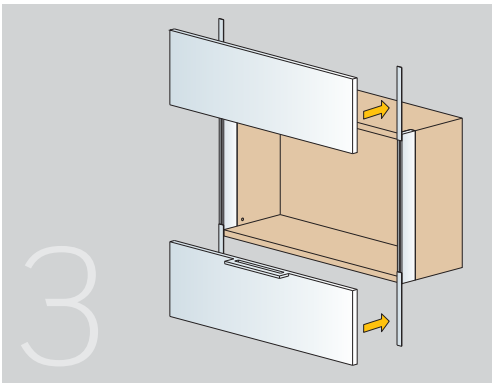

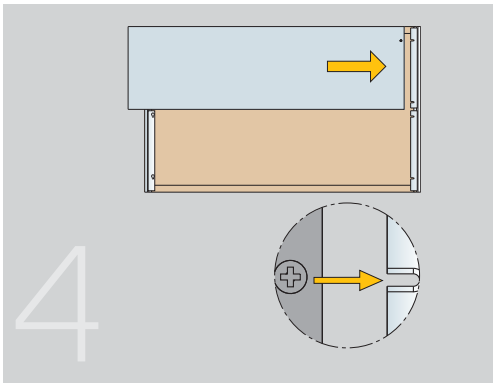

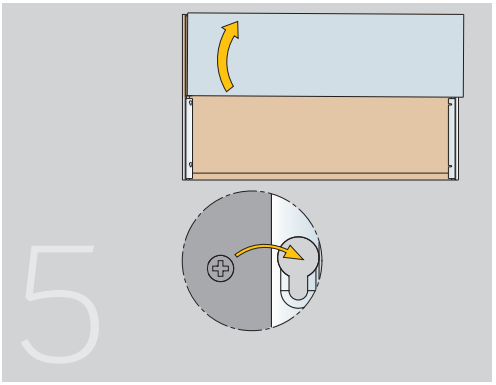

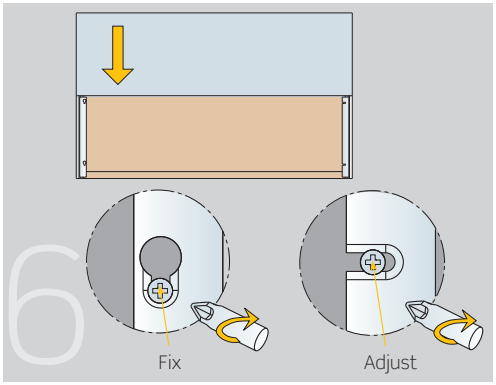

Repeat steps 4, 5 and 6 to for the assembly of the lower door.

* To guarantee a correct operation, leave the screw slightly loose.

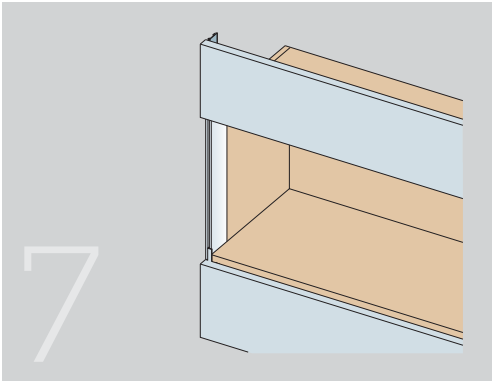

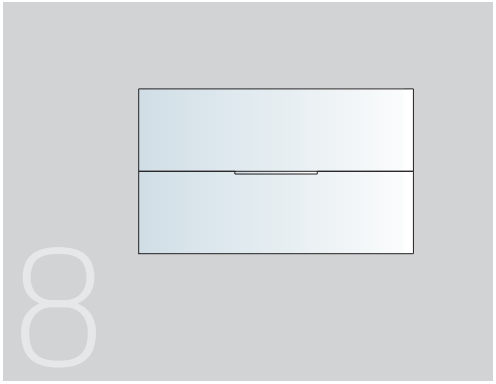

NOTES

2 SALISCENDI 40

Synchronised vertical sliding door systems. The recommended door size is a quarter of the total height of the fitting. Minimum door height: 350mm.

Synchronized vertical opening door system.

705.900.101	1

Cut-to-measure. Contains all the fittings necessary for a set of doors.

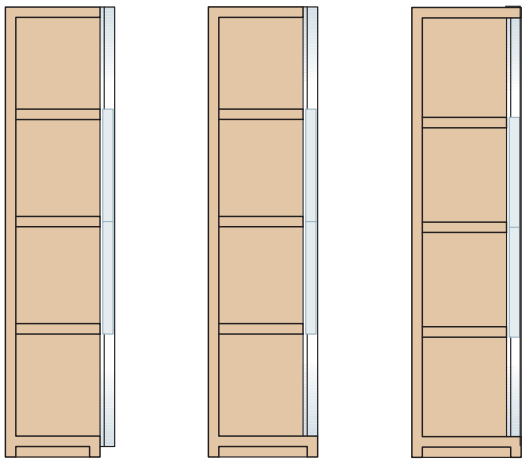

Technical data

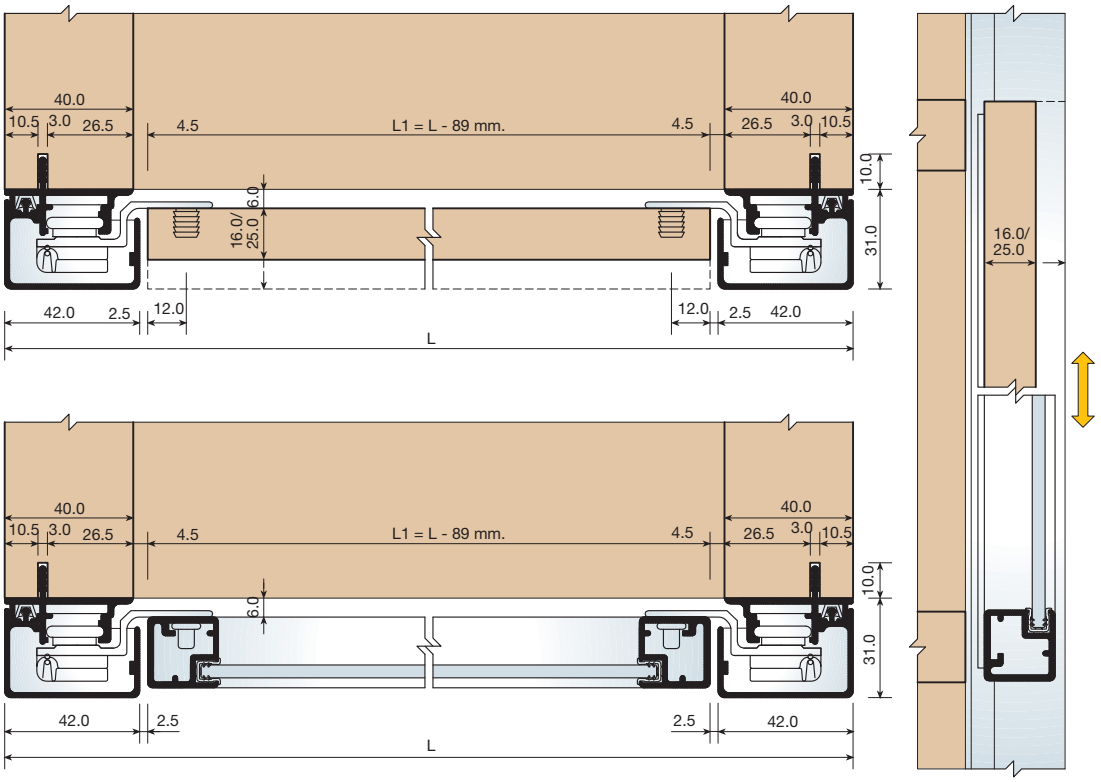

Technical data

Assembly

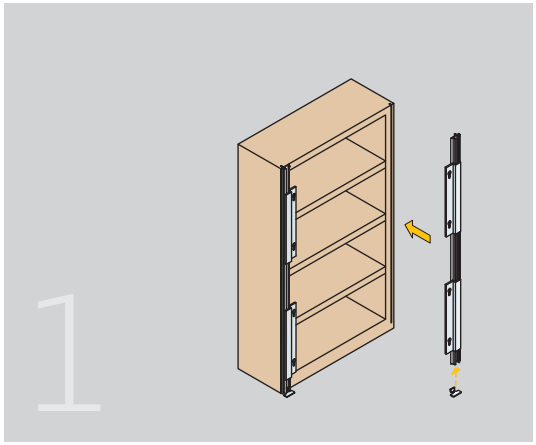

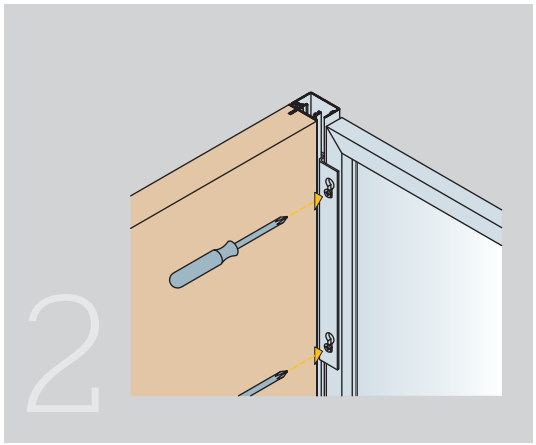

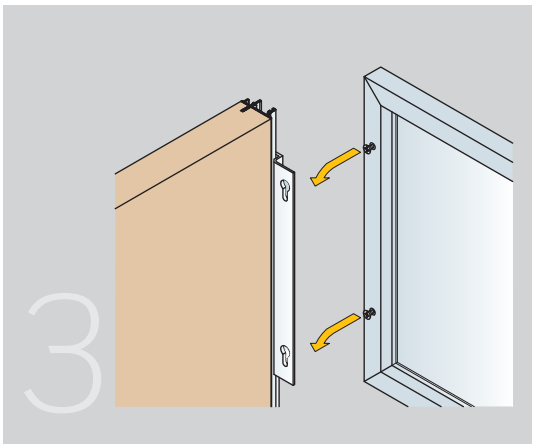

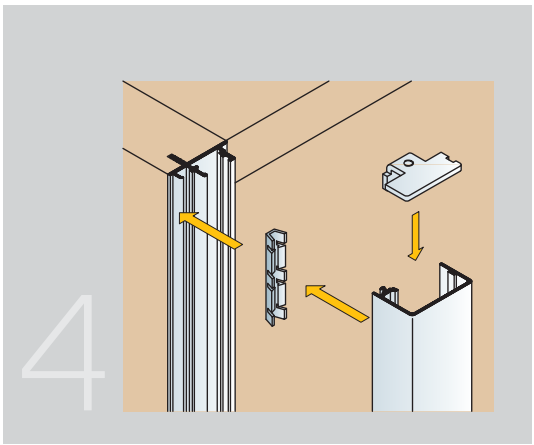

STRAIGHTENERS

This fitting helps to correct any possible door warping, and to prevent it from re-appearing. It is recommended for use with door thickness of 16mm and above, and for heights up to 2,600mm.

pp.

1 STRAIGHTENER 1 700

2 STRAIGHTENER 3 702

3 STRAIGHTENER 4 703

1 STRAIGHTENERS 1

This fitting helps to correct any possible door warping, and to prevent it from re-appearing. It is recommended for use with door thickness of 16 mm and above, and for heights up to 2,600 mm.

Straightener set.

Nickel-plated	754.000.063	50

In boxes of 50 sets.

Rod.

L = Distance between centres	Nickel-plated	
960mm = (32 x 30)	716.009.066	
1.152mm = (32 x 36)	716.011.063	
1.344mm = (32 x 42)	716.013.060	
1.536mm = (32 x 48)	716.015.064	
1.728mm = (32 x 54)	716.017.061	25
1.920mm = (32 x 60)	716.019.065	
2.112mm = (32 x 66)	716.021.062	
2.304mm = (32 x 72)	716.023.066	
2.496mm = (32 x 78)	716.024.061	

Special sizes to order.

Measurements for machining on the door

Drilling holes on the body



Slot for rod



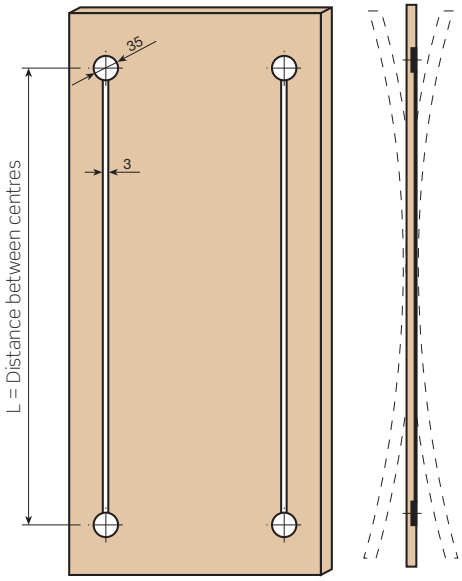

Note
2 straighteners per door are recommended.

Assembly

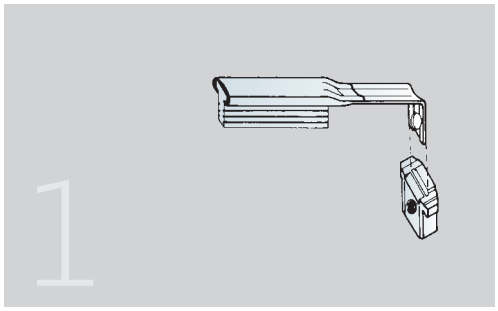

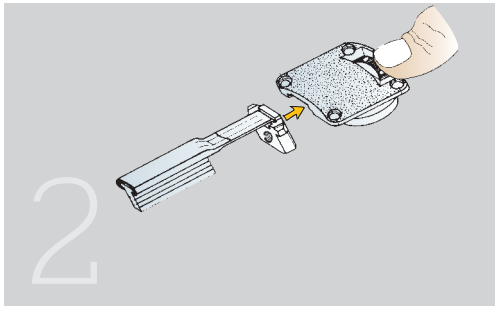

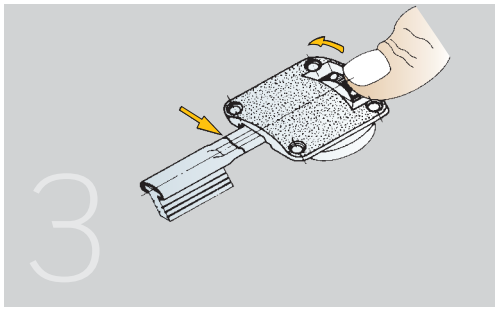

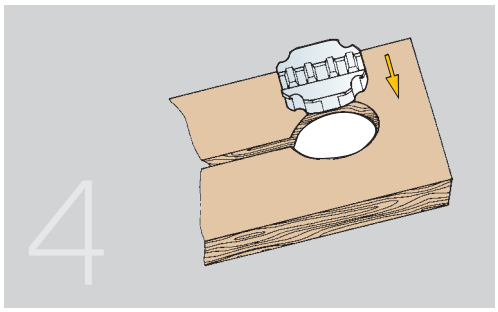

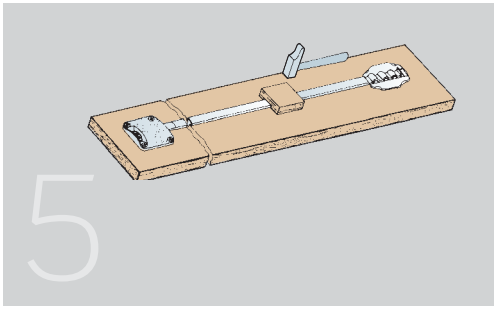

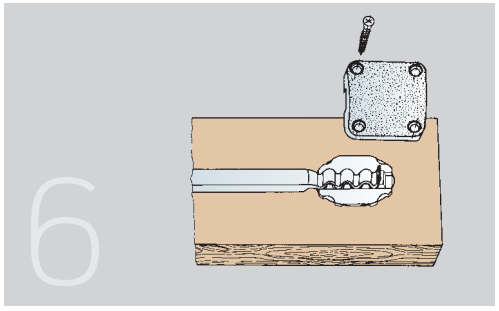

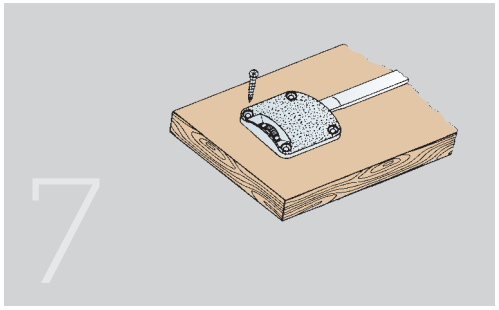

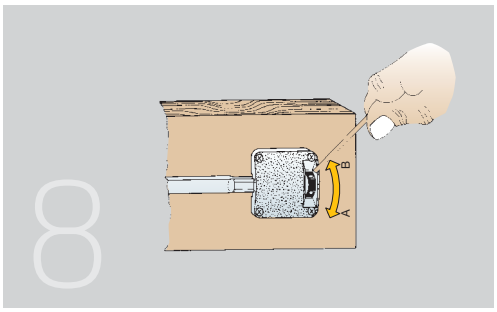

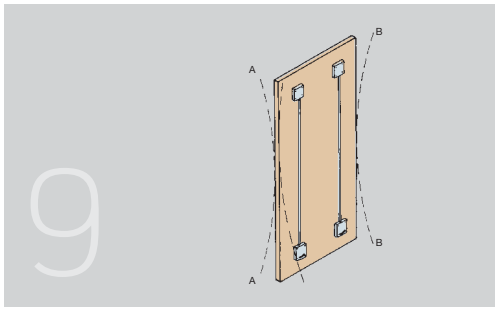

2 STRAIGHTENERS 3

This fitting helps to correct any possible door warping, and to prevent it from re-appearing. It is recommended for use with door thickness of 16mm and above, and for heights up to 2,600mm.

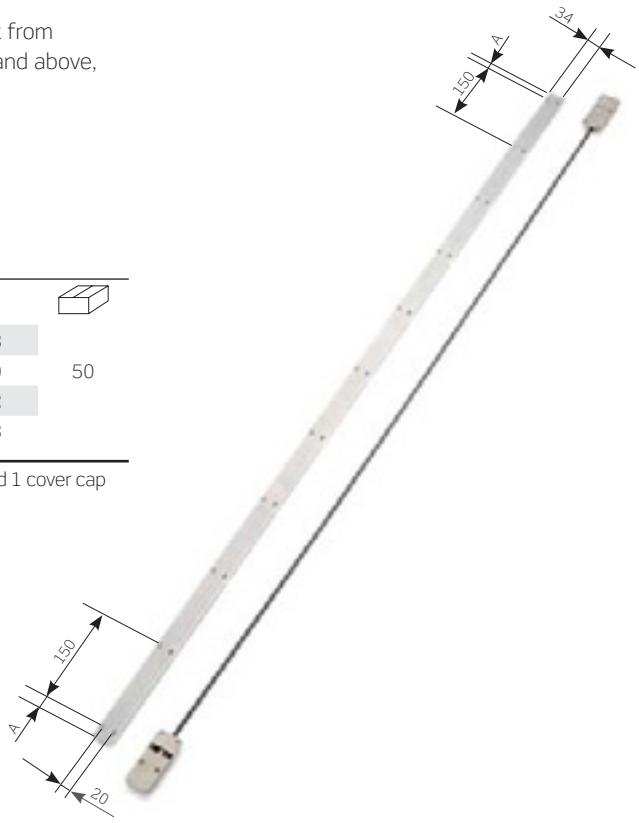

Straightener set 3.

Dist. Between centres L	Threaded stud bolt L	Cover cap L	Set ref.	
1.600mm (32x50)	1.648mm	1.540mm	754.516.103	
1.824mm (32x57)	1.872mm	1.764mm	754.518.100	50
1.920mm (32x60)	1.968mm	1.860mm	754.519.102	
2.304mm (32x72)	2.352mm	2.244mm	754.523.103	

Each set has 1 upper body, 1 lower body, 38 screws, 2 nuts, 1 threaded stud bolt and 1 cover cap profile. Special sizes to order.

Dist. Between centres	A
1.600mm	20
1.824mm	57
1.920mm	30
2.304mm	72

Measurements for machining on the door

Drilling holes on the body



Slot for cover cap



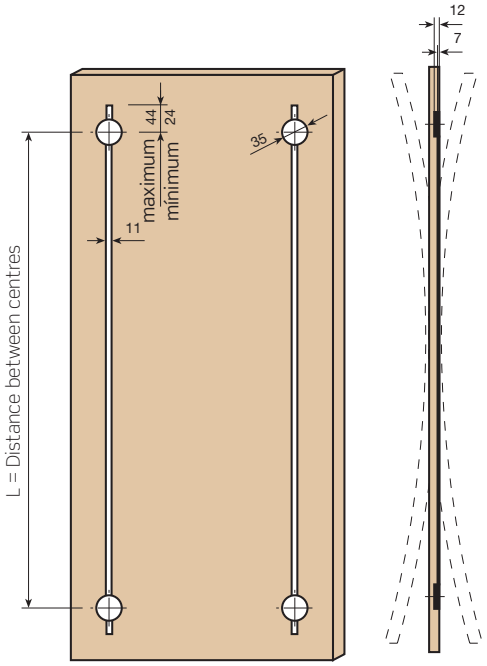

Note
2 straighteners per door are recommended.

3 STRAIGHTENERS 4

Designed for 12mm. thick closet doors. This product responds to the trend for closet doors of lesser thickness, being more susceptible to suffer from more deformation problems because of use.

Straightener set.

Nickel-plated	754.700.063	50

In boxes of 50 sets.

Rod.

L = Distance between centres	Nickel-plated	
960mm = (32 x 30)	716.009.066	
1.152mm = (32 x 36)	716.011.063	
1.344mm = (32 x 42)	716.013.060	
1.536mm = (32 x 48)	716.015.064	
1.728mm = (32 x 54)	716.017.061	25
1.920mm = (32 x 60)	716.019.065	
2.112mm = (32 x 66)	716.021.062	
2.304mm = (32 x 72)	716.023.066	
2.496mm = (32 x 78)	716.024.061	

Special sizes to order.

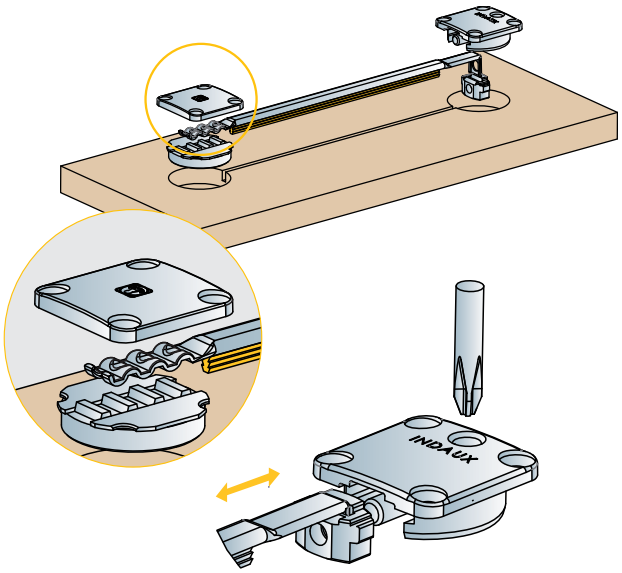

Measurements for machining on the door



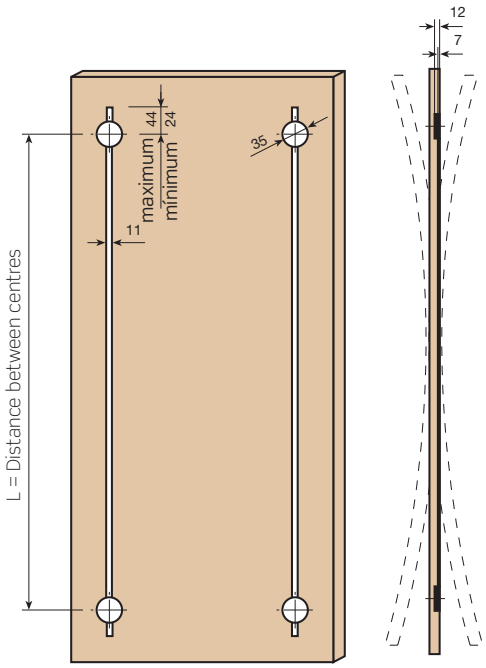

Note
2 straighteners per door are recommended.

NOTES

ACCESORIES

1 ACCESSORIES

These accessories can be used for all models.

Dust strip.

	Roll	15mm.	
7x9	175m	753.009.106	
7x11	200m	753.011.103	1
7x16	125m	753.016.106	



Double-sided adhesive tape.

9x0,13	750.013.106	1



Stop with nail.

Brown	420.100.015	5.000



Knock-in nut without head.

Natural	949.500.101	10.000



INDAUX
FURNITURE FITTINGS MANUFACTURER

09

FURNITURE ACCESSORIES

Cupboard doors 709

1. **Screen** 710
2. **Screen Fusion** 712
3. **Screen Click** 714
4. **Screen Easy** 716
5. **Screen 3** 718
6. **Screen 4** 720

Glass cabinet doors 723

1. Machined glass cabinets and profiles to be machined 724
   - 20x20 1mm radius 724
   - 20x20 6mm radius 726
   - 20x20 1mm radius, 7.5mm visible 728
   - 35x20 1mm radius, 7.5mm visible 730
   - 45x20 1mm radius, 7.5mm visible 732
   - 45x20 1.2 visible 734
   - 45x20x20 visible 736
   - 50x20x7.5 visible 738
2. Glass cabinet doors without machining: **SCREEN KIT** 740

Handles and edge profiles 743

Panelling systems 746

1. Horizontal panelling **RASTY** 746
2. Vertical panelling **FORTE** 753
3. Horizontal/vertical panelling 756
   - **HEAVY** 756
   - **THIN-WALL** 762
4. Accessories for horizontal panelling systems 764
5. Accessories for vertical panelling systems 770

Profiles for structures 777

1. Multi-purpose structure **STRUKT** 778
2. Structure 40x40 780
3. Structure 20x20 782

Equipment for inside cabinets 785

1. CD, DVD, VHS holder profiles 786
2. Aluminium shelf 788
3. Wire ducting 790
4. Aluminium tie rack 791
5. Trouser hanger 792
6. Clothes rails 793
7. Clothes hooks 797
8. Folding clothes hangers 797
9. Shoe rack 798
10. Tie rack 798
11. Trouser rack 799
12. Movable hanger 800

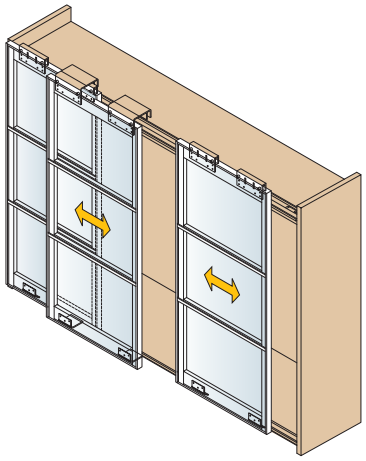

CUPBOARD DOORS

Aluminium door systems for cupboards.
Cut and machined to the client's requirements.
To be cut and machined.

pp.

1 SCREEN 710

2 SCREEN FUSION 712

3 SCREEN CLICK 714

4 SCREEN EASY 716

5 SCREEN 3 718

6 SCREEN 4 720

1 SCREEN

Machining for **MASTER LUX**, **MASTER MAS** and **SISTEMA-4** sliding doors.

Number of cross-pieces	0	1	2	3	
Handle 29 mm.	708.300.504	708.301.506	708.302.501	708.303.503	
Handle 35 mm.	708.400.501	708.401.503	708.402.505	708.403.500	
Handle 49 mm.	708.500.505	708.501.500	708.502.502	708.503.504	
Handle 29 & 35 mm.	708.600.502	708.601.504	708.602.506	708.603.501	1
Handle 29 & 49 mm.	708.700.506	708.701.501	708.702.503	708.703.505	
Handle 29 & 64 mm	708.800.503	708.801.505	708.802.500	708.803.502	
Handle 49 & 86 mm.	708.900.500	708.901.502	708.902.504	708.903.506	

Machined to order. Please specify door measurements when placing your order. For 4mm. glass. Smooth aluminium. The cross-pieces are arranged so that the glass pieces are all equal. Please check for other arrangements.

Machining for interior doors.

Number of cross-pieces	0	1	2	3	
Handle 29 mm.	709.000.504	709.001.506	709.002.501	709.003.503	
Handle 35 mm.	709.100.501	709.101.503	709.102.505	709.103.500	1
Handle 49 mm.	709.200.505	709.201.500	709.202.502	709.203.504	

Machined to order. Please specify door measurements when placing your order. For 4mm. glass. Smooth aluminium. The cross-pieces are arranged so that the glass pieces are all equal. Please check for other arrangements.

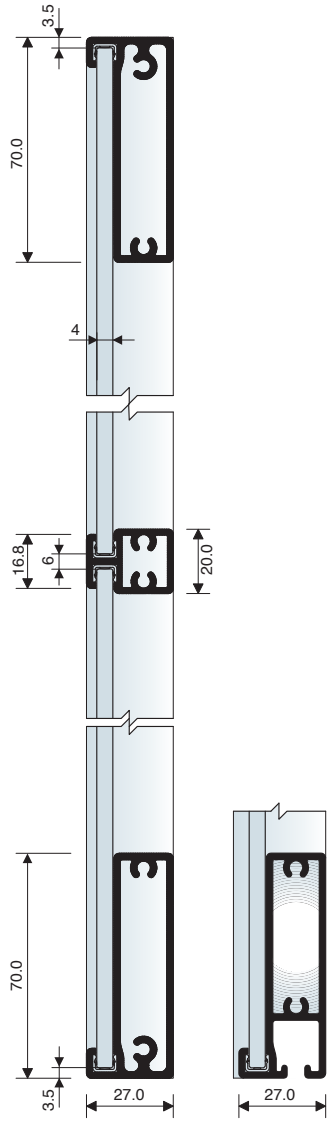

Technical data: *Assembly*

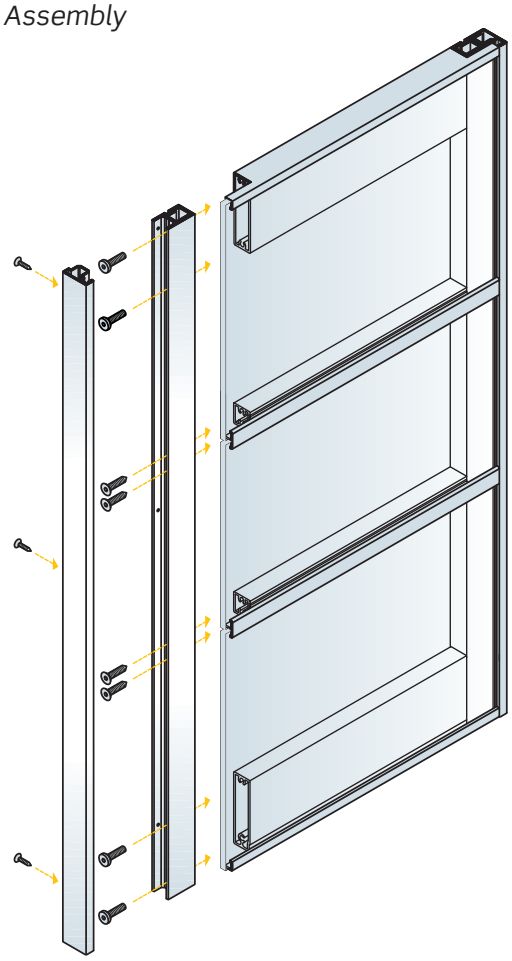

Technical data

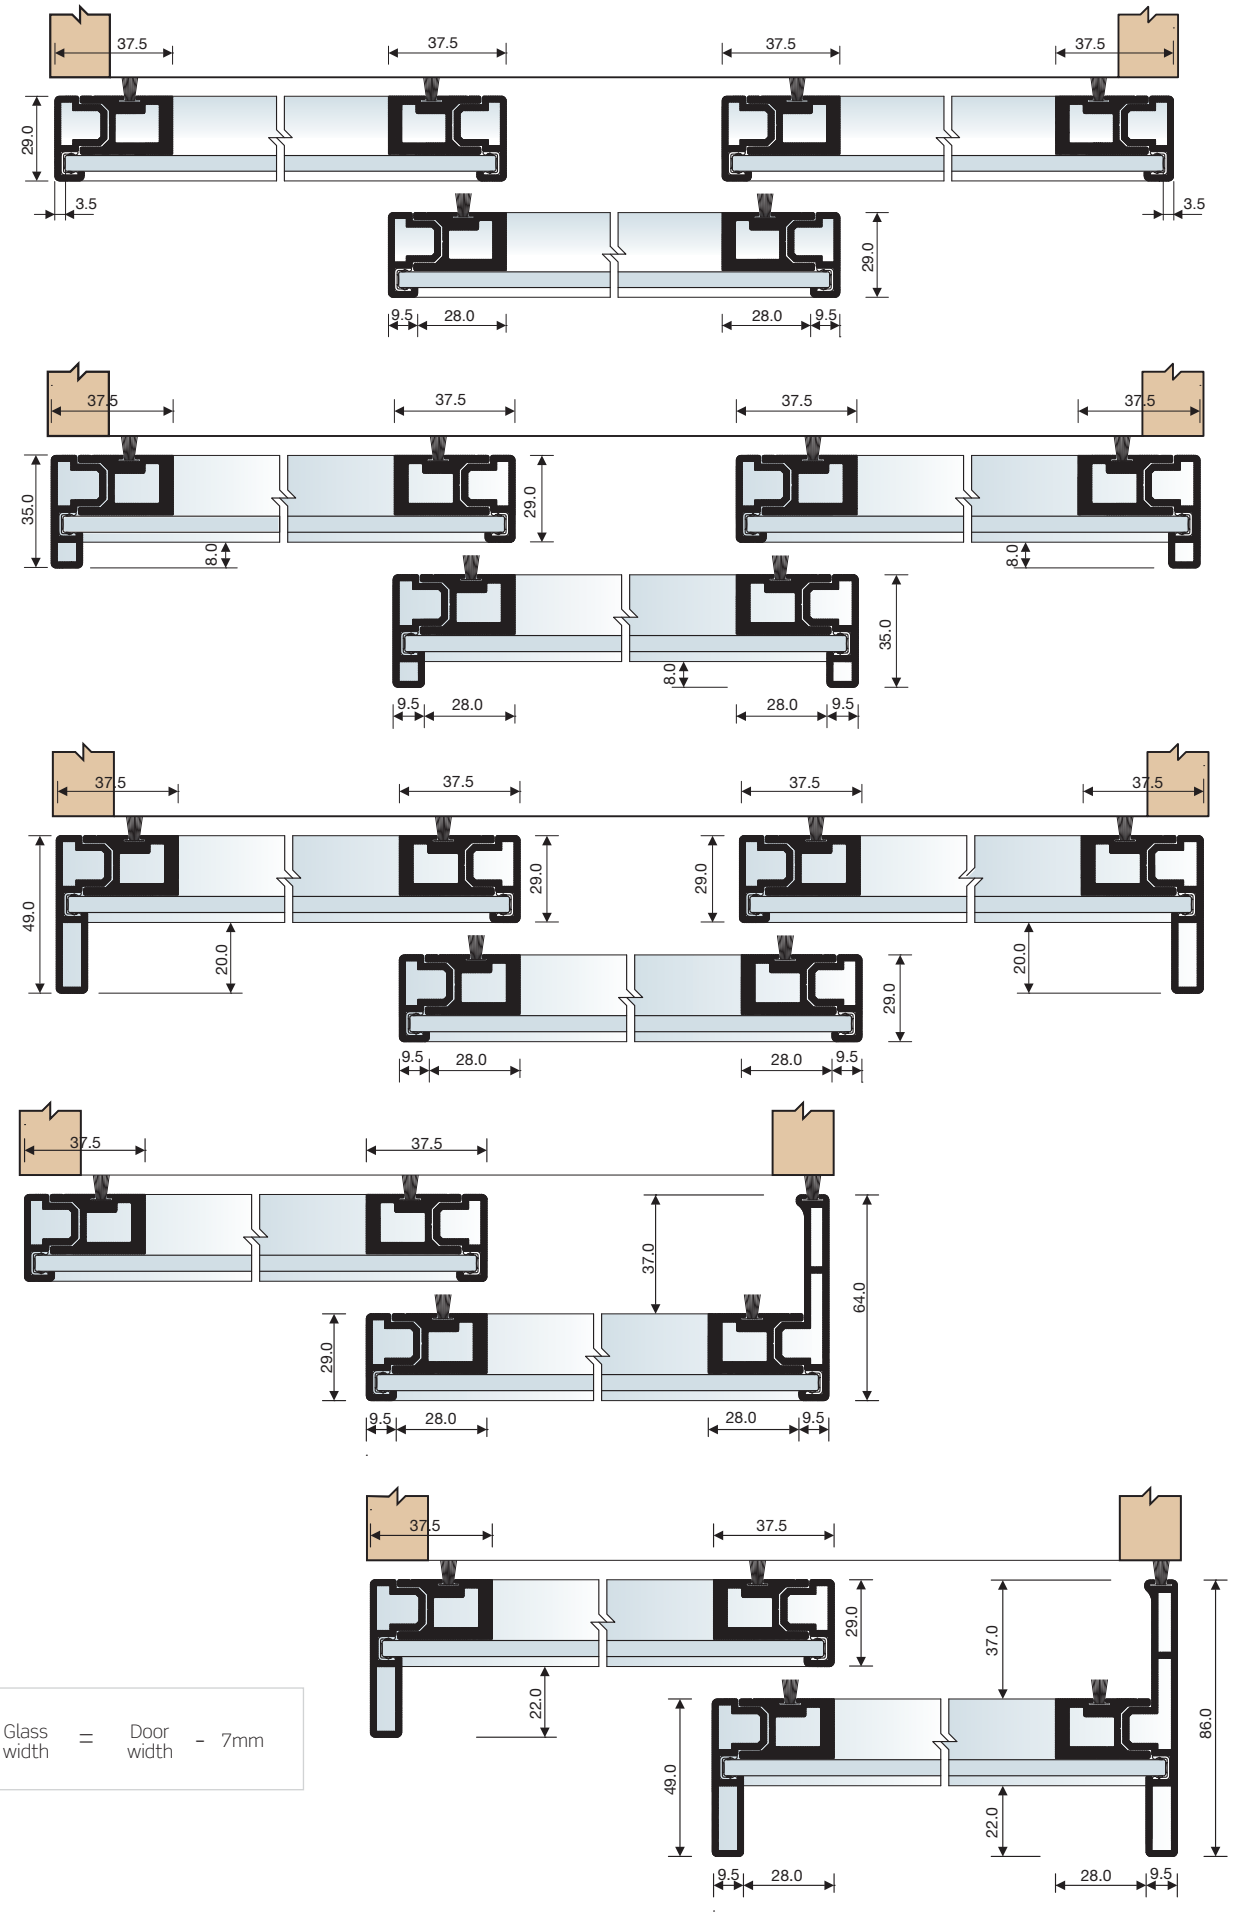

Glass width = Door width - 7mm

2 SCREEN FUSION

Machining for **MASTER LUX** and **MASTER MAS** sliding doors.

Number of cross-pieces	0	1	2	3	
Handle 30 mm.	717.500.501	717.501.503	717.502.505	717.503.500	
Handle 50 mm.	717.600.505	717.601.500	717.602.502	717.603.504	
Handle 30 & 50 mm.	717.700.502	717.701.504	717.702.506	717.703.501	1
Handle 30 & 66 mm.	717.800.506	717.801.501	717.802.503	717.803.505	
Handle 50 & 87 mm.	717.900.503	717.901.505	717.902.500	717.903.502	

Machined to order. Please specify door measurements when placing your order. For 4mm. glass or 12mm. chipboard maximum. Smooth aluminium. The cross-pieces are arranged so that the glass pieces are all equal. Please check for other arrangements.

Technical data: *Assembly*

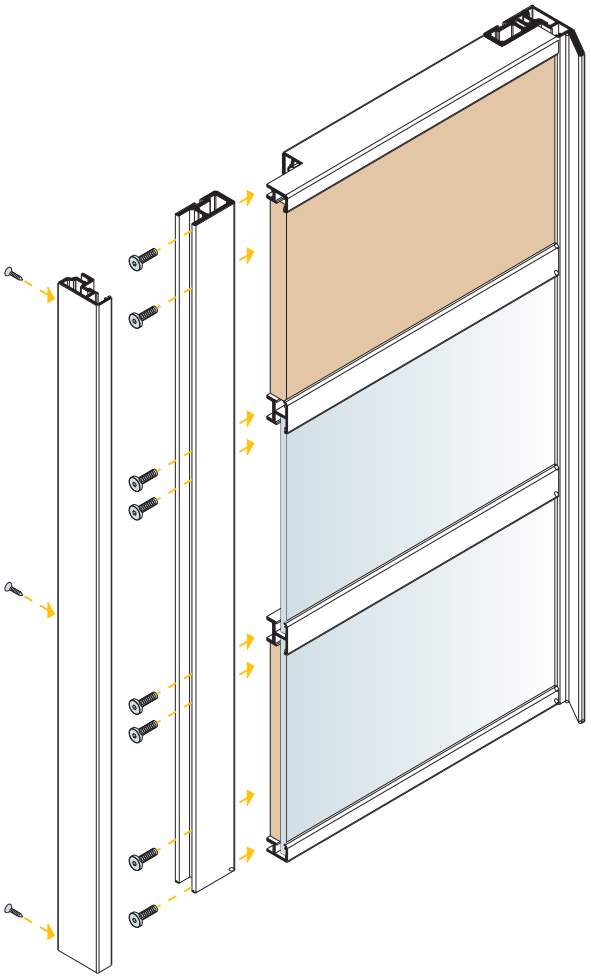

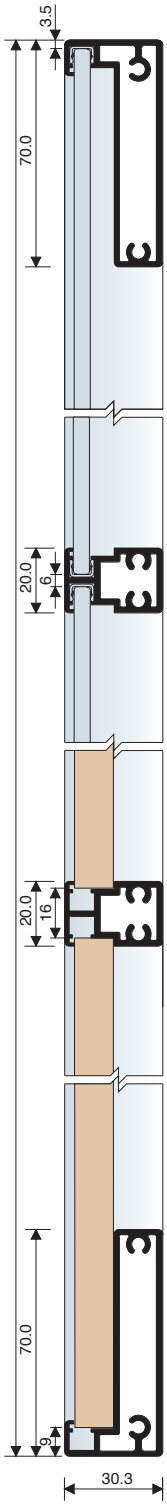

Technical data

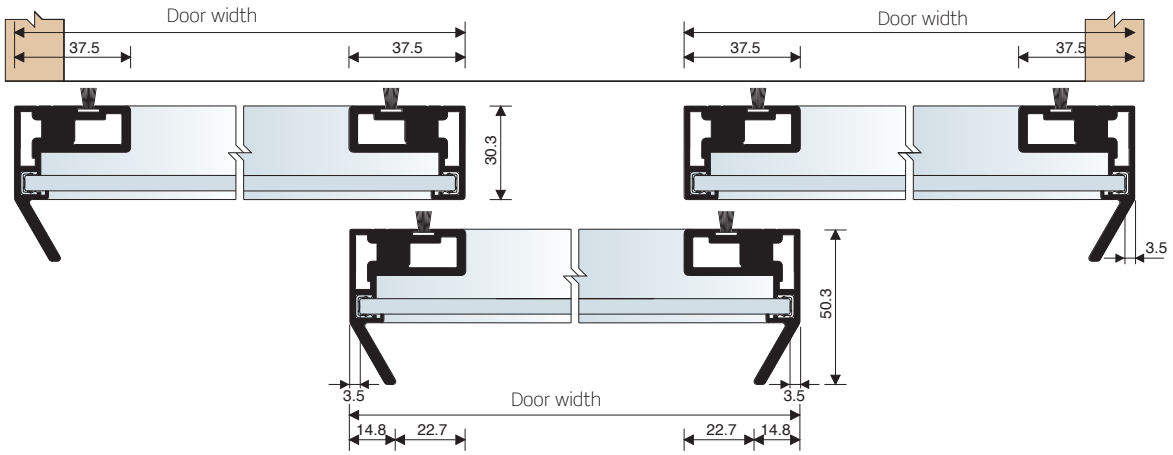

Glass width = Door width - 7mm

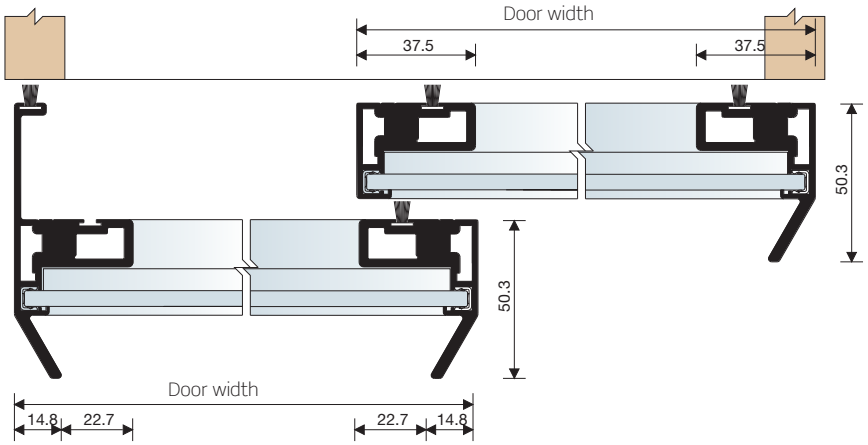

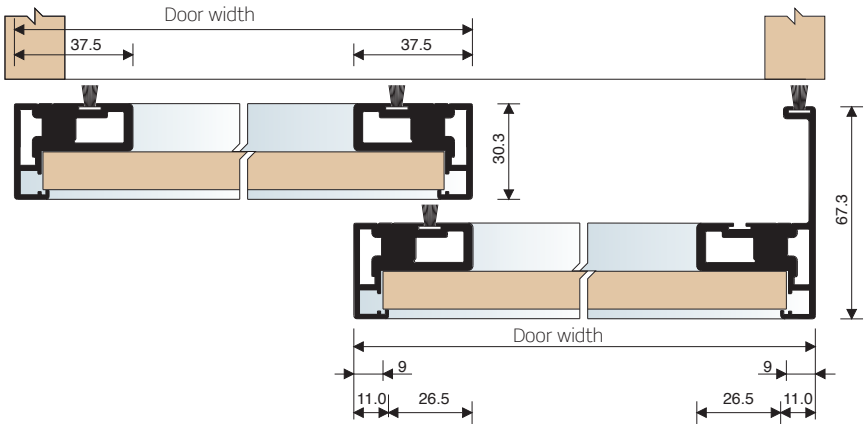

Glass width = Door width - 18mm

3 SCREEN CLICK

For 12mm chipboard maximum.

Upper/lower track profile.

	3m. bars	
Anodized silk	718.130.501	10
Anodized black	718.130.545	

Side track profile.

	3m. bars	
Anodized silk	718.030.504	10
Anodized black	718.030.541	

Intermediate cross-piece track profile.

	3m. bars	
Anodized silk	718.230.505	10
Anodized black	718.230.542	

Tongue-piece adaptor for glass.

	3m. bars	
Anodized silk	718.330.502	10
Anodized black	718.330.546	

Side cover.

	3m. bars	
Anodized silk	718.430.506	10
Anodized black	718.430.543	

Side cover for stop.

	3m. bars	
Anodized silk	718.530.503	10
Anodized black	718.530.540	

Stop.

	3m. bars	
Black	753.430.020	10

Gasket for glass.

Glass thickness	3m. bars	
4mm.	753.734.026	25
5mm.	753.735.021	

Screws DIN 7981 Ø4.2x32 joint assembly.

Zinc-coated	986.132.033	200

Screws DIN 965 m 4x15 door assembly.

Zinc-coated	726.015.032	500

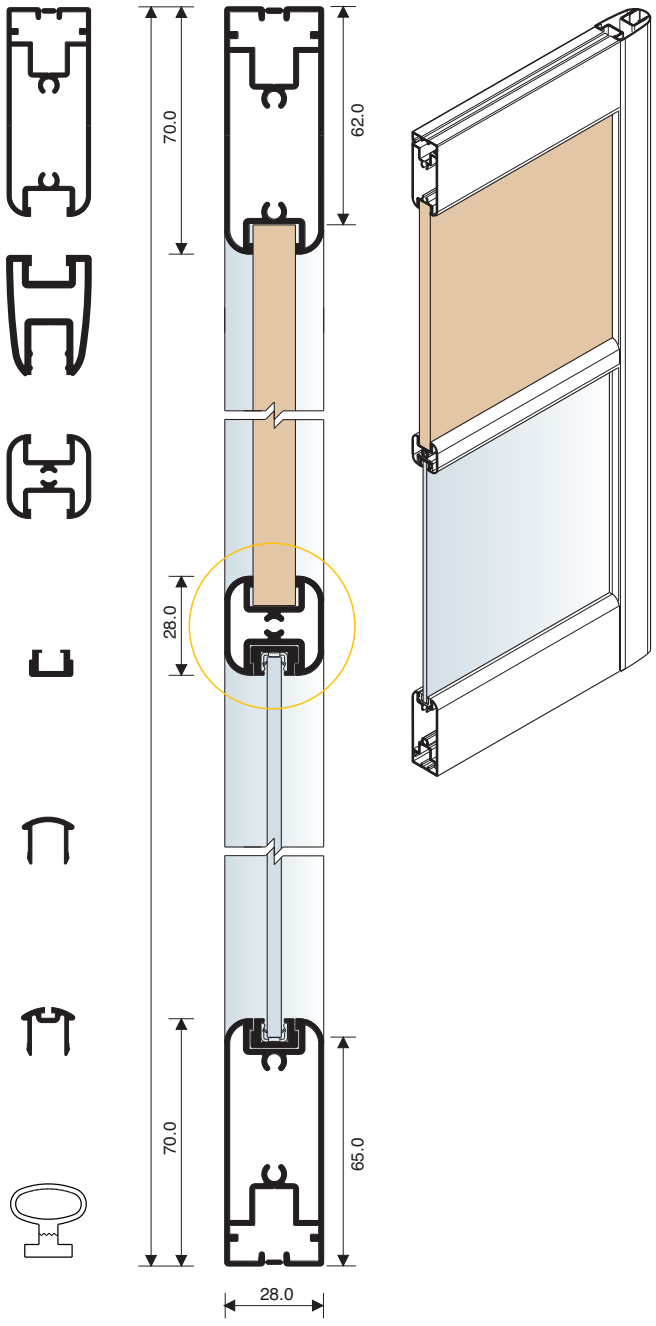

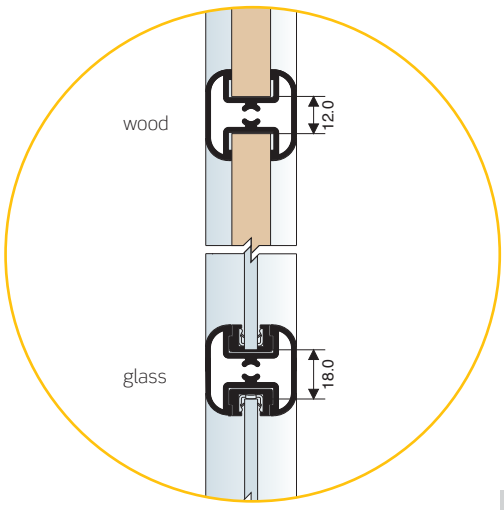

Technical data

Assembly

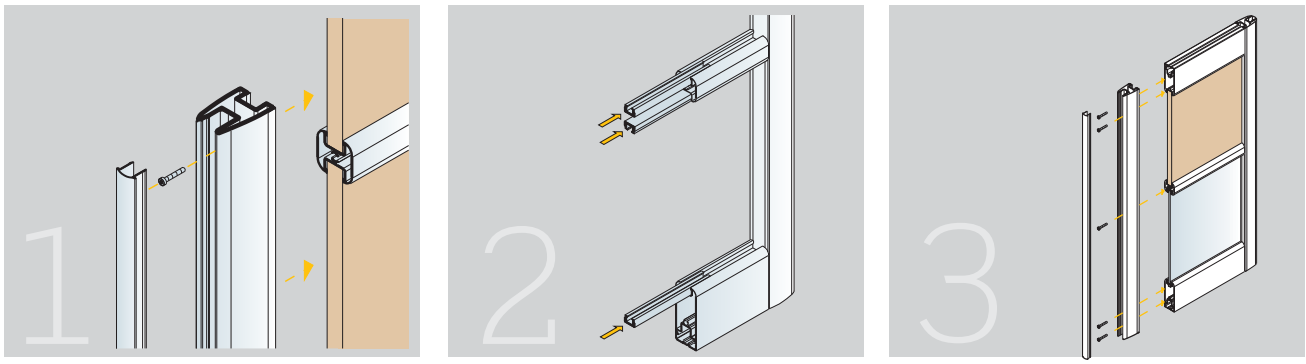

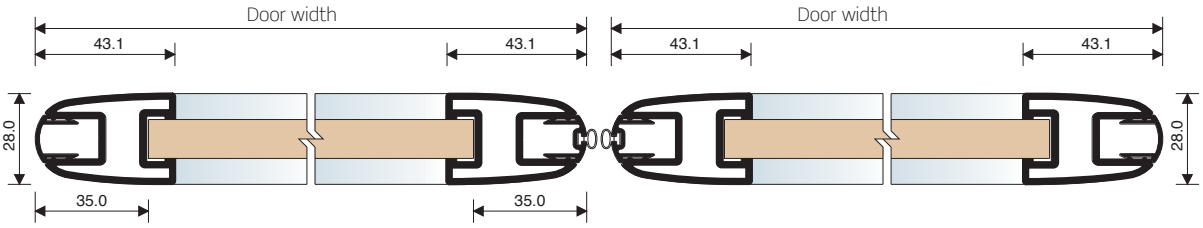

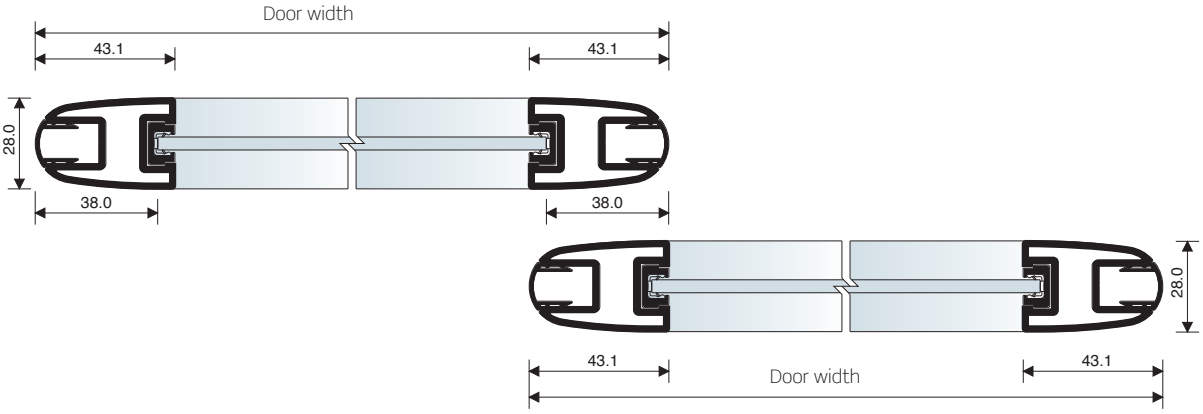

4 SCREEN EASY

Side track profile.

Silk	708.027.504	6

2.350 mm bars.

Side track profile with handle.

Silk	708.139.500	6

2.350 mm bars.

Upper/lower track profile.

Silk	707.530.504	6

3.000 mm bars.

Lower track profile for interior door.

Silk	707.630.501	6

3.000 mm bars.

Intermediate cross-piece track profile.

Silk	707.830.502	10

3.000 mm bars.

Gasket for glass.

Glass thickness		
4 mm.	753.734.026	25
5 mm.	753.735.021	

3.000 mm. bars.

Upper/lower track profile joint.

	750.200.021	50

Intermediate track profile joint.

	750.300.025	50

Drilling template.

	751.400.020	50

Screws Ø4.2x32 joint assembly.

Zinc-coated	986.132.033	200

Screws m 4x15 door assembly.

Zinc-coated	726.015.032	500

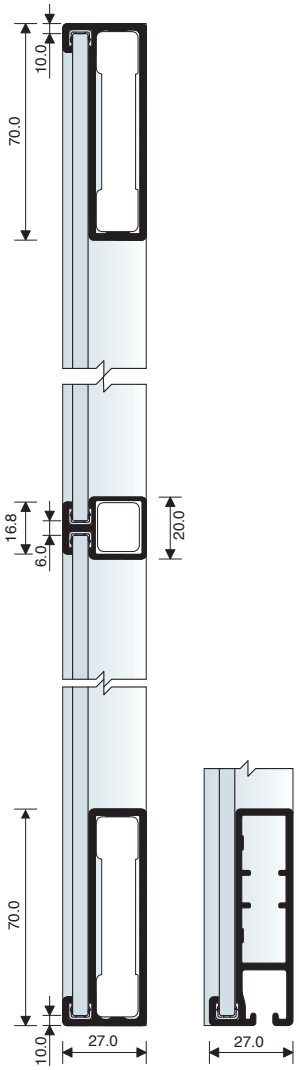

Technical data

Assembly

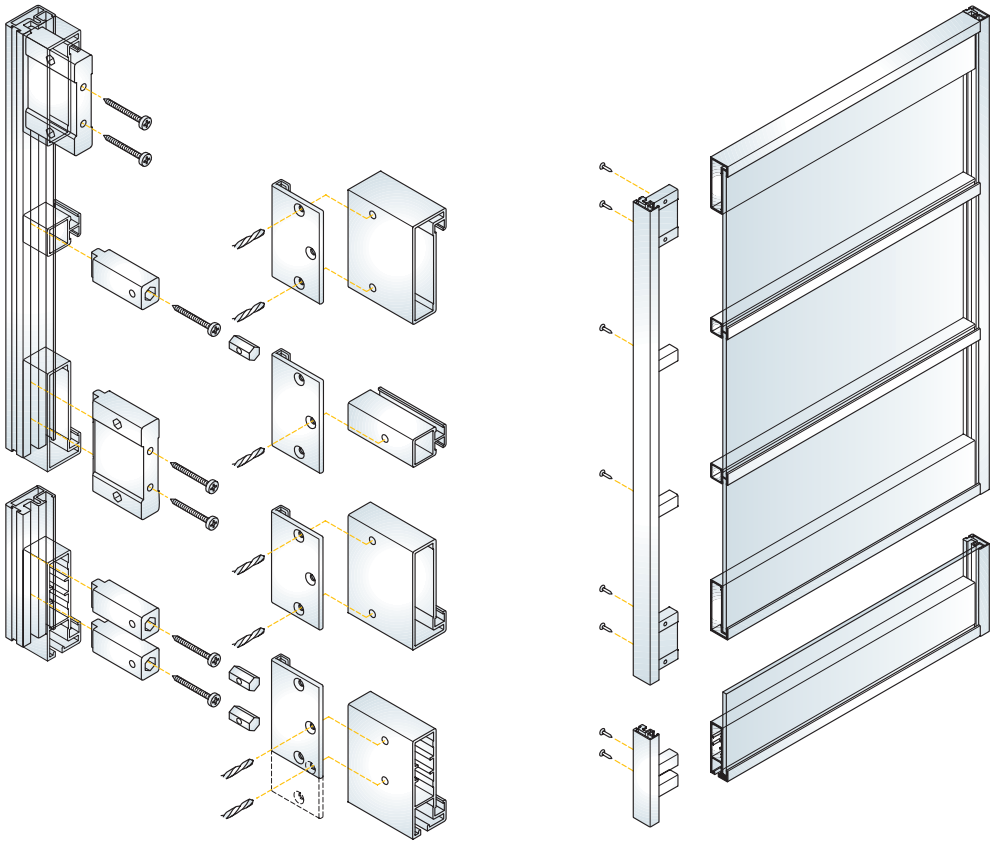

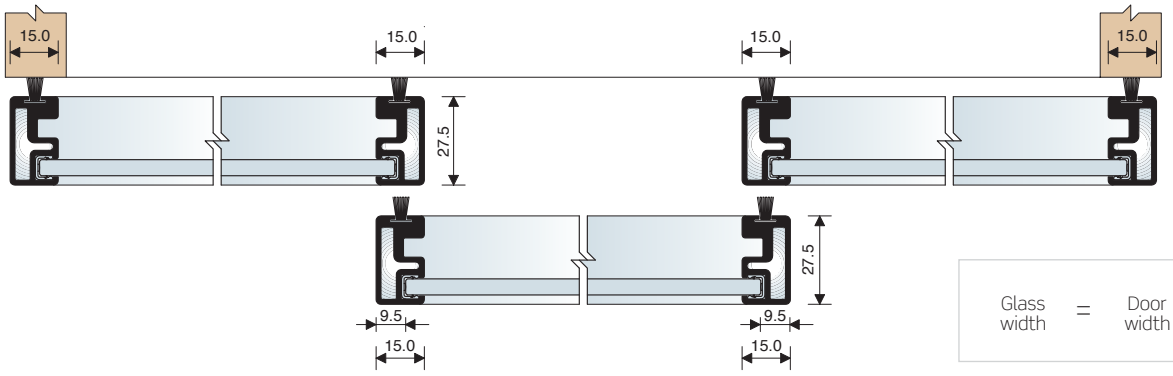

Glass width = Door width - 19mm

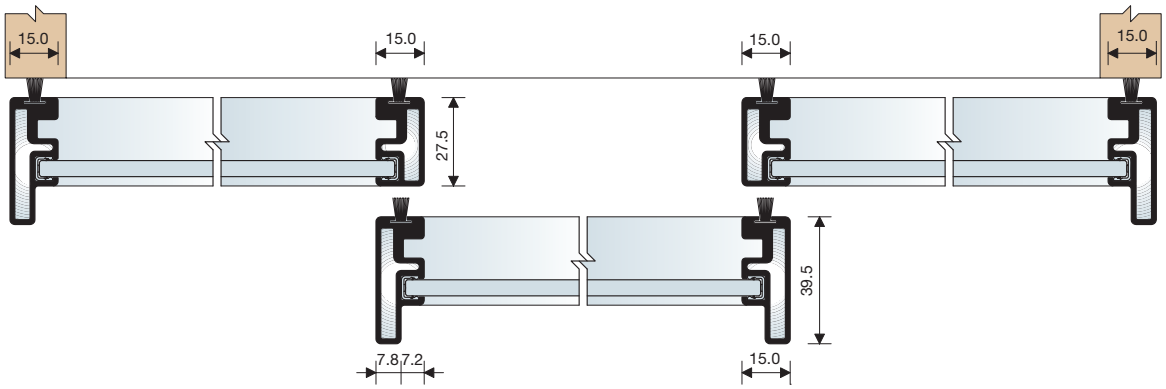

5 SCREEN 3

These profiles for aluminium doors are offered to be cut and mounted by the customer.

Handle 40.

Matt silver-anodized	719.552.514	10

5.200mm bars.

Handle 30.

Matt silver-anodized	719.452.510	10

5.200mm bars.

Upright.

Natural	718.952.080	10

5.200mm bars.

Jonquil.

	754.140.310	50

3.000mm strips.

Inferior-superior crosspiece.

Matt silver-anodized	718.760.512	4

6.000mm bars.

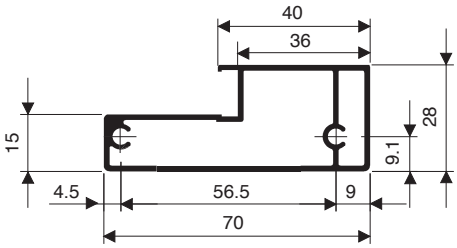

Japanese door crosspiece.

Matt silver-anodized	718.860.516	8

6.000mm bars.



Handle assembly

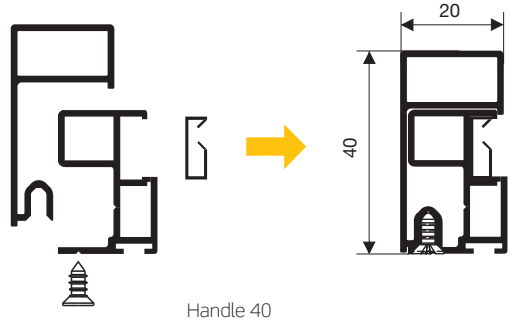

Handle 40

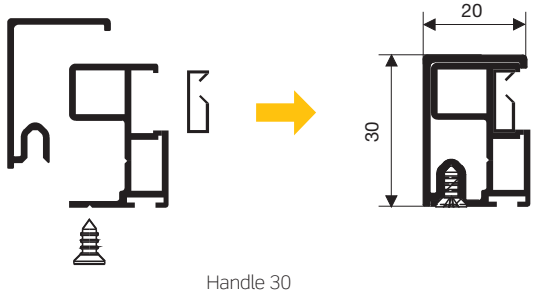

Handle 30

Assembly

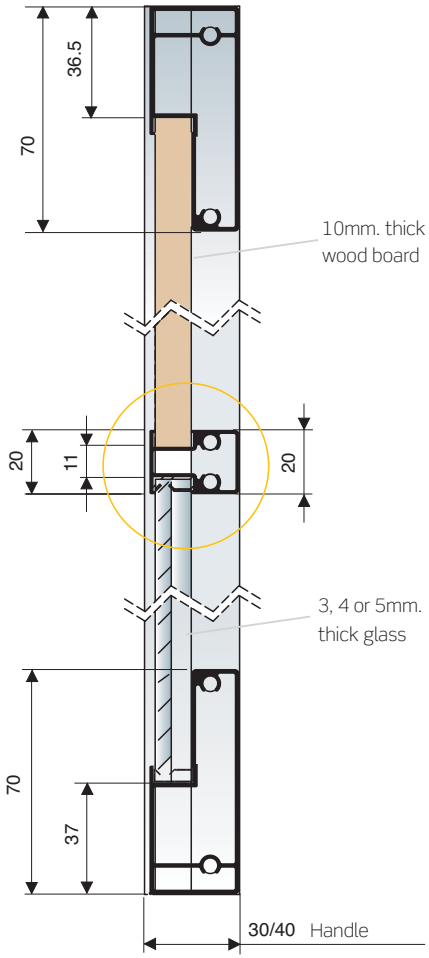



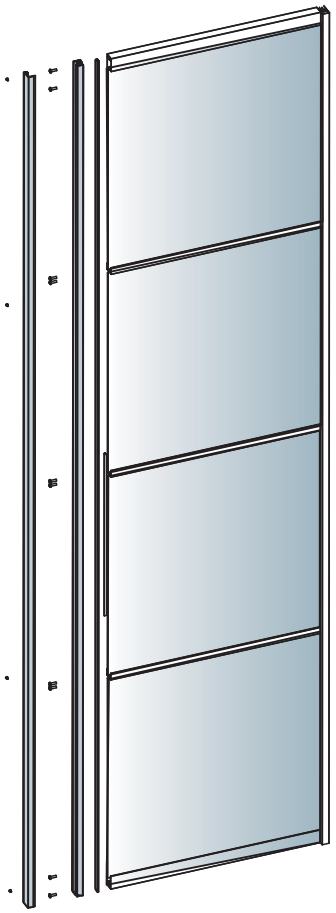

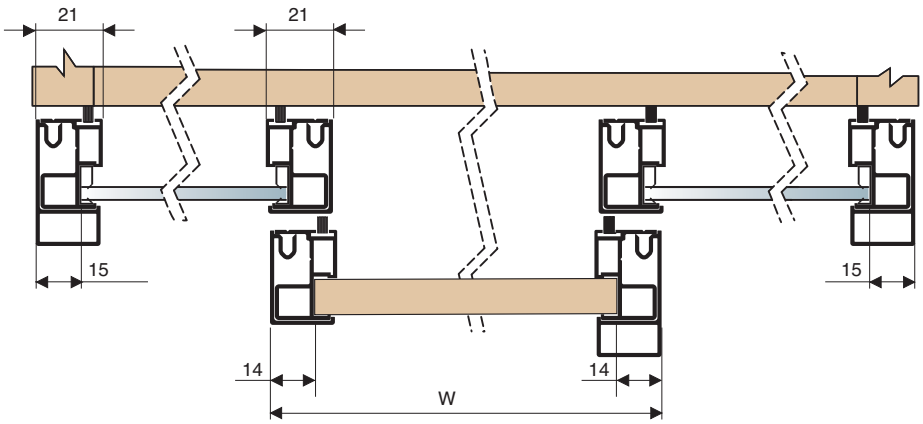

Glass width	=	Door width	-	28mm

Glass width	=	Door width	-	30mm

6 SCREEN 4

SCREEN-4 aluminium door system is now available. The easy clip-on handle assembly is its main feature as no machining is required. These profiles for aluminium doors are offered to be cut and mounted by the customer.

Handle 30.

Matt silver-anodized	706.452.515	10

5.200mm bars.

Handle 40.

Matt silver-anodized	706.552.512	10

5.200mm bars.

Upright.

Natural	712.352.502	10

5.200mm bars.

Jonquil.

	754.140.310	50

3.000mm strips.

Inferior-superior crosspiece.

Matt silver-anodized	718.760.512	4

6.000mm bars.

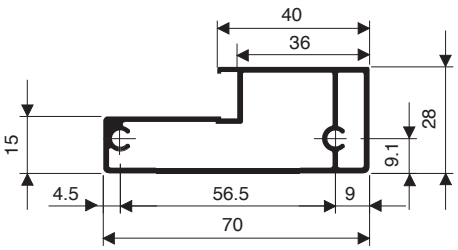

Japanese door crosspiece.

Matt silver-anodized	718.860.516	8

6.000mm bars.



Handle assembly

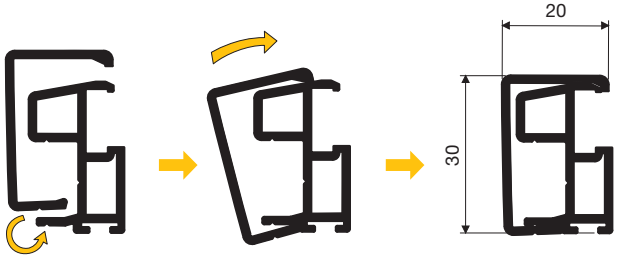

Handle 30

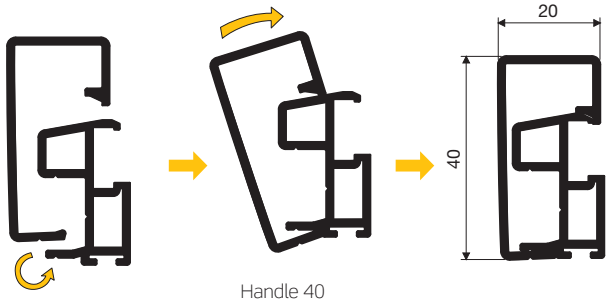

Handle 40

Assembly

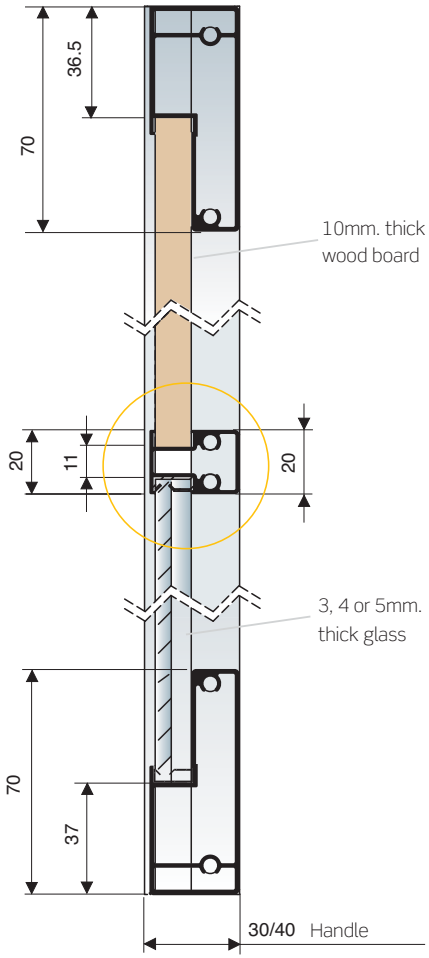



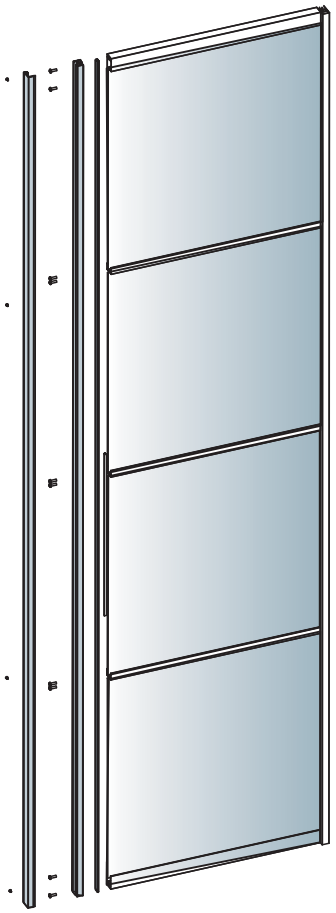

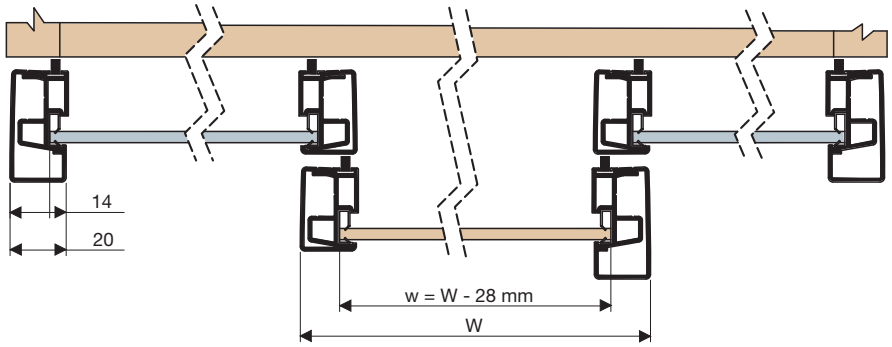

Glass width	=	Door width	-	28mm

Glass width	=	Door width	-	30mm

GLASS CABINET DOORS

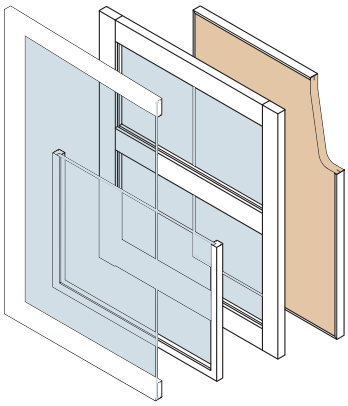

pp.

1 MACHINED GLASS CABINETS AND UNMACHINED PROFILES 724

- 20x20 1mm radius
  - *Machined glass cabinets* 724
  - *Profile to be machined* 725
- 20x20 6mm radius
  - *Machined glass cabinets* 726
  - *Profile to be machined* 727
- 20x20 1mm radius, 7.5mm visible
  - *Machined glass cabinets* 728
  - *Profile to be machined* 729
- 35x20 1mm radius, 7.5mm visible
  - *Machined glass cabinets* 730
  - *Profile to be machined* 731
- 45x20 1mm radius, 7.5mm visible
  - *Machined glass cabinets* 732
  - *Profile to be machined* 733
- 45x20 1.2 visible
  - *Machined glass cabinets* 734
  - *Profile to be machined* 735
- 45x20x20 visible
  - *Machined glass cabinets* 736
  - *Profile to be machined* 737
- 50x20x7.5 visible
  - *Machined glass cabinets* 738
  - *Profile to be machined* 739

2 UNMACHINED: **SCREEN KIT** 740

1 MACHINED GLASS CABINETS

20x20 1mm radius



Glass measurement = Total window measurement – 30mm

› Standard kitchen

Glass cabinet 20x20 1mm radius.

Module	Dim. Glass 4mm.	Anod. Silver matt	Anod. Stainless steel	
70x30 (698x298)	671x271	143.130.514	143.130.562	
70x35 (698x348)	671x321	143.135.510	143.135.565	
70x40 (698x398)	671x371	143.140.513	143.140.561	
70x45 (698x448)	671x421	143.145.516	143.145.564	
70x50 (698x498)	671x471	143.150.512	143.150.560	
70x60 (698x598)	671x571	143.160.511	143.160.566	
90x30 (898x298)	871x271	143.330.515	143.330.563	1
90x35 (898x348)	871x321	143.335.511	143.335.566	
90x40 (898x398)	871x371	143.340.514	143.340.562	
90x45 (898x448)	871x421	143.345.510	143.345.565	
90x50 (898x498)	871x471	143.350.513	143.350.561	
90x60 (898x598)	871x571	143.360.512	143.360.560	

Supplied machined and dismantled, with the joining fittings and the gaskets for 4mm glass. In boxes of 1 door.

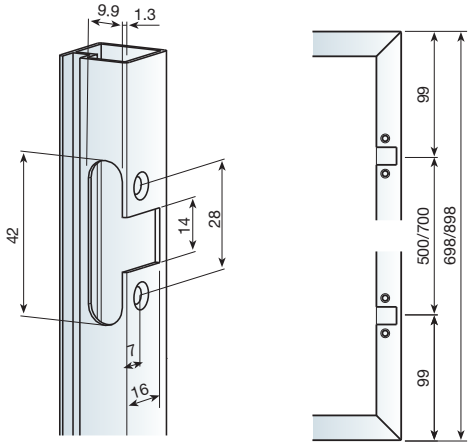

Machining and location of hinges

› Made to measure

Glass cabinet 20x20 R1 to measure.

Profile	Hinges	Anod. Silver mat	Anod. Stainless steel	
20x20R1	0	143.100.510	143.100.565	
20x20R1	2	143.102.514	143.102.562	1
20x20R1	3	143.103.516	143.103.564	
20x20R1	4	143.104.511	143.104.566	

Note
The position of the hinges is calculated from the inside of the cabinet (machining side). This should be taken into account in the case of asymmetric doors. Machining for 2 hinges.

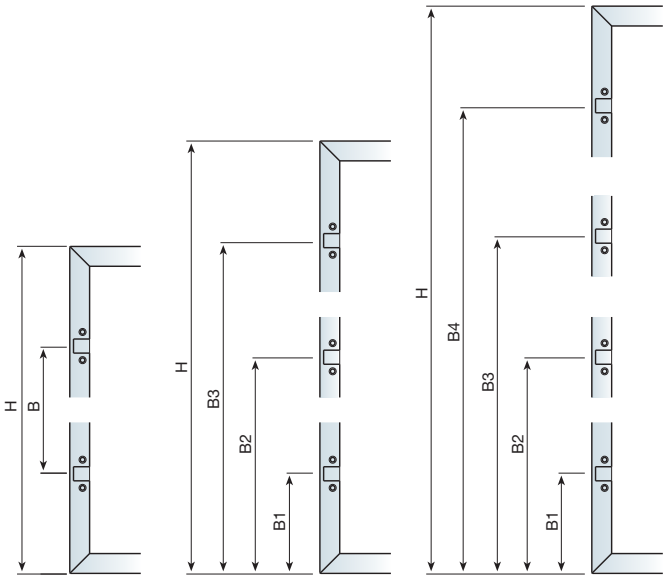

Machining for 2 hinges

Machining for 3 hinges

Machining for 4 hinges

› According to client's specifications

Glass cabinet 20x20 R1 according to client's specifications.

Profile	Anod. Silver mat	Anod. Stainless steel	
20x20R1	143.199.512	143.199.560	1

1 PROFILE TO BE MACHINED

20x20 1mm radius



› Profile to be machined

Profile to be machined 20x20 R1.

	Anod. Silver matt	Anod. Stainless steel	
	149.060.516	149.060.564	10

6m. bars.

Tongue-piece for 4mm glass.

Transparent	753.604.316	50

3m. bars supplied in boxes of 50 units. For 4mm glass.

Joining fittings.



Zinc-coated	154.700.033	100

Bags of 4 brackets and 8 screws. For 100 doors.

MESUCO 143 rapid hinge for aluminium frame.



110° Opening		
Full overlay	306.000.063	
Half overlay	306.100.060	50
Full inset	306.200.064	

For 25 doors

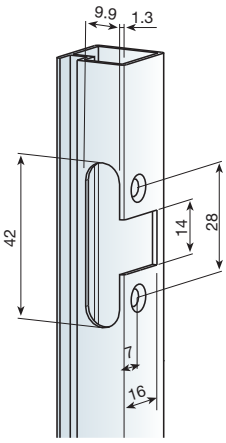

0mm crank hinge
Base plate height=C=18+A-E

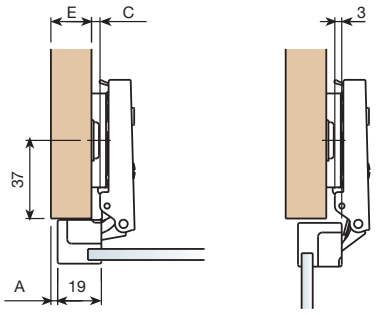

Half crank hinge
Base plate height=C=8+A-E

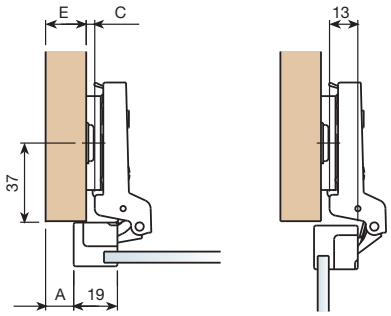

Full crank hinge
Base plate height=C=1+D

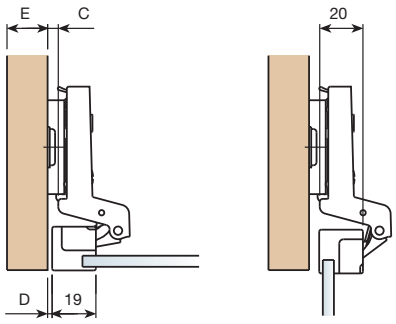

SYSTEM 32 screw-fix mounting plate.

Chock		
2	083.243.134	200
4	083.243.230	

Supplied in bags of 500 units. Each bag covers 25 doors.

1 MACHINED GLASS CABINETS

20x20 6mm radius



Glass measurement = Total window measurement – 30mm

› Standard kitchen

Glass cabinet 20x20 6mm radius.

Module	Dim. Glass 4mm.	Anod. Silver matt	Anod. Stainless steel	
70x30 (698x298)	671x271	143.630.513	143.630.561	
70x35 (698x348)	671x321	143.635.516	143.635.564	
70x40 (698x398)	671x371	143.640.512	143.640.560	
70x45 (698x448)	671x421	143.645.515	143.645.563	
70x50 (698x498)	671x471	143.650.511	143.650.566	
70x60 (698x598)	671x571	143.660.510	143.660.565	
90x30 (898x298)	871x271	143.830.514	143.830.562	1
90x35 (898x348)	871x321	143.835.510	143.835.565	
90x40 (898x398)	871x371	143.840.513	143.840.561	
90x45 (898x448)	871x421	143.845.516	143.845.564	
90x50 (898x498)	871x471	143.850.512	143.850.560	
90x60 (898x598)	871x571	143.860.511	143.860.566	

Supplied machined and dismantled, with the joining fittings and the gaskets for 4mm glass. In boxes of 1 door.

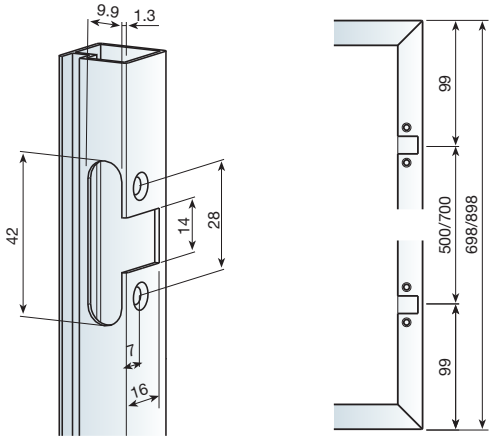

Machining and position of hinges

› Made to measure

Glass cabinet 20x20 R6 to measure.

20x20R6	0	143.600.516	143.600.564	
20x20R6	2	143.602.513	143.602.561	1
20x20R6	3	143.603.515	143.603.563	
20x20R6	4	143.604.510	143.604.565	

Note
The position of the hinges is calculated from the inside of the cabinet (machining side). This should be taken into account in the case of asymmetric doors.



Machining for 2 Hinges

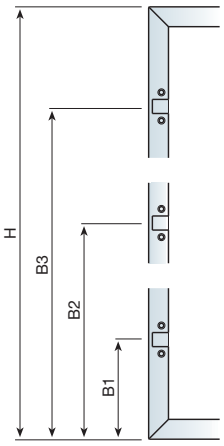

Machining for 3 Hinges

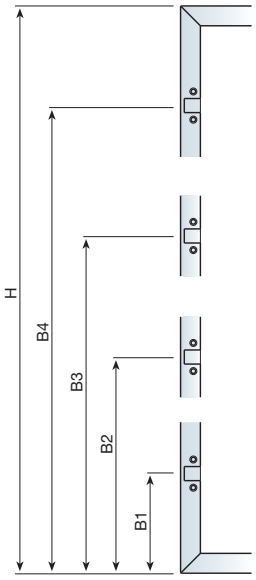

Machining for 4 Hinges

› According to client's specifications

Glass cabinet 20x20 R6 according to client's specifications.

Profile	Anod. Silver matt	Anod. Stainless steel	
20x20R6	143.699.511	143.699.566	1

1 PROFILE TO BE MACHINED

20x20 6mm radius



› Profile to be machined

Profile to be machined 20x20 R6.

Anod. Silver matt	Anod. Stainless steel	
149.160.513	149.160.561	10

6m. bars. supplied in boxes of 10 units.

Tongue-piece for 4mm glass.

Transparent	753.604.316	50

3m. bars. supplied in boxes of 50 units. For 4mm glass.

Joining fittings.



Zinc-coated	154.700.033	100

Bags of 4 brackets and 8 screws. Supplied in boxes of 100 units
For 100 doors.

MESUCO 143 rapid hinge for aluminium frame.



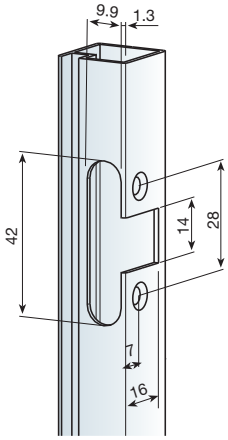

110° Opening	
Full overlay	306.000.063
Half overlay	306.100.060
Full inset	306.200.064

50

For 25 doors.

0mm crank hinge
Base plate height=C=18+A-E

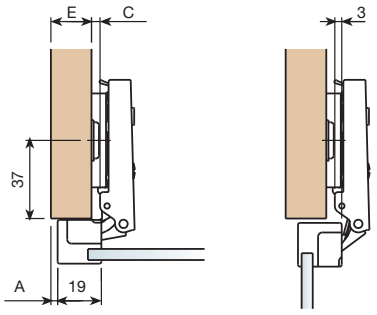

Half crank hinge
Base plate height=C=8+A-E

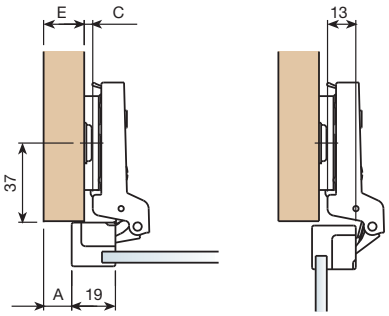

Full crank hinge
Base plate height=C=1+D

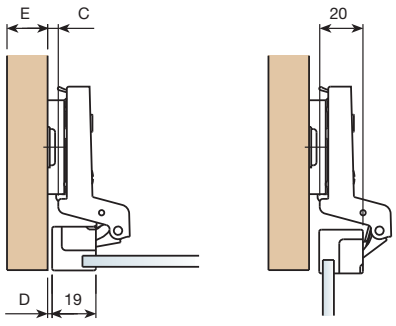

SYSTEM 32 screw-fix mounting plate.





Chock		
2	083.243.134	200
4	083.243.230	

Supplied in bags of 50 units. Each bag covers 25 doors.

1 MACHINED GLASS CABINETS

20x20 1mm radius, 7.5mm visible



Glass measurement = Total window measurement − 4mm

› Standard kitchen

Glass cabinet 20x20x7.5mm displayed.

Module	Dim. Glass 4mm.	Anod. Silver matt	Anod. Stainless steel
70x30 (698x298)	694x294	144.130.512	144.130.560
70x35 (698x348)	694x344	144.135.515	144.135.563
70x40 (698x398)	694x394	144.140.511	144.140.566
70x45 (698x448)	694x444	144.145.514	144.145.562
70x50 (698x498)	694x494	144.150.510	144.150.565
70x60 (698x598)	694x594	144.160.516	144.160.564
90x30 (898x298)	894x294	144.330.513	144.330.561
90x35 (898x348)	894x344	144.335.516	144.335.564
90x40 (898x398)	894x394	144.340.512	144.340.560
90x45 (898x448)	894x444	144.345.515	144.345.563
90x50 (898x498)	894x494	144.350.511	144.350.566
90x60 (898x598)	894x594	144.360.510	144.360.565

1

Supplied machined and dismantled, with the joining fittings and the gaskets for 4mm glass. In boxes of 1 door.

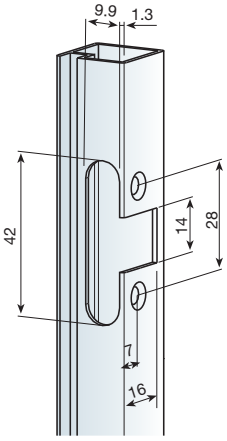

Machining and position of hinges

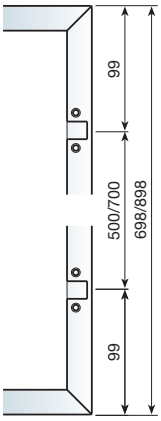

Assembly of doors with cross-pieces

Glass cabinet with one 20x20x7.5mm. Cross-piece.

Module	Dim. Glass 4mm.	Anod. Silver matt	Anod. Stainless steel
70x30 (698x298)	344x294	144.630.511	144.630.566
70x35 (698x348)	344x344	144.635.514	144.635.562
70x40 (698x398)	344x394	144.640.510	144.640.565
70x45 (698x448)	344x444	144.645.513	144.645.561
70x50 (698x498)	344x494	144.650.516	144.650.564
70x60 (698x598)	344x594	144.660.515	144.660.563
90x30 (898x298)	444x294	144.830.512	144.830.560
90x35 (898x348)	444x344	144.835.515	144.835.563
90x40 (898x398)	444x394	144.840.511	144.840.566
90x45 (898x448)	444x444	144.845.514	144.845.562
90x50 (898x498)	444x494	144.850.510	144.850.565
90x60 (898x598)	444x594	144.860.516	144.860.564

Glass cabinet with two 20x20x7.5mm cross-pieces.

Dim. Glass 4mm.	Anod. Silver matt	Anod. Stainless steel
228x294	145.130.510	145.130.565
228x344	145.135.513	145.135.561
228x394	145.140.516	145.140.564
228x444	145.145.512	145.145.560
228x494	145.150.515	145.150.563
228x594	145.160.514	145.160.562
294x294	145.330.511	145.330.566
294x344	145.335.514	145.335.562
294x394	145.340.510	145.340.565
294x444	145.345.513	145.345.561
294x494	145.350.516	145.350.564
294x594	145.360.515	145.360.563

1

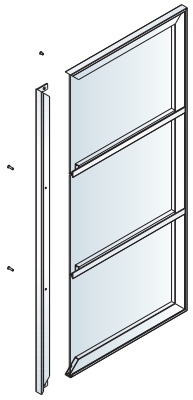

Supplied machined and dismantled, with the joining fittings and the gaskets for 4mm glass. In boxes of 1 door

› Made to measure

Glass cabinet 20x20x7.5mm. To measure.

Profile	Hinges	Anod. Silver matt	Anod. Stainless steel	Silver gloss
20x20x7.5	0	144.100.515	144.100.563	144.100.106
20x20x7.5	2	144.102.512	144.102.560	144.102.103
20x20x7.5	3	144.103.514	144.103.562	144.103.105
20x20x7.5	4	144.104.516	144.104.564	144.104.100

1

Note
The position of the hinges is calculated from the inside of the cabinet (machining side). This should be taken into account in the case of asymmetric doors.



Machining for 2 Hinges

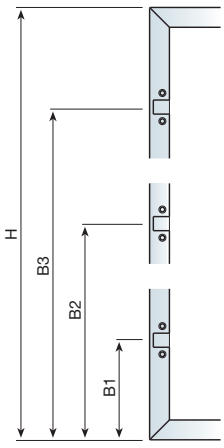

Machining for 3 Hinges

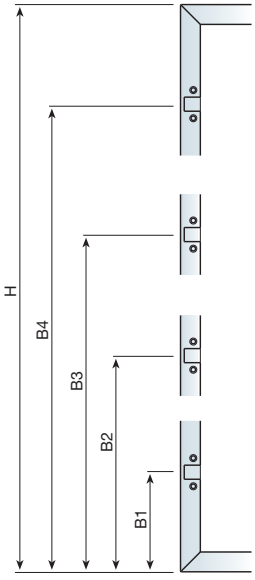

Machining for 4 Hinges

› According to client's specifications

Glass cabinet 20x20x7.5mm. According to client's specifications.

Profile	Anod. Silver matt	Anod. Stainless steel	Silver gloss
20x20x7.5	144.199.510	144.199.565	144.199.101

1

1 PROFILE TO BE MACHINED

20x20 1mm radius, 7.5 visible



› Profile to be machined

Profile to be machined 20x20x7.5mm.

Anod. Silver matt	Anod. Stainless steel	Silver gloss	
149.260.510	149.260.565	149.260.101	10

6m. bars. Supplied in boxes of 10 units.

Gasket for 4mm. Glass.

Transparent	753.604.316	50

3m. bars. Supplied in boxes of 50 units. For 4mm glass.

Joining fittings.

Zinc-coated	154.700.033	100



Bags of 4 brackets and 8 screws. Supplied in boxes of 100 units. For 100 doors.

MESUCO 143 rapid hinge for aluminium frame.

110° Opening		
Full overlay	306.000.063	50
Half overlay	306.100.060	
Full inset	306.200.064	

For 25 doors.



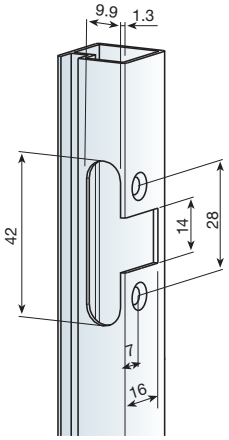

0mm crank hinge
Base plate height=C=18+A-E

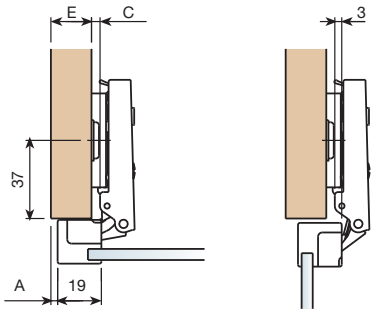

Half crank hinge
Base plate height=C=8+A-E

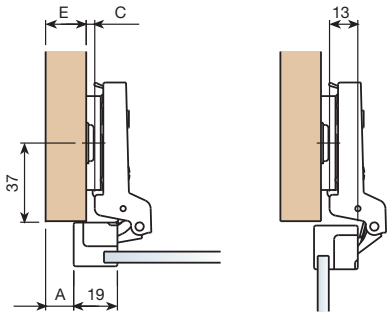

Full crank hinge
Base plate height=C=1+D

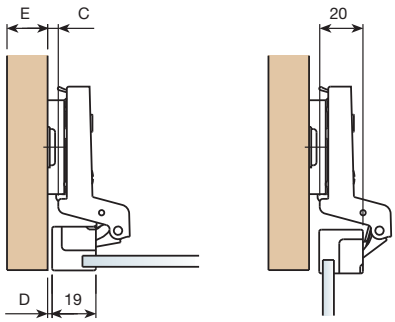

SYSTEM 32 screw-fix mounting plate.

Chock		
2	083.243.134	200
4	083.243.230	

Supplied in bags of 50 units. Each bag covers 2 doors.





1 MACHINED GLASS CABINETS

35x20 1mm radius, 7.5mm visible



Glass measurement = Total window measurement − 4mm

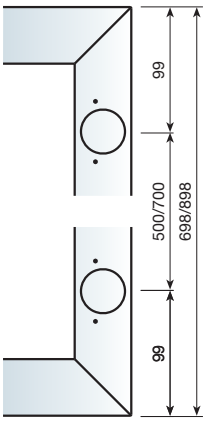

Assembly of doors with cross-pieces



Machining and position of hinges

› Standard kitchen

Glass cabinet 35x20x7.5mm. displayed.

Module	Dim. Glass 4mm	Anod. Silver matt	Anod. Stainless steel
70x30 (698x298)	694x294	145.630.516	145.630.564
70x35 (698x348)	694x344	145.635.512	145.635.560
70x40 (698x398)	694x394	145.640.515	145.640.563
70x45 (698x448)	694x444	145.645.511	145.645.566
70x50 (698x498)	694x494	145.650.514	145.650.562
70x60 (698x598)	694x594	145.660.513	145.660.561
90x30 (898x298)	894x294	145.830.510	145.830.565
90x35 (898x348)	894x344	145.835.513	145.835.561
90x40 (898x398)	894x394	145.840.516	145.840.564
90x45 (898x448)	894x444	145.845.512	145.845.560
90x50 (898x498)	894x494	145.850.515	145.850.563
90x60 (898x598)	894x594	145.860.514	145.860.562

1

Supplied machined and dismantled with joining fittings and gaskets for 4 mm glass. In boxes of 1 door.

Glass cabinet with one 35x20x7.5mm cross-piece.

Module	Dim. Glass 4mm	Anod. Silver matt	Anod. Stainless steel
70x30 (698x298)	344x294	146.130.515	146.130.563
70x35 (698x348)	344x344	146.135.511	146.135.566
70x40 (698x398)	344x394	146.140.514	146.140.562
70x45 (698x448)	344x444	146.145.510	146.145.565
70x50 (698x498)	344x494	146.150.513	146.150.561
70x60 (698x598)	344x594	146.160.512	146.160.560
90x30 (898x298)	444x294	146.330.516	146.330.564
90x35 (898x348)	444x344	146.335.512	146.335.560
90x40 (898x398)	444x394	146.340.515	146.340.563
90x45 (898x448)	444x444	146.345.511	146.345.566
90x50 (898x498)	444x494	146.350.514	146.350.562
90x60 (898x598)	444x594	146.360.513	146.360.561

Glass cabinet with two 35x20x7.5mm cross-pieces.

Dim. Glass 4mm	Anod. Silver matt	Anod. Stainless steel
228x294	146.630.514	146.630.562
228x344	146.635.510	146.635.565
228x394	146.640.513	146.640.561
228x444	146.645.516	146.645.564
228x494	146.650.512	146.650.560
228x594	146.660.511	146.660.566
294x294	146.830.515	146.830.563
294x344	146.835.511	146.835.566
294x394	146.840.514	146.840.562
294x444	146.845.510	146.845.565
294x494	146.850.513	146.850.561
294x594	146.860.512	146.860.560

1

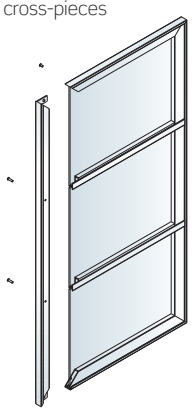

Supplied machined and dismantled with joining fittings and gaskets for 4 mm glass. In boxes of 1 door.

› Made to measure

Glass cabinet 35x20x7.5mm. To measure.

Profile	Hinges	Anod. Silver matt	Anod. Stainless steel
35x20x7.5	0	145.600.512	145.600.560
35x20x7.5	2	145.602.516	145.602.564
35x20x7.5	3	145.603.511	145.603.566
35x20x7.5	4	145.604.513	145.604.561

1

Note
The position of the hinges is calculated from the inside of the cabinet (machining side). This should be taken into account in the case of asymmetric doors.





Machining for 2 Hinges

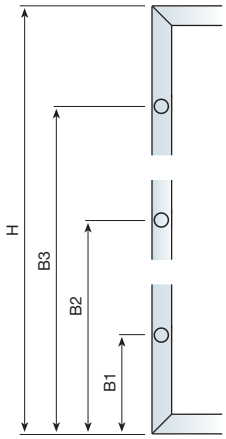

Machining for 3 Hinges

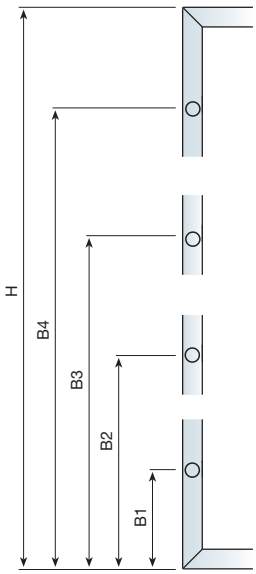

Machining for 4 Hinges

› According to client's specifications

Glass cabinet 35x20x7.5mm. According to client's specifications.

Profile	Anod. Silver matt	Anod. Stainless steel
30x20x7.5	145.699.514	145.699.562

1

1 PROFILE TO BE MACHINED



35x20 1mm radius, 7.5mm visible

› Profile to be machined

Profile to be machined 30x20x7.5mm.

	Anod. Silver matt	Anod. Stainless steel	
	149.360.514	149.360.562	10

6m. bars. Supplied in boxes of 10 units.

Gasket for 4mm glass.

Transparent	753.604.316	50

3m. bars. Supplied in boxes of 50 units. For 4mm glass.

Joining fittings.



Zinc-coated	154.700.033	100

Bags of 4 brackets and 8 screws. Supplied in boxes of 100 units. For 100 doors.

1 MACHINED GLASS CABINETS



Glass measurement = Total window measurement − 4mm

45x20 1mm radius, 7.5mm visible

› Standard kitchen

Glass cabinet 45x20x7.5mm. displayed.

Module	Dim. Glass 4mm.	Anod. Silver matt	Anod. Stainless steel	
70x30 (698x298)	694x294	147.630.512	147.630.560	
70x35 (698x348)	694x344	147.635.515	147.635.563	
70x40 (698x398)	694x394	147.640.511	147.640.566	
70x45 (698x448)	694x444	147.645.514	147.645.562	
70x50 (698x498)	694x494	147.650.510	147.650.565	
70x60 (698x598)	694x594	147.660.516	147.660.564	
90x30 (898x298)	894x294	147.830.513	147.830.561	1
90x35 (898x348)	894x344	147.835.516	147.835.564	
90x40 (898x398)	894x394	147.840.512	147.840.560	
90x45 (898x448)	894x444	147.845.515	147.845.563	
90x50 (898x498)	894x494	147.850.511	147.850.566	
90x60 (898x598)	894x594	147.860.510	147.860.565	

Supplied machined and dismantled with joining fittings and gaskets for 4 mm glass. In boxes of 1 door.



Machining and position of hinges

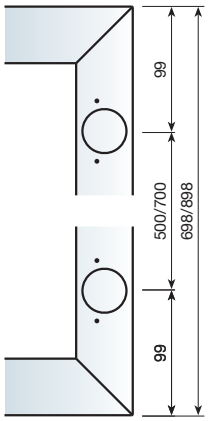

Assembly of doors with cross-pieces

Glass cabinet with one cross-piece 45x20x7.5mm.

Module	Dim. Glass 4mm.	Anod. Silver matt	Anod. Stainless steel
70x30 (698x298)	344x294	148.130.511	148.130.566
70x35 (698x348)	344x344	148.135.514	148.135.562
70x40 (698x398)	344x394	148.140.510	148.140.565
70x45 (698x448)	344x444	148.145.513	148.145.561
70x50 (698x498)	344x494	148.150.516	148.150.564
70x60 (698x598)	344x594	148.160.515	148.160.563
90x30 (898x298)	444x294	148.330.512	148.330.560
90x35 (898x348)	444x344	148.335.515	148.335.563
90x40 (898x398)	444x394	148.340.511	148.340.566
90x45 (898x448)	444x444	148.345.514	148.345.562
90x50 (898x498)	444x494	148.350.510	148.350.565
90x60 (898x598)	444x594	148.360.516	148.360.564

Glass cabinet with two cross-pieces 45x20x7.5mm.

Dim. Glass 4mm.	Anod. Silver matt	Anod. Stainless steel	
228x294	148.630.510	148.630.565	
228x344	148.635.513	148.635.561	
228x394	148.640.516	148.640.564	
228x444	148.645.512	148.645.560	
228x494	148.650.515	148.650.563	
228x594	148.660.514	148.660.562	1
294x294	148.830.511	148.830.566	
294x344	148.835.514	148.835.562	
294x394	148.840.510	148.840.565	
294x444	148.845.513	148.845.561	
294x494	148.850.516	148.850.564	
294x594	148.860.515	148.860.563	

Supplied machined and dismantled with joining fittings and gaskets for 4 mm glass. In boxes of 1 door.

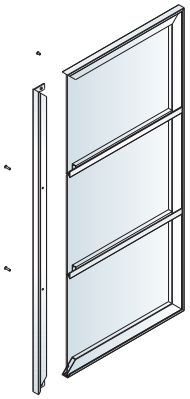

› Made to measure

Glass cabinet 45x20x7.5mm. To measure.

Profile	Hinges	Anod. Silver matt	Anod. Stainless steel	
45x20x7.5	0	147.600.515	147.600.563	
45x20x7.5	2	147.602.512	147.602.560	1
45x20x7.5	3	147.603.514	147.603.562	
45x20x7.5	4	147.604.516	147.604.564	

Note
The position of the hinges is calculated from the inside of the cabinet (machining side). This should be taken into account in the case of asymmetric doors.

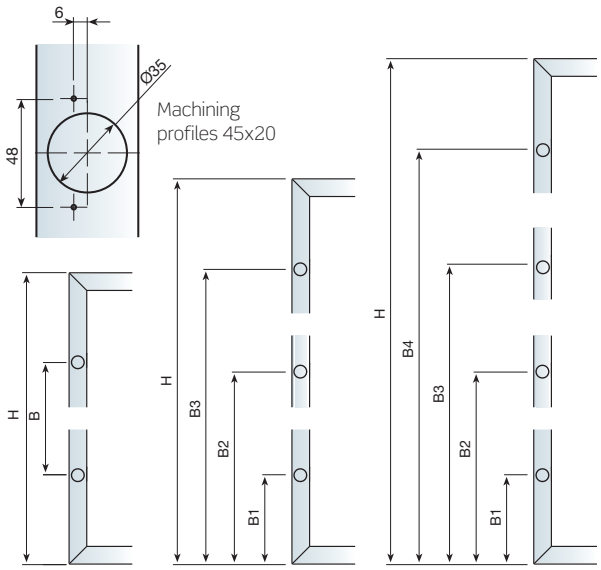

Machining for 2 Hinges

Machining for 3 Hinges

Machining for 4 Hinges

› According to client's specifications

Glass cabinet 45x20x7.5mm. According to client's specifications.

Profile	Anod. Silver matt	Anod. Stainless steel	Silver gloss	
45x20x7.5	147.699.510	147.699.565	147.699.101	1

1 PROFILE TO BE MACHINED



45x20 1mm radius, 7.5mm visible

› Profile to be machined

Profile to be machined 45x20x7.5mm.

Anod. Silver matt	Anod. Stainless steel	Silver gloss	Black	
149.560.515	149.560.563	149.560.106	149.560.541	10

6m. Bars. Supplied in boxes of 10 units.

Gasket for 4mm glass.

Transparent	753.604.316	50

3m. Bars. Supplied in boxes of 50 units. For 4mm glass.

Joining fittings.



Zinc-coated	154.800.030	100

Bags of 4 brackets and 8 screws. Supplied in boxes of 100 units. For 100 doors

1 MACHINED GLASS CABINETS

45x20 1.2 visible



Glass measurement = Total window measurement – 3mm

› Standard kitchen

Glass cabinet 45x20x1.2 For adhered glass.

Module	Dim. Glass 4mm.	Anod. Silver matt	Anod. Stainless steel	
70x30 (698x298)	695x295	147.130.513	147.130.561	
70x35 (698x348)	695x345	147.135.516	147.135.564	
70x40 (698x398)	695x395	147.140.512	147.140.560	
70x45 (698x448)	695x445	147.145.515	147.145.563	
70x50 (698x498)	695x495	147.150.511	147.150.566	
70x60 (698x598)	695x595	147.160.510	147.160.565	1
90x30 (898x298)	895x295	147.330.514	147.330.562	
90x35 (898x348)	895x345	147.335.510	147.335.565	
90x40 (898x398)	895x395	147.340.513	147.340.561	
90x45 (898x448)	895x445	147.345.516	147.345.564	
90x50 (898x498)	895x495	147.350.512	147.350.560	
90x60 (898x598)	895x595	147.360.511	147.360.566	

Supplied machined and dismantled with joining fittings and gaskets for 4 mm glass. In boxes of 1 door.



Machining and position of hinges

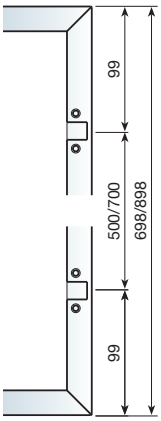

› Made to measure

Glass cabinet 45x20x1.2 To measure.

Profile	Hinges	Anod. Silver matt	Anod. Stainless steel	
45x20x1.2	0	147.100.516	147.100.564	
45x20x1.2	2	147.102.513	147.102.561	1
45x20x1.2	3	147.103.515	147.103.563	
45x20x1.2	4	147.104.510	147.104.565	



Machining for 2 Hinges

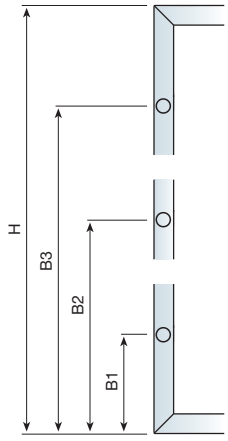

Machining for 3 Hinges

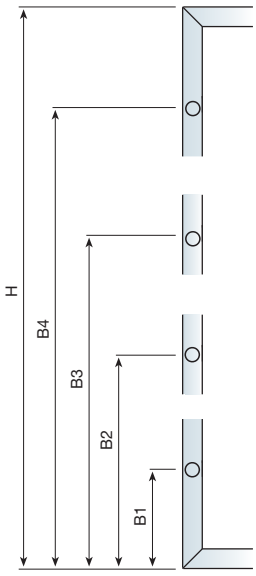

Machining for 4 Hinges

Note
The position of the hinges is calculated from the inside of the cabinet (machining side). This should be taken into account in the case of asymmetric doors.



Machining Profiles 45x20

› According to client's specifications

Glass cabinet 45x20x1.2 According to client's specifications.

Profile	Anod. Silver matt	Anod. Stainless steel	
45x20x1.2	147.199.511	147.199.566	1

1 PROFILE TO BE MACHINED

45x20 1.2 visible

› Profile to be machined



Profile to be machined 45x20x1.2mm.

	Anod. Silver	Anod. Stainless	
	149.460.511	149.460.566	10

6m. Bars. Supplied in boxes of 10 units.

Joining fittings.

Zinc-coated	154.800.030	100

Bags of 4 brackets and 8 screws. Supplied in boxes of 100 units. For 100 doors.



1 MACHINED GLASS CABINETS



Glass measurement = Total window measurement – 30mm

45x20x20 visible

› Made to measure

Glass cabinet 45x20x20 to measure.

Profile	Hinges	Anod. Silver matt	
45x20x20	0	147.500.511	1
45x20x20	2	147.502.515	
45x20x20	3	147.503.510	
45x20x20	4	147.504.512	

Note
The position of the hinges is calculated from the inside of the cabinet (machining side). This should be taken into account in the case of asymmetric doors.

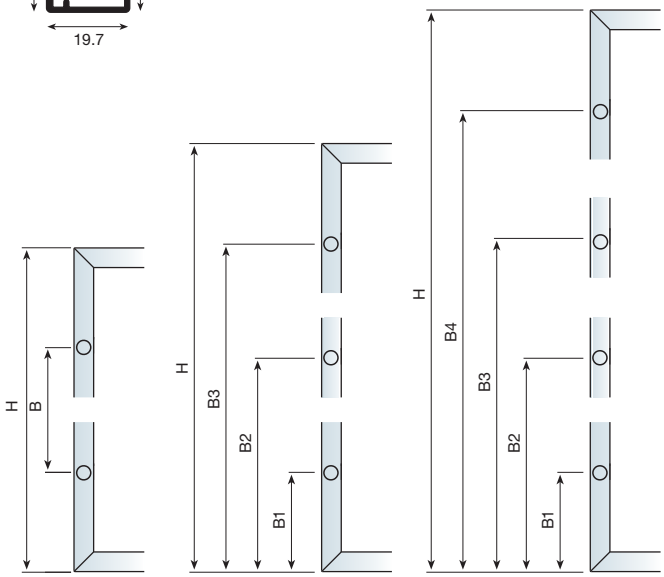

Machining for 2 Hinges | Machining for 3 Hinges | Machining for 4 Hinges



Machining profiles 45x20

› According to client's specifications

Glass cabinet 45x20x20 according to client's specifications.

Profile	Anod. Silver matt	
45x20x20	147.599.513	1

1 PROFILE TO BE MACHINED



45x20x20 visible

› Profile to be machined

Profile to be machined 45x20x20mm.

	Anod. Silver matt	
	151.760.512	10

6m. bars. Supplied in boxes of 10 units.

Gasket for 4mm glass.

Transparent	753.604.316	50

3m. bars. Supplied in boxes of 50 units. For 4mm glass.

Joining fittings.



Zinc-coated	154.800.030	100

Bags of 4 brackets and 8 screws. Supplied in boxes of 100 units. For 100 doors.

1 MACHINED GLASS CABINETS



Glass measurement	=	Total window measurement	–	4mm

50x20x7.5 visible

› Made to measure

Glass cabinet 50x20x7.5 made to measure.

Profile	Hinges	Anod. Silver matt	
50x20x7.5	0	147.700.512	1
50x20x7.5	2	147.702.516	
50x20x7.5	3	147.703.511	
50x20x7.5	4	147.704.513	

Note
The position of the hinges is calculated from the inside of the cabinet (machining side). This should be taken into account in the case of asymmetric doors.



Machining
Profiles 45x20

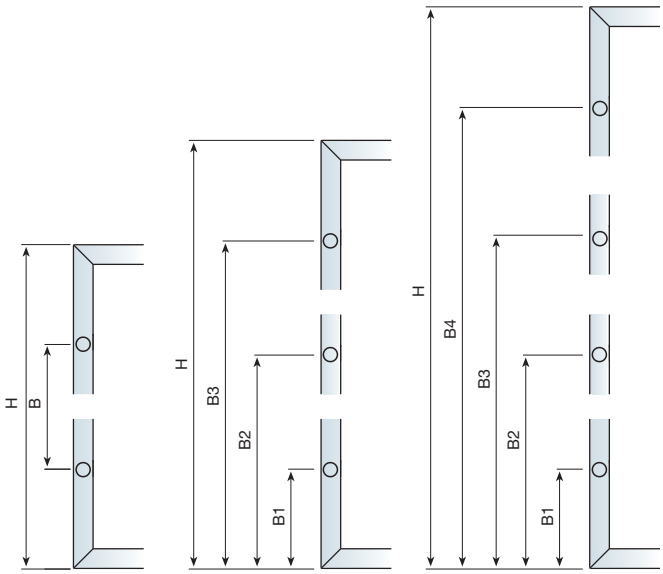

Machining for 2 Hinges
Machining for 3 Hinges
Machining for 4 Hinges

› According to client's specifications

Glass cabinet 45x20x20 according to client's specifications.

Profile	Anod. Silver matt	
50x20x7.5	147.799.514	1

1 PROFILE TO BE MACHINED



50x20x7.5 visible

› Profile to be machined

Profile to be machined 50x20x7.5mm.

	Anod. Silver matt	
	151.860.516	10

6m. bars. Supplied in boxes of 10 units.

Gasket for 4mm glass.

Transparent	753.604.316	50

3m. bars. Supplied in boxes of 50 units. For 4mm glass.

Joining fittings.

Zinc-coated	154.800.030	100



Bags of 4 brackets and 8 screws. Supplied in boxes of 100 units. For 100 doors.

2 UNMACHINED: SCREEN KIT

Aluminium profile for 4 mm glass.

Mat anodized	150.630.513	20

3m bars. For 4mm glass.



Aluminium profile.

Anodized silver matt	150.930.511	20

3m. bars. For 4mm glass.



Plastic cover profile.

Grey	150.730.311	20

3m. bars

Plastic tongue-piece.

Translucent	753.604.316	50

3m. bars. For 4mm glass.

Corner bracket.

Zinc plated	523.200.031	100

For 25 doors.



MESUCO 143 hinge program for clamp mounting.

Opening 110		
Full overlay	060.093.073	
Half overlay	061.193.075	50
Full inset	062.193.073	

For 25 doors.



0mm crank hinge
Base plate height=C=18+A-E

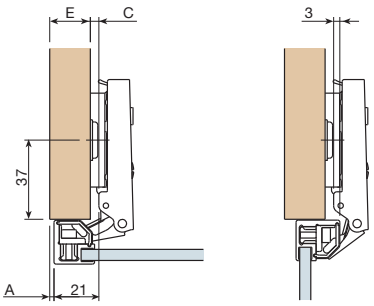

Half crank hinge
Base plate height=C=8+A-E

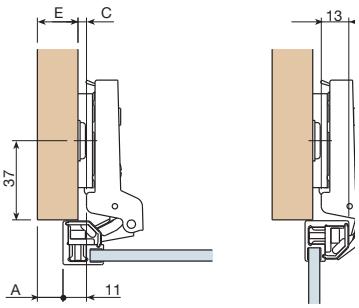

Full crank hinge
Base plate height=C=1+D

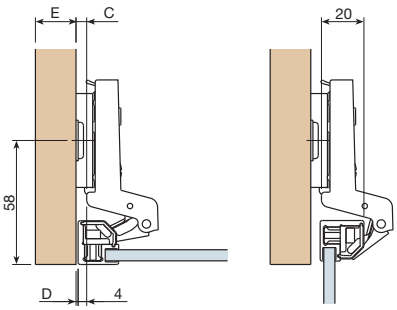

Mounting plates (screw-fix).

Height		
2	083.243.134	200
4	083.243.230	

Bags containing 50 pces.

Other adaptors.

110° Opening		
Independent system 32 adaptor	526.200.032	
With base for DELTA lifting device	526.300.036	50
With base for pneumatic pivot arm	526.400.033	

For 25 doors.



System 32 holes



Delta stay adaptor
Gas stay adaptor

Technical data

Assembly

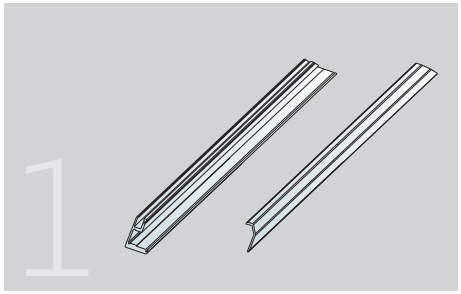

Cut aluminium and plastic sides to required size.

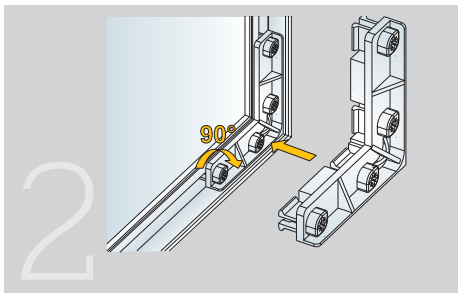

Fit plastic tongue-piece and glass. Fix using corner brackets. Turn expansion cam 90°. The door is ready.

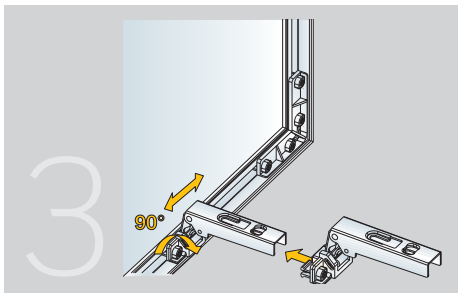

Mount hinges, pressing cups lightly. After mounting, The hinge can be easily displaced along the profile. Turn Expansion cam 90°

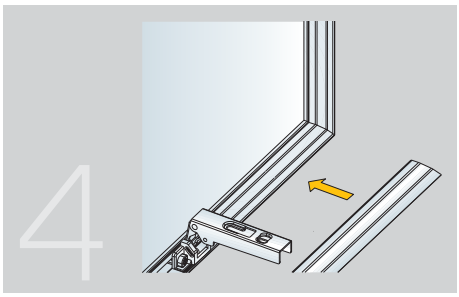

Finish using the plastic cover profile.

HANDLES AND EDGE PROFILES

1 EDGE PROFILES

Profiles

Edge profile.

Anodized silver matt					
Edge	E	3m bars.	Full overlay to measure	Double mitre to measure	
2.5	16	150.030.510	150.000.513	150.002.510	
2.5	19	150.230.511	150.200.514	150.202.511	10
7.5	16	150.130.514	150.100.510	150.102.514	
7.5	19	150.330.515	150.300.511	150.302.515	

To finish off the edges on wooden doors. As they only enter 5 mm in the edge, you can use any type of hinge. The visible part has the same appearance as that of our aluminium doors.

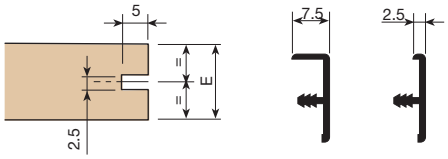

E = door thickness

Profile to feign a cross-piece.

	3m bars.	
Anodized silver matt	149.730.512	20

To feign a cross-piece in wooden panels or doors.



Edge profiles.

Displayed	Anodized silver matt	
2mm.	149.830.516	20
4.5mm.	149.930.513	

To make up or divide panels or doors, also feigning a cross-piece. It may be used in 6 mm panels, 19 mm panels and above. 3m bars.

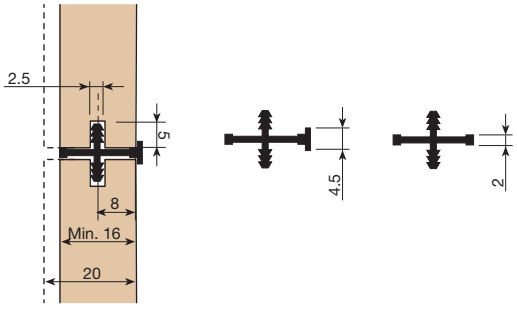

HANDLES

Handle.

Height 24mm.	2.6m bars	5.2m bars	To measure	
Anod. Silver gloss	-	150.452.105	150.400.106	10
Anod. Silver matt	-	150.452.514	150.400.515	
Anod. Gold gloss	-	150.452.772	150.400.773	
White laquered	-	150.452.805	150.400.806	
Oak coated not varnished	150.426.905	-	150.400.902	
Sapeli coated not varnished	150.426.931	-	150.400.935	

Height 28mm.	2.6m bars	5.2m bars	To measure	
Anod. Silver gloss	-	150.552.102	150.500.103	10
Anod. Silver matt	-	150.552.511	150.500.512	
Anod. Gold gloss	-	150.552.776	150.500.770	
White laquered	-	150.552.802	150.500.803	
Oak coated not varnished	150.526.902	-	150.500.906	
Sapeli coated not varnished	150.526.935	-	150.500.932	

When selecting the measurement, please specify the length of the profile (l) and the length (b) to cut the fixing rib.
Highly resistant handle can also be used as a straightener. For 20mm.
panel. The width of the panel is the width of the door minus 20mm.

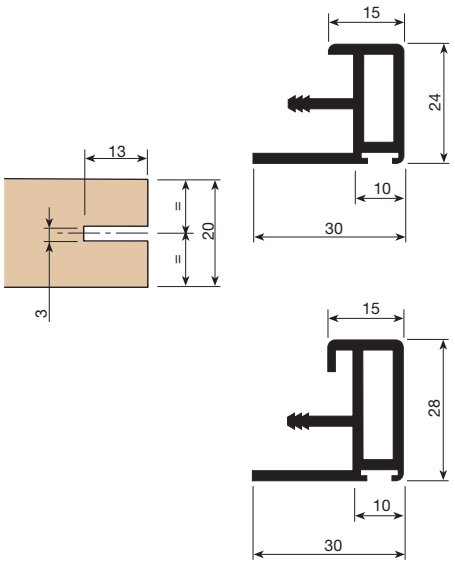

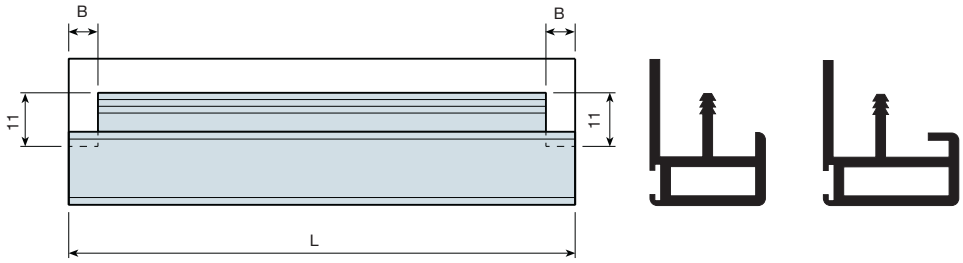

PANELLING SYSTEMS

Horizontal and vertical panelling systems
for different panel thicknesses.

pp.

1 HORIZONTAL: **RASTY** 746
- Lower profile 746
- Intermediate profile - wall-fix 747
- Intermediate profile - assembly with base 748
- Intermediate profile - knock-in 749
- Upper profile 749
- Side closing profile 750
- Independent profile 751
- Technical data 752

2 VERTICAL: **FORTE** 753
- For 19 mm floating panel 753
- For 19 mm wall-fixed panel 754
- For different panel thicknesses 755

3 HORIZONTAL/VERTICAL: **HEAVY** 756
- 25.5 mm 758
- 34.5 mm 759

4 HORIZONTAL/VERTICAL: **THIN WALL** 762

5 HORIZONTAL ACCESSORIES 764
- Wooden shelf support 765
- Glass shelf support 765
- Accessories 766

6 VERTICAL ACCESSORIES 770
- Wooden shelf support 770
- Glass shelf support 773
- Accessories 774

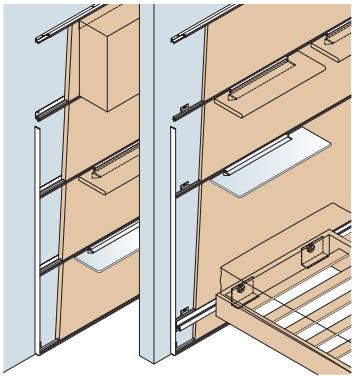

1 HORIZONTAL PANELLING SYSTEMS: RASTY

> For panel thicknesses up to 30mm.
> 3 Fixing systems:
> Wall-fix, with base or knock-in.

Lower profile

Lower profile for assembly with base.

Anodized	153.230.512	10

3m bars. To assemble with base 154.000.103.

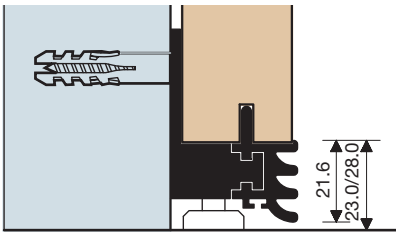



Base for lower profile.

	154.000.103	10



Assembly

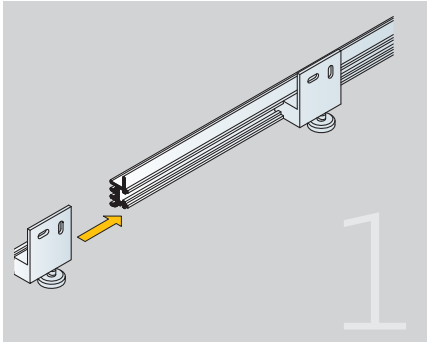

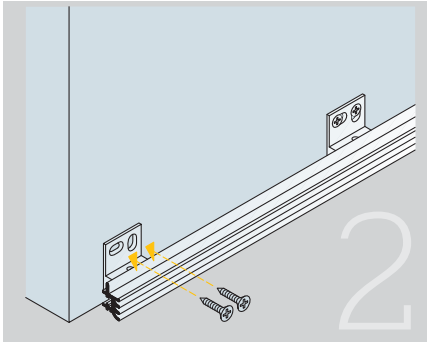

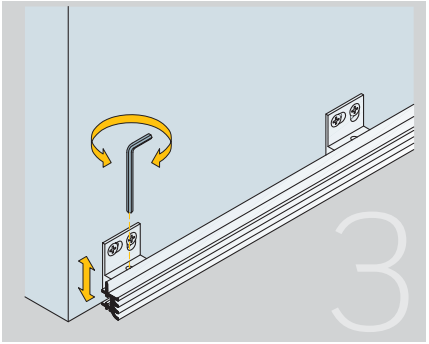

Intermediate profile – wall-fix

Intermediate profile for wall-fix.

Anodized	153.430.513	8

3m bars.

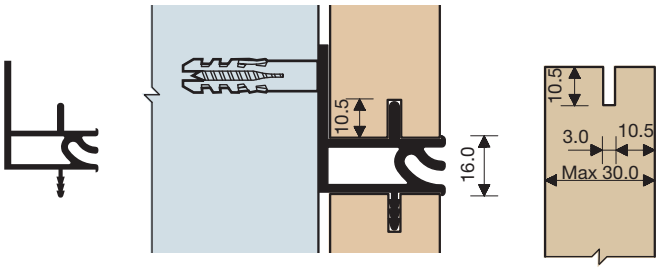

Plain intermediate profile for wall-fixing.

Anodized	153.530.510	4

6m bars.

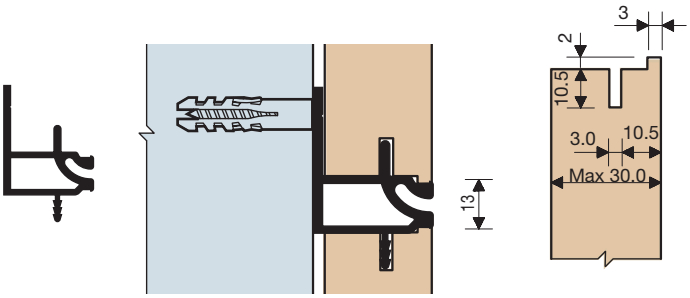

Assembly

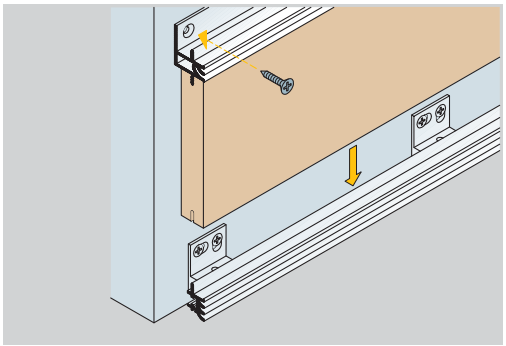

Intermediate profile for assembly with base

Intermediate profile for assembly with base.

Anodized	153.730.511	10

3m bars.

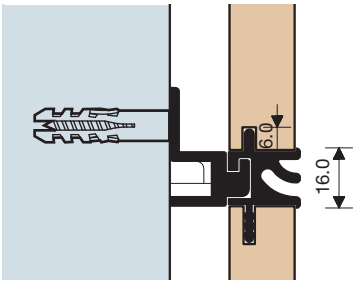



Base for Intermediate profile.

	154.100.030	10

Assembly

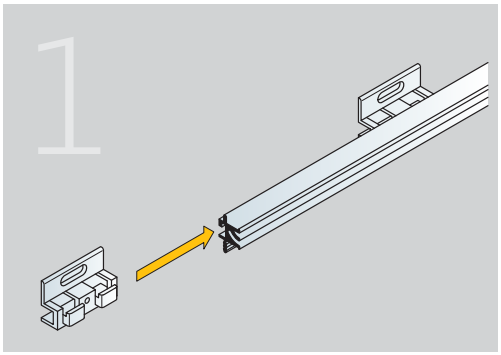

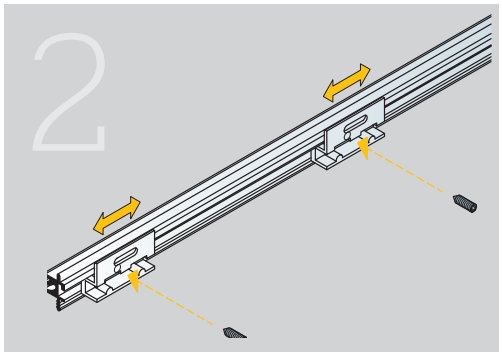

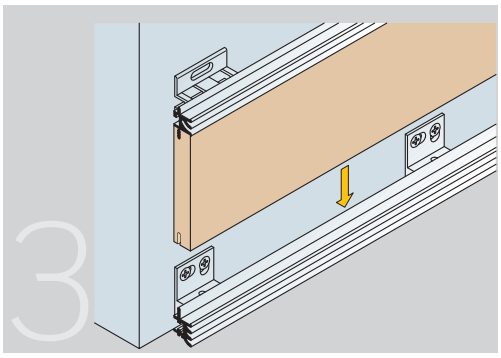

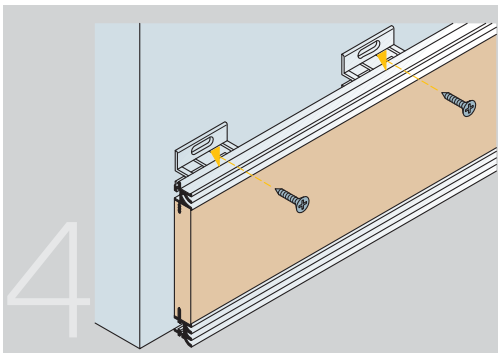

Intermediate profile – knock-in

Intermediate profile for knock-in.

Anodized	153.630.514	20

3m bars.

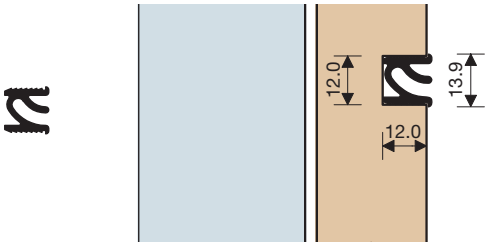

Upper profile

Upper profile.

Anodized	153.030.511	5

3m bars.

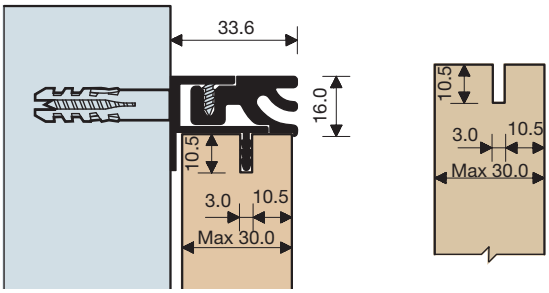

Assembly

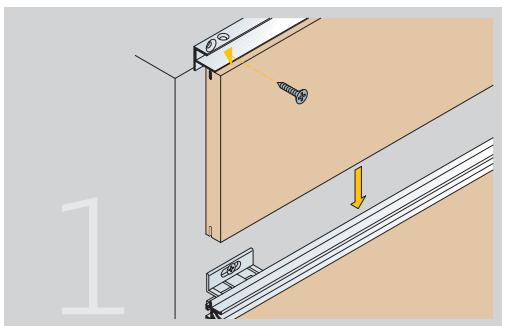

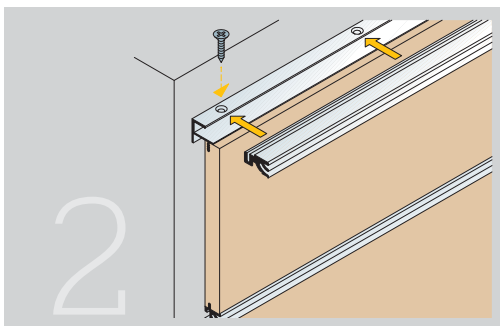

Side closing profile

Side closing profile.

Anodized	153.930.512	20

3m bars.

Joining seal for side profile.

Grey	157.000.314	20

For use with wall-fix intermediate profiles, refs. 153.430.513 and 153.530.510.

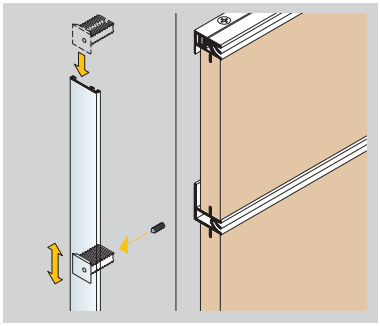

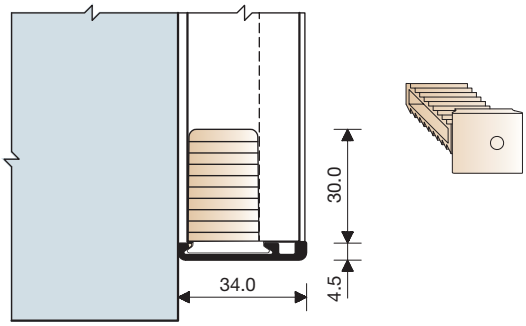

Joining seal for side profile.

Grey	157.000.311	20

For use with intermediate profiles - assembly with base, ref. 153.730.511.

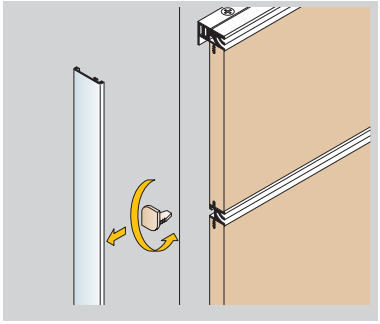

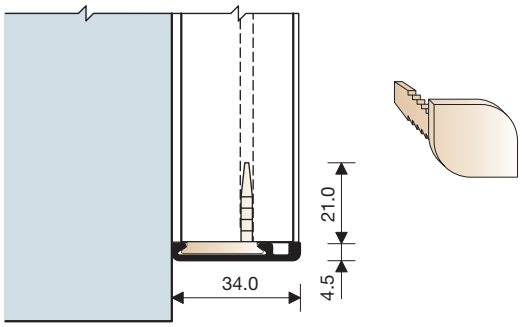

Side profile edge cover.

Grey	157.600.310	20

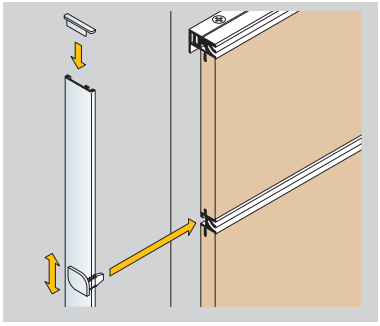

Independent profile

Horizontally held independent profile for walls. Can be set up for kitchens or offices. All accessories in the horizontal panelling system may be used.

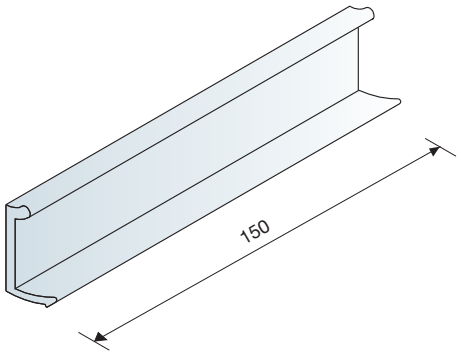

Independent profile.

	3m bars.	
Anodized silk	158.430.510	10

Each bar supplied with 4 aluminium supports to fix the profile.



Profile end cover.

Black	157.800.020	20

Each reference consists of a set of covers.

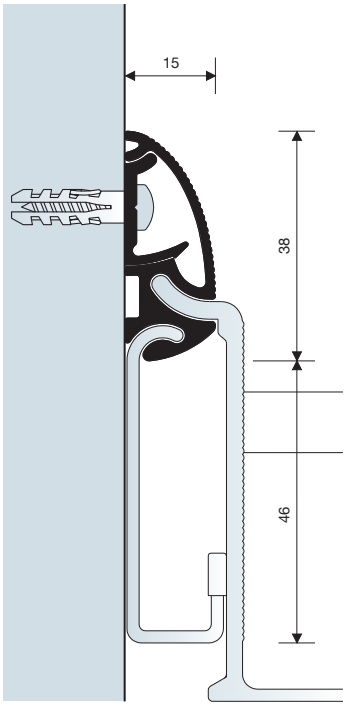

Accessories divider.

Natural aluminium	158.300.100	20



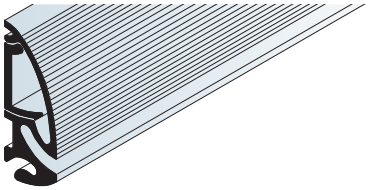

Sample set-ups

Kitchen

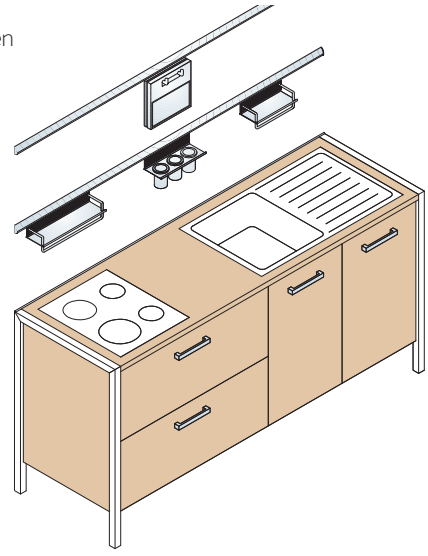

Office

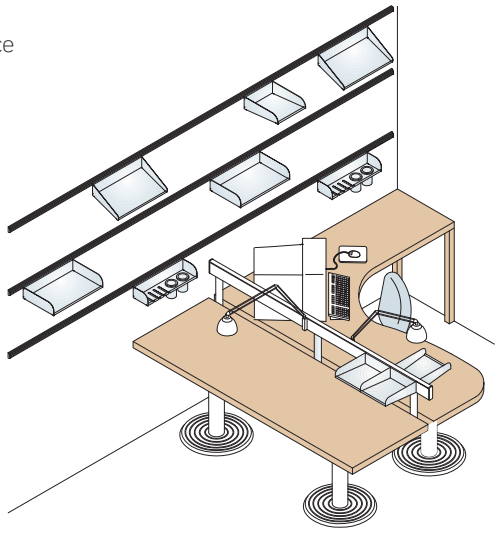

Technical data

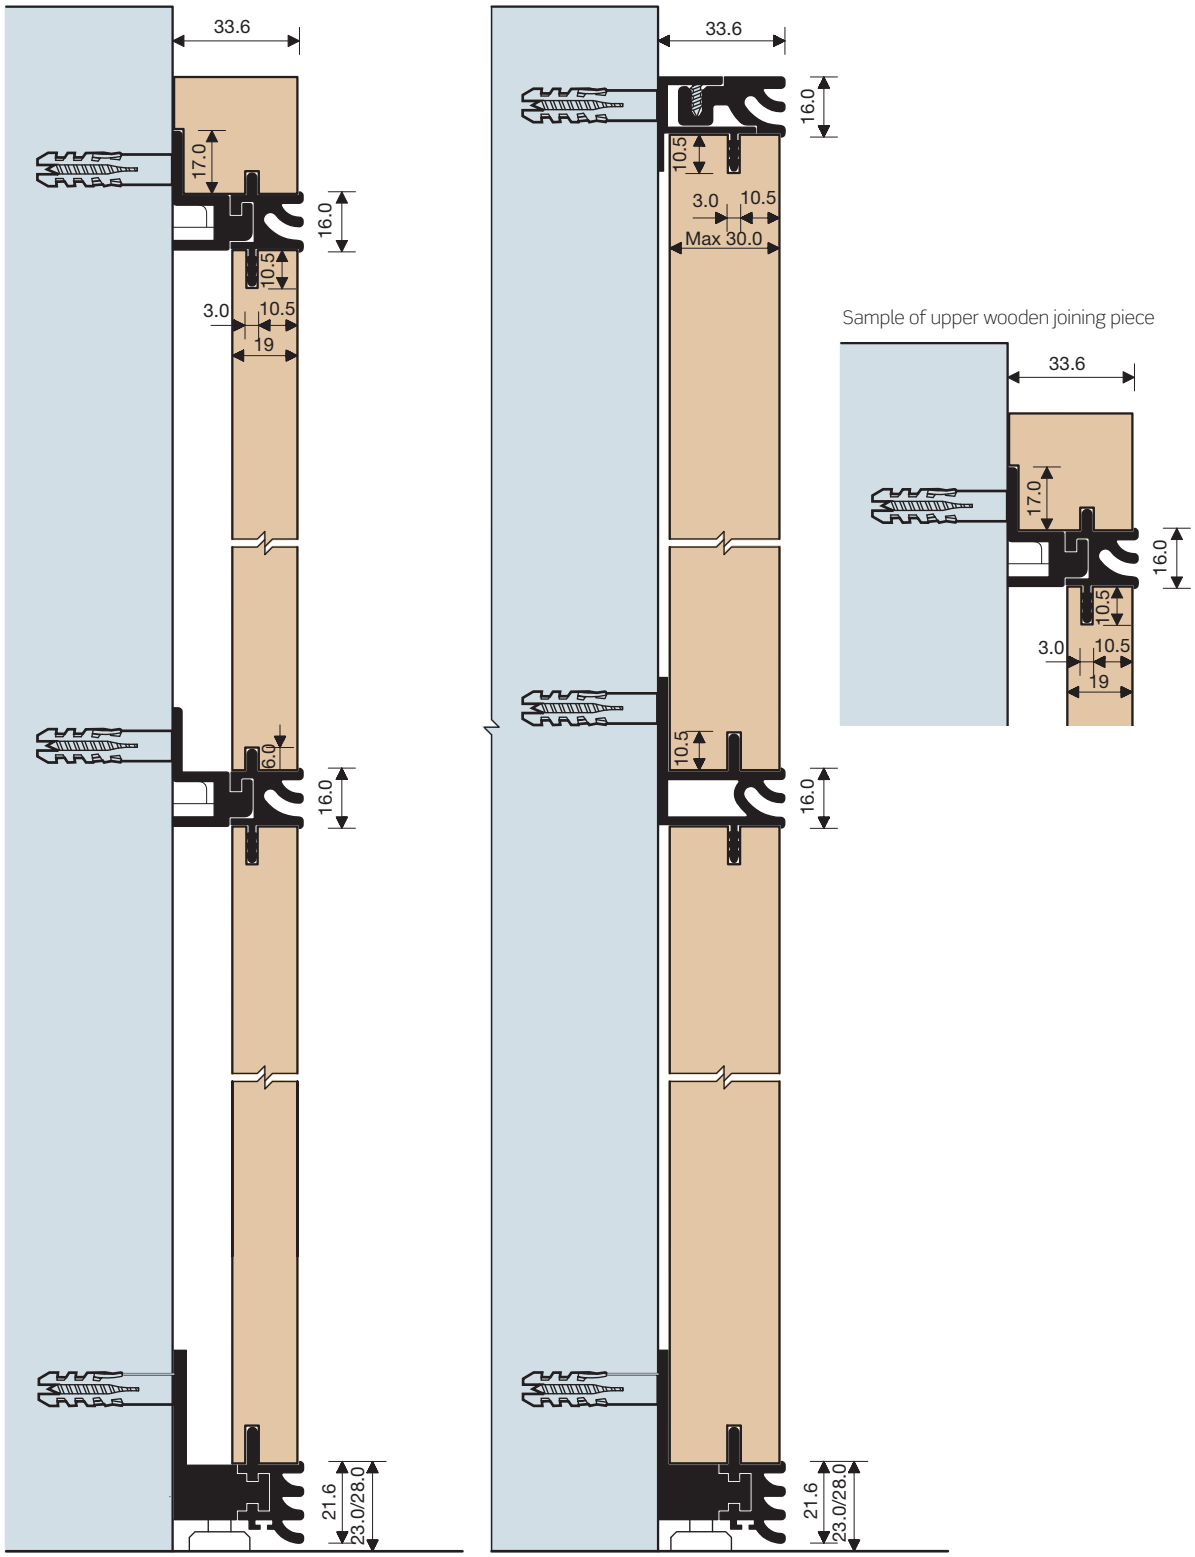

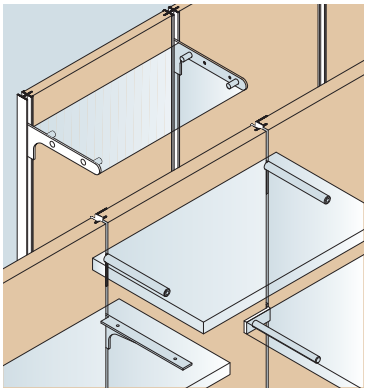

2 VERTICAL PANELLING SYSTEMS: FORTE

- For 19mm floating panel.
- For 19mm panel.
- For 18 to 22mm panel.
- For 16 to 18mm panel.
- For any thickness.
- Screwed to the wall.

For 19mm floating panel

Side rack. For 19 mm panel.

Anodized	159.030.513	10

3m bars.



Intermediate rack. For 19mm panel.

Anodized	159.130.510	10

3m bars.

For 19mm panel. Wall-fixed

Side rack. For 19mm panel.

Anodized	159.230.514	10

3m bars.

Intermediate rack. For 19mm panel.

Anodized	159.330.511	10

3m bars.



Intermediate rack. For 19mm panel.

Anodized	159.430.515	10

3m bars.

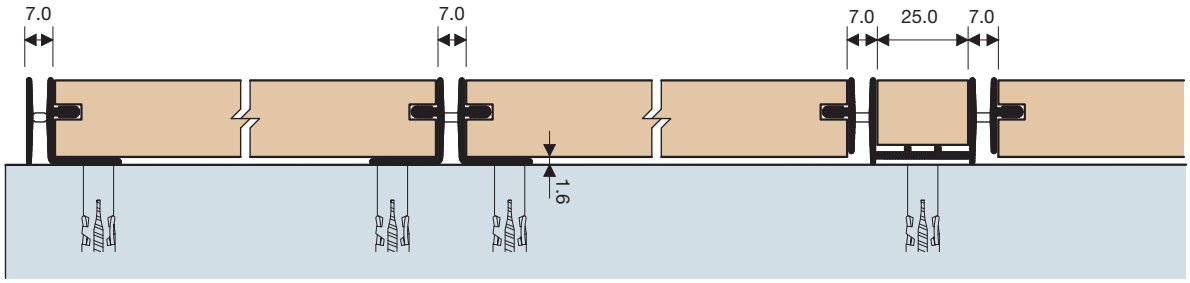

For different panel thicknesses

Intermediate rack for 18 to 22mm panel.

Anodized	159.830.510	10

3m bars.

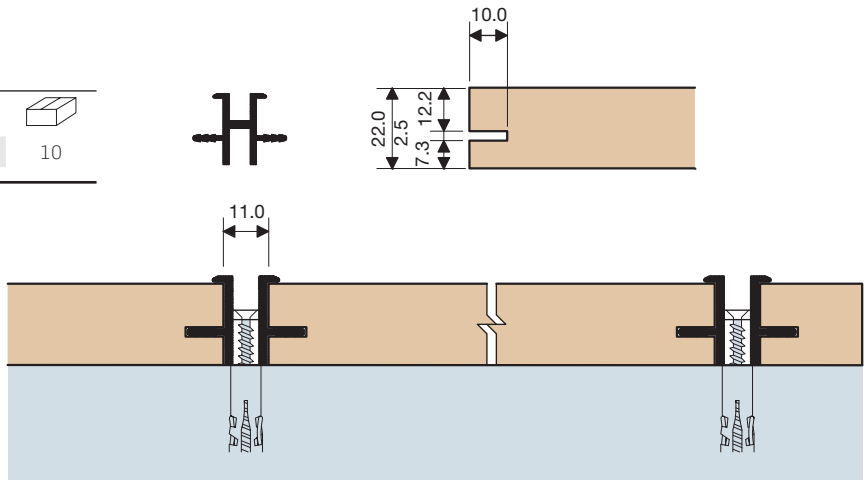

Intermediate rack for 16 to 18mm panel.

Anodized	159.730.513	10

3m bars.

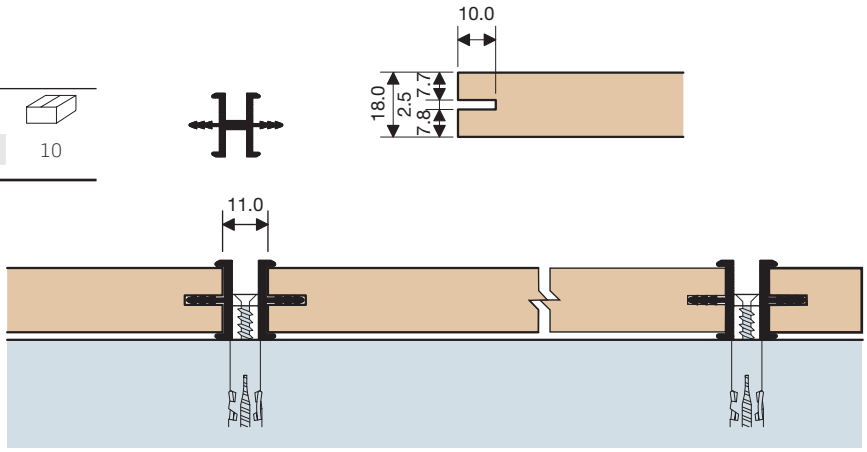

Intermediate rack for any thickness.

Anodized	159.630.516	20

3m bars.

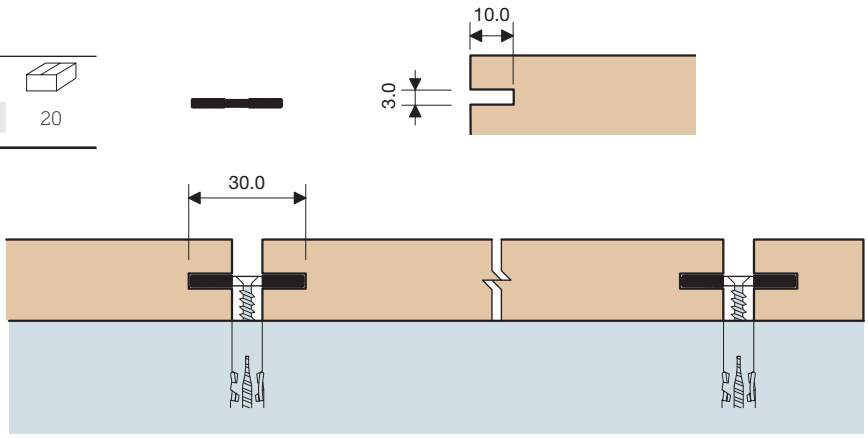

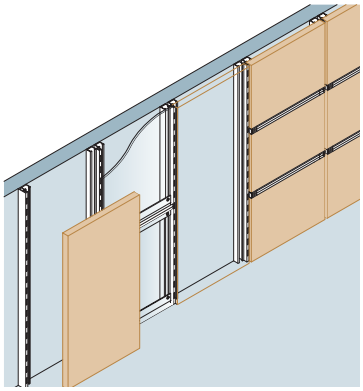

3 HORIZONTAL AND VERTICAL PANELLING SYSTEMS: **HEAVY**

For panels up to 19mm.

Single rack.

Anodized	156.030.512	5

3m bars.



Double rack.

Anodized	156.130.516	5

3m bars.

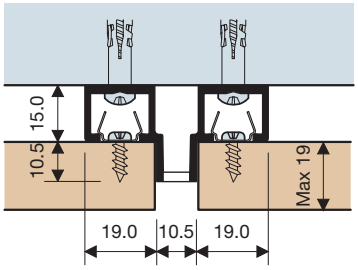

Horizontal panelling profile.

Anodized	156.230.513	4

6m bars.

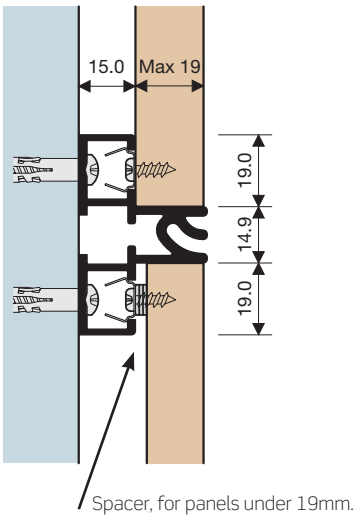

Horizontal intermediate cover.

Grey	157.300.312	20



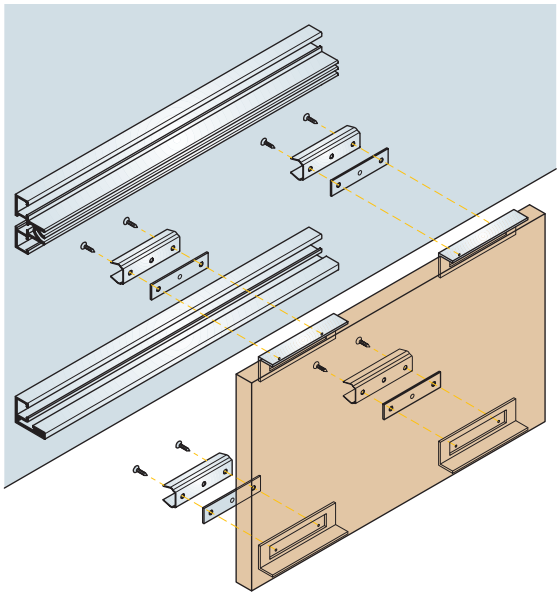

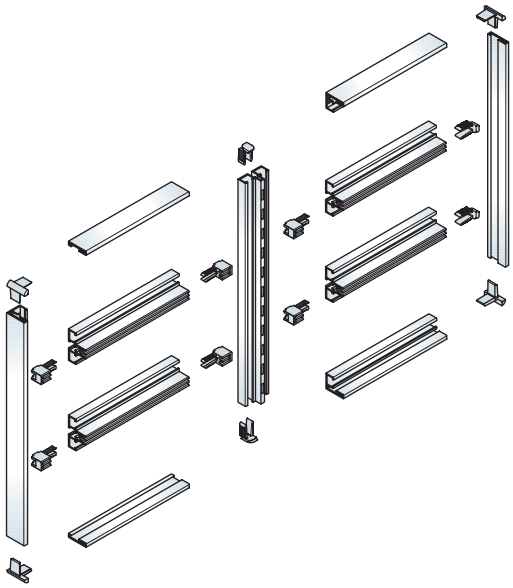

Sample set-ups

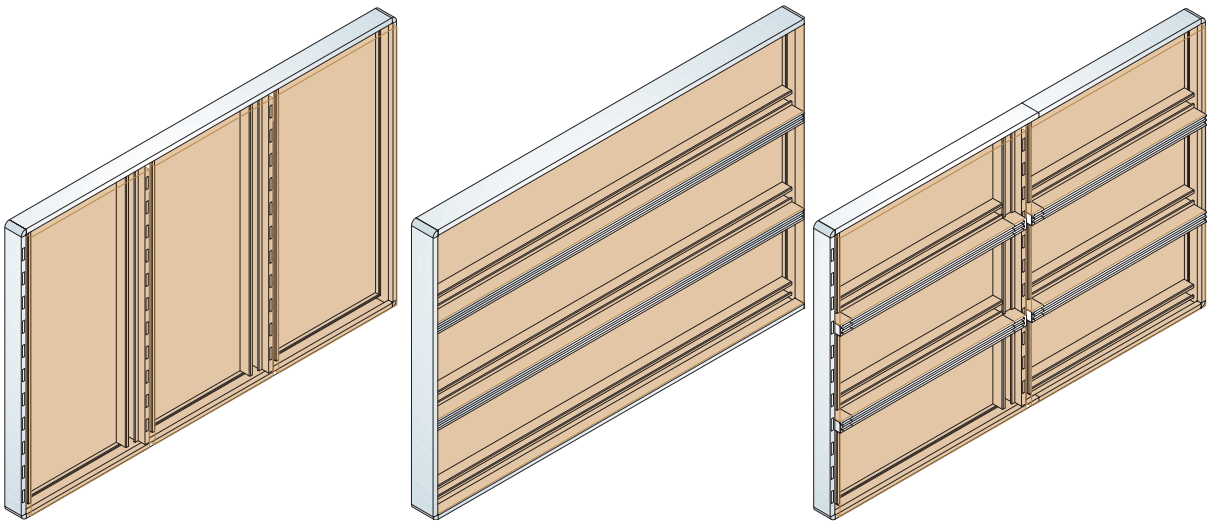

25.5mm

Vertical/horizontal joining piece with rack 25.5mm.

Anodized	156.430.514	10

3m bars.

Vertical/horizontal joining piece 25.5mm.

Anodized	156.630.515	10

3m bars.

Corner cover 25.5mm.

Grey	157.725.315	20



Horizontal/vertical intermediate joining seal.

Grey	157.200.315	20



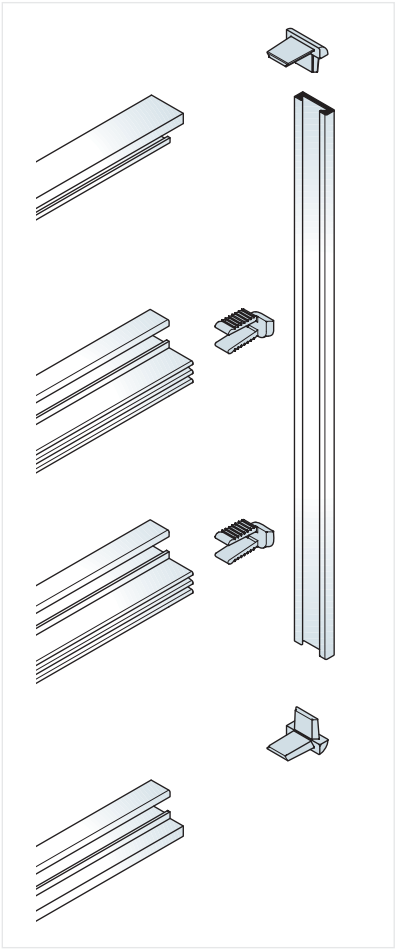

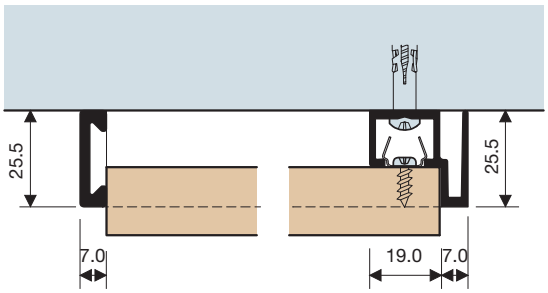

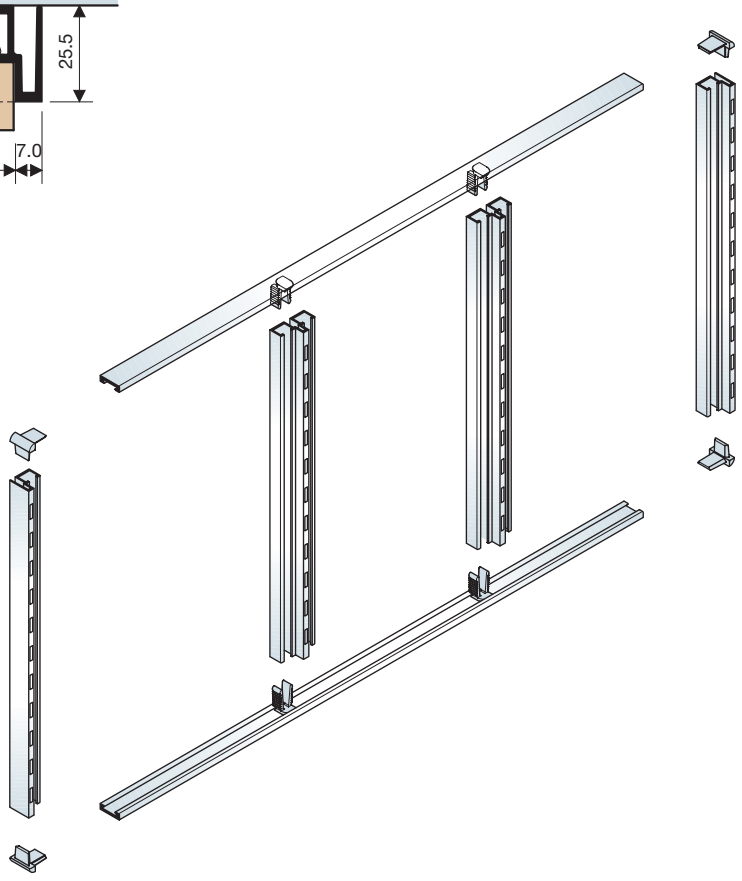

34.5mm

Vertical/horizontal joining piece 34.5mm.

Anodized	156.530.511	10

3m bars.

Vertical/horizontal joining piece 34.5mm.

Anodized	156.630.515	10

3m bars.

Corner cover 34.5mm.

Grey	157.734.312	20



Horizontal/vertical intermediate joining seal.

Grey	157.200.315	20



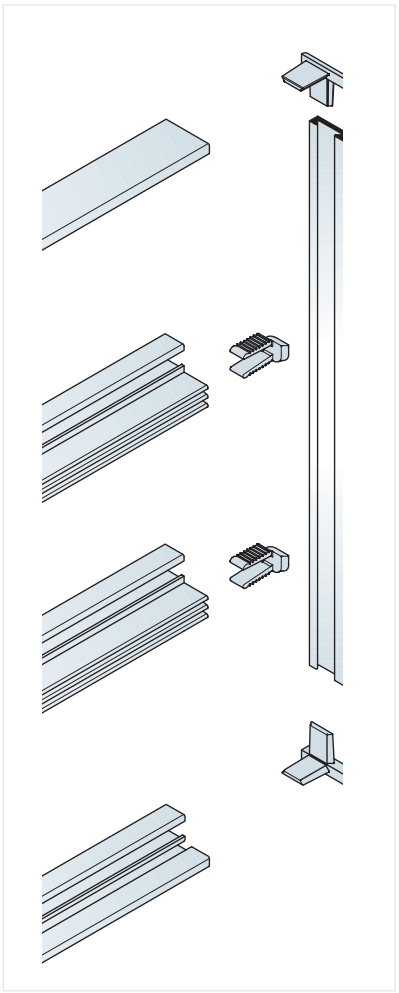

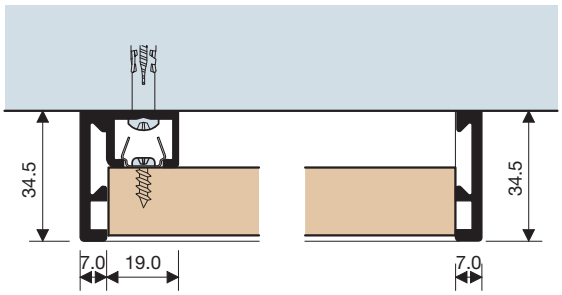

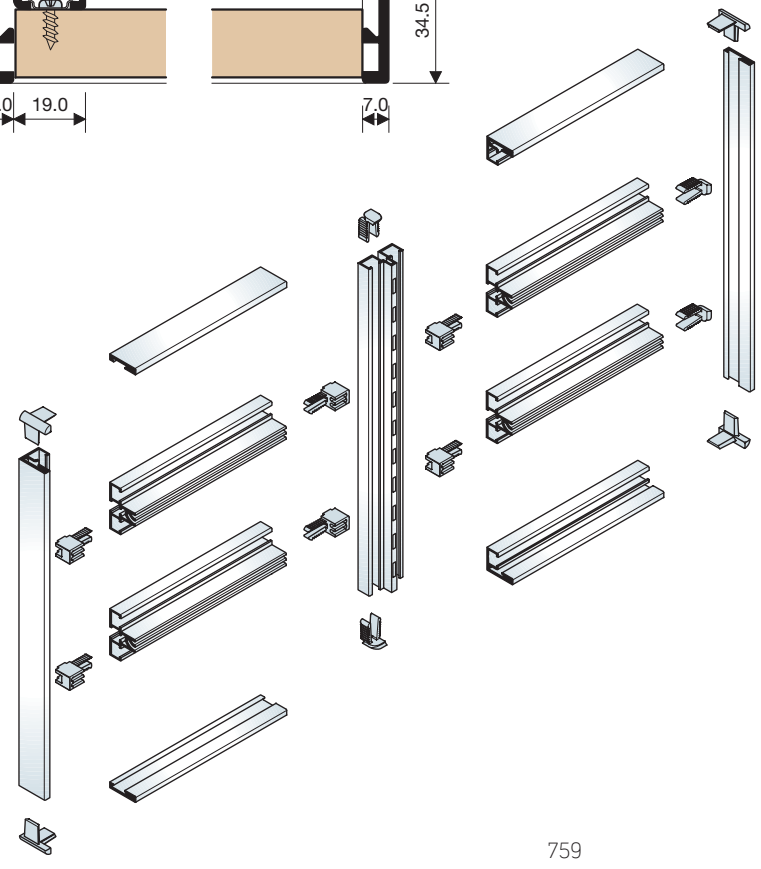

Assembly

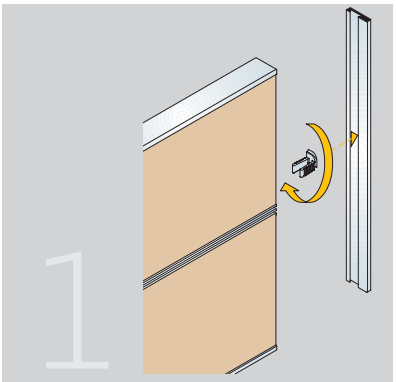

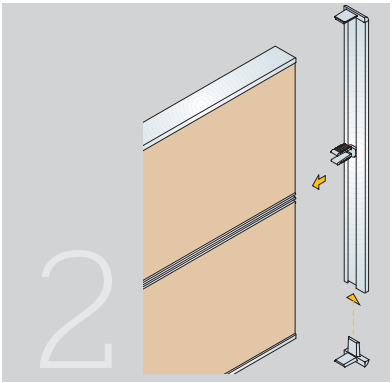

Adjustable leg.

	154.300.031	10



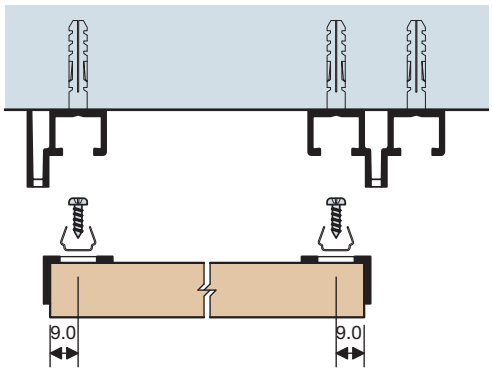

Panel coupler.

Anodized	154.400.035	40



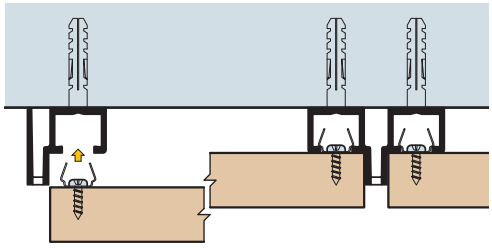

Positioning bracket.

Grey	154.500.032	20



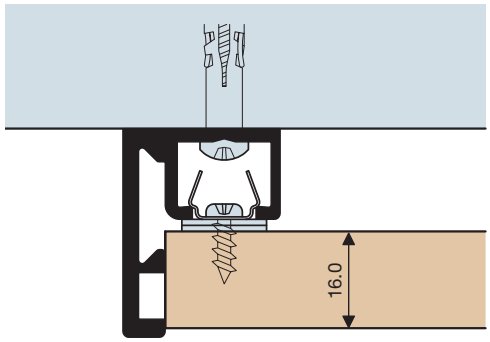

1mm-thick spacer.

Grey	154.600.036	40

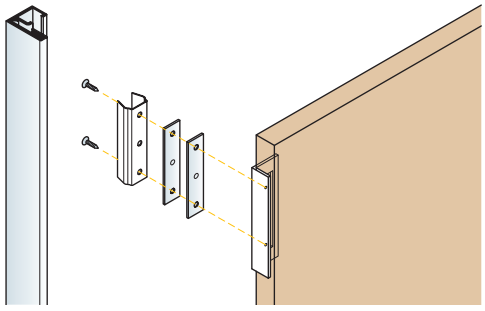

Assembly

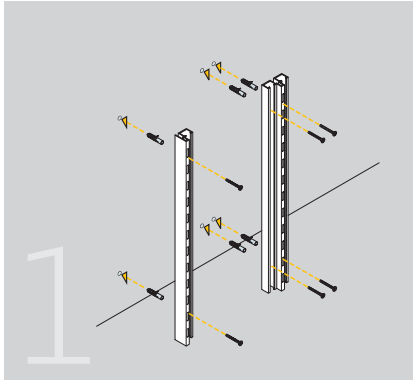

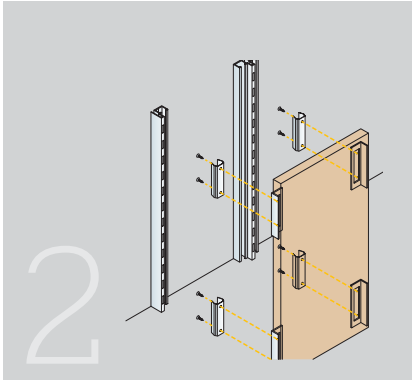

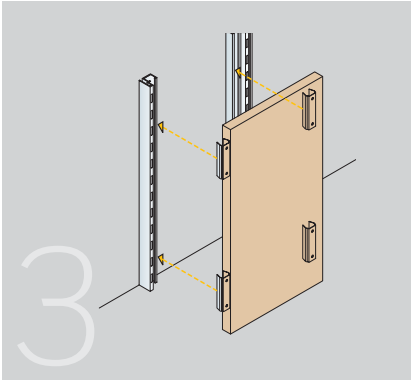

Transversal profile for glass.

Anodized	155.830.511	2

For 4mm glass. Machined to measure. It contains the tongue-pieces for glass and the necessary fittings.





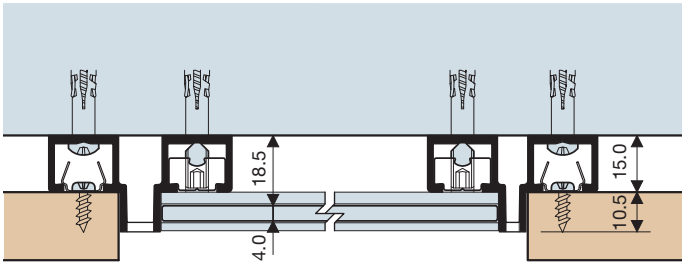

Assembly

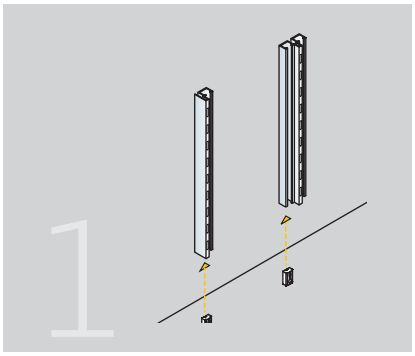

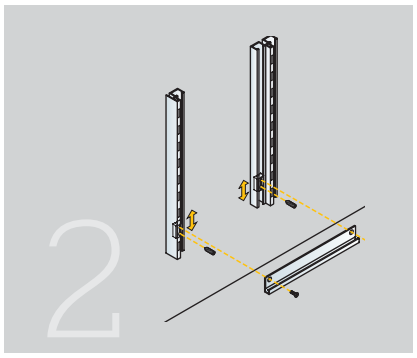

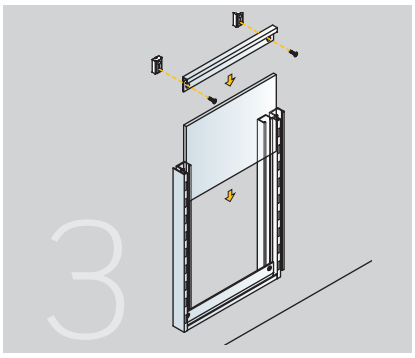

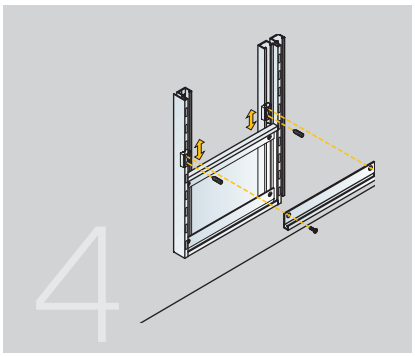

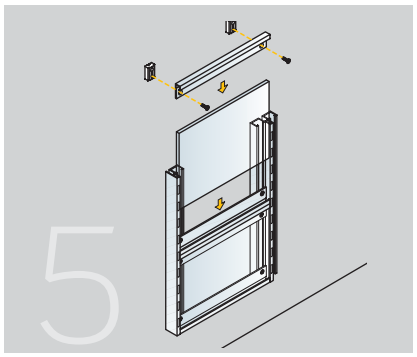

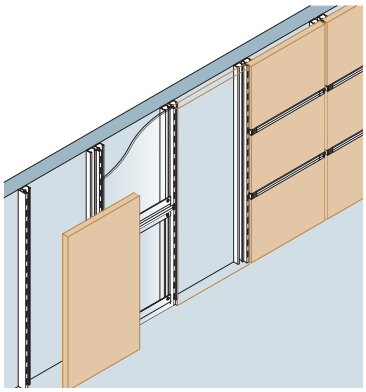

4 HORIZONTAL AND VERTICAL PANELLING SYSTEMS: THIN WALL

For 8 and 9mm panels.

Single rack profile.

Anodized	155.030.514	10

3m bars.

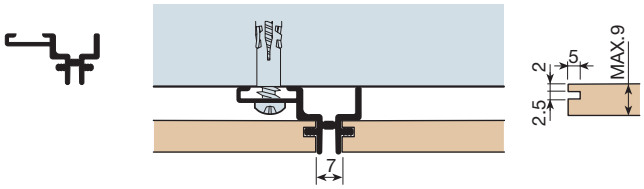

Horizontal panelling profile.

Anodized	155.130.511	10

3m bars.

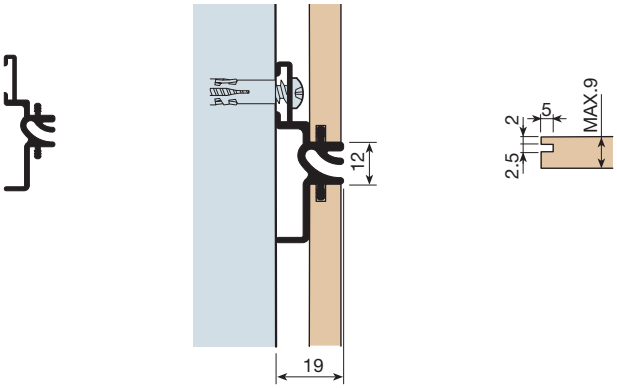

Horizontal/vertical intermediate displayed profile.

Anodized	155.230.515	10

3m bars.

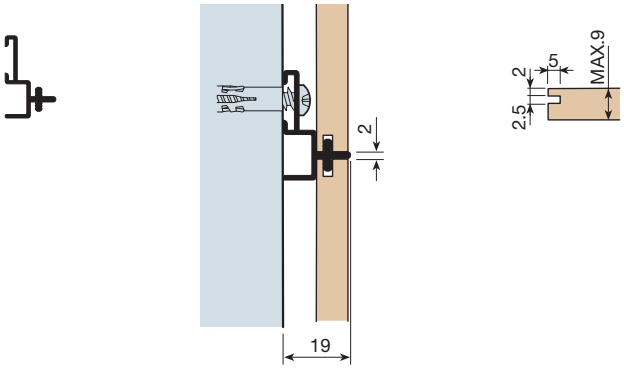

Horizontal/vertical intermediate concealed profile.

Anodized	155.330.512	10

3m bars.



Horizontal/vertical displayed end profile 10mm.

Anodized	155.430.516	10

3m bars.



Horizontal/vertical concealed end profile.

Anodized	155.530.513	10

3m bars.



Sample vertical section

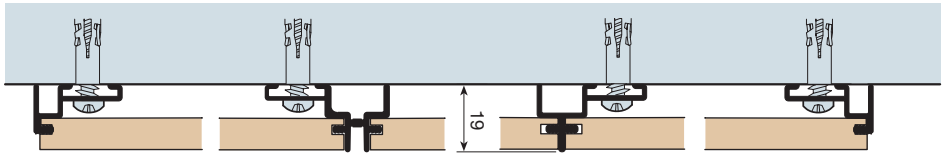

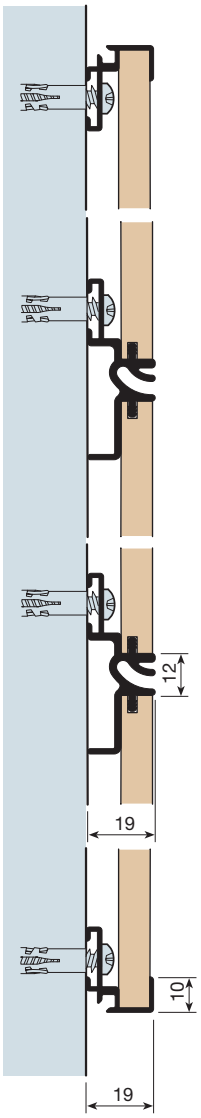

Sample horizontal section

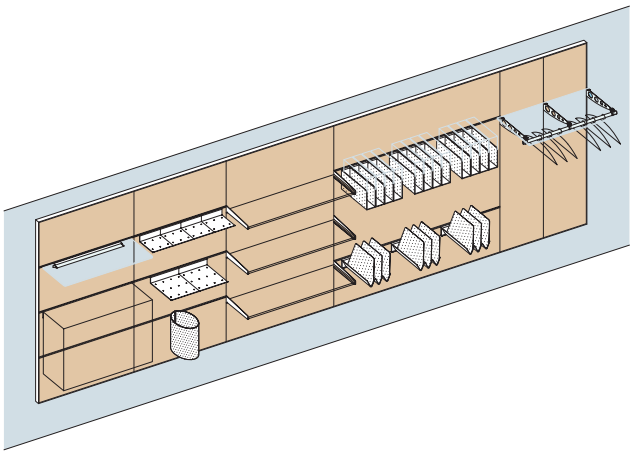

5 HORIZONTAL PANELLING ACCESSORIES

- Accessories for horizontal panelling systems.
- Accessories for vertical panelling systems.
- Accessories for independent profile systems.
- Easily adaptable to all panelling systems.

Wooden shelf support

Wooden shelf support.

E thickness	19mm.	30mm.	
Anodized	158.019.514	158.030.515	1

Cut to size, each reference has a support with the corresponding grey plastic covers.

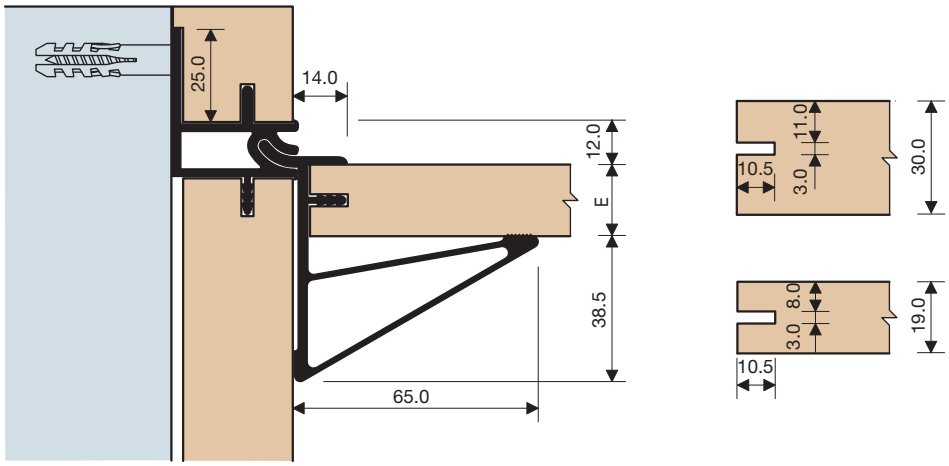

Assembly

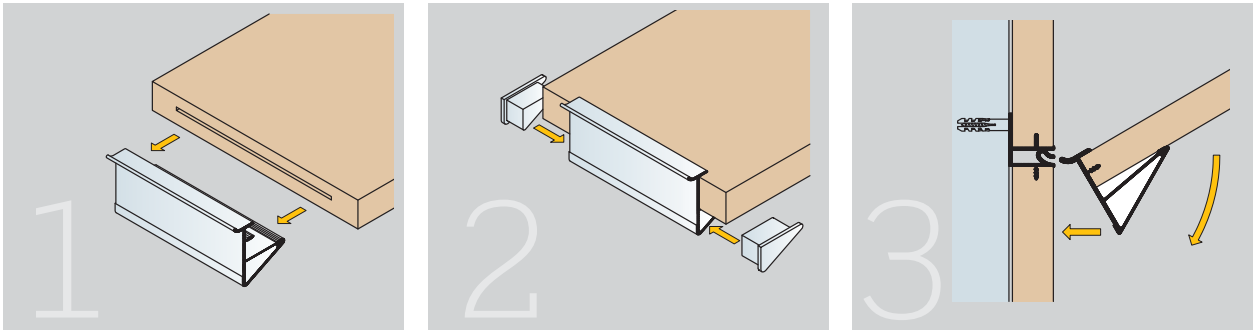

Wooden shelf support

Bag of components, bed support.

Set for one bed	154.900.104	10

Each bag contains two support brackets for the headboard and two brakes.



Sliding profile for beds.

Anodized	155.730.514	5

3m bars.

Assembly

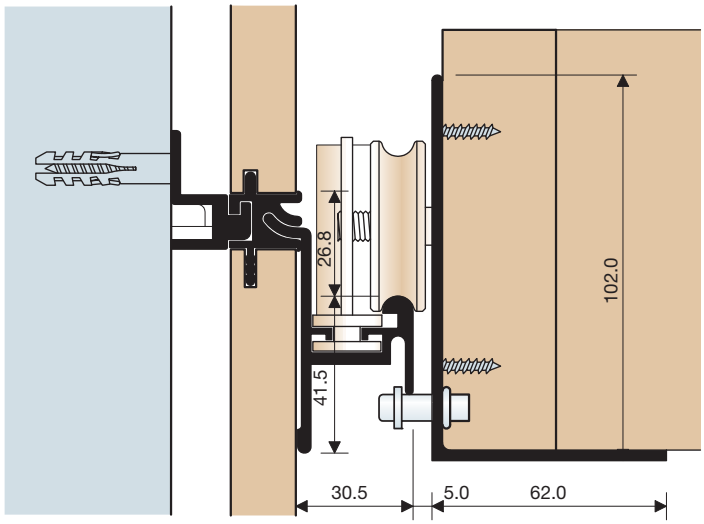

Glass shelf support

Coupler profile.

Anodized	155.900.511	5

Cut to size.

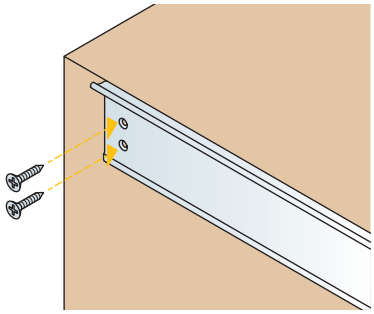

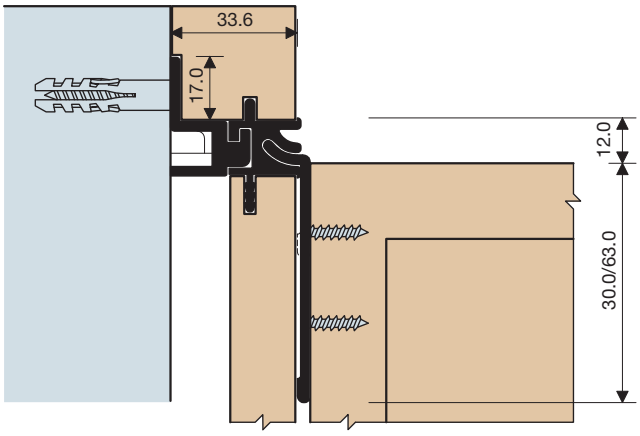

Accessories

Wooden shelf support.

Anodized	160.000.514	10

For 5 shelves.



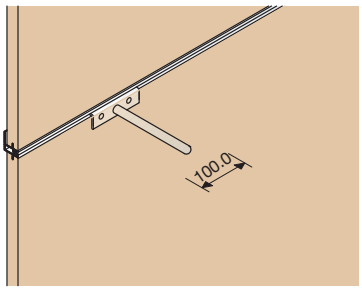

Glass shelf support.

Anodized	160.100.511	10

For 5 shelves.

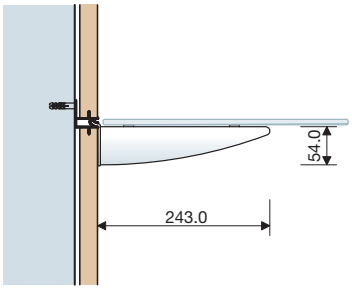

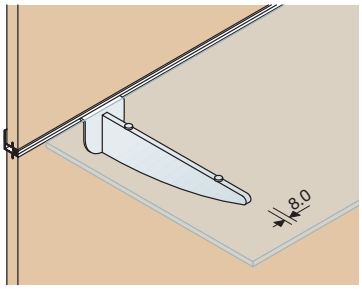

Blister rack

	Anodized	
Single	160.810.510	5
Double	160.820.516	6



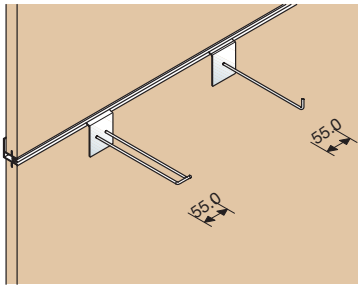

Hook hanger.

Anodized	160.900.515	10



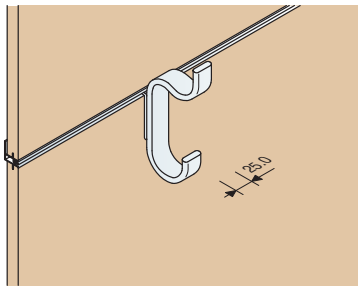

Miscellaneous.

Hook	161.215.515	20
Cushion support	161.225.514	



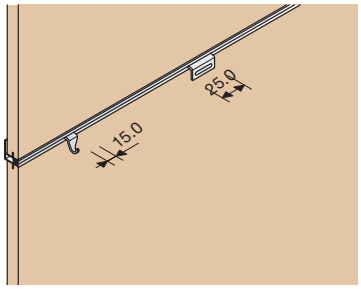

Accessories

Stand

Anodized	160.300.512	1



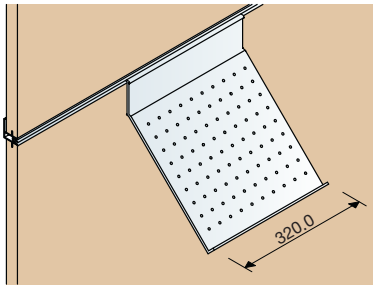

Folder-stand.

Anodized	160.400.516	1



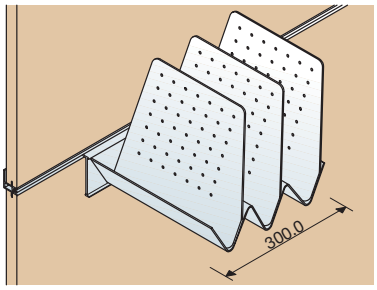

File-holder.

Anodized	160.500.513	1



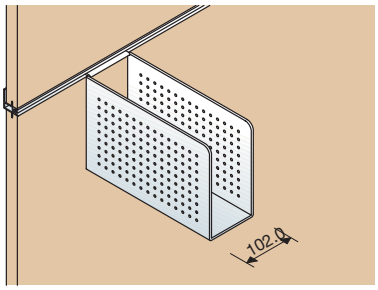

Tray shelf.

Length	350mm.	500mm.	
Depth 162	160.635.510	160.650.512	1
Depth 262	160.735.514	160.750.516	

Anodized



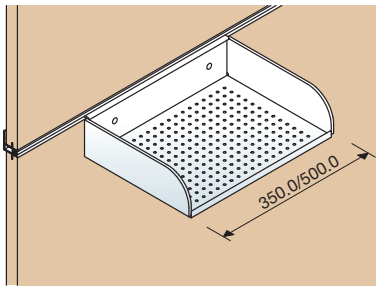

Accessories

Cd rack.

Length	510mm.	760mm.	To measure	
Anodized	161.051.516	161.076.510	161.000.512	1

With end covers.





Dvd rack.

	To measure	
Anodized	161.100.516	1

With end covers.





Basket

Anodized	160.200.515	1





Accessories

Chopping board rack.

Anodized	163.400.510	1





Knife-holder.

Anodized	163.600.511	1

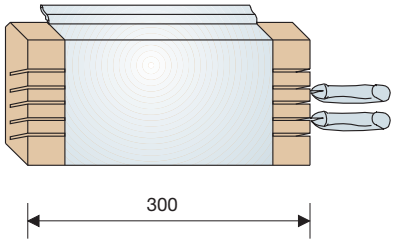



Kitchen roll holder.

Anodized	163.800.512	1





Jar holder.

Anodized	163.500.514	1





Rolling pin holder with rolling pin.

Anodized	163.700.515	1

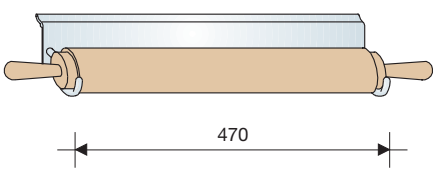



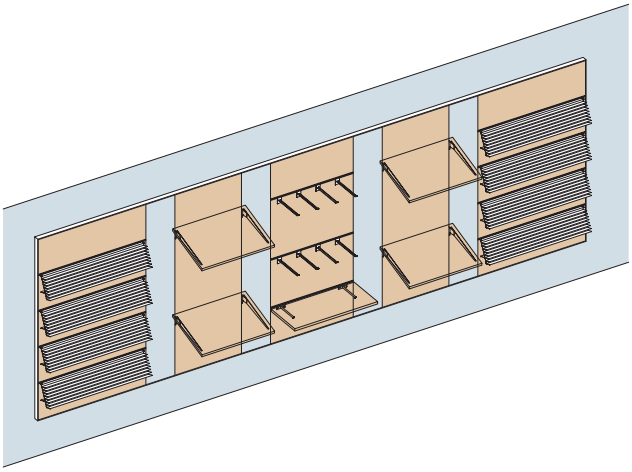

6 VERTICAL PANELLING ACCESSORIES

- Accessories for horizontal panelling systems.
- Accessories for vertical panelling systems.
- Accessories for independent profile systems.
- Easily adaptable to all panelling systems.

Wooden shelf support

Wooden shelf support.

Anodized	161.300.510	10

For 5 shelves.

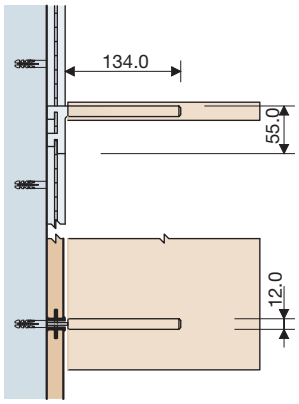

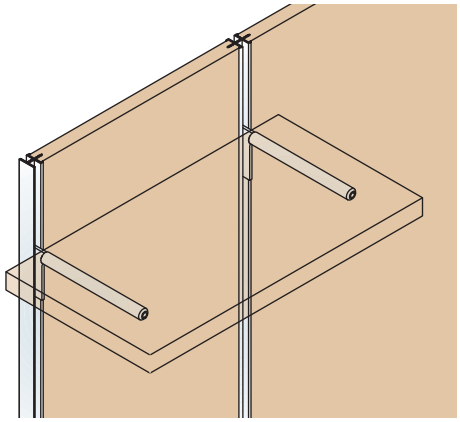

Wooden shelf support.

Anodized	161.400.514	10

For 5 shelves.

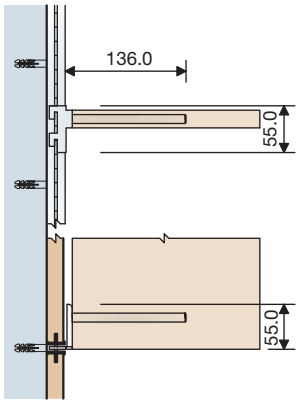

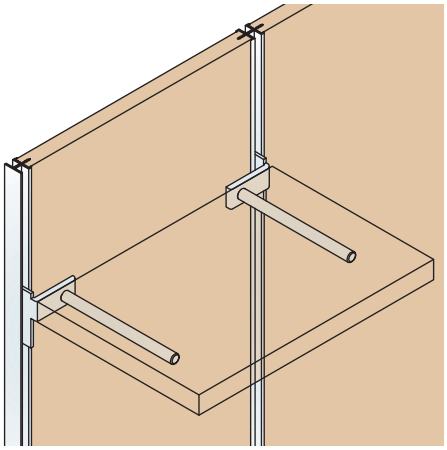

Wooden shelf support

Wooden shelf support.

Anodized	161.500.511	10

For 5 shelves.

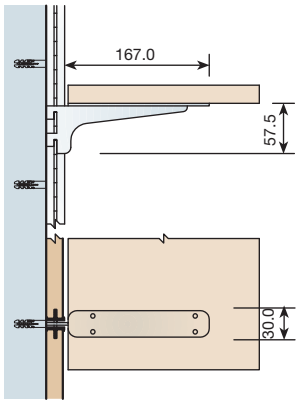

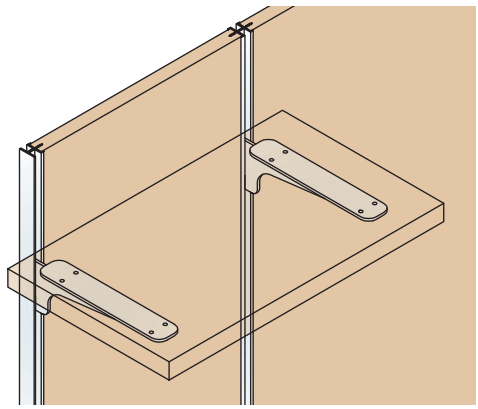

Wooden shelf support.

Anodized	161.600.515	10

For 5 shelves.

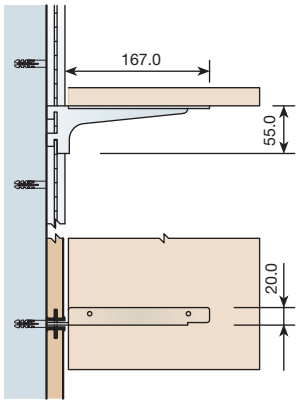

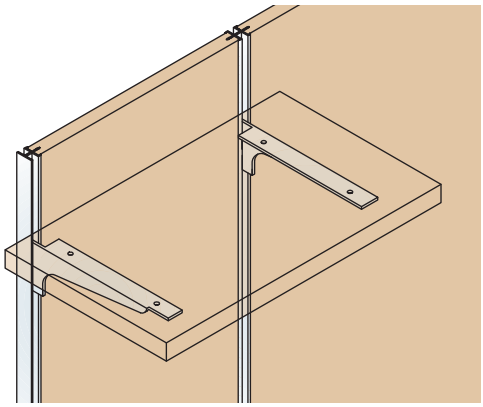

Wooden shelf support.

Length	200	300	
Anodized	161.720.510	161.730.516	10

For 5 shelves.

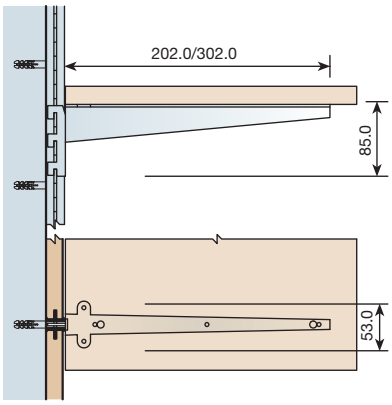

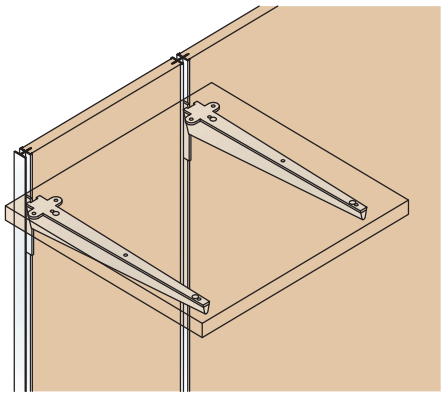

Wooden shelf support

Wooden shelf support.

Anodized	162.000.510	10

For 5 shelves.

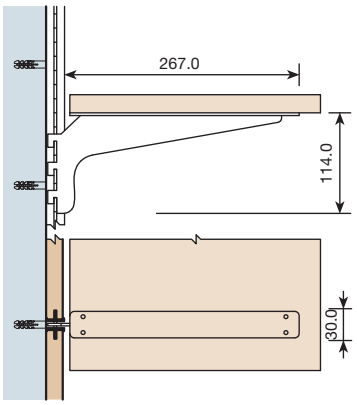

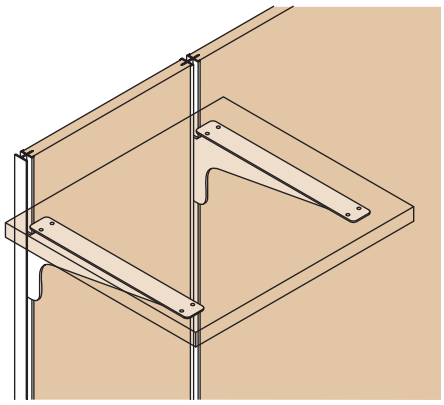

Wooden shelf support.

Anodized	162.100.514	10

For 5 shelves.

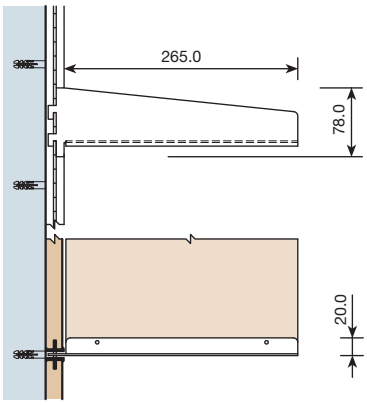

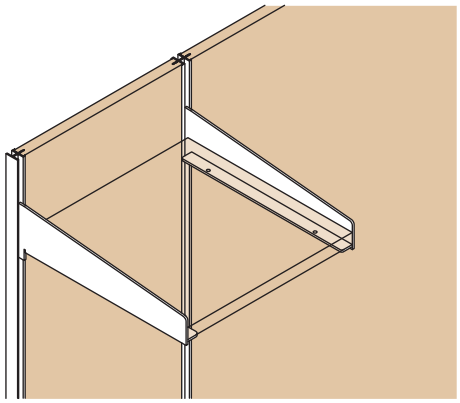

Wooden shelf support.

Anodized	162.200.511	10

For 5 shelves.

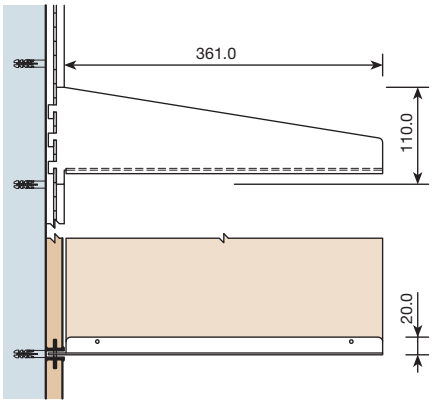

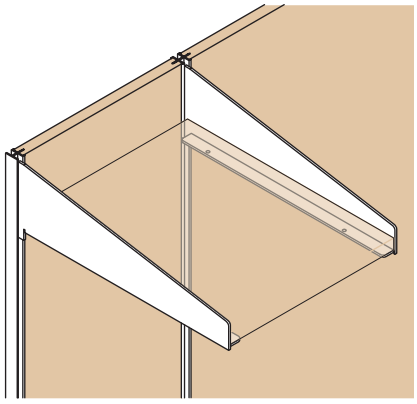

Glass shelf support

Glass shelf support.

Length	200	300	
Anodized	161.820.514	161.830.513	10

For 5 shelves.

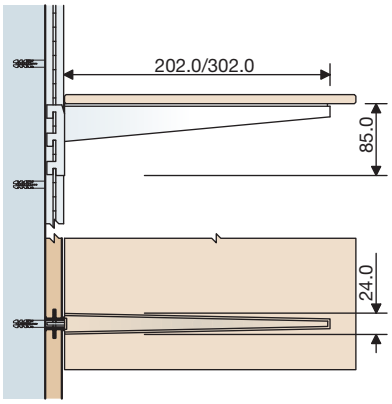

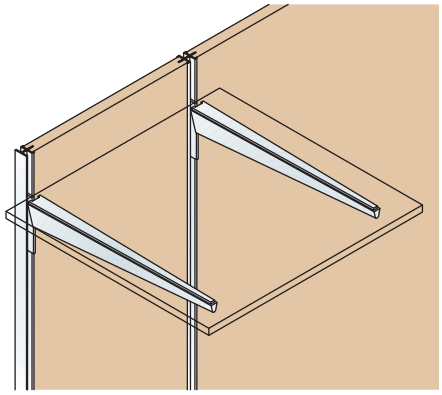

Accessories

Bar support.

Anodized	162.300.515	10

For10 bars.

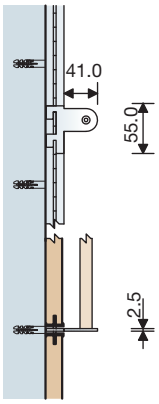

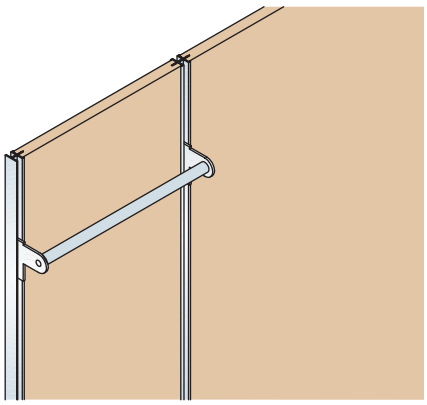

Accessories

Hanging bar.

	Anodized	
Plain	162.530.513	10
Ribbed	162.630.510	

3m bars.

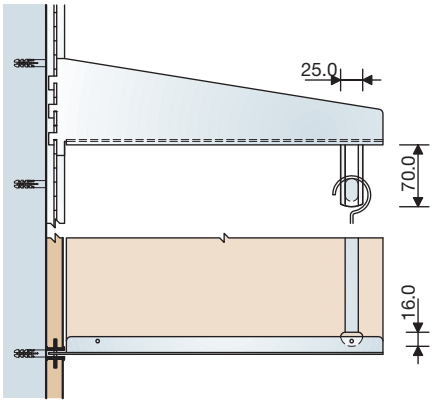

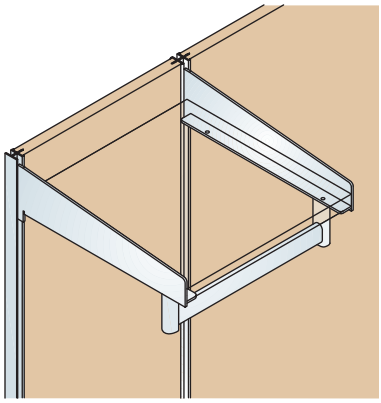

Tube support.

Anodized	162.700.510	10



NOTES

PROFILES FOR STRUCTURES

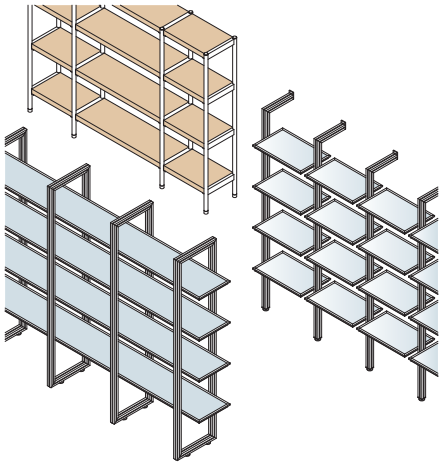

Profiles for aluminium structures:
> For multi-purpose structures 40x40mm
> For worktops and auxiliary structures 40x40mm.
> For structures 20x20mm

pp.

1 MULTI-PURPOSE STRUCTURE **STRUKT** 778

2 STRUCTURES 40X40 780

3 STRUCTURES 20X20 782

1 MULTI-PURPOSE STRUCTURE STRUKT 40x40

Straight post 40x40.

Anodized silk	151.100.515	1

Cut to size.





To release the channel, just pull off the protective aluminium strip

Post or cross-piece 40x40, one 45° cut.

Anodized silk	151.145.514	1

Cut to size.

Post or cross-piece 40x40, two 45° cuts.

Anodized silk	151.245.511	1

Cut to size.

Angle joint

Natural	519.500.100	1



Bracket joint

	40mm.	110mm.	
Anodized silk	519.904.512		1
Anodized silk		519.911.512	

The 40mm joint is supplied in boxes of 20 units, for 5 shelves. The 110mm joint comes in boxes of 10 units, for 5 shelves. Each reference includes a nut.



40mm joint to hold shelves at the corner.



110mm joint to hold shelves at the centre.

Adjustable leg.

Anodized silk	164.000.513	1



End strip to wall, ceiling or work surface support

Anodized silk	164.100.510	1

It may be used to join the structure to the wall or ceiling as well as joining it to horizontal elements (Work surfaces, tables...).



Nut for other elements.

Natural	164.200.105	1

This enables other elements to be attached, such as drawer units, wooden side units for hinges or wooden drawers, sides and back pieces to form a cabinet.

Shelf for glass or panel 10mm.

Type of assembly	Corner	Centre	
Normal	171.501.514	171.601.511	1
With supports and hanging bar	171.502.516	171.602.513	

Anodized silk. Cut and machined to measure. Includes the joining brackets and gaskets for the glass.

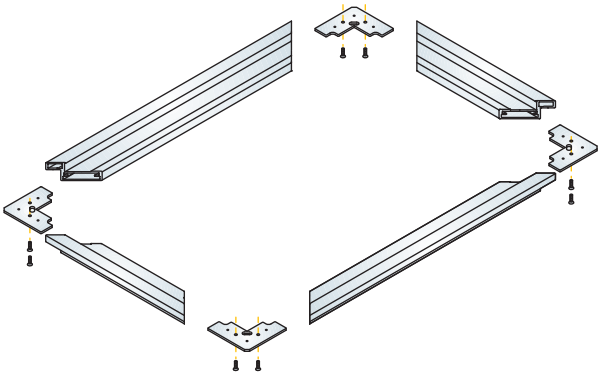

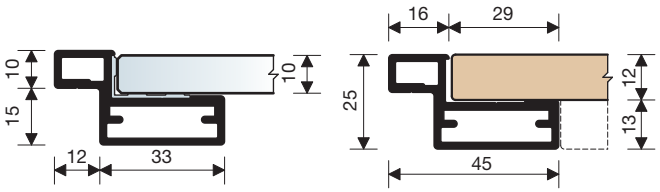

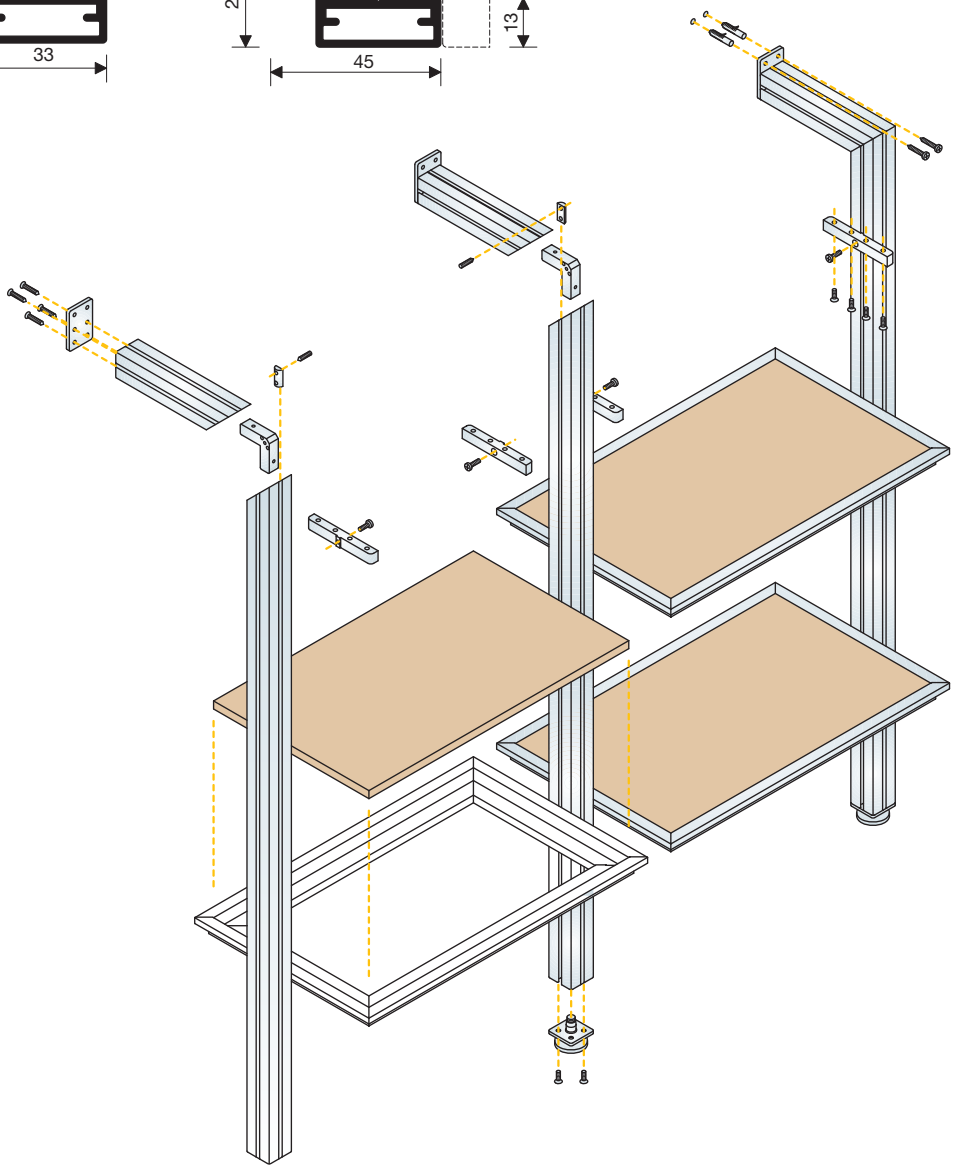

2 WORKTOP AND AUXILIARY STRUCTURES 40x40

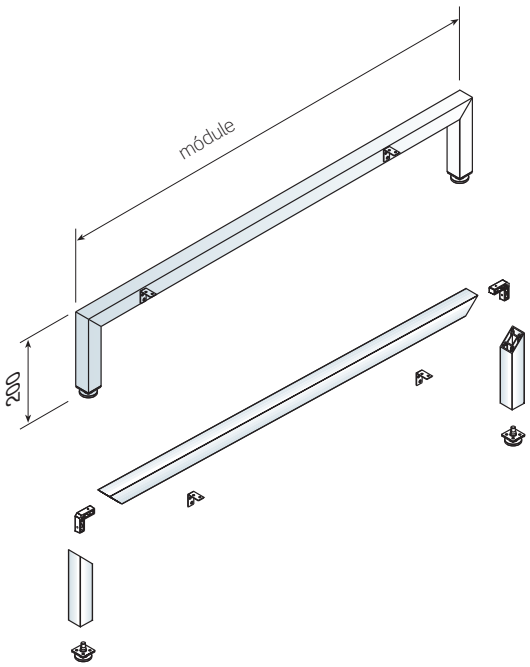

Bridge for worktop 40x40.

Module	Central	End	
450	165.145.551	165.045.554	
500	165.150.554	165.050.550	
560	165.156.552	165.056.555	
580	165.158.556	165.058.552	
600	165.160.553	165.060.556	
700	165.170.552	165.070.555	1
800	165.180.551	165.080.554	
900	165.190.550	165.090.553	
1000	165.191.552	165.091.555	
1200	165.199.554	165.099.550	
To measure (height 200mm)	165.100.552	165.000.555	
To measure	165.102.556	165.002.552	

Anodized steel. Supplied dismantled in boxes of 1 unit with the necessary joining fittings and screws. Total adjustable height 200±5mm.

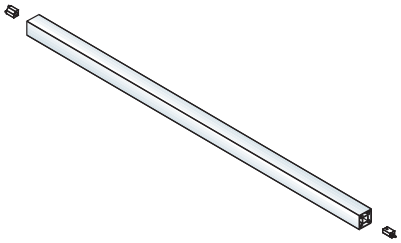

Cross-piece for worktop 40x40.

Length	Anodized steel	
To measure	165.200.556	2

Supplied dismantled in boxes of 2 nuits with the necessary joining fittings and screws.

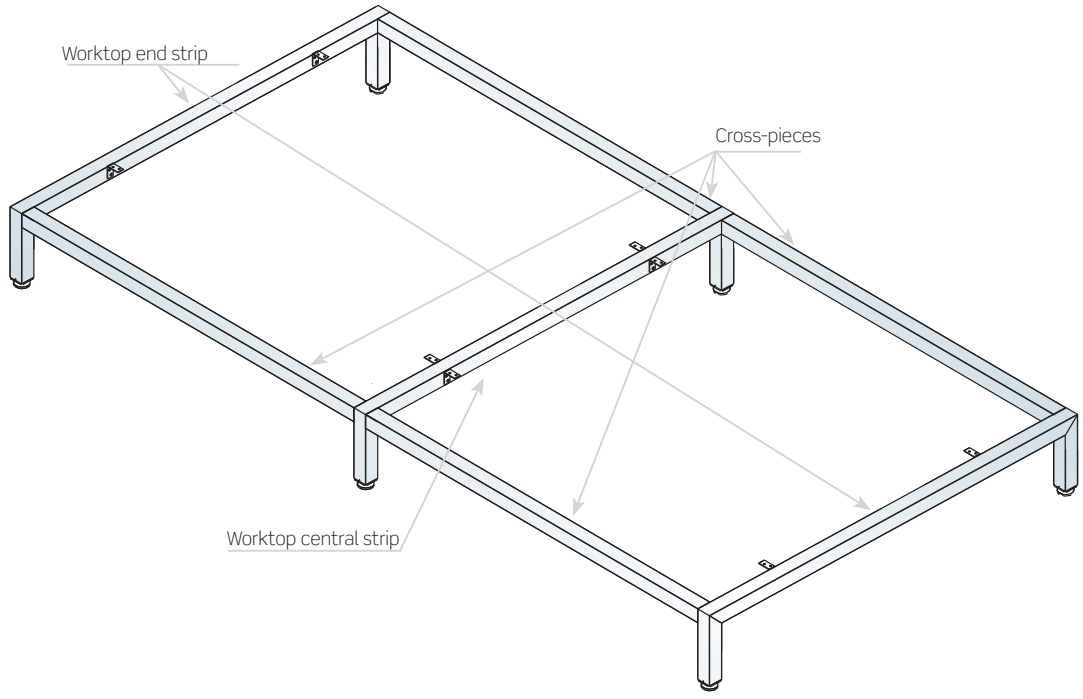

End strip for auxiliary structure 40x40.

Module	One cross-piece	Two cross-pieces
450	167.045.550	168.045.555
500	167.050.553	168.050.551
560	167.056.551	168.056.556
580	167.058.555	168.058.553
600	167.060.552	168.060.550
700	167.070.551	168.070.556
800	167.080.550	168.080.555
900	167.090.556	168.090.554
1000	167.091.551	168.091.556
1200	167.099.553	168.099.551
To measure (height 900mm)	167.000.551	168.000.556
To measure	167.003.550	168.003.555

1

Anodized steel. Supplied dismantled in boxes of 1 unit with the necessary fittings and screws. Total adjustable height 900±5mm. (700 Module plus skirting board or worktop). Please check for other structures.

Central strip for auxiliary structure 40x40.

Module	One cross-piece	Two cross-pieces
450	169.045.553	170.045.551
500	169.050.556	170.050.554
560	169.056.554	170.056.552
580	169.058.551	170.058.556
600	169.060.555	170.060.553
700	169.070.554	170.070.552
800	169.080.553	170.080.551
900	169.090.552	170.090.550
1000	169.091.554	170.091.552
1200	169.099.556	170.099.554
To measure (height 900mm)	169.000.554	170.000.552
To measure	169.003.553	170.003.551

1

Anodized steel. Supplied dismantled in boxes of 1 unit with the necessary fittings and screws. Total adjustable height 900±5mm. (700 module plus skirting board or worktop). Please check for other structures.

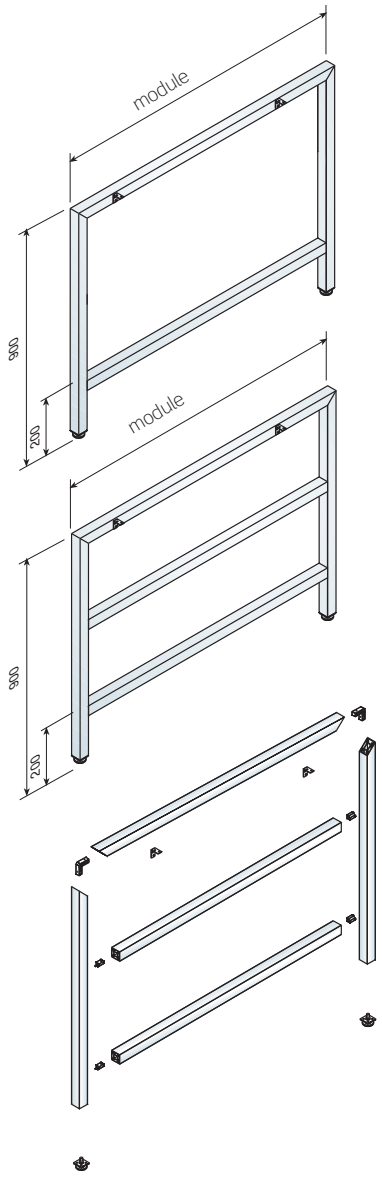

Cross-piece for structures 40x40.

Length	Anodized steel
To measure	165.300.553

2

Supplied dismantled in boxes of 2 units with the necessary fittings and screws, as well as the supports for wooden and glass shelves.





Machining of the wooden shelf

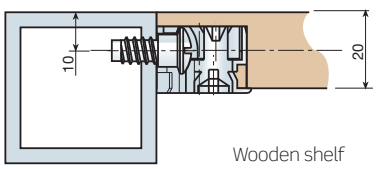

Wooden shelf

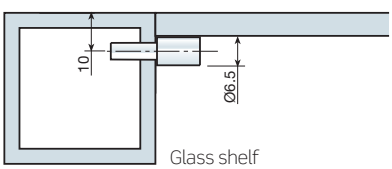

Glass shelf

3 AUXILIARY STRUCTURES 20x20

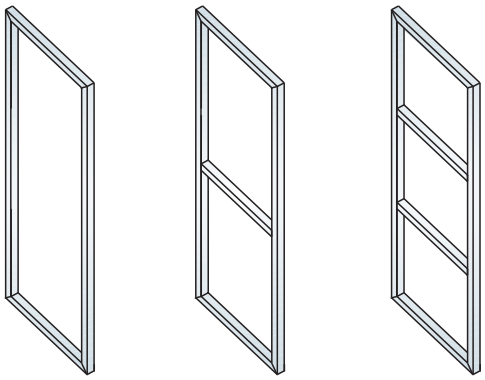

End strip for auxiliary structure 20x20.

Module	No cross-piece	One cross-piece	Two cross-pieces	
700x300	165.730.552	167.730.555	168.730.553	
700x330	165.733.551	167.733.554	168.733.552	
900x300	165.930.553	167.930.556	168.930.554	1
900x330	165.930.552	167.933.555	168.933.553	
	165.702.552	167.702.555	168.702.553	

Anodized steel-coloured. Supplied dismantled in boxes of 1 unit with the necessary fittings and screws. Please check for other structures.

Central strip for auxiliary structure 20x20.

Module	No cross-piece	One cross-piece	Two cross-pieces	
700x300	166.730.550	169.730.551	170.730.556	
700x330	166.733.556	169.733.550	170.733.555	
900x300	166.930.551	169.930.552	170.930.550	10
900x330	166.933.550	169.933.551	170.933.556	
	166.702.550	169.702.551	170.702.556	

Anodized steel-coloured. Supplied dismantled in boxes of 10 units.

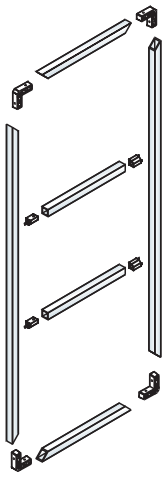

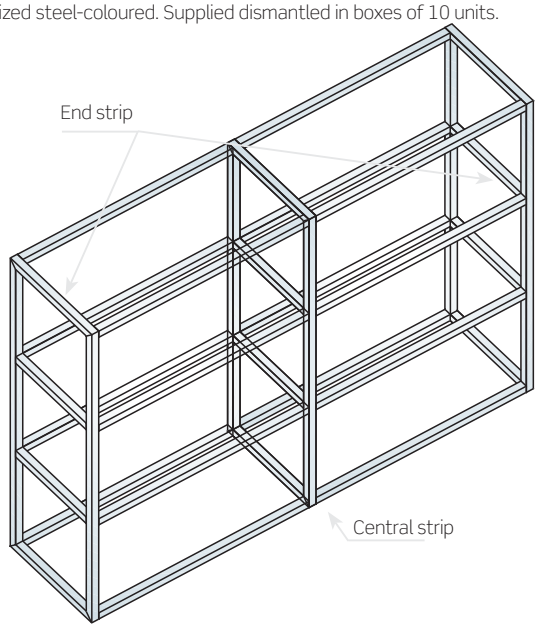

Cross-piece 20x20

Length	Anodized steel	
To measure	165.500.554	2

Supplied dismantled in boxes of 2 units with the necessary fittings and screws, as well as the supports for wooden and glass shelves.



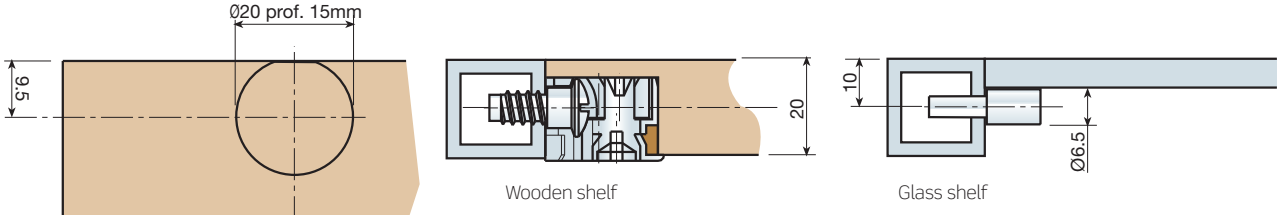

Machining of the wooden shelf

Wooden shelf

Glass shelf

Sample set-ups

Structure 40x40 incorporated into lower cabinet

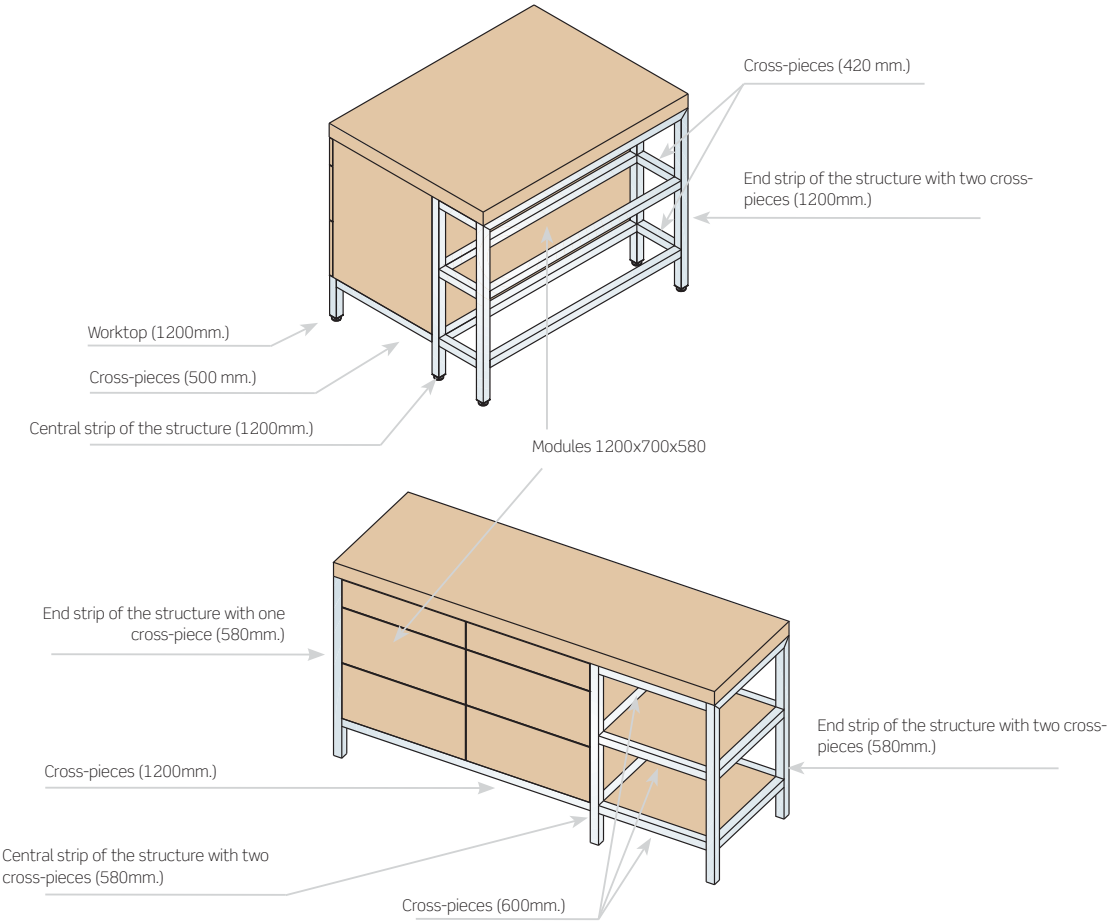

Structure 20x20 incorporated into the upper cabinet

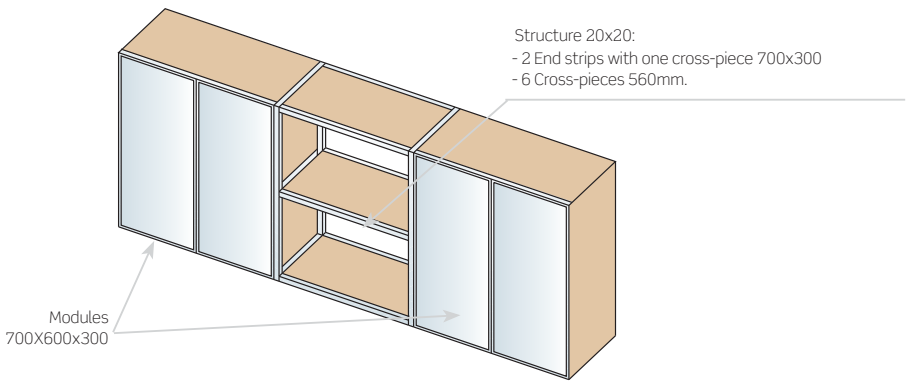

EQUIPMENT FOR INSIDE CABINETS

A whole range of extra furniture accessories

pp.

1 CD, DVD, VHS HOLDERS 786

2 ALUMINIUM SHELF 788

3 WIRE DUCTING 790

4 ALUMINIUM TIE RACK 791

5 TROUSER RACK 792

6 CLOTHES RAILS 793
- Dressy 793
- Aluminium clothes rail 794
- Clothes rail and supports 795

7 CLOTHES HOOKS 797

8 SHOE RACK 798

9 TIE RACK 798

10 TROUSER RACK 799

11 MOVABLE HANGER 800

1 CD, DVD, VHS HOLDERS

CD holder.

Aluminium anodized silk	163.100.512	1

Cut to size.

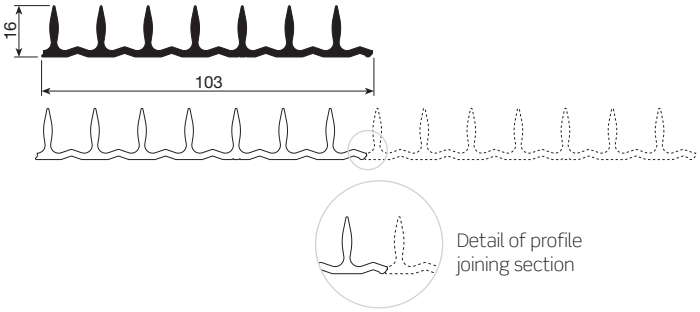

DVD holder.

Aluminium anodized silk	163.200.516	1

Cut to size.

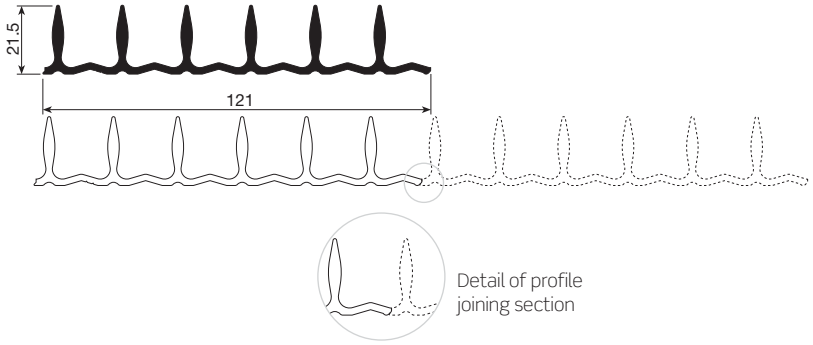

CD, DVD, VHS holder.

Aluminium anodized silk	163.300.513	1

Cut to size.

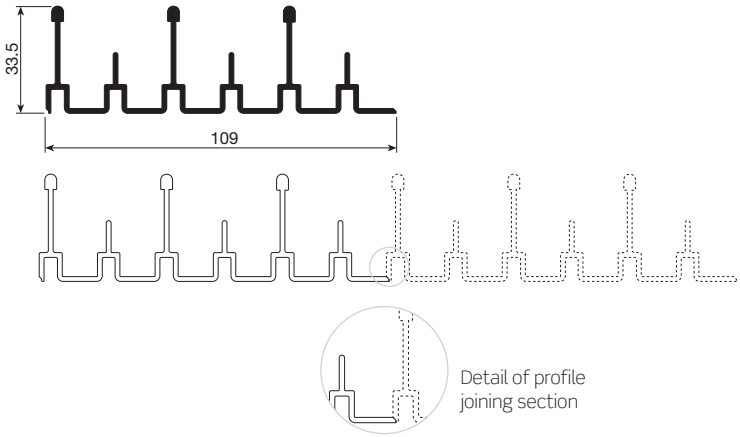

Wall-fix CD holder.

Aluminium anodized silk	163.000.515	1

Cut to size.

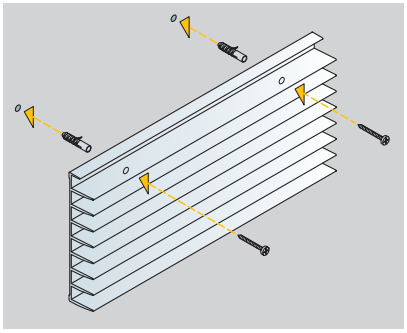

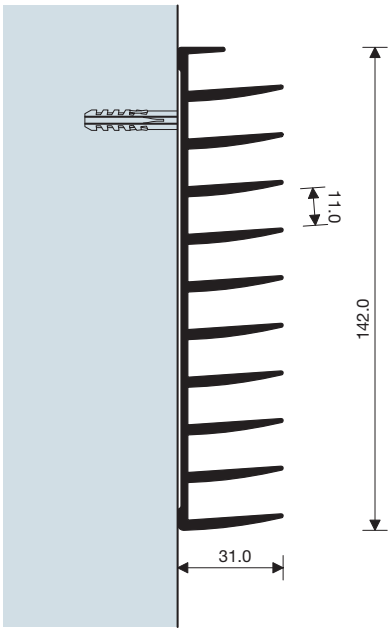

Glass shelf support.

Aluminium anodized silk	158.200.512	1

Cut to size.

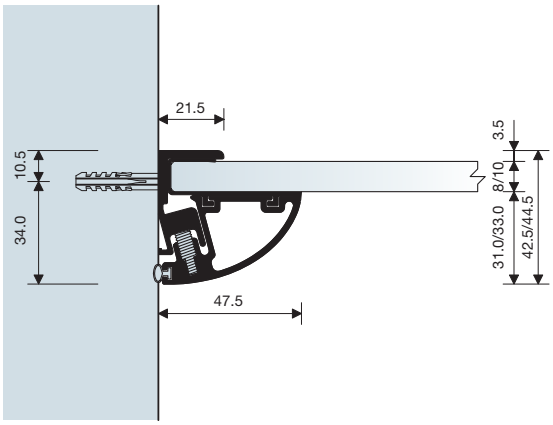

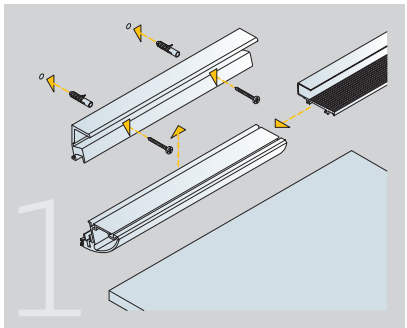

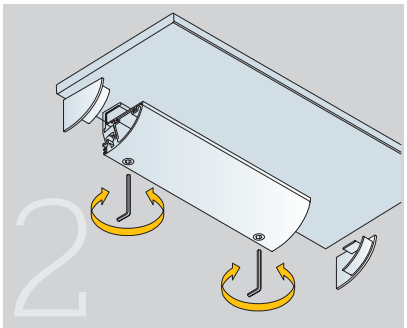

2 ALUMINIUM SHELF

Aluminium shelf.

Anodized silk	164.600.516	1

Cut to size. Each ref. Consists of one shelf and two supports.

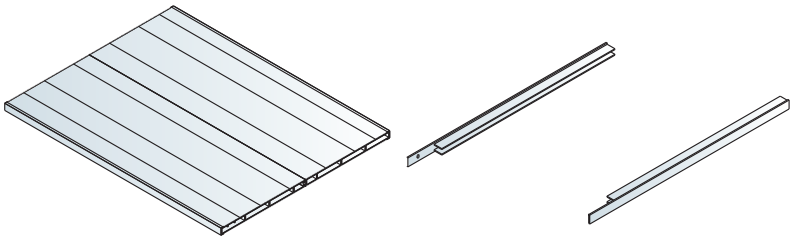

Technical data

Assembly

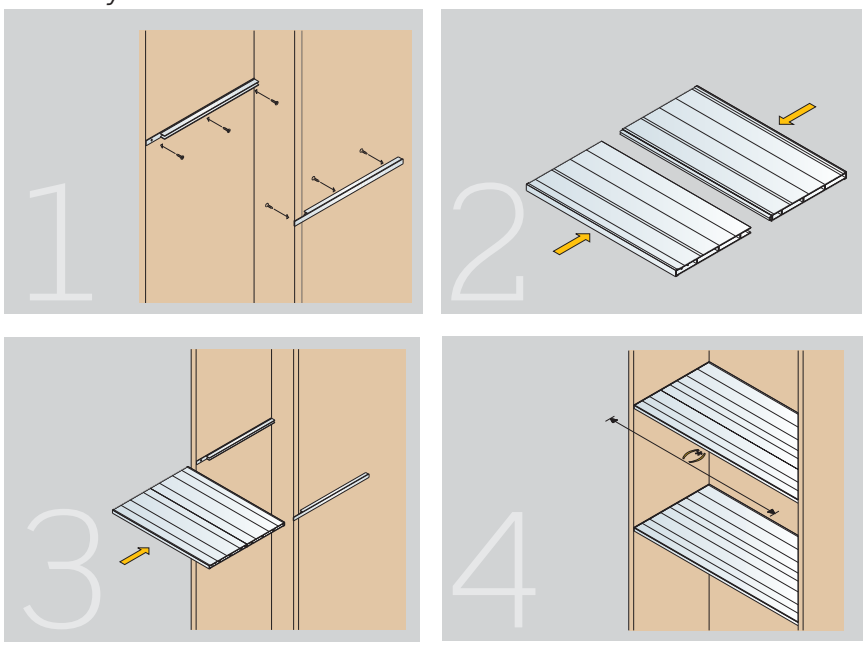

Tray for glass, wood and steel.

Anodized silk	164.800.510	1

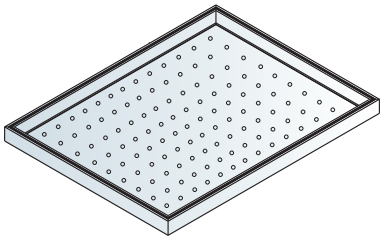

Technical data

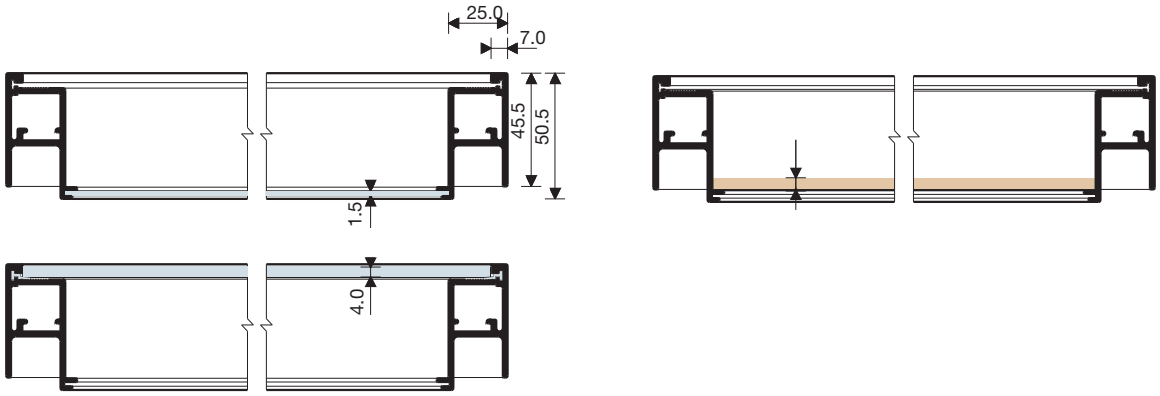

Assembly

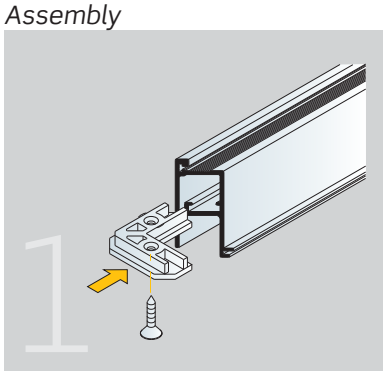

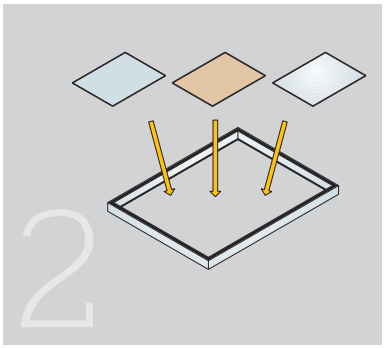

Fixed tray

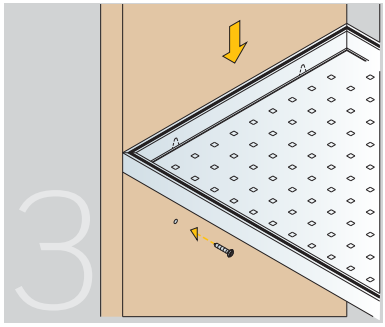

Pull-out tray

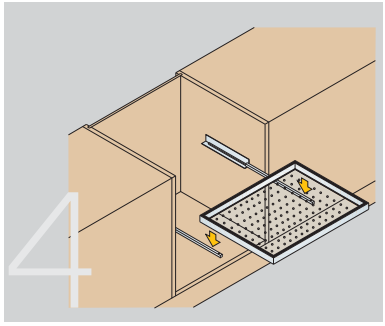

3 WIRE DUCTING

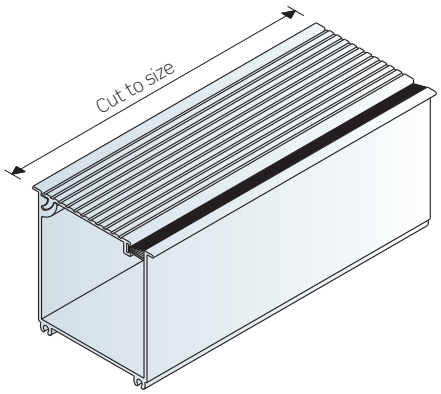

Wire ducting

	Cut to measure	
Anodized silk	163.900.516	1

Technical data

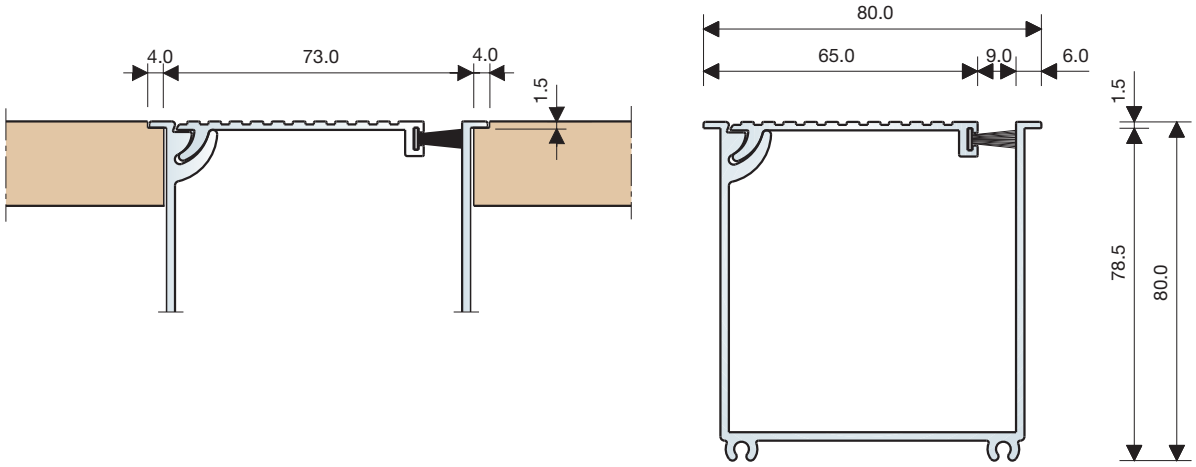

Assembly

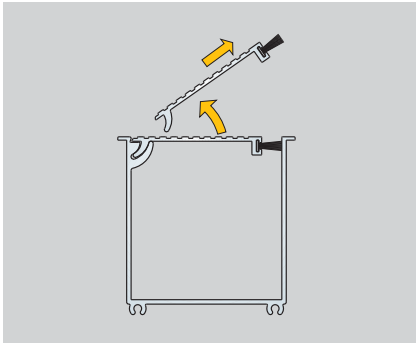

4 ALUMINIUM TIE RACK

Tie rack

Anodized silk	164.400.515	1

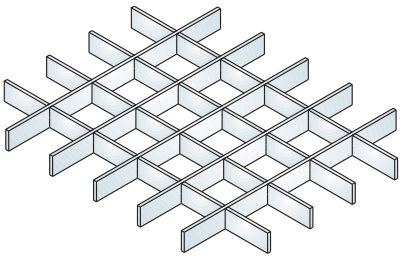

Technical data

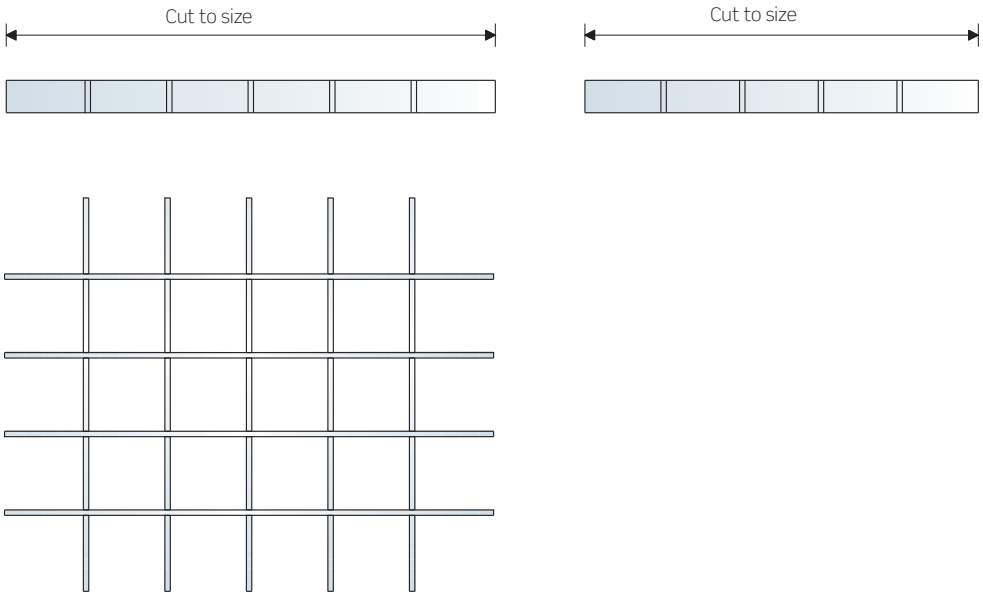

Assembly

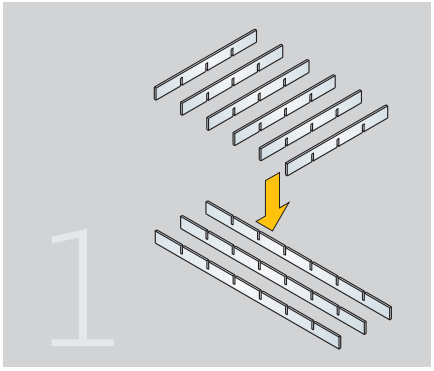

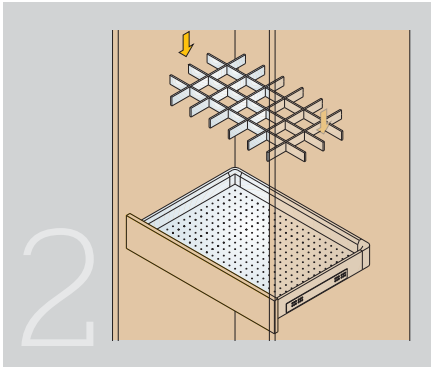

5 TROUSER RACK

Trouser rack.

Anodized silk	164.700.513	1

Each reference is made up 2 exterior profiles, bars according to size and 1 bag of mounting supports.

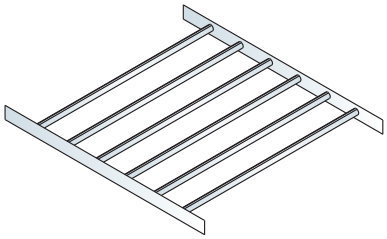

Technical data

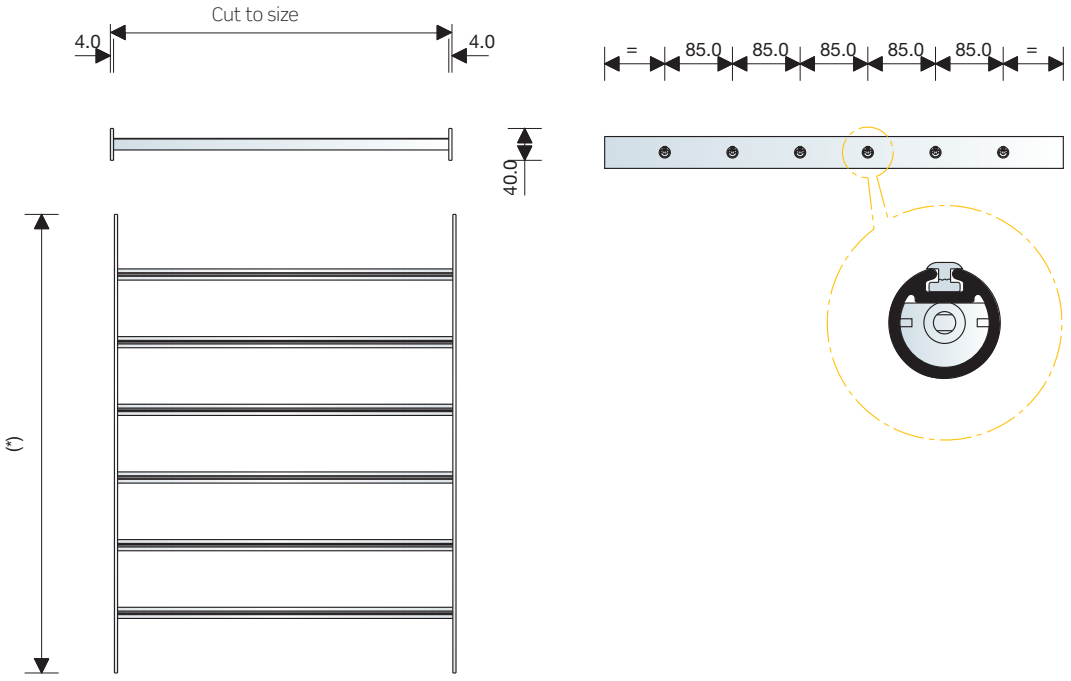

Assembly

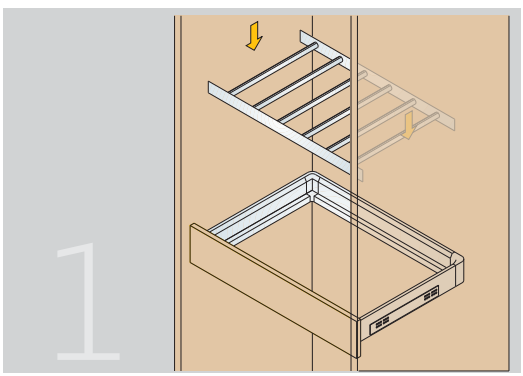

6 CLOTHES RAILS

Dressy

Clothes rail.

	Anodized silk	
Plain	162.530.513	10
Ribbed	162.630.510	

3m bars.

Support for tube.

Anodized silk	162.800.514	20



Intermediate support for tube.

Anodized silk	162.900.511	20







Technical data

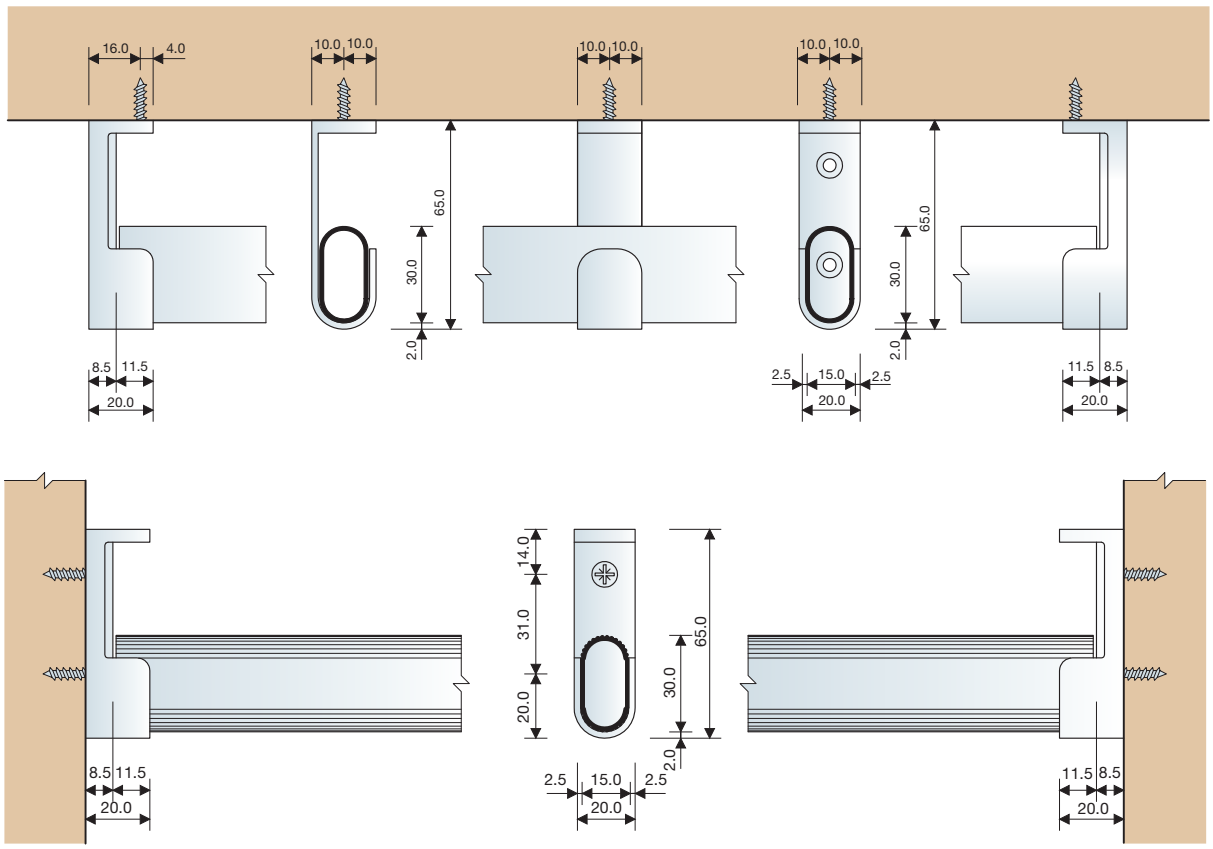

Aluminium clothes rails

Shelf unit hanger.

Anodized silk	162.400.512	1

Each ref. Consists of one bar cut to size, 2 supports and two aluminium cover caps.



Technical data

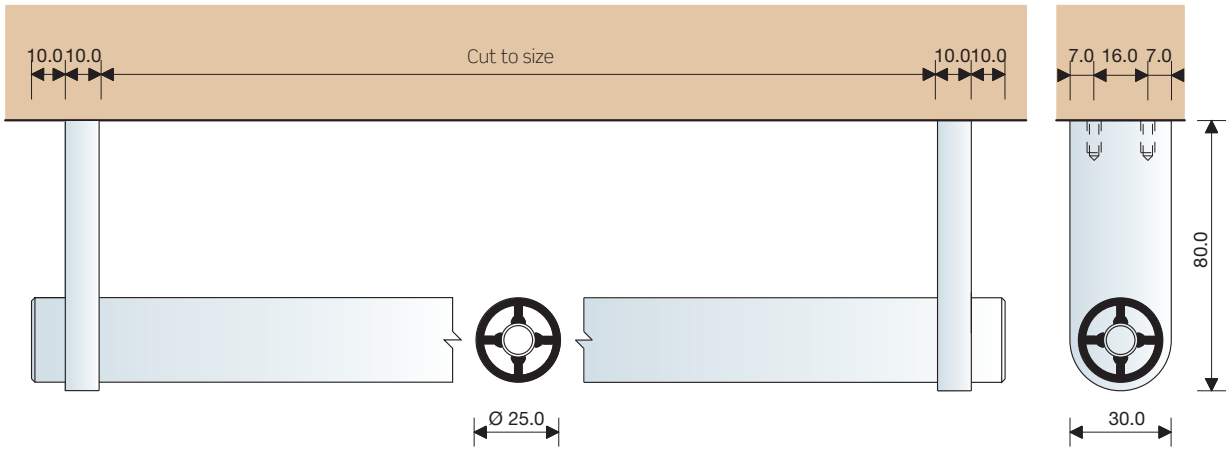

Assembly

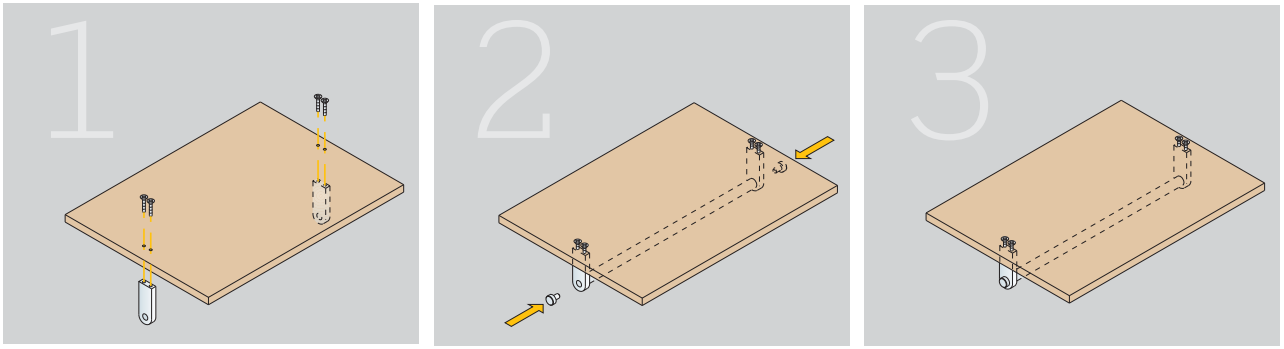

Hanger tube and support

Plastic coated 20x17,5 hanger tube.

Length	Special length	5m	
White	885.000.001	885.100.005	Special length
Brown	885.000.012	885.100.016	25
Golden	885.000.174	885.100.171	5 m
Black	885.000.023	885.100.020	10

Plastic coated steel.



Steel support for 2 screws.

Zinc-plated	880.800.034	
Bichromated	880.800.056	1.000
Blued	880.800.255	



Support for 2 screws.

White	880.100.001	
Brown	880.100.012	200
Black	880.100.023	



Support for 1 screw.

White	880.000.004	
Brown	880.000.015	200
Black	880.000.026	



Intermediate support.

White	880.321.002	
Brown	880.321.013	100
Black	880.321.024	



End support.

White	880.221.005	
Brown	880.221.016	100
Black	880.221.020	

Hanging bar and supports

Oval hanging bar 30x15 welded.

Length	To order	4 metres	
Nickel-plated	884.250.065	884.740.065	To order 25
Brass-coated	884.250.113	884.740.113	4 Metres 15

Made of steel.



Oval hanging bar 22x16.

Length	To order	5 metres	
Anonid. Silver	884.000.795	884.100.792	To order 25 5 Metres 10
Anonid. Gold	884.000.773	884.100.770	

Made of aluminium



Oval hanging bar 30x16.

Length	To order	5 metres	
Anonid. Silver	884.930.793	884.830.796	To order 25 5 Metres 10
Anonid. Gold	884.930.771	884.830.774	

Made of aluminium.



Bar support – 2 screws.

Nickel-plated	881.000.061	200
Brass-coated and varnished	881.000.573	



Bar support – 1 screw + pivot Ø10.

Nickel-plated	881.100.065	200
Brass-coated and varnished	881.100.570	



End bar support.

Nickel-plated	880.630.063	100
Brass-coated and varnished	880.630.575	



Intermediate bar support.

Nickel-plated	880.730.060	100
Brass-coated and varnished	880.730.572	

7 HOOKS AND HANGERS

Clothes hanger.

Anodized silk	164.500.512	5

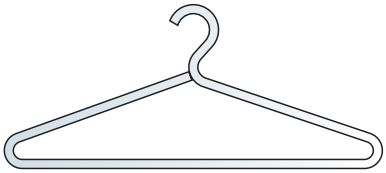

Folding clothes hanger for 6 hangers.

	Chrome-plated	
Hanger	446.528.121	25

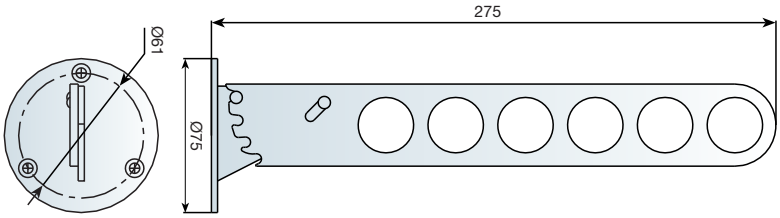

Double folding hanger.

Width (mm.)	Chrome-plated/grey	
500-650	446.850.143	
650-880	446.865.145	4
880-1200	446.888.142	

Each reference consists of a complete folding hanger with brackets so that it can be fixed to the side of the wardrobe.

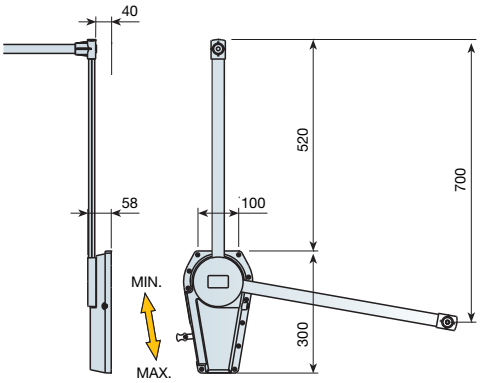

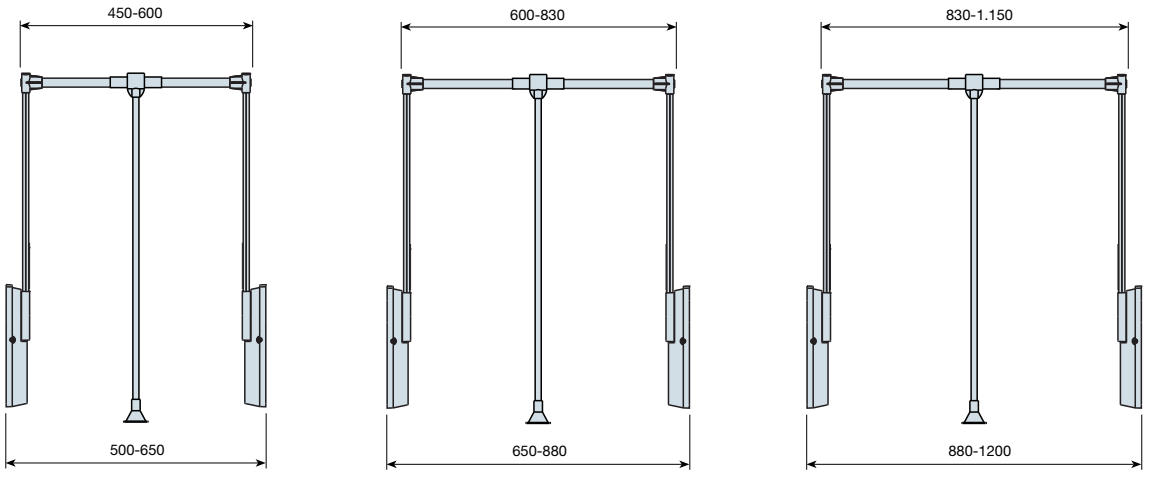

8 SHOE RACK

Extendable shoe rack.

Extension	Chrome-plated	
480-800mm.	446.740.125	20

Each reference consists of a shoe rack with two black plastic brackets.

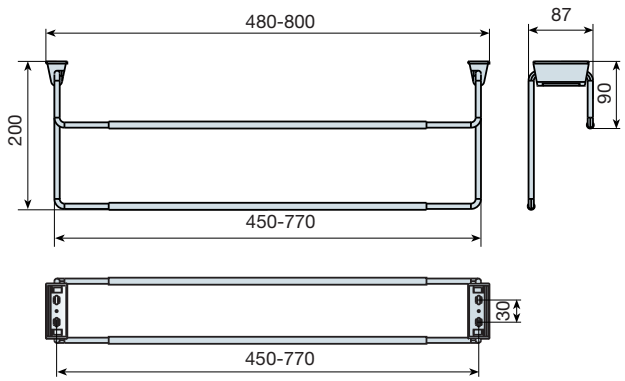

9 TIE RACK

16-Hook tie rack.

Black	446.216.024	5

Screws supplied.



Tie rack.

Length	Grey	
450mm	446.445.145	32

Each reference consists of one tie rack with its corresponding bracket.

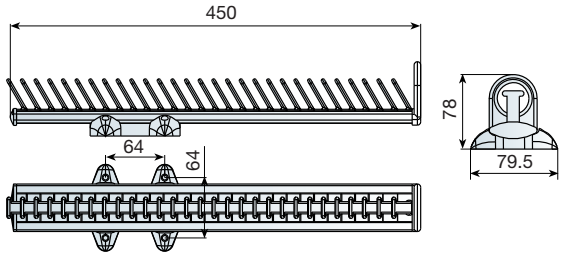

10 TROUSER RACK

Trouser rack.

Length	Anodized silver	
450mm	446.345.141	12

Each reference consists of one trouser rack with its corresponding bracket.

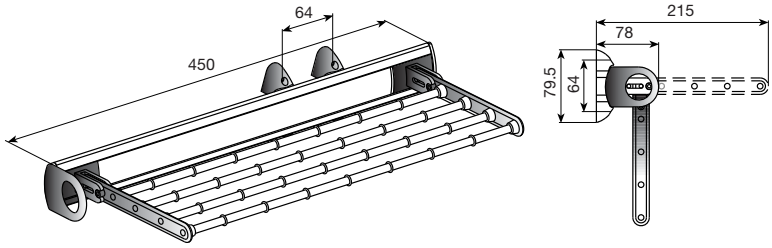

Pull-out trouser rack (fixed to wardrobe ceiling).

Extension	Chrome-plated	
10 Bars	446.610.124	5

Each reference consists of one trouser rack with 2 ball bearing runners with brackets to be fixed onto the ceiling of the wardrobe.

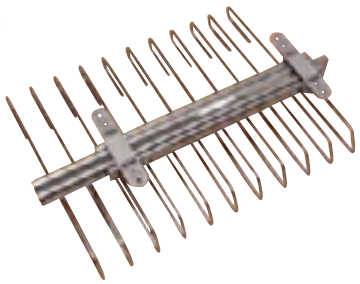

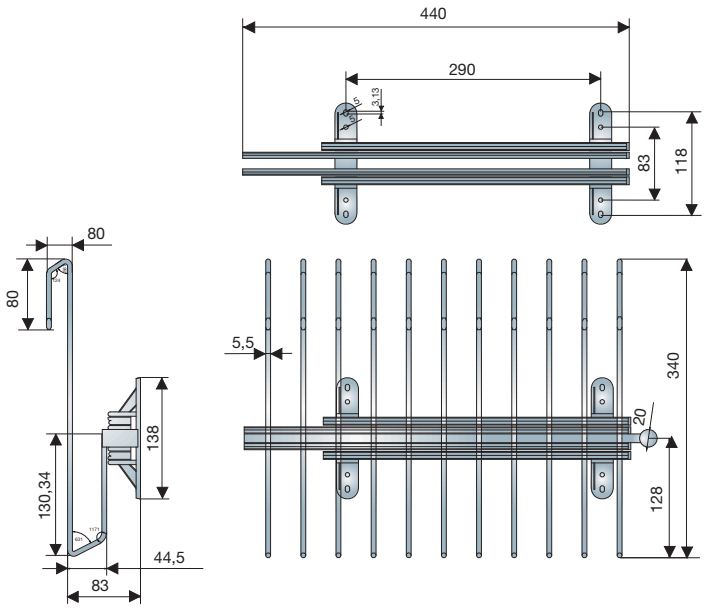

11 MOVABLE HANGER

Movable hanger.

	Length		
White Ral 9003	300	889.330.002	
Brown Ral 8016	300	889.330.013	
Black Ral 9005	300	889.330.024	
White Ral 9003	350	889.335.005	100
Brown Ral 8016	350	889.335.016	
Black Ral 9005	350	889.335.020	

Movable hanger with 2 plastic bodies and nickel-plated metal rods.

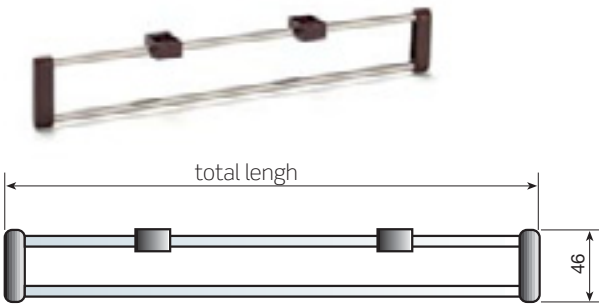

Movable hanger.

	Length		
White Ral 9003	300	889.830.001	
Brown Ral 8016	300	889.830.012	
Black Ral 9005	300	889.830.023	
White Ral 9003	350	889.835.004	50
Brown Ral 8016	350	889.835.015	
Black Ral 9005	350	889.835.026	

Hanger with plastic body and nickel-plated metal tube.

Movable metal hanger.

L		
300	889.630.066	50
350	889.635.062	

100% Metallic hanger.

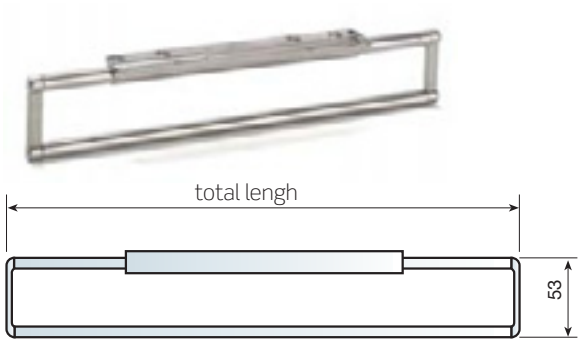

Movable hanger.

	Length		
White Ral 9003	300	889.930.005	
Gold	300	889.930.171	
Black Ral 9005	300	889.930.020	
White Ral 9003	350	889.935.001	25
Gold	350	889.935.174	
Black Ral 9005	350	889.935.023	

Movable hanger with plastic body, upper nickel-plated tube, lower plastic-coated tube in white, gold and black.

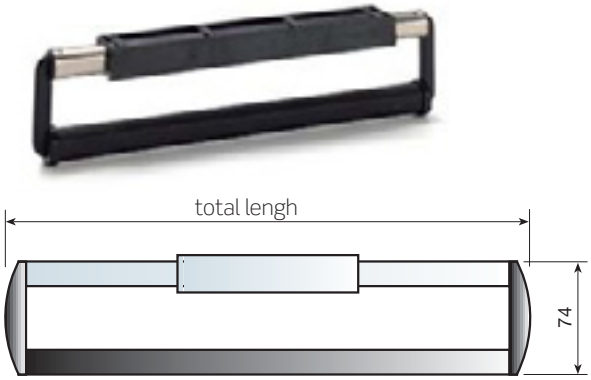

NOTES

INDAUX
FURNITURE FITTINGS MANUFACTURER

Index of references

This index of references aims to make it easier to find products in our catalogue. The first column lists the reference numbers and the second column lists the page number where you will find the product in question. The references are made up of nine numbers, the last three of which represent, in this order, the colour, finish and control digit.

Reference	pp.
010.000.115	117
010.009.112	117
010.050.213	117
010.050.316	117
010.050.412	117
011.000.113	117
011.009.110	117
011.050.211	117
011.050.314	117
011.050.410	117
012.000.111	117
012.009.115	117
012.050.216	117
012.050.312	117
012.050.415	117
020.020.044	92
020.020.162	92
020.020.173	92
020.021.046	92
020.021.164	92
020.021.175	92
020.023.043	93
020.023.161	93
020.023.172	93
020.030.010	93
020.060.040	92
020.060.166	92
020.060.176	92
020.063.046	93
020.063.164	93
020.063.175	93
020.069.044	92
020.069.162	92
020.069.173	92
020.070.046	92
020.070.164	92
020.070.175	92
020.071.041	92
020.071.166	92
020.071.170	92
020.073.045	93
020.073.163	93
020.073.174	93
021.020.042	92
021.020.160	92
021.020.171	92
021.021.044	92
021.021.162	92
021.021.173	92
021.023.041	93
021.023.166	93
021.023.170	93
021.030.015	93
021.060.045	92
021.060.163	92
021.060.174	92
021.063.044	93
021.063.162	93
021.063.173	93
021.069.042	92
021.069.160	92
021.069.171	92
021.070.044	92
021.070.162	92
021.070.173	92
021.071.046	92
021.071.164	92
021.071.175	92

Reference	pp.
021.073.043	93
021.073.161	93
021.073.172	93
022.020.165	92
022.020.176	92
022.021.160	92
022.021.171	92
022.023.164	93
022.023.175	93
022.030.013	93
022.060.161	92
022.060.172	92
022.063.160	93
022.063.171	93
022.069.165	92
022.069.176	92
022.070.160	92
022.070.171	92
022.071.162	92
022.071.173	92
022.073.166	93
022.073.170	93
023.120.160	92
023.120.171	92
023.121.162	92
023.121.173	92
023.123.166	93
023.123.170	93
023.160.163	92
023.160.174	92
023.163.162	93
023.163.173	93
023.169.160	92
023.169.171	92
023.170.162	92
023.170.173	92
023.171.164	92
023.171.175	92
023.173.161	93
023.173.172	93
024.120.165	92
024.120.176	92
024.121.160	92
024.121.171	92
024.123.164	93
024.123.175	93
024.160.161	92
024.160.172	92
024.163.160	93
024.163.171	93
024.169.165	92
024.169.176	92
024.170.160	92
024.170.171	92
024.171.162	92
024.171.173	92
024.173.166	93
024.173.170	93
025.120.163	92
025.120.174	92
025.121.165	92
025.121.176	92
025.123.162	93
025.123.173	93
025.160.166	92
025.160.170	92
025.163.165	93
025.163.176	93

Reference	pp.
025.169.163	92
025.169.174	92
025.170.165	92
025.170.176	92
025.171.160	92
025.171.171	92
025.173.164	93
025.173.175	93
026.120.065	92
026.120.113	92
026.121.060	92
026.121.115	92
026.123.112	93
026.160.061	92
026.160.116	92
026.163.115	93
026.169.065	92
026.169.113	92
026.170.060	92
026.170.115	92
026.171.062	92
026.171.110	92
026.173.114	93
028.120.061	92
028.120.116	92
028.121.063	92
028.121.111	92
028.123.115	93
028.160.064	92
028.160.112	92
028.163.111	93
028.169.061	92
028.169.116	92
028.170.063	92
028.170.111	92
028.171.065	92
028.171.113	92
028.173.110	93
029.120.066	92
029.120.114	92
029.121.061	92
029.121.116	92
029.123.113	93
029.160.062	92
029.160.110	92
029.163.116	93
029.169.066	92
029.169.114	92
029.170.061	92
029.170.116	92
029.171.063	92
029.171.111	92
029.173.115	93
030.020.012	78
030.020.045	78
030.021.014	78
030.021.040	78
030.023.044	79
030.030.022	79
030.040.124	78
030.041.126	78
030.043.123	79
030.060.015	78
030.060.041	78
030.060.925	78
030.063.040	79
030.063.924	79
030.069.012	78

Reference	pp.
030.069.045	78
030.069.922	78
030.070.014	78
030.070.040	78
030.070.924	78
030.071.016	78
030.071.042	78
030.071.926	78
030.073.046	79
030.073.923	79
031.020.010	78
031.020.043	78
031.021.012	78
031.021.045	78
031.023.042	79
031.030.020	79
031.040.122	78
031.041.124	78
031.043.121	79
031.060.013	78
031.060.046	78
031.060.923	78
031.063.045	79
031.063.922	79
031.069.010	78
031.069.043	78
031.069.920	78
031.070.012	78
031.070.045	78
031.070.922	78
031.071.014	78
031.071.040	78
031.071.924	78
031.073.044	79
031.073.921	79
032.120.012	78
032.121.014	78
032.130.022	79
032.140.124	78
032.141.126	78
032.143.123	79
032.160.015	78
032.160.925	78
032.163.924	79
032.169.012	78
032.169.922	78
032.170.014	78
032.170.924	78
032.171.016	78
032.171.926	78
032.173.923	79
033.020.120	78
033.021.122	78
033.023.126	79
033.060.123	78
033.063.122	79
033.069.120	78
033.070.122	78
033.071.124	78
033.073.121	79
034.020.125	78
034.021.120	78
034.023.124	79
034.060.121	78
034.063.120	79
034.069.125	78
034.070.120	78
034.071.122	78

Reference	pp.
034.073.126	79
036.120.125	78
036.121.120	78
036.123.124	79
036.160.121	78
036.163.120	79
036.169.125	78
036.170.120	78
036.171.122	78
036.173.126	79
037.130.026	79
037.140.121	78
037.141.123	78
037.143.120	79
037.160.922	78
037.163.921	79
037.169.926	78
037.170.921	78
037.171.923	78
037.173.920	79
040.020.013	40
040.020.046	40
040.021.015	40
040.021.041	40
040.023.045	41
040.030.023	41
040.040.125	40
040.041.120	40
040.043.124	41
040.060.016	40
040.060.042	40
040.060.926	40
040.063.041	41
040.063.925	41
040.069.013	40
040.069.046	40
040.069.923	40
040.070.015	40
040.070.041	40
040.070.925	40
040.071.010	40
040.071.043	40
040.071.920	40
040.073.040	41
040.073.924	41
041.020.011	40
041.020.040	40
041.021.013	40
041.021.046	40
041.023.043	41
041.030.021	41
041.040.123	40
041.041.125	40
041.043.122	41
041.060.014	40
041.060.040	40
041.060.924	40
041.063.046	41
041.063.923	41
041.069.011	40
041.069.044	40
041.069.921	40
041.070.013	40
041.070.046	40
041.070.923	40
041.071.015	40
041.071.041	40
041.071.925	40

Reference	pp.
041.073.045	41
041.073.922	41
042.120.013	40
042.121.015	40
042.130.023	41
042.140.125	40
042.141.120	40
042.143.124	41
042.160.016	40
042.160.926	40
042.163.925	41
042.169.013	40
042.169.923	40
042.170.015	40
042.170.925	40
042.171.010	40
042.171.920	40
042.173.924	41
043.020.121	40
043.021.123	40
043.023.120	41
043.060.124	40
043.063.123	41
043.069.121	40
043.070.123	40
043.071.125	40
043.073.122	41
044.020.126	40
044.021.121	40
044.023.125	41
044.060.122	40
044.063.121	41
044.069.126	40
044.070.121	40
044.071.123	40
044.073.120	41
046.120.126	40
046.121.121	40
046.123.125	41
046.160.122	40
046.163.121	41
046.169.126	40
046.170.121	40
046.171.123	40
046.173.120	41
047.130.020	41
047.140.122	40
047.141.124	40
047.143.121	41
047.160.923	40
047.163.922	41
047.169.920	40
047.170.922	40
047.171.924	40
047.173.921	41
060.030.051	55
060.030.073	55
060.040.046	54
060.040.153	54
060.040.175	54
060.041.041	54
060.041.155	54
060.041.170	54
060.043.045	55
060.043.152	55
060.043.174	55
060.060.151	54
060.060.173	54
060.060.840	54
060.063.150	55
060.063.172	55
060.063.846	55
060.069.155	54
060.069.170	54
060.069.844	54
060.070.150	54
060.070.172	54
060.070.846	54
060.071.152	54
060.071.174	54
060.071.841	54
060.073.156	55
060.073.171	55
060.073.845	55
060.093.073	741
060.140.161	54
060.141.163	54
060.143.160	55
060.160.166	54
060.163.165	55
060.169.163	54
060.170.165	54
060.171.160	54
060.173.164	55
061.040.044	54
061.041.046	54
061.043.043	55
061.060.845	54
061.063.844	55
061.069.842	54
061.070.844	54
061.071.846	54
061.073.843	55
061.130.053	55
061.130.075	55
061.140.155	54
061.140.166	54
061.140.170	54
061.141.150	54
061.141.161	54
061.141.172	54
061.143.154	55
061.143.165	55
061.143.176	55
061.160.153	54
061.160.164	54
061.160.175	54
061.163.152	55
061.163.163	55
061.163.174	55
061.169.150	54
061.169.161	54
061.169.172	54
061.170.152	54
061.170.163	54
061.170.174	54
061.171.154	54
061.171.165	54
061.171.176	54
061.173.151	55
061.173.162	55
061.173.173	55
061.193.075	741
062.130.051	55
062.130.073	55
062.140.153	54
062.140.164	54
062.140.175	54
062.141.155	54
062.141.166	54
062.141.170	54
062.143.152	55
062.143.163	55
062.143.174	55
062.160.151	54
062.160.162	54
062.160.173	54
062.163.150	55
062.163.161	55
062.163.172	55
062.169.155	54
062.169.166	54
062.169.170	54
062.170.150	54
062.170.161	54
062.170.172	54
062.171.152	54
062.171.163	54
062.171.174	54
062.173.156	55
062.173.160	55
062.173.171	55
062.193.073	741
063.140.173	54
063.141.175	54
063.143.172	55
063.160.171	54
063.163.170	55
063.169.175	54
063.170.170	54
063.171.172	54
063.173.176	55
064.140.171	54
064.141.173	54
064.143.170	55
064.160.176	54
064.163.175	55
064.169.173	54
064.170.175	54
064.171.170	54
064.173.174	55
065.140.176	54
065.141.171	54
065.143.175	55
065.160.174	54
065.163.173	55
065.169.171	54
065.170.173	54
065.171.175	54
065.173.172	55
066.140.174	54
066.141.176	54
066.143.173	55
066.160.172	54
066.163.171	55
066.169.176	54
066.170.171	54
066.171.173	54
066.173.170	55
067.130.055	55
067.130.070	55
067.140.150	54
067.140.172	54
067.141.152	54
067.141.174	54
067.143.156	55
067.143.171	55
067.160.155	54
067.160.170	54
067.163.154	55
067.163.176	55
067.169.152	54
067.169.174	54
067.170.154	54
067.170.176	54
067.171.156	54
067.171.171	54
067.173.153	55
067.173.175	55
068.140.170	54
068.141.172	54
068.143.176	55
068.160.175	54
068.163.174	55
068.169.172	54
068.170.174	54
068.171.176	54
068.173.173	55
069.140.175	54
069.141.170	54
069.143.174	55
069.160.173	54
069.163.172	55
069.169.170	54
069.170.172	54
069.171.174	54
069.173.171	55
080.000.001	118
080.000.104	118
080.100.031	118
080.100.042	118
080.100.053	118
080.100.134	118
080.100.145	118
080.100.156	118
080.100.230	118
080.100.241	118
080.100.252	118
080.100.333	118
080.100.344	118
080.100.355	118
080.100.436	118
080.100.440	118
080.100.451	118
080.203.126	118
080.203.222	118
080.203.314	118
080.203.410	118
080.303.123	118
080.303.226	118
080.303.311	118
080.303.414	118
080.503.124	118
080.503.220	118
080.603.121	118
080.603.224	118
080.603.316	118
080.603.412	118
080.803.122	118
080.803.225	118
081.000.006	94
081.000.102	94
081.100.003	94
081.100.106	94
081.203.021	94
081.203.124	94
081.203.220	94
081.203.312	94
081.203.415	94
081.303.025	94
081.303.121	94
081.303.224	94
081.303.316	94
081.303.412	94
081.503.026	94
081.503.122	94
081.503.225	94
081.503.310	94
081.503.413	94
081.603.023	94
081.603.126	94
081.603.222	94
081.603.314	94
081.603.410	94
081.800.036	94
081.800.040	94
081.800.051	94
081.800.132	94
081.800.143	94
081.800.154	94
081.800.235	94
081.800.246	94
081.800.250	94
081.800.331	94
081.800.342	94
081.800.353	94
081.800.434	94
081.800.445	94
081.800.456	94
081.803.024	94
081.803.120	94
081.803.223	94
081.803.315	94
081.803.411	94
082.000.111	80
082.001.010	80
082.001.113	80
082.001.216	80
082.100.115	80
082.101.014	80
082.101.110	80
082.101.213	80
082.201.011	80
082.201.114	80
082.201.313	80
082.203.015	80
082.203.111	80
082.253.124	80
082.253.220	80
082.301.015	80
082.301.111	80
082.301.310	80
082.303.012	80
082.303.115	80
082.553.122	80
082.553.225	80
082.601.013	80
082.601.116	80
082.601.315	80
082.603.010	80

Reference	pp.
082.603.021	80
082.603.113	80
082.603.124	80
083.001.111	42
083.001.214	42
083.001.310	42
083.041.114	56
083.041.210	56
083.101.115	42
083.101.211	42
083.101.314	42
083.141.111	56
083.141.214	56
083.201.112	42
083.201.215	42
083.201.414	42
083.203.116	42
083.203.212	42
083.203.315	42
083.241.115	56
083.241.211	56
083.241.314	56
083.241.410	56
083.243.123	56
083.243.134	725
083.243.226	56
083.243.230	725
083.301.116	42
083.301.212	42
083.301.411	42
083.303.113	42
083.303.216	42
083.303.312	42
083.341.112	56
083.341.215	56
083.341.311	56
083.341.414	56
083.343.120	56
083.343.223	56
083.503.114	42
083.601.114	42
083.601.210	42
083.601.416	42
083.603.111	42
083.603.214	42
083.603.310	42
083.641.110	56
083.641.213	56
083.641.316	56
083.641.412	56
083.643.125	56
083.643.221	56
083.743.122	56
083.743.225	56
083.748.125	56
083.748.221	56
090.100.161	130
090.100.172	130
090.100.301	41
090.100.371	55
090.100.382	55
090.100.426	55
090.100.430	41
090.100.485	55
090.100.500	41
090.100.511	41
101.115.066	16
101.115.571	16
101.165.573	16
101.205.510	16
134.030.503	219
134.030.772	219
134.030.783	219
134.030.805	219
134.030.890	219
134.130.500	219
134.130.776	219
134.130.780	219
134.130.802	219
134.130.894	219
134.330.501	219
134.330.770	219
134.330.781	219
134.330.803	219
134.330.895	219
134.430.505	219
134.430.774	219
134.430.785	219
134.430.800	219
134.430.892	219
134.630.506	218
134.630.775	218
134.630.786	218
134.630.801	218
134.630.893	218
134.730.503	218
134.730.772	218
134.730.783	218
134.730.805	218
134.730.890	218
143.100.510	724
143.100.565	724
143.102.514	724
143.102.562	724
143.103.516	724
143.103.564	724
143.104.511	724
143.104.566	724
143.130.514	724
143.130.562	724
143.135.510	724
143.135.565	724
143.140.513	724
143.140.561	724
143.145.516	724
143.145.564	724
143.150.512	724
143.150.560	724
143.160.511	724
143.160.566	724
143.199.512	724
143.199.560	724
143.330.515	724
143.330.563	724
143.335.511	724
143.335.566	724
143.340.514	724
143.340.562	724
143.345.510	724
143.345.565	724
143.350.513	724
143.350.561	724
143.360.512	724
143.360.560	724
143.600.516	726
143.600.564	726
143.602.513	726
143.602.561	726
143.603.515	726
143.603.563	726
143.604.510	726
143.604.565	726
143.630.513	726
143.630.561	726
143.635.516	726
143.635.564	726
143.640.512	726
143.640.560	726
143.645.515	726
143.645.563	726
143.650.511	726
143.650.566	726
143.660.510	726
143.660.565	726
143.699.511	726
143.699.566	726
143.830.514	726
143.830.562	726
143.835.510	726
143.835.565	726
143.840.513	726
143.840.561	726
143.845.516	726
143.845.564	726
143.850.512	726
143.850.560	726
143.860.511	726
143.860.566	726
144.100.106	728
144.100.515	728
144.100.563	728
144.102.103	728
144.102.512	728
144.102.560	728
144.103.105	728
144.103.514	728
144.103.562	728
144.104.100	728
144.104.516	728
144.104.564	728
144.130.512	728
144.130.560	728
144.135.515	728
144.135.563	728
144.140.511	728
144.140.566	728
144.145.514	728
144.145.562	728
144.150.510	728
144.150.565	728
144.160.516	728
144.160.564	728
144.199.101	728
144.199.510	728
144.199.565	728
144.330.513	728
144.330.561	728
144.335.516	728
144.335.564	728
144.340.512	728
144.340.560	728
144.345.515	728
144.345.563	728
144.350.511	728
144.350.566	728
144.360.510	728
144.360.565	728
144.630.511	728
144.630.566	728
144.635.514	728
144.635.562	728
144.640.510	728
144.640.565	728
144.645.513	728
144.645.561	728
144.650.516	728
144.650.564	728
144.660.515	728
144.660.563	728
144.830.512	728
144.830.560	728
144.835.515	728
144.835.563	728
144.840.511	728
144.840.566	728
144.845.514	728
144.845.562	728
144.850.510	728
144.850.565	728
144.860.516	728
144.860.564	728
145.130.510	728
145.130.565	728
145.135.513	728
145.135.561	728
145.140.516	728
145.140.564	728
145.145.512	728
145.145.560	728
145.150.515	728
145.150.563	728
145.160.514	728
145.160.562	728
145.330.511	728
145.330.566	728
145.335.514	728
145.335.562	728
145.340.510	728
145.340.565	728
145.345.513	728
145.345.561	728
145.350.516	728
145.350.564	728
145.360.515	728
145.360.563	728
145.600.512	730
145.600.560	730
145.602.516	730
145.602.564	730
145.603.511	730
145.603.566	730
145.604.513	730
145.604.561	730
145.630.516	730
145.630.564	730
145.635.512	730
145.635.560	730
145.640.515	730
145.640.563	730
145.645.511	730
145.645.566	730
145.650.514	730
145.650.562	730
145.660.513	730
145.660.561	730
145.699.514	730
145.699.562	730
145.830.510	730
145.830.565	730
145.835.513	730
145.835.561	730
145.840.516	730
145.840.564	730
145.845.512	730
145.845.560	730
145.850.515	730
145.850.563	730
145.860.514	730
145.860.562	730
146.130.515	730
146.130.563	730
146.135.511	730
146.135.566	730
146.140.514	730
146.140.562	730
146.145.510	730
146.145.565	730
146.150.513	730
146.150.561	730
146.160.512	730
146.160.560	730
146.330.516	730
146.330.564	730
146.335.512	730
146.335.560	730
146.340.515	730
146.340.563	730
146.345.511	730
146.345.566	730
146.350.514	730
146.350.562	730
146.360.513	730
146.360.561	730
146.630.514	730
146.630.562	730
146.635.510	730
146.635.565	730
146.640.513	730
146.640.561	730
146.645.516	730
146.645.564	730
146.650.512	730
146.650.560	730
146.660.511	730
146.660.566	730
146.830.515	730
146.830.563	730
146.835.511	730
146.835.566	730
146.840.514	730
146.840.562	730
146.845.510	730
146.845.565	730
146.850.513	730
146.850.561	730
146.860.512	730
146.860.560	730
147.100.516	734
147.100.564	734
147.102.513	734

Reference	pp.
147.102.561	734
147.103.515	734
147.103.563	734
147.104.510	734
147.104.565	734
147.130.513	734
147.130.561	734
147.135.516	734
147.135.564	734
147.140.512	734
147.140.560	734
147.145.515	734
147.145.563	734
147.150.511	734
147.150.566	734
147.160.510	734
147.160.565	734
147.199.511	734
147.199.566	734
147.330.514	734
147.330.562	734
147.335.510	734
147.335.565	734
147.340.513	734
147.340.561	734
147.345.516	734
147.345.564	734
147.350.512	734
147.350.560	734
147.360.511	734
147.360.566	734
147.500.511	736
147.502.515	736
147.503.510	736
147.504.512	736
147.599.513	736
147.600.515	732
147.600.563	732
147.602.512	732
147.602.560	732
147.603.514	732
147.603.562	732
147.604.516	732
147.604.564	732
147.630.512	732
147.630.560	732
147.635.515	732
147.635.563	732
147.640.511	732
147.640.566	732
147.645.514	732
147.645.562	732
147.650.510	732
147.650.565	732
147.660.516	732
147.660.564	732
147.699.101	732
147.699.510	732
147.699.565	732
147.700.512	738
147.702.516	738
147.703.511	738
147.704.513	738
147.799.514	738
147.830.513	732
147.830.561	732
147.835.516	732
147.835.564	732

Reference	pp.
147.840.512	732
147.840.560	732
147.845.515	732
147.845.563	732
147.850.511	732
147.850.566	732
147.860.510	732
147.860.565	732
147.900.513	664
148.130.511	732
148.130.566	732
148.135.514	732
148.135.562	732
148.140.510	732
148.140.565	732
148.145.513	732
148.145.561	732
148.150.516	732
148.150.564	732
148.160.515	732
148.160.563	732
148.330.512	732
148.330.560	732
148.335.515	732
148.335.563	732
148.340.511	732
148.340.566	732
148.345.514	732
148.345.562	732
148.350.510	732
148.350.565	732
148.360.516	732
148.360.564	732
148.630.510	732
148.630.565	732
148.635.513	732
148.635.561	732
148.640.516	732
148.640.564	732
148.645.512	732
148.645.560	732
148.650.515	732
148.650.563	732
148.660.514	732
148.660.562	732
148.830.511	732
148.830.566	732
148.835.514	732
148.835.562	732
148.840.510	732
148.840.565	732
148.845.513	732
148.845.561	732
148.850.516	732
148.850.564	732
148.860.515	732
148.860.563	732
149.060.516	725
149.060.564	725
149.160.513	727
149.160.561	727
149.260.101	729
149.260.510	729
149.260.565	729
149.360.514	731
149.360.562	731
149.460.511	735
149.460.566	735

Reference	pp.
149.560.106	733
149.560.515	733
149.560.541	733
149.560.563	733
149.730.512	742
149.830.516	743
149.930.513	743
150.000.513	743
150.002.510	743
150.030.510	743
150.100.510	743
150.102.514	743
150.130.514	743
150.200.514	743
150.202.511	743
150.230.511	743
150.300.511	743
150.302.515	743
150.330.515	743
150.400.106	744
150.400.515	744
150.400.773	744
150.400.806	744
150.400.902	744
150.400.935	744
150.426.905	744
150.426.931	744
150.452.105	744
150.452.514	744
150.452.772	744
150.452.805	744
150.500.103	744
150.500.512	744
150.500.770	744
150.500.803	744
150.500.906	744
150.500.932	744
150.526.902	744
150.526.935	744
150.552.102	744
150.552.511	744
150.552.776	744
150.552.802	744
150.630.513	740
150.730.311	740
150.930.511	740
151.100.515	778
151.145.514	778
151.245.511	778
151.760.512	737
151.860.516	739
153.030.511	749
153.230.512	746
153.430.513	747
153.530.510	747
153.630.514	749
153.730.511	748
153.930.512	750
154.000.103	746
154.100.030	748
154.300.031	760
154.400.035	760
154.500.032	760
154.600.036	760
154.700.033	725
154.800.030	733
154.900.104	765
155.030.514	762

Reference	pp.
155.130.511	762
155.230.515	762
155.330.512	763
155.430.516	763
155.530.513	763
155.730.514	765
155.830.511	761
155.900.511	761
156.030.512	756
156.130.516	756
156.230.513	756
156.430.514	758
156.530.511	759
156.630.515	758
157.000.311	750
157.000.314	750
157.200.315	758
157.300.312	757
157.600.310	750
157.725.315	758
157.734.312	759
157.800.020	751
158.019.514	764
158.030.515	764
158.200.512	787
158.300.100	751
158.430.510	751
159.030.513	753
159.130.510	753
159.230.514	754
159.330.511	754
159.430.515	754
159.630.516	755
159.730.513	755
159.830.510	755
160.000.514	764
160.100.511	764
160.200.515	766
160.300.512	765
160.400.516	765
160.500.513	765
160.635.510	765
160.650.512	765
160.735.514	765
160.750.516	765
160.810.510	764
160.820.516	764
160.900.515	764
161.000.512	766
161.051.516	766
161.076.510	766
161.100.516	766
161.215.515	764
161.225.514	764
161.300.510	768
161.400.514	768
161.500.511	769
161.600.515	769
161.720.510	769
161.730.516	769
161.820.514	771
161.830.513	772
162.000.510	770
162.100.514	770
162.200.511	770
162.300.515	771
162.400.512	794
162.530.513	772

Reference	pp.
162.630.510	772
162.700.510	772
162.800.514	793
162.900.511	793
163.000.515	787
163.100.512	786
163.200.516	786
163.300.513	786
163.400.510	767
163.500.514	767
163.600.511	767
163.700.515	767
163.800.512	767
163.900.516	790
164.000.513	778
164.100.510	778
164.200.105	779
164.400.515	791
164.500.512	797
164.600.516	788
164.700.513	792
164.800.510	789
165.000.555	780
165.002.552	780
165.045.554	780
165.050.550	780
165.056.555	780
165.058.552	780
165.060.556	780
165.070.555	780
165.080.554	780
165.090.553	780
165.091.555	780
165.099.550	780
165.100.552	780
165.102.556	780
165.145.551	780
165.150.554	780
165.156.552	780
165.158.556	780
165.160.553	780
165.170.552	780
165.180.551	780
165.190.550	780
165.191.552	780
165.199.554	780
165.200.556	780
165.300.553	781
165.500.554	782
165.702.552	782
165.730.552	782
165.733.551	782
165.930.552	782
165.930.553	782
166.702.550	782
166.730.550	782
166.733.556	782
166.930.551	782
166.933.550	782
167.000.551	781
167.003.550	781
167.045.550	781
167.050.553	781
167.056.551	781
167.058.555	781
167.060.552	781
167.070.551	781
167.080.550	781

Reference	pp.
167.090.556	781
167.091.551	781
167.099.553	781
167.702.555	782
167.730.555	782
167.733.554	782
167.930.556	782
167.933.555	782
168.000.556	781
168.003.555	781
168.045.555	781
168.050.551	781
168.056.556	781
168.058.553	781
168.060.550	781
168.070.556	781
168.080.555	781
168.090.554	781
168.091.556	781
168.099.551	781
168.702.553	782
168.730.553	782
168.733.552	782
168.930.554	782
168.933.553	782
169.000.554	781
169.003.553	781
169.045.553	781
169.050.556	781
169.056.554	781
169.058.551	781
169.060.555	781
169.070.554	781
169.080.553	781
169.090.552	781
169.091.554	781
169.099.556	781
169.702.551	782
169.730.551	782
169.733.550	782
169.930.552	782
169.933.551	782
170.000.552	781
170.003.551	781
170.045.551	781
170.050.554	781
170.056.552	781
170.058.556	781
170.060.553	781
170.070.552	781
170.080.551	781
170.090.550	781
170.091.552	781
170.099.554	781
170.702.556	782
170.730.556	782
170.733.555	782
170.930.550	782
170.933.556	782
171.501.514	779
171.502.516	779
171.601.511	779
171.602.513	779
187.003.036	276
187.004.031	276
188.934.060	16
188.934.572	16
189.129.511	16
189.840.066	16
189.840.571	16
194.700.004	487
194.700.310	487
197.400.000	546
197.400.022	546
197.400.092	546
197.400.136	546
197.400.313	546
197.802.065	31
197.803.060	31
197.805.064	31
197.900.102	367
197.980.101	380
197.992.023	380
197.993.025	380
198.800.000	554
198.800.022	554
198.800.092	554
198.800.136	554
198.800.313	554
198.900.004	514
198.900.310	514
200.111.004	8
200.111.015	8
200.111.026	8
200.112.006	8
200.112.010	8
200.112.021	8
200.121.003	9
200.121.014	9
200.121.025	9
200.122.005	9
200.122.016	9
200.122.020	9
200.211.001	8
200.211.012	8
200.211.023	8
200.212.003	8
200.212.014	8
200.212.025	8
200.221.000	9
200.221.011	9
200.221.022	9
200.222.002	9
200.222.013	9
200.222.024	9
200.400.023	573
200.521.064	11
200.522.066	11
200.551.061	11
200.552.063	11
200.600.061	15
200.700.021	573
200.950.061	11
200.970.066	11
201.001.006	8
201.001.010	8
201.001.021	8
201.002.001	8
201.002.012	8
201.002.023	8
201.005.066	11
201.006.061	11
201.010.106	15
201.020.105	15
201.102.005	9
201.102.016	9
201.102.020	9
201.102.064	11
201.103.000	9
201.103.011	9
201.104.061	15
201.201.066	13
201.202.035	12
201.203.004	13
201.203.015	13
201.203.026	13
201.204.032	12
201.400.065	15
201.700.100	572
201.800.023	573
201.900.020	573
202.150.104	575
202.250.101	572
203.200.104	576
203.300.101	573
203.400.105	573
203.500.102	576
210.015.002	6
210.015.013	6
210.015.024	6
210.020.005	7
210.020.016	7
210.020.020	7
210.915.003	6
210.915.014	6
210.915.025	6
210.920.006	7
210.920.010	7
210.920.021	7
213.020.006	25
213.020.021	25
213.020.312	25
213.040.004	25
213.040.026	25
213.040.310	25
213.120.003	25
213.120.025	25
213.120.316	25
213.140.001	25
213.140.023	25
213.140.314	25
213.220.000	24
213.220.022	24
213.220.313	24
213.240.005	24
213.240.020	24
213.240.311	24
213.320.004	24
213.320.026	24
213.320.310	24
213.340.002	24
213.340.024	24
213.340.315	24
213.500.066	31
213.600.063	31
213.700.141	31
213.820.003	25
213.820.025	25
213.820.316	25
213.840.001	25
213.840.023	25
213.840.314	25
213.920.000	24
213.920.022	24
213.920.313	24
213.940.005	24
213.940.020	24
213.940.311	24
214.000.006	25
214.000.021	25
214.000.312	25
214.100.003	25
214.100.025	25
214.100.316	25
214.200.000	25
214.200.022	25
214.200.313	25
220.020.065	10
220.920.066	10
222.120.065	14
222.220.062	14
272.000.024	572
280.500.010	13
280.500.021	13
281.004.006	18
281.004.010	18
281.004.021	18
281.104.003	18
281.104.014	18
281.104.025	18
281.404.001	19
281.404.012	19
281.404.023	19
281.504.005	19
281.504.016	19
281.504.020	19
282.100.033	18
282.200.030	18
300.012.101	133
300.012.112	133
300.013.103	133
300.510.103	132
300.512.100	132
300.514.104	132
300.516.101	132
300.814.194	131
300.935.062	136
301.521.205	138
301.521.216	138
301.521.220	138
301.521.231	138
301.550.200	139
301.550.211	139
301.550.222	139
301.550.233	139
301.650.204	139
301.650.215	139
301.650.226	139
301.650.230	139
301.850.021	139
301.950.025	139
302.020.003	81
302.020.014	81
302.020.025	81
302.030.002	43
302.030.013	43
302.030.024	43
302.030.061	43
302.040.001	43
302.040.012	43
302.040.023	43
302.080.004	95
302.080.015	95
302.080.026	95
302.080.063	95
302.131.060	71
302.143.715	57
303.008.016	134
303.008.020	134
303.011.015	134
303.011.026	134
305.112.194	131
306.000.052	55
306.000.063	725
306.050.054	55
306.100.056	55
306.100.060	725
306.200.053	55
306.200.064	725
313.012.066	135
314.006.066	137
314.106.063	137
314.116.062	137
314.230.092	135
314.306.090	135
314.308.094	135
314.310.091	135
314.842.021	140
314.842.205	140
314.842.216	140
314.842.220	140
314.842.231	140
314.942.025	140
314.942.202	140
314.942.213	140
314.942.224	140
314.942.235	140
318.010.066	123
318.011.061	123
318.012.063	123
318.020.065	123
318.021.060	123
318.022.062	123
318.030.064	123
318.031.066	123
318.032.061	123
318.110.063	109
318.111.065	109
318.112.060	109
318.120.062	109
318.121.064	109
318.122.066	109
318.210.060	70
318.211.062	70
318.212.064	70
318.220.066	70
318.221.061	70
318.222.063	70
323.210.064	109
323.220.063	109
323.230.062	109
323.310.061	109
323.320.060	109
323.330.066	109
323.410.065	70
323.420.064	70
323.430.063	70
323.510.062	70
323.520.061	70
323.530.060	70

Reference	pp.
323.610.066	109
323.620.065	109
323.630.064	109
323.710.063	70
323.720.062	70
323.730.061	70
343.706.064	668
344.020.025	668
344.040.023	668
344.100.061	669
344.110.023	669
344.110.314	669
344.130.065	669
344.140.064	669
344.150.063	669
344.406.064	668
344.510.062	109
344.520.061	109
344.530.060	109
344.610.066	70
344.620.065	70
344.630.064	70
348.500.062	70
348.502.066	70
348.700.060	109
348.702.060	109
350.010.065	124
350.012.062	124
350.014.066	124
350.020.064	124
350.022.061	124
350.024.065	124
350.030.063	124
350.032.060	124
350.034.064	124
350.110.062	109
350.112.066	109
350.114.063	109
350.120.061	109
350.122.065	109
350.124.062	109
350.130.060	109
350.132.064	109
350.134.061	109
350.210.066	70
350.212.063	70
350.214.060	70
350.220.065	70
350.222.062	70
350.224.066	70
350.230.061	70
350.232.061	70
350.234.065	70
351.110.001	43
351.111.003	43
351.112.005	43
351.600.222	117
351.600.233	117
351.600.255	117
351.610.000	117
351.700.226	43
351.700.230	43
351.700.252	43
351.710.004	43
351.800.223	117
351.800.234	117
351.800.256	117
351.810.001	117

Reference	pp.
351.900.220	43
351.900.231	43
351.900.253	43
351.910.005	43
352.905.000	56
352.905.011	56
352.905.022	56
352.910.003	56
352.910.014	56
352.910.025	56
390.820.065	137
390.848.732	79
390.852.232	93
390.852.346	93
390.855.345	93
390.855.452	79
390.855.566	79
390.855.894	79
406.027.020	186
406.138.025	186
408.034.001	184
408.034.023	184
408.045.002	184
408.045.024	184
408.065.000	184
408.065.022	184
408.134.005	184
408.134.020	184
408.145.006	184
408.145.021	184
408.165.004	184
408.165.026	184
409.016.020	173
409.019.004	173
409.019.012	173
409.019.026	173
409.022.025	173
409.222.004	173
409.222.026	173
409.416.000	173
409.416.475	173
409.422.005	173
409.422.473	173
409.711.024	181
409.714.023	181
409.717.022	181
409.720.021	181
409.811.021	181
409.814.020	181
409.817.026	181
409.820.025	181
409.911.025	181
409.914.024	181
409.917.023	181
409.920.022	181
410.114.025	174
410.122.020	174
410.214.022	174
410.222.024	174
410.314.026	174
410.322.021	174
410.514.020	174
410.522.022	174
410.614.024	174
410.622.026	174
410.711.022	179
410.714.021	179
410.717.020	179

Reference	pp.
410.720.026	179
410.811.026	179
410.814.025	179
410.817.024	179
410.820.023	179
410.911.023	179
410.914.022	179
410.917.021	179
410.920.020	179
411.200.020	174
411.400.021	174
411.513.023	174
411.515.020	174
411.620.020	174
411.712.022	179
411.812.026	179
411.900.020	179
413.032.104	188
413.040.106	188
413.315.033	189
413.325.032	189
414.000.031	188
414.100.035	188
414.516.804	190
414.615.036	190
414.700.031	189
414.808.026	175
414.812.020	175
414.905.024	170
414.907.021	170
414.909.025	170
414.912.024	170
414.914.021	170
415.200.004	191
415.200.015	191
415.200.192	191
415.200.693	191
415.219.696	191
415.300.001	191
415.300.012	191
415.300.196	191
415.500.805	190
415.600.032	180
416.024.022	172
416.032.024	172
416.052.022	172
416.070.023	172
416.100.020	172
416.120.025	172
417.111.026	180
417.114.025	180
417.117.024	180
417.120.023	180
417.905.025	170
417.907.022	170
417.909.026	170
417.912.025	170
417.914.022	170
420.000.022	288
420.100.004	288
420.100.015	288
420.100.026	288
420.200.001	288
420.200.012	288
420.200.023	288
420.300.005	288
420.300.016	288
420.300.020	288

Reference	pp.
420.400.002	288
420.400.013	288
420.400.024	288
424.905.025	170
424.907.022	170
424.909.026	170
424.912.025	170
424.914.022	170
425.000.004	173
425.000.015	173
425.000.192	173
430.800.053	285
432.000.030	285
432.619.036	277
432.718.031	277
432.817.033	277
432.916.035	277
434.040.106	214
434.045.102	214
434.050.105	214
434.060.104	214
434.070.103	214
434.080.102	214
434.090.101	214
441.050.002	208
441.172.001	208
441.382.001	208
441.750.002	208
441.872.001	208
441.982.004	208
442.070.005	208
442.175.005	208
442.285.001	208
443.050.300	513
443.130.306	461
443.135.302	461
443.140.305	461
443.145.301	461
443.150.304	461
443.160.303	461
443.190.300	461
443.260.300	520
445.028.010	211
445.120.001	211
445.213.005	210
445.413.006	210
446.216.024	798
446.345.141	799
446.445.145	798
446.528.121	797
446.610.124	799
446.740.125	798
446.850.143	799
446.865.145	799
446.888.142	799
450.008.101	186
460.000.015	186
460.000.461	186
465.049.502	222
465.051.506	222
465.055.500	222
465.149.506	222
465.151.503	222
465.155.504	222
465.249.503	222
465.251.500	222
465.255.501	222
465.349.500	222

Reference	pp.
465.351.504	222
465.355.505	222
465.449.504	222
465.451.501	222
465.455.502	222
465.549.501	222
465.551.505	222
465.555.506	222
465.649.505	222
465.651.502	222
465.655.503	222
466.071.126	185
466.071.804	185
466.071.826	185
466.087.123	185
466.087.801	185
466.087.823	185
466.171.123	185
466.171.812	185
466.171.823	185
466.187.120	185
466.187.816	185
466.187.820	185
466.629.800	222
466.630.802	222
466.633.801	222
468.200.121	206
468.400.030	204
468.500.034	204
468.600.871	202
468.700.875	202
468.925.004	204
469.111.123	202
469.121.122	202
469.132.123	202
469.201.121	202
469.202.123	202
469.340.126	204
469.345.122	204
469.360.124	204
469.437.124	204
469.440.123	204
469.445.126	204
469.452.126	204
469.460.121	204
470.630.005	196
470.640.004	196
470.730.002	196
470.740.001	196
470.830.124	196
470.840.123	196
470.927.122	196
470.940.120	196
471.460.872	202
472.011.002	200
472.111.006	200
472.800.123	198
472.901.004	198
472.901.310	198
472.902.006	198
472.902.312	198
473.300.004	198
478.065.501	223
478.065.781	223
478.065.803	223
478.065.895	223
478.113.506	223
478.113.786	223

Reference	pp.
478.113.801	223
478.113.893	223
481.135.001	206
481.215.000	207
481.330.006	207
482.250.005	195
482.250.311	195
482.350.002	195
482.350.315	195
482.510.000	195
482.510.313	195
482.612.001	196
482.612.314	196
482.618.006	196
482.618.312	196
482.730.006	196
482.730.312	196
482.740.005	196
482.740.311	196
482.830.121	196
482.840.120	196
483.012.003	194
483.012.316	194
483.118.005	194
483.118.311	194
483.430.006	196
483.430.312	196
483.440.005	195
483.440.311	195
484.110.126	199
484.120.125	199
484.270.124	209
484.275.120	209
484.310.120	203
484.320.126	203
484.420.123	207
484.430.122	207
484.540.125	205
484.545.121	205
484.560.123	205
484.640.122	205
484.645.125	205
484.660.120	205
484.820.125	201
510.011.106	238
510.211.030	244
510.308.035	244
510.835.032	259
510.835.065	259
511.108.043	229
511.108.054	229
511.108.065	229
511.108.102	229
511.195.042	229
511.195.053	229
511.195.064	229
511.195.101	229
511.525.033	251
511.525.066	251
519.306.034	221
519.310.035	221
519.315.031	221
519.500.100	778
519.904.512	778
519.911.512	778
520.133.036	252
520.735.036	239
520.839.034	239

Reference	pp.
520.937.034	245
521.079.031	245
521.100.031	245
521.604.031	220
521.608.032	220
521.612.033	220
521.735.034	260
521.755.032	260
521.835.031	260
521.855.036	260
522.077.032	239
522.100.036	239
522.470.034	260
522.489.030	260
522.727.030	272
522.950.035	260
523.200.031	741
523.437.036	272
523.834.032	230
523.934.036	230
524.144.036	231
524.214.250	272
524.215.252	272
524.634.036	231
524.724.034	231
524.734.033	231
524.834.030	231
525.224.103	232
525.234.102	232
525.324.100	232
525.334.106	232
525.424.104	232
525.434.103	232
526.008.066	296
526.009.061	296
526.010.063	296
526.012.060	296
526.015.066	296
526.108.063	296
526.109.065	296
526.110.060	296
526.112.064	296
526.115.063	296
526.200.032	741
526.300.036	741
526.400.033	741
528.133.034	252
528.233.031	252
528.333.035	252
530.100.001	238
530.100.012	238
530.100.023	238
530.225.065	251
530.300.002	265
530.300.013	265
530.300.024	265
530.400.006	238
530.400.010	238
530.400.021	238
530.400.065	238
530.500.003	259
530.500.014	259
530.500.025	259
530.500.062	264
530.700.004	264
530.700.015	264
530.700.026	264
531.217.002	229

Reference	pp.
531.217.013	229
531.217.024	229
531.217.061	229
531.335.066	259
540.403.006	276
540.403.021	276
540.403.194	276
540.500.004	267
540.500.026	267
540.500.192	267
540.500.015	295
550.000.006	266
550.000.010	266
550.000.021	266
550.100.106	265
550.200.033	265
550.500.005	265
550.600.002	266
570.000.104	264
580.200.040	267
580.200.106	267
581.028.000	281
581.028.011	281
581.028.022	281
581.030.004	281
581.030.015	281
581.030.026	281
581.034.005	281
581.034.016	281
581.034.020	281
581.200.060	282
581.322.033	266
581.325.032	266
581.432.106	264
581.532.033	264
581.940.052	267
581.940.251	267
581.945.055	267
581.945.254	267
581.950.051	267
581.950.250	267
581.955.054	267
581.955.253	267
582.150.030	276
582.150.052	276
582.150.251	276
583.008.252	272
583.150.035	276
583.150.050	276
583.150.256	276
583.238.036	276
583.238.051	276
583.238.250	276
583.245.036	276
583.245.051	276
583.245.250	276
583.250.032	276
583.250.054	276
583.250.253	276
583.547.031	276
583.547.053	276
583.547.252	276
610.000.005	222
610.000.016	222
619.015.036	329
619.020.032	329
619.025.035	329
619.030.031	329

Reference	pp.
619.035.034	329
619.040.030	329
619.045.033	329
619.050.036	329
619.055.032	329
619.060.035	329
619.070.034	329
619.075.030	329
619.085.036	329
619.095.035	329
619.115.033	329
619.130.035	329
619.200.035	329
619.800.031	344
620.400.034	336
620.400.105	317
620.600.035	344
620.860.030	310
621.700.030	345
621.900.031	329
621.901.033	329
622.000.035	336
623.000.033	317
624.000.031	326
624.100.035	326
624.200.032	325
624.300.036	325
624.400.033	327
624.500.030	328
624.600.034	328
625.000.036	316
625.100.033	316
625.200.030	316
625.300.034	316
625.400.031	316
625.500.035	316
625.700.036	310
626.000.104	341
626.200.002	320
626.300.006	320
626.400.003	320
626.500.000	320
627.000.032	335
627.100.036	333
627.200.033	333
627.300.030	334
627.400.034	334
630.000.103	310
630.100.100	336
630.700.103	336
630.800.100	329
630.801.102	329
632.500.105	352
633.000.104	347
633.112.104	348
633.212.101	350
633.410.105	349
633.514.103	351
633.612.103	354
635.145.312	487
639.000.003	316
639.000.014	316
639.000.062	316
639.000.143	316
639.000.191	316
639.100.000	316
639.100.011	316
639.100.066	316

Reference	pp.
639.100.140	316
639.100.195	316
639.400.005	320
639.400.145	320
639.500.002	320
639.500.142	320
640.200.002	348
640.200.013	348
640.200.024	348
640.200.190	348
640.300.006	350
640.300.010	350
640.300.021	350
640.300.194	350
640.400.003	351
640.400.014	351
640.400.025	351
640.400.191	351
640.500.000	351
640.500.011	351
640.500.022	351
640.500.195	351
648.230.100	477
648.230.310	477
648.235.103	477
648.235.313	477
648.240.106	477
648.240.316	477
648.245.102	477
648.245.312	477
648.250.105	477
648.250.315	477
648.260.104	477
648.260.314	477
648.270.103	477
648.270.313	477
648.280.102	477
648.280.312	477
648.290.101	477
648.290.311	477
648.291.103	477
648.291.313	477
648.299.105	477
648.299.315	477
648.327.105	476
648.327.315	476
648.348.105	476
648.348.315	476
648.360.101	476
648.360.311	476
648.430.101	475
648.430.311	475
648.435.104	475
648.435.314	475
648.440.100	475
648.440.310	475
648.445.103	475
648.445.313	475
648.450.106	475
648.450.316	475
648.460.105	475
648.460.315	475
648.470.104	475
648.470.314	475
648.480.103	475
648.480.313	475
648.490.102	475
648.490.312	475

Reference	pp.
648.491.104	475
648.491.314	475
648.499.106	475
648.499.316	475
648.630.102	477
648.630.312	477
648.635.105	477
648.635.315	477
648.640.101	477
648.640.311	477
648.645.104	477
648.645.314	477
648.650.100	477
648.650.310	477
648.660.106	477
648.660.316	477
648.670.105	477
648.670.315	477
648.680.104	477
648.680.314	477
648.690.103	477
648.690.313	477
648.691.105	477
648.691.315	477
648.699.100	477
648.699.310	477
650.045.023	568
650.045.314	568
650.050.026	568
650.050.310	568
650.070.024	568
650.070.315	568
650.145.020	568
650.145.311	568
650.150.023	568
650.150.314	568
650.170.021	568
650.170.312	568
650.245.024	568
650.245.315	568
650.250.020	568
650.250.311	568
650.270.025	568
650.270.316	568
650.345.021	568
650.345.312	568
650.350.024	568
650.350.315	568
650.370.022	568
650.370.313	568
650.431.806	212
650.443.802	212
650.780.314	479
650.790.313	479
650.791.315	479
650.799.310	479
650.880.311	479
650.890.310	479
650.891.312	479
650.899.314	479
651.045.021	568
651.045.312	568
651.050.024	568
651.050.315	568
651.070.022	568
651.070.313	568
651.145.025	568
651.145.316	568
651.150.021	568
651.150.312	568
651.170.026	568
651.170.310	568
651.245.022	568
651.245.313	568
651.250.025	568
651.250.316	568
651.270.023	568
651.270.314	568
651.345.026	568
651.345.310	568
651.350.022	568
651.350.313	568
651.370.020	568
651.370.311	568
652.027.003	495
652.040.001	495
652.045.004	495
652.050.000	495
652.050.140	495
652.140.005	495
652.145.001	495
652.150.004	495
652.240.002	495
652.245.005	495
652.250.001	495
652.250.141	495
653.027.001	487
653.035.003	487
653.040.006	487
653.045.002	487
653.050.005	487
653.050.311	487
653.055.001	487
653.127.005	487
653.127.311	487
653.127.812	487
653.135.000	487
653.135.313	487
653.135.814	487
653.140.003	487
653.140.316	487
653.140.810	487
653.145.006	487
653.145.813	487
653.150.002	487
653.150.315	487
653.150.816	487
653.155.005	487
653.155.311	487
653.155.812	487
653.235.004	487
653.235.310	487
653.235.811	487
653.240.000	487
653.240.313	487
653.240.814	487
653.245.003	487
653.245.316	487
653.245.810	487
653.250.006	487
653.250.312	487
653.250.813	487
653.255.002	487
653.255.315	487
653.255.816	487
653.335.001	487
653.335.314	487
653.335.815	487
653.340.004	487
653.340.310	487
653.340.811	487
653.345.000	487
653.345.313	487
653.345.814	487
653.350.003	487
653.350.316	487
653.350.810	487
653.355.006	487
653.355.312	487
653.355.813	487
653.427.003	489
653.427.316	489
653.427.810	489
653.435.005	489
653.435.311	489
653.435.812	489
653.440.001	489
653.440.314	489
653.440.815	489
653.445.004	489
653.445.310	489
653.445.811	489
653.450.000	489
653.450.313	489
653.450.814	489
653.455.003	489
653.455.316	489
653.455.810	489
653.725.004	542
653.725.026	542
653.725.096	542
653.725.133	542
653.725.310	542
653.725.811	542
653.727.001	489
653.727.023	542
653.727.093	542
653.727.130	542
653.727.314	542
653.727.815	542
653.730.000	542
653.730.022	542
653.730.092	542
653.730.136	542
653.730.313	542
653.730.814	542
653.735.003	489
653.735.025	542
653.735.095	542
653.735.132	542
653.735.316	542
653.735.810	542
653.740.006	489
653.740.021	542
653.740.091	542
653.740.135	542
653.740.312	542
653.740.813	542
653.745.002	489
653.745.024	542
653.745.094	542
653.745.131	542
653.745.315	542
653.745.816	542
653.748.000	543
653.748.001	542
653.748.023	542
653.748.093	542
653.748.130	542
653.748.314	542
653.748.815	542
653.750.005	489
653.750.020	542
653.750.090	542
653.750.134	542
653.750.311	542
653.750.812	542
653.755.001	489
653.755.023	542
653.755.093	542
653.755.130	542
653.755.314	542
653.755.815	542
653.952.143	428
654.030.005	488
654.030.311	488
654.035.001	488
654.035.314	488
654.040.004	488
654.040.310	488
654.045.000	488
654.045.313	488
654.050.003	488
654.050.316	488
654.060.002	488
654.060.315	488
654.090.006	488
654.090.312	488
654.130.002	488
654.130.315	488
654.135.005	488
654.135.311	488
654.140.001	488
654.140.314	488
654.145.004	488
654.145.310	488
654.150.000	488
654.150.313	488
654.160.006	488
654.160.312	488
654.190.003	488
654.190.316	488
654.880.144	432
654.890.143	432
654.891.145	432
654.899.140	432
654.900.315	490
655.080.145	432
655.090.144	432
655.091.146	432
655.099.141	432
655.452.140	428
655.500.031	344
655.552.144	428
655.600.035	344
655.627.140	427
655.635.142	427
655.640.145	427
655.648.140	427
655.727.144	427
655.735.146	427
655.740.142	427
655.748.144	427
656.900.101	434
656.950.103	434
657.027.103	426
657.027.136	424
657.027.140	426
657.035.105	426
657.035.131	424
657.035.142	426
657.040.101	426
657.040.134	424
657.040.145	426
657.048.103	426
657.048.136	424
657.048.140	426
657.060.106	426
657.060.132	424
657.060.143	426
657.230.066	426
657.230.136	424
657.230.140	426
657.235.062	426
657.235.132	424
657.235.143	426
657.240.065	426
657.240.135	424
657.240.146	426
657.245.061	426
657.245.131	424
657.245.142	426
657.250.064	426
657.250.134	424
657.250.145	426
657.255.060	424
657.255.130	424
657.255.141	424
657.260.063	426
657.260.133	424
657.260.144	426
657.270.062	426
657.270.132	424
657.270.143	426
657.280.061	426
657.280.131	424
657.280.142	426
657.290.060	426
657.290.130	424
657.290.141	426
657.291.062	426
657.291.132	424
657.291.143	426
657.299.064	426
657.299.134	424
657.299.145	426
657.330.063	428
657.330.133	426
657.330.144	428
657.335.066	428
657.335.136	426
657.335.140	428
657.340.062	428
657.340.132	426
657.340.143	428
657.345.065	428
657.345.135	426
657.345.146	428
657.350.061	428
657.350.131	426

657.350.142	428	659.645.140	434	660.335.104	431	664.827.030	474	665.825.020	546
657.355.064	426	659.650.143	434	660.335.141	431	664.848.030	474	665.825.090	546
657.355.134	426	659.660.142	434	660.340.100	431	664.860.033	474	665.825.134	546
657.355.145	426	659.680.140	434	660.340.144	431	664.930.140	478	665.825.311	546
657.360.060	428	659.690.146	434	660.345.103	431	664.935.143	478	665.825.812	546
657.360.130	426	659.691.141	434	660.345.140	431	664.940.146	478	665.827.002	546
657.360.141	428	659.699.143	434	660.350.106	431	664.945.142	478	665.827.024	546
657.370.066	428	660.030.066	433	660.350.143	431	664.950.145	478	665.827.094	546
657.370.136	426	660.030.140	433	660.360.105	431	664.960.144	478	665.827.131	546
657.370.140	428	660.035.062	433	660.360.142	431	664.980.142	478	665.827.315	546
657.380.065	428	660.035.143	433	660.370.104	431	664.990.141	478	665.827.816	546
657.380.135	426	660.040.065	433	660.370.141	431	664.991.143	478	665.830.001	546
657.380.146	428	660.040.146	433	660.380.103	431	664.999.145	478	665.830.023	546
657.390.064	428	660.045.061	433	660.380.140	431	665.250.003	541	665.830.093	546
657.390.134	426	660.045.142	433	660.390.102	431	665.250.025	541	665.830.130	546
657.390.145	428	660.050.064	433	660.390.146	431	665.250.095	541	665.830.314	546
657.391.066	428	660.050.145	433	660.391.104	431	665.250.132	541	665.830.815	546
657.391.136	426	660.060.063	433	660.391.141	431	665.250.316	541	665.835.004	546
657.391.140	428	660.060.144	433	660.399.106	431	665.250.810	541	665.835.026	546
657.399.061	428	660.070.062	433	660.399.143	431	665.270.001	541	665.835.096	546
657.399.131	426	660.070.143	433	660.630.106	433	665.270.023	541	665.835.133	546
657.399.142	428	660.080.061	433	660.630.143	433	665.270.093	541	665.835.310	546
657.700.061	427	660.080.142	433	660.635.102	433	665.270.130	541	665.835.811	546
657.700.131	425	660.090.060	433	660.635.146	433	665.270.314	541	665.840.000	546
657.700.142	427	660.090.141	433	660.640.105	433	665.270.815	541	665.840.022	546
657.800.065	429	660.091.062	433	660.640.142	433	665.300.005	541	665.840.092	546
657.800.135	427	660.091.143	433	660.645.101	433	665.300.020	541	665.840.136	546
657.800.146	429	660.099.064	433	660.645.145	433	665.300.090	541	665.840.313	546
657.852.031	426	660.099.145	433	660.650.104	433	665.300.134	541	665.840.814	546
657.900.143	427	660.127.064	429	660.650.141	433	665.300.311	541	665.845.003	546
657.952.035	426	660.127.134	426	660.660.103	433	665.300.812	541	665.845.025	546
658.000.103	427	660.127.145	429	660.660.140	433	665.350.000	541	665.845.095	546
658.050.105	427	660.135.136	426	660.670.102	433	665.350.022	541	665.845.132	546
658.100.100	429	660.135.140	429	660.670.146	433	665.350.092	541	665.845.316	546
658.150.102	429	660.135.166	429	660.680.101	433	665.350.136	541	665.845.810	546
658.227.102	431	660.140.062	429	660.680.145	433	665.350.313	541	665.848.002	546
658.227.146	431	660.140.132	426	660.690.100	433	665.350.814	541	665.848.024	546
658.235.141	431	660.140.143	429	660.690.144	433	665.400.002	541	665.848.094	546
658.238.104	431	660.148.064	429	660.691.102	433	665.400.024	541	665.848.131	546
658.240.100	431	660.148.134	426	660.691.146	433	665.400.094	541	665.848.315	546
658.240.144	431	660.148.145	429	660.699.104	433	665.400.131	541	665.848.816	546
658.248.102	431	660.160.060	429	660.699.141	433	665.400.315	541	665.850.006	546
658.248.146	431	660.160.130	426	661.200.035	317	665.400.816	541	665.850.021	546
658.260.105	431	660.160.141	429	661.727.032	426	665.450.004	541	665.850.091	546
658.260.142	431	660.230.104	431	661.735.034	426	665.450.026	541	665.850.135	546
658.327.106	429	660.230.141	431	661.740.030	426	665.450.096	541	665.850.312	546
658.327.132	427	660.235.100	431	661.748.032	426	665.450.133	541	665.850.813	546
658.327.143	429	660.235.144	431	661.760.035	426	665.450.310	541	665.855.002	546
658.335.101	429	660.240.103	431	662.130.302	317	665.450.811	541	665.855.024	546
658.335.134	427	660.240.140	431	662.240.106	317	665.480.001	540	665.855.094	546
658.335.145	429	660.245.106	431	662.600.061	558	665.480.023	541	665.855.131	546
658.340.104	429	660.245.143	431	662.700.021	559	665.480.093	541	665.855.315	546
658.340.130	427	660.250.102	431	662.800.025	556	665.480.130	541	665.855.816	546
658.340.141	429	660.250.146	431	662.800.316	556	665.480.314	541	666.250.001	541
658.348.106	429	660.260.101	431	662.821.025	571	665.480.815	541	666.250.023	541
658.348.132	427	660.260.145	431	662.821.316	571	665.500.006	541	666.250.093	541
658.348.143	429	660.270.100	431	662.853.026	571	665.500.021	541	666.250.130	541
658.360.102	429	660.270.144	431	662.853.310	571	665.500.091	541	666.250.314	541
658.360.135	429	660.280.106	431	662.900.022	576	665.500.135	541	666.250.815	541
658.360.146	429	660.280.143	431	662.900.313	576	665.500.312	541	666.270.006	541
659.527.035	426	660.290.105	431	662.925.023	573	665.500.813	541	666.270.021	541
659.535.030	426	660.290.142	431	662.925.314	573	665.550.001	541	666.270.091	541
659.540.033	426	660.291.100	431	662.950.024	578	665.550.023	541	666.270.135	541
659.548.035	426	660.291.144	431	662.950.315	578	665.550.093	541	666.270.312	541
659.560.031	426	660.299.102	431	664.548.500	461	665.550.130	541	666.270.813	541
659.630.145	434	660.299.146	431	664.727.033	474	665.550.314	541	666.300.003	541
659.635.141	434	660.330.101	431	664.748.033	474	665.550.815	541	666.300.025	541
659.640.144	434	660.330.145	431	664.760.036	474	665.825.005	546	666.300.095	541

Reference	pp.
666.300.132	541
666.300.316	541
666.300.810	541
666.350.005	541
666.350.020	541
666.350.090	541
666.350.134	541
666.350.311	541
666.350.812	541
666.400.000	541
666.400.022	541
666.400.092	541
666.400.136	541
666.400.313	541
666.400.814	541
666.450.002	541
666.450.024	541
666.450.094	541
666.450.131	541
666.450.315	541
666.450.816	541
666.480.006	541
666.480.021	541
666.480.091	541
666.480.135	541
666.480.312	541
666.480.813	541
666.500.004	541
666.500.026	541
666.500.096	541
666.500.133	541
666.500.310	541
666.500.811	541
666.550.006	541
666.550.021	541
666.550.091	541
666.550.135	541
666.550.312	541
666.550.813	541
666.825.003	546
666.825.025	546
666.825.095	546
666.825.132	546
666.825.316	546
666.825.810	546
666.827.000	546
666.827.022	546
666.827.092	546
666.827.136	546
666.827.313	546
666.827.814	546
666.830.006	546
666.830.021	546
666.830.091	546
666.830.135	546
666.830.312	546
666.830.813	546
666.835.002	546
666.835.024	546
666.835.094	546
666.835.131	546
666.835.315	546
666.835.816	546
666.840.005	546
666.840.020	546
666.840.090	546
666.840.134	546
666.840.311	546
666.840.812	546
666.845.001	546
666.845.023	546
666.845.093	546
666.845.130	546
666.845.314	546
666.845.815	546
666.848.000	546
666.848.022	546
666.848.092	546
666.848.136	546
666.848.313	546
666.848.814	546
666.850.004	546
666.850.026	546
666.850.096	546
666.850.133	546
666.850.310	546
666.850.811	546
666.855.000	546
666.855.022	546
666.855.092	546
666.855.136	546
666.855.313	546
666.855.814	546
667.250.006	541
667.250.021	541
667.250.091	541
667.250.135	541
667.250.312	541
667.250.813	541
667.270.004	541
667.270.026	541
667.270.096	541
667.270.133	541
667.270.310	541
667.270.811	541
667.300.001	541
667.300.023	541
667.300.093	541
667.300.130	541
667.300.314	541
667.300.815	541
667.350.003	541
667.350.025	541
667.350.095	541
667.350.132	541
667.350.316	541
667.350.810	541
667.400.005	541
667.400.020	541
667.400.090	541
667.400.134	541
667.400.311	541
667.400.812	541
667.450.000	541
667.450.022	541
667.450.092	541
667.450.136	541
667.450.313	541
667.450.814	541
667.480.004	541
667.480.026	541
667.480.096	541
668.125.006	550
668.125.021	550
668.125.091	550
668.125.135	550
668.125.312	550
668.125.813	550
668.127.003	550
668.127.025	550
668.127.095	550
668.127.132	550
668.127.316	550
668.127.810	550
668.130.002	550
668.130.024	550
668.130.094	550
668.130.131	550
668.130.315	550
668.130.816	550
668.135.005	550
668.135.020	550
668.135.090	550
668.135.134	550
668.135.311	550
668.135.812	550
668.140.001	550
668.140.023	550
668.140.093	550
668.140.130	550
668.140.314	550
668.140.815	550
668.145.004	550
668.145.026	550
668.145.096	550
668.145.133	550
668.145.310	550
668.145.811	550
668.148.003	549
668.148.025	550
668.148.095	550
668.148.132	550
668.148.316	550
668.148.810	550
668.150.000	550
668.150.022	550
668.150.092	550
668.150.136	550
668.150.313	550
668.150.814	550
668.155.003	550
668.155.025	550
668.155.095	550
668.155.132	550
668.155.316	550
668.155.810	550
668.225.003	550
668.225.025	550
668.225.095	550
668.225.132	550
668.225.316	550
668.225.810	550
668.227.000	550
668.227.022	550
668.227.092	550
668.227.136	550
668.227.313	550
668.227.814	550
668.230.006	550
668.230.021	550
668.230.091	550
668.230.135	550
668.230.312	550
668.230.813	550
668.235.002	550
668.235.024	550
668.235.094	550
668.235.131	550
668.235.315	550
668.235.816	550
668.240.005	550
668.240.020	550
668.240.090	550
668.240.134	550
668.240.311	550
668.240.812	550
668.245.001	550
668.245.023	550
668.245.093	550
668.245.130	550
668.245.314	550
668.245.815	550
668.248.000	550
668.248.022	550
668.248.092	550
668.248.136	550
668.248.313	550
668.248.814	550
668.250.004	550
668.250.026	550
668.250.096	550
668.250.133	550
668.250.310	550
668.250.811	550
668.255.000	550
668.255.022	550
668.255.092	550
668.255.136	550
668.255.313	550
668.255.814	550
668.325.000	550
668.325.022	550
668.325.092	550
668.325.136	550
668.325.313	550
668.325.814	550
668.327.004	550
668.327.026	550
668.327.096	550
668.327.133	550
668.327.310	550
668.327.811	550
668.330.003	550
668.330.025	550
668.330.095	550
668.330.132	550
668.330.316	550
668.330.810	550
668.335.006	550
668.335.021	550
668.335.091	550
668.335.135	550
668.335.312	550
668.335.813	550
668.340.002	550
668.340.024	550
668.340.094	550
668.340.131	550
668.340.315	550
668.340.816	550
668.345.005	550
668.345.020	550
668.345.090	550
668.345.134	550
668.345.311	550
668.345.812	550
668.348.004	550
668.348.026	550
668.348.096	550
668.348.133	550
668.348.310	550
668.348.811	550
668.350.001	550
668.350.023	550
668.350.093	550
668.350.130	550
668.350.314	550
668.350.815	550
668.355.004	550
668.355.026	550
668.355.096	550
668.355.133	550
668.355.310	550
668.355.811	550
669.000.006	549
669.000.021	550
669.000.091	550
669.000.135	550
669.000.312	550
669.000.813	550
670.000.004	550
670.000.026	550
670.000.096	550
670.000.133	550
670.000.310	550
670.000.811	550
671.000.002	550
671.000.024	550
671.000.094	550
671.000.131	550
671.000.315	550
671.000.816	550
672.125.005	542
672.125.020	542
672.125.090	542
672.125.134	542
672.125.311	542
672.125.812	542
672.127.002	542
672.127.024	542
672.127.094	542
672.127.131	542
672.127.315	542
672.127.816	542
672.130.001	542
672.130.023	542
672.130.093	542
672.130.130	542
672.130.314	542
672.130.815	542
672.135.004	542
672.135.026	542
672.135.096	542
672.135.133	542
672.135.310	542
672.135.812	542
672.140.000	542
672.140.022	542
672.140.092	542
672.140.136	542

Reference	pp.
672.140.313	542
672.140.814	542
672.145.003	542
672.145.025	542
672.145.095	542
672.145.132	542
672.145.316	542
672.145.810	542
672.148.002	540
672.148.024	542
672.148.094	542
672.148.131	542
672.148.315	542
672.148.816	542
672.150.006	542
672.150.021	542
672.150.091	542
672.150.135	542
672.150.312	542
672.150.813	542
672.155.002	542
672.155.024	542
672.155.094	542
672.155.131	542
672.155.315	542
672.155.816	542
672.439.025	544
672.439.316	544
672.442.024	544
672.442.315	544
672.539.022	544
672.539.313	544
672.542.021	544
672.542.312	544
672.639.026	544
672.639.310	544
672.642.025	544
672.642.316	544
672.730.004	543
672.735.000	543
672.740.003	543
672.745.006	543
672.750.002	543
672.750.020	544
672.750.311	544
672.760.001	543
672.830.001	543
672.835.004	543
672.840.000	543
672.845.003	543
672.850.006	543
672.860.005	543
674.000.316	475
676.905.003	490
676.911.001	490
677.900.311	490
677.900.005	490
678.130.003	492
678.130.305	492
678.135.006	492
678.135.301	492
678.140.002	492
678.140.304	492
678.145.005	492
678.145.300	492
678.150.001	492
678.150.303	492
678.160.000	492

Reference	pp.
678.160.302	492
678.330.004	492
678.330.306	492
678.335.000	492
678.335.302	492
678.340.003	492
678.340.305	492
678.345.006	492
678.345.301	492
678.350.002	492
678.350.304	492
678.360.001	492
678.360.303	492
678.430.104	472
678.430.314	472
678.435.100	472
678.435.310	472
678.440.103	472
678.440.313	472
678.445.106	472
678.445.316	472
678.450.102	472
678.450.312	472
678.530.101	472
678.530.311	472
678.535.104	472
678.535.314	472
678.540.100	472
678.540.310	472
678.545.103	472
678.545.313	472
678.550.106	472
678.550.316	472
678.560.105	472
678.560.315	472
678.570.104	472
678.570.314	472
678.580.103	472
678.580.313	472
678.590.102	472
678.590.312	472
678.591.104	472
678.591.314	472
678.599.106	472
678.599.316	472
678.660.102	472
678.660.312	472
678.690.106	472
678.690.316	472
678.699.103	472
678.699.313	472
678.730.301	449
678.740.300	449
678.745.303	449
678.750.306	449
678.760.305	449
679.127.514	444
679.140.512	444
679.148.514	444
679.200.513	444
679.205.516	444
679.230.510	444
679.235.513	444
679.240.516	444
679.245.512	444
679.250.515	444
679.260.514	444
679.300.064	490

Reference	pp.
679.700.022	570
679.700.313	570
680.230.003	500
680.230.460	500
680.235.006	500
680.235.463	500
680.240.002	500
680.240.466	500
680.245.005	500
680.245.462	500
680.250.001	500
680.250.465	500
680.260.000	500
680.260.464	500
680.330.000	507
680.330.464	507
680.335.003	507
680.335.460	507
680.340.006	507
680.340.463	507
680.345.002	507
680.345.466	507
680.350.005	507
680.350.462	507
680.360.004	507
680.360.461	507
680.417.006	506
680.420.005	506
680.425.001	506
680.430.004	506
680.435.000	506
680.440.003	506
681.030.000	510
681.030.313	510
681.035.003	510
681.035.316	510
681.040.006	510
681.040.312	510
681.045.002	510
681.045.315	510
681.050.005	510
681.050.311	510
681.060.004	510
681.060.310	510
681.130.004	510
681.130.310	510
681.135.000	510
681.135.313	510
681.140.003	510
681.140.316	510
681.145.006	510
681.145.312	510
681.150.002	510
681.150.315	510
681.160.001	510
681.160.314	510
681.230.001	510
681.230.314	510
681.235.004	510
681.235.310	510
681.240.000	510
681.240.313	510
681.245.003	510
681.245.316	510
681.250.006	510
681.250.312	510
681.260.005	510
681.260.311	510

Reference	pp.
681.430.002	507
681.430.466	507
681.435.005	507
681.435.462	507
681.440.001	507
681.440.465	507
681.445.004	507
681.445.461	507
681.450.000	507
681.450.464	507
681.460.006	507
681.460.463	507
681.530.006	507
681.530.463	507
681.535.002	507
681.535.466	507
681.540.005	507
681.540.462	507
681.545.001	507
681.545.465	507
681.550.004	507
681.550.461	507
681.560.003	507
681.560.460	507
681.760.004	520
681.760.310	520
681.765.000	520
681.765.313	520
681.830.004	499
681.830.461	499
681.835.000	499
681.835.464	499
681.840.003	499
681.840.460	499
681.845.006	499
681.845.463	499
681.850.002	499
681.850.466	499
681.860.001	499
681.860.465	499
681.960.005	520
681.960.311	520
681.965.001	520
681.965.314	520
683.230.004	514
683.230.310	514
683.235.000	514
683.235.313	514
683.240.003	514
683.240.316	514
683.245.006	514
683.245.312	514
683.250.002	514
683.250.315	514
683.260.314	514
683.327.002	456
683.327.315	456
683.340.000	456
683.340.313	456
683.348.002	456
683.348.315	456
683.427.511	456
683.440.516	456
683.448.511	456
683.600.001	514
684.030.104	454
684.035.100	454
684.040.103	454

Reference	pp.
684.045.106	454
684.050.102	454
684.060.101	454
684.130.005	454
684.130.311	454
684.130.904	454
684.135.001	454
684.135.314	454
684.135.900	454
684.140.004	454
684.140.310	454
684.140.903	454
684.145.000	454
684.145.313	454
684.145.906	454
684.150.003	454
684.150.316	454
684.150.902	454
684.160.002	454
684.160.315	454
684.160.901	454
684.430.316	454
684.435.312	454
684.440.315	454
684.445.311	454
684.450.314	454
684.460.313	454
684.530.000	455
684.530.313	455
684.535.003	455
684.535.316	455
684.540.006	455
684.540.312	455
684.545.002	455
684.545.315	455
684.550.005	455
684.550.311	455
684.560.004	455
684.560.310	455
684.590.001	455
684.590.314	455
684.630.004	455
684.630.310	455
684.635.000	455
684.635.313	455
684.640.003	455
684.640.316	455
684.645.006	455
684.645.312	455
684.650.002	455
684.650.315	455
684.660.001	455
684.660.314	455
684.730.001	455
684.730.314	455
684.735.004	455
684.735.310	455
684.740.000	455
684.740.313	455
684.745.003	455
684.745.316	455
684.750.006	455
684.750.312	455
684.760.005	455
684.760.311	455
684.830.005	455
684.835.001	455
684.840.004	455

Reference	pp.
684.845.000	455
684.850.003	455
684.860.002	455
684.890.006	455
684.930.002	455
684.935.005	455
684.940.001	455
684.945.004	455
684.950.000	455
684.960.006	455
684.990.003	455
685.000.002	506
685.000.315	511
685.000.466	508
685.200.003	506
685.200.316	511
685.200.460	508
685.600.031	499
685.900.106	460
686.130.141	472
686.135.144	472
686.140.140	472
686.145.143	472
686.150.146	472
686.160.145	472
686.170.144	472
686.180.143	472
686.190.144	472
686.191.144	472
686.199.146	472
686.230.311	454
686.235.314	454
686.240.310	454
686.245.313	454
686.250.316	454
686.260.315	454
686.330.002	514
686.330.315	514
686.335.005	514
686.335.311	514
686.340.001	514
686.340.314	514
686.345.004	514
686.345.310	514
686.350.000	514
686.350.313	514
686.360.006	514
686.360.312	514
686.430.006	514
686.430.312	514
686.435.002	514
686.435.315	514
686.440.005	514
686.440.311	514
686.445.001	514
686.445.314	514
686.450.004	514
686.450.310	514
686.460.003	514
686.460.316	514
686.530.003	455
686.535.006	455
686.540.002	455
686.545.005	455
686.550.001	455
686.560.000	455
686.590.004	455
686.630.103	472

Reference	pp.
686.630.313	472
686.635.106	472
686.635.316	472
686.640.102	472
686.640.312	472
686.645.105	472
686.645.315	472
686.650.101	472
686.650.311	472
686.660.100	472
686.660.310	472
686.680.105	472
686.680.315	472
686.830.001	455
686.835.004	455
686.840.000	455
686.845.003	455
686.850.006	455
686.860.005	455
686.890.002	455
687.035.005	502
687.035.462	502
687.045.004	502
687.045.461	502
687.130.006	502
687.130.463	502
687.135.002	509
687.135.466	509
687.140.005	502
687.140.462	502
687.145.001	509
687.145.465	509
687.430.004	543
687.435.000	543
687.440.003	543
687.445.006	543
687.450.002	543
687.460.001	543
687.530.001	461
687.530.303	461
687.530.911	461
687.535.004	461
687.535.306	461
687.535.914	461
687.540.000	461
687.540.302	461
687.540.910	461
687.545.003	461
687.545.305	461
687.545.913	461
687.550.006	461
687.550.301	461
687.550.916	461
687.560.005	461
687.560.300	461
687.560.915	461
687.590.002	461
687.590.142	461
687.635.001	512
687.635.314	512
687.645.000	512
687.645.313	512
687.650.003	512
687.650.316	512
687.660.002	512
687.660.315	512
687.930.003	512
687.930.316	512

Reference	pp.
687.935.006	512
687.935.312	512
687.940.002	512
687.940.315	512
687.945.005	512
687.945.311	512
688.300.104	446
689.035.001	502
689.035.465	502
689.045.000	502
689.045.464	502
689.050.003	502
689.050.460	502
689.060.002	509
689.060.466	509
689.100.300	444
689.200.105	446
689.430.000	473
689.430.313	473
689.435.003	473
689.435.316	473
689.440.006	473
689.440.312	473
689.445.002	473
689.445.315	473
689.450.005	473
689.450.311	473
689.460.004	473
689.460.310	473
689.490.001	473
689.490.314	473
689.530.004	473
689.530.310	473
689.535.000	473
689.535.313	473
689.540.003	473
689.540.316	473
689.545.006	473
689.545.312	473
689.550.002	473
689.550.315	473
689.560.001	473
689.560.314	473
689.590.005	473
689.590.311	473
689.630.001	473
689.630.314	473
689.635.004	473
689.635.310	473
689.640.000	473
689.640.313	473
689.645.003	473
689.645.316	473
689.650.006	473
689.650.312	473
689.660.005	473
689.660.311	473
689.690.002	473
689.690.315	473
689.915.140	431
689.916.146	431
698.920.140	431
700.500.102	373
700.603.105	653
700.700.103	620
700.710.102	620
700.720.101	620
700.730.100	620

Reference	pp.
700.860.101	692
700.870.100	692
700.955.102	693
700.960.105	693
700.970.104	693
701.740.174	610
701.800.105	632
701.900.102	632
702.010.105	630
702.020.104	630
702.220.105	628
702.330.101	628
702.600.102	636
702.700.106	636
703.400.106	682
703.507.103	602
703.508.105	602
703.509.100	602
703.510.102	602
703.512.106	602
703.840.174	610
703.850.335	610
703.902.102	657
703.903.104	657
704.402.101	644
704.403.103	644
704.502.105	642
704.503.100	642
704.602.102	653
704.603.104	653
704.700.102	614
704.908.142	606
704.909.144	606
704.910.146	606
704.911.141	606
705.000.100	606
705.010.106	606
705.050.102	610
705.057.102	610
705.060.101	610
705.067.101	610
705.100.104	606
705.110.103	606
705.150.106	610
705.157.106	610
705.160.105	610
705.167.105	610
705.270.101	664
705.290.106	664
705.370.105	664
705.390.103	664
705.401.104	674
705.402.106	674
705.403.101	674
705.500.106	596
705.600.103	596
705.700.100	676
705.900.101	697
706.000.503	596
706.060.504	596
706.100.500	596
706.160.501	596
706.200.504	596
706.260.505	596
706.322.503	664
706.330.505	664
706.452.515	720
706.552.512	720

Reference	pp.
706.600.101	674
706.660.102	674
706.800.102	606
706.810.101	606
706.840.105	606
706.850.104	606
706.900.106	606
706.910.105	606
707.000.501	606
707.060.502	606
707.100.505	606
707.160.506	606
707.200.502	606
707.300.506	606
707.360.500	606
707.400.503	607
707.530.504	716
707.630.501	716
707.700.501	614
707.830.502	716
708.027.504	716
708.139.500	716
708.300.504	710
708.301.506	710
708.302.501	710
708.303.503	710
708.400.501	710
708.401.503	710
708.402.505	710
708.403.500	710
708.500.505	710
708.501.500	710
708.502.502	710
708.503.504	710
708.600.502	710
708.601.504	710
708.602.506	710
708.603.501	710
708.700.506	710
708.701.501	710
708.702.503	710
708.703.505	710
708.800.503	710
708.801.505	710
708.802.500	710
708.803.502	710
708.900.500	710
708.901.502	710
708.902.504	710
708.903.506	710
709.000.504	710
709.001.506	710
709.002.501	710
709.003.503	710
709.100.501	710
709.101.503	710
709.102.505	710
709.103.500	710
709.200.505	710
709.201.500	710
709.202.502	710
709.203.504	710
709.310.103	674
709.320.102	674
709.400.510	599
709.500.514	600
709.530.511	600
709.600.102	600

Reference	pp.
709.700.515	598
709.900.516	598
710.800.101	646
710.810.100	646
710.920.103	668
710.920.501	668
710.960.106	668
710.960.504	668
711.500.101	628
711.500.506	668
711.500.775	628
711.500.786	628
711.500.801	628
711.500.893	628
711.716.106	628
711.716.773	628
711.716.784	628
711.716.806	628
711.716.891	628
711.800.106	628
711.800.773	628
711.800.784	628
711.800.806	628
711.800.891	628
711.900.103	628
711.900.770	628
711.900.781	628
711.900.803	628
711.900.895	628
712.916.864	628
712.916.875	628
712.916.901	628
712.916.912	628
712.916.923	628
712.916.934	628
712.916.945	628
712.352.502	720
713.100.102	636
713.100.802	636
713.100.894	636
713.200.106	636
713.200.806	636
713.200.891	636
713.300.103	636
713.300.803	636
713.300.895	636
713.400.100	636
713.400.800	636
713.400.892	636
713.952.105	650
713.952.514	650
714.142.100	642
714.142.516	642
714.142.774	642
714.142.785	642
714.142.800	642
714.142.892	642
714.242.104	642
714.242.513	642
714.242.771	642
714.242.782	642
714.242.804	642
714.242.896	642
714.342.101	642
714.342.510	642
714.342.775	642
714.342.786	642
714.342.801	642
714.342.893	642
714.526.411	652
714.526.444	652
714.526.724	652
714.526.735	652
714.526.864	652
714.526.875	652
714.526.886	652
714.526.901	652
714.526.934	652
714.526.945	652
714.552.101	652
714.552.510	652
714.552.775	652
714.552.786	652
714.552.801	652
714.552.893	652
714.626.415	648
714.626.441	648
714.626.721	648
714.626.732	648
714.626.861	648
714.626.872	648
714.626.883	648
714.626.905	648
714.626.931	648
714.626.942	648
714.652.105	648
714.652.514	648
714.652.772	648
714.652.783	648
714.652.805	648
714.652.890	648
714.752.102	659
714.752.511	659
714.752.802	659
714.820.105	652
714.820.411	652
714.820.444	652
714.820.514	652
714.820.724	652
714.820.735	652
714.820.772	652
714.820.783	652
714.820.805	652
714.820.864	652
714.820.875	652
714.820.886	652
714.820.890	652
714.820.901	652
714.820.934	652
714.820.945	652
714.920.102	653
714.920.415	653
714.920.441	653
714.920.511	653
714.920.721	653
714.920.732	653
714.920.776	653
714.920.780	653
714.920.802	653
714.920.861	653
714.920.872	653
714.920.883	653
714.920.894	653
714.920.905	653
714.920.931	653
714.920.942	653
715.020.106	652
715.020.412	652
715.020.445	652
715.020.515	652
715.020.725	652
715.020.736	652
715.020.773	652
715.020.784	652
715.020.806	652
715.020.865	652
715.020.876	652
715.020.880	652
715.020.891	652
715.020.902	652
715.020.935	652
715.020.946	652
715.220.100	659
715.220.516	659
715.220.800	659
715.426.412	648
715.426.445	648
715.426.725	648
715.426.736	648
715.426.865	648
715.426.876	648
715.426.880	648
715.426.902	648
715.426.935	648
715.426.946	648
715.452.102	648
715.452.511	648
715.452.776	648
715.452.780	648
715.452.802	648
715.452.894	648
715.542.100	644
715.542.516	644
715.542.774	644
715.542.785	644
715.542.800	644
715.542.892	644
715.620.102	659
715.620.511	659
715.620.802	659
715.700.100	683
715.700.100	683
715.760.500	686
715.760.511	686
715.760.802	686
715.860.106	686
715.860.515	686
715.860.806	686
715.926.002	659
715.926.024	659
715.926.315	659
716.009.066	700
716.011.063	700
716.013.060	700
716.015.064	700
716.017.061	700
716.019.065	700
716.021.062	700
716.023.066	700
716.024.061	700
716.307.001	626
716.307.012	626
716.307.023	626
716.307.196	626
716.452.516	648
716.452.516	650
717.215.516	646
717.500.501	712
717.501.503	712
717.502.505	712
717.503.500	712
717.600.505	712
717.601.500	712
717.602.502	712
717.603.504	712
717.700.502	712
717.701.504	712
717.702.506	712
717.703.501	712
717.800.506	712
717.801.501	712
717.802.503	712
717.803.505	712
717.900.503	712
717.901.505	712
717.902.500	712
717.903.502	712
718.030.504	714
718.030.541	714
718.130.501	714
718.130.545	714
718.230.505	714
718.230.542	714
718.330.502	714
718.330.546	714
718.430.506	714
718.430.543	714
718.530.503	714
718.530.540	714
718.760.512	718
718.860.516	718
718.952.080	718
719.452.510	718
719.552.514	718
721.006.005	597
721.006.016	597
721.006.020	597
721.006.193	597
721.160.101	634
721.160.775	634
721.160.786	634
721.160.801	634
721.160.893	634
721.220.102	626
721.220.776	626
721.220.780	626
721.220.802	626
721.220.894	626
721.230.101	626
721.230.775	626
721.230.786	626
721.230.801	626
721.230.893	626
721.500.032	682
721.600.036	682
721.707.011	597
721.807.015	597
722.500.015	626
722.908.001	361
722.908.012	361
722.908.023	361
723.100.313	646
726.015.032	714
730.507.035	360
730.508.030	360
730.510.034	360
730.510.060	281
730.600.301	460
730.700.003	491
730.700.305	448
730.700.305	491
730.700.316	491
731.000.001	518
731.245.104	387
732.400.001	491
732.400.303	447
732.400.303	491
732.401.305	460
732.517.100	360
732.527.106	362
732.800.305	444
732.900.302	447
733.000.063	491
733.100.104	448
733.345.023	570
733.345.314	570
733.350.026	570
733.350.310	570
733.370.024	570
733.370.315	570
733.433.024	570
733.433.315	570
733.436.023	570
733.436.314	570
733.438.020	570
733.438.311	570
733.500.003	554
733.607.022	555
733.607.033	555
733.807.023	555
733.807.034	555
733.927.316	475
733.948.316	475
733.960.312	475
734.239.026	557
734.239.310	557
734.516.020	557
734.516.311	557
734.522.025	557
734.522.316	557
734.812.024	571
734.812.315	571
734.814.021	571
734.814.312	571
734.821.021	571
734.821.312	571
734.933.021	571
734.933.312	571
734.935.025	571
734.935.316	571
734.936.020	571
734.936.311	571
734.939.026	571
734.939.310	571
735.100.310	589
735.200.314	589
735.380.026	557
735.380.310	557
735.392.022	557
735.392.313	557

Reference	pp.
735.425.025	557
735.425.316	557
735.518.081	589
735.618.085	589
735.900.023	557
735.900.314	557
736.075.034	552
736.107.035	552
736.139.036	552
736.500.026	570
736.500.310	570
741.606.003	597
741.606.014	597
741.606.025	597
741.606.191	597
743.330.125	460
743.335.121	460
743.340.124	460
743.345.120	460
743.350.123	460
743.360.122	460
743.370.121	460
743.380.120	460
743.390.126	460
745.043.806	518
745.048.802	518
745.130.120	501
745.135.123	501
745.140.126	501
745.145.122	501
745.150.125	501
745.160.124	501
745.230.124	508
745.235.120	508
745.240.123	508
745.245.126	508
745.250.122	508
745.260.121	508
745.330.121	512
745.335.124	512
745.340.120	512
745.345.123	512
745.350.126	512
745.360.125	512
745.830.120	460
745.835.123	460
745.840.126	460
745.845.122	460
745.850.125	460
745.860.124	460
745.870.123	460
745.880.122	460
745.890.121	460
746.227.506	447
746.240.504	447
746.248.506	447
746.300.505	447
746.530.503	447
746.535.506	447
746.540.502	447
746.545.505	447
746.550.501	447
746.560.500	447
746.635.002	491
746.635.304	491
746.635.816	491
746.640.005	491
746.640.300	491
746.640.812	491
746.645.001	491
746.645.303	491
746.645.815	491
746.650.004	491
746.650.306	491
746.650.811	491
746.700.006	491
746.800.003	554
746.830.000	554
746.835.003	491
746.835.003	554
746.835.316	491
746.840.006	491
746.840.312	491
746.845.002	491
746.845.315	491
746.850.005	491
746.850.311	491
746.860.004	491
746.860.310	491
746.890.001	491
746.890.314	491
747.130.311	475
747.135.314	475
747.140.310	475
747.145.313	475
747.150.316	475
747.160.315	475
747.170.314	475
747.180.313	475
747.190.312	475
747.191.314	475
747.199.316	475
748.100.006	491
748.100.301	447
748.100.301	491
748.400.004	545
748.400.026	545
748.400.096	545
748.400.133	545
748.400.310	545
748.600.311	478
748.700.315	474
750.013.106	705
750.200.021	716
750.300.025	716
751.300.104	374
751.400.020	716
752.900.105	735
753.009.106	705
753.011.103	705
753.016.106	705
753.110.105	648
753.230.310	659
753.260.311	659
753.280.312	659
753.430.020	714
753.503.310	652
753.504.312	652
753.604.316	725
753.734.026	714
753.735.021	714
754.000.063	700
754.140.310	718
754.516.103	702
754.518.100	702
754.519.102	702
754.523.103	702
754.700.063	705
755.030.006	378
755.030.021	378
755.030.312	378
755.035.002	378
755.035.024	378
755.035.315	378
755.040.005	378
755.040.020	378
755.040.311	378
755.045.001	378
755.045.023	378
755.045.314	378
755.050.004	378
755.050.026	378
755.050.310	378
755.055.000	378
755.055.022	378
755.055.313	378
755.060.003	378
755.060.025	378
755.060.316	378
755.225.004	379
755.225.026	379
755.225.310	379
755.230.000	379
755.230.022	379
755.230.313	379
755.235.003	379
755.235.025	379
755.235.316	379
755.240.006	379
755.240.021	379
755.240.312	379
755.245.002	379
755.245.024	379
755.245.315	379
755.250.005	379
755.250.020	379
755.250.311	379
755.255.001	379
755.255.023	379
755.255.314	379
755.260.004	379
755.260.026	379
755.260.310	379
755.730.006	378
755.730.021	378
755.730.312	378
755.735.002	378
755.735.024	378
755.735.315	378
755.740.005	378
755.740.020	378
755.740.311	378
755.745.001	378
755.745.023	378
755.745.314	378
755.750.004	378
755.750.026	378
755.750.310	378
755.755.000	378
755.755.022	378
755.755.313	378
755.760.003	378
755.760.025	378
755.760.316	378
756.035.825	591
756.345.026	569
756.345.310	569
756.350.022	569
756.350.313	569
756.370.020	569
756.370.311	569
759.025.805	373
759.025.820	373
759.030.801	373
759.030.823	373
759.035.804	373
759.035.826	373
759.040.800	373
759.040.822	373
759.045.803	373
759.045.825	373
759.050.806	373
759.050.821	373
759.225.806	380
759.225.821	380
759.230.802	380
759.230.824	380
759.235.805	380
759.235.820	380
759.240.801	380
759.240.823	380
759.245.804	380
759.245.826	380
759.250.800	380
759.250.822	380
759.255.803	380
759.255.825	380
759.260.806	380
759.260.821	380
759.270.805	380
759.270.820	380
759.280.804	380
759.280.826	380
759.325.803	380
759.325.825	380
759.327.800	380
759.327.822	380
759.330.806	380
759.330.821	380
759.335.802	380
759.335.824	380
759.340.805	380
759.340.820	380
759.345.801	380
759.345.823	380
759.350.804	380
759.350.826	380
759.355.800	380
759.355.822	380
759.370.802	380
759.370.824	380
759.380.801	380
759.380.823	380
759.525.804	373
759.525.826	373
759.530.800	373
759.530.822	373
759.535.803	373
759.535.825	373
759.540.806	373
759.540.821	373
759.545.802	373
759.545.824	373
759.550.805	373
759.550.820	373
759.745.803	377
759.750.806	377
760.025.803	372
760.025.825	372
760.030.806	372
760.030.821	372
760.035.802	372
760.035.824	372
760.040.805	372
760.040.820	372
760.043.804	518
760.045.801	372
760.045.823	372
760.048.800	518
760.050.804	372
760.050.826	372
760.055.800	372
760.055.822	372
760.060.803	372
760.060.825	372
760.070.802	372
760.070.824	372
760.080.801	372
760.080.823	372
760.125.800	372
760.125.822	372
760.130.803	372
760.130.825	372
760.135.806	372
760.135.821	372
760.140.802	372
760.140.824	372
760.145.805	372
760.145.820	372
760.150.801	372
760.150.823	372
760.235.803	375
760.240.806	375
760.245.802	375
760.250.805	375
760.345.806	376
760.350.802	376
760.725.803	374
760.725.825	374
760.730.806	374
760.730.821	374
760.735.802	374
760.735.824	374
760.740.805	374
760.740.820	374
760.745.801	374
760.745.823	374
760.750.804	374
760.750.826	374
762.630.035	394
762.635.031	394
762.640.034	394
762.645.030	394
762.650.033	394
762.655.036	394
762.660.032	394
762.730.032	396
762.735.035	396
762.740.031	396
762.745.034	396

Reference	pp.
762.750.030	396
762.755.033	396
762.760.036	396
763.030.030	395
763.035.033	395
763.040.036	395
763.045.032	395
763.050.035	395
763.055.031	395
763.060.034	395
763.130.034	397
763.135.030	397
763.140.033	397
763.145.036	397
763.150.032	397
763.155.035	397
763.160.031	397
765.127.031	445
765.140.036	445
765.143.035	499
765.148.031	445
765.227.035	445
765.240.033	445
765.248.035	445
766.025.035	389
766.030.031	389
766.035.034	389
766.040.030	389
766.045.033	389
766.050.036	389
766.055.032	389
766.060.035	389
766.065.031	389
766.125.032	388
766.130.035	388
766.135.031	388
766.140.034	388
766.145.030	388
766.150.033	388
766.155.036	388
766.160.032	388
766.165.035	388
766.243.030	499
766.248.033	499
766.425.030	387
766.430.033	387
766.435.036	387
766.440.032	387
766.445.035	387
766.450.031	387
766.455.034	387
766.460.030	387
766.465.033	387
766.525.034	386
766.530.030	386
766.535.033	386
766.540.036	386
766.545.032	386
766.550.035	386
766.555.031	386
766.560.034	386
766.565.030	386
767.127.034	458
767.140.032	458
767.148.034	458
767.152.035	458
767.327.035	459
767.340.033	459
767.348.035	459
767.427.032	459
767.440.030	459
767.448.032	459
768.127.032	458
768.140.030	458
768.148.032	458
768.152.033	458
768.327.033	459
768.340.031	459
768.348.033	459
768.427.030	459
768.440.035	459
768.448.030	459
768.527.034	457
768.540.032	457
768.548.034	457
768.552.035	457
768.827.032	458
768.840.030	458
768.848.032	458
768.852.033	458
769.430.034	379
769.435.030	379
769.440.033	379
769.445.036	379
769.450.032	379
769.455.035	379
769.460.031	379
769.465.034	379
769.530.031	393
769.535.034	393
769.540.030	393
769.545.033	393
769.550.036	393
769.555.032	393
769.560.035	393
769.565.031	393
769.630.035	390
769.635.031	390
769.640.034	390
769.645.030	390
769.650.033	390
769.655.036	390
769.660.032	390
769.665.035	390
769.730.032	392
769.735.035	392
769.740.031	392
769.745.034	392
769.750.030	392
769.755.033	392
769.760.036	392
769.765.032	392
775.525.752	361
775.530.755	361
775.535.751	361
775.540.754	361
775.545.750	361
775.550.753	361
775.555.756	361
776.134.752	360
776.159.753	360
776.183.752	360
776.215.753	360
776.243.753	360
776.277.751	360
776.311.756	360
776.335.755	360
776.513.754	368
776.515.751	368
776.518.750	368
776.521.756	368
776.524.755	368
776.531.755	368
776.533.752	368
776.619.756	369
776.622.755	369
776.624.752	369
776.627.751	369
776.630.750	369
776.632.754	369
778.345.751	569
778.350.753	569
778.445.754	569
778.450.750	569
778.470.755	569
778.745.752	569
778.750.755	569
778.770.753	569
778.825.751	365
778.830.754	365
778.835.750	365
778.840.753	365
778.845.756	365
778.850.752	365
778.860.751	365
778.870.750	365
778.925.755	366
778.930.751	366
778.935.754	366
778.940.750	366
778.945.753	366
778.950.756	366
778.960.755	366
778.970.754	366
779.380.755	571
779.392.751	556
779.425.754	556
781.030.751	362
781.035.754	362
781.040.750	362
781.045.753	362
781.050.756	362
781.055.752	362
781.130.755	364
781.135.751	364
781.140.754	364
781.145.750	364
781.150.753	364
781.155.756	364
781.230.752	363
781.235.755	363
781.240.751	363
781.245.754	363
781.250.750	363
781.255.753	363
784.380.752	571
784.392.755	571
784.425.751	571
788.116.000	506
788.316.001	511
788.316.314	511
789.216.002	507
789.216.466	507
789.219.001	507
789.219.465	507
789.543.801	500
789.543.860	500
789.548.804	500
789.548.863	500
789.643.805	500
789.643.864	500
789.648.801	500
789.648.860	500
800.101.061	163
800.101.805	163
800.102.063	163
800.102.800	163
800.201.802	163
800.202.804	163
803.060.005	164
804.206.141	158
804.208.145	158
804.210.142	158
804.212.146	158
804.215.145	158
804.306.101	158
804.308.105	158
804.310.102	158
804.312.106	158
804.315.105	158
804.800.146	158
804.900.143	158
806.200.312	165
806.400.000	164
810.000.063	151
810.100.060	151
810.237.062	151
810.328.061	151
810.400.065	151
810.500.062	151
812.000.066	159
812.100.063	159
812.200.060	159
813.035.510	142
813.130.010	143
813.130.021	143
813.137.010	143
813.137.021	143
813.530.012	143
813.530.023	143
813.537.012	143
813.537.023	143
813.925.000	144
813.925.011	144
813.925.022	144
813.928.006	144
813.928.010	144
813.928.021	144
813.932.000	144
813.932.011	144
813.932.022	144
814.900.004	163
814.900.015	163
814.900.026	163
816.900.000	162
816.900.011	162
819.900.001	145
819.900.012	145
819.900.023	145
823.130.066	143
823.137.066	143
823.530.061	143
823.537.061	143
826.900.060	162
880.000.004	795
880.000.015	795
880.000.026	795
880.100.001	795
880.100.012	795
880.100.023	795
880.221.005	795
880.221.016	795
880.221.020	795
880.321.002	795
880.321.013	795
880.321.024	795
880.630.063	796
880.630.575	796
880.730.060	796
880.730.572	796
880.800.034	795
880.800.056	795
880.800.255	795
881.000.061	796
881.000.573	796
881.100.065	796
881.100.570	796
884.000.773	796
884.000.795	796
884.100.770	796
884.100.792	796
884.250.065	796
884.250.113	796
884.740.065	796
884.740.113	796
884.830.774	796
884.830.796	796
884.930.771	796
884.930.793	796
885.000.001	795
885.000.012	795
885.000.023	795
885.000.174	795
885.100.005	795
885.100.016	795
885.100.020	795
885.100.171	795
889.030.800	212
889.037.800	212
889.330.002	800
889.330.013	800
889.330.024	800
889.335.005	800
889.335.016	800
889.335.020	800
889.630.066	800
889.635.062	800
889.830.001	800
889.830.012	800
889.830.023	800
889.835.004	800
889.835.015	800
889.835.026	800
889.930.005	800
889.930.020	800
889.930.171	800
889.935.001	800
889.935.023	800
889.935.174	800
900.000.102	289

Reference	pp.
912.020.060	301
912.320.065	301
913.002.005	294
913.002.016	294
913.002.020	294
913.002.193	294
913.008.003	294
913.008.014	294
913.008.025	294
913.008.191	294
913.009.005	294
913.009.016	294
913.009.020	294
913.009.193	294
913.010.000	294
913.010.011	294
913.010.022	294
913.010.195	294
913.012.004	294
913.012.015	294
913.012.026	294
913.012.192	294
913.015.003	294
913.015.014	294
913.015.025	294
913.015.191	294
913.108.000	294
913.108.011	294
913.108.022	294
913.108.195	294
913.109.002	294
913.109.013	294
913.109.024	294
913.109.190	294
913.110.004	294
913.110.015	294
913.110.026	294
913.110.192	294
913.208.041	294
913.208.063	294
913.209.043	294
913.209.065	294
913.210.045	294
913.210.060	294
913.212.042	294
913.212.064	294
913.215.041	294
913.215.063	294
913.408.064	294
913.409.066	294
913.410.061	294
913.412.065	294
913.415.064	294
914.000.032	292
915.008.065	297
915.100.060	297
915.208.066	298
915.308.063	298
915.408.060	298
915.508.064	298

Reference	pp.
918.000.013	292
918.000.016	292
918.000.020	292
918.000.024	292
918.300.003	300
918.300.014	300
918.300.025	300
919.000.106	139
919.500.116	137
919.900.004	288
919.900.015	288
919.900.026	288
920.111.006	302
920.111.010	302
920.111.021	302
920.200.105	302
920.300.006	302
920.300.010	302
920.300.021	302
920.300.194	302
920.405.006	300
920.405.010	300
920.405.021	300
920.405.194	300
920.406.001	302
920.406.012	302
920.406.023	302
920.406.196	302
920.505.062	303
920.515.061	303
920.525.060	303
920.700.001	300
920.700.012	300
920.715.003	300
920.715.014	300
920.805.034	299
920.805.045	299
920.805.056	299
920.919.005	300
920.919.016	300
920.919.020	300
921.105.102	301
921.203.102	301
921.303.062	301
921.405.063	301
921.503.004	299
921.503.015	299
921.503.026	299
921.503.693	299
921.903.032	303
922.100.001	302
922.100.012	302
922.100.023	302
922.100.196	302
922.405.002	299
922.405.013	299
922.405.024	299
922.405.691	299
922.812.030	298
922.813.032	298

Reference	pp.
922.905.023	295
923.016.006	303
923.019.005	303
923.309.030	295
923.311.034	295
923.314.033	295
923.409.034	295
923.411.031	295
923.414.030	295
923.507.034	295
923.510.033	295
923.513.032	295
923.708.030	295
930.100.006	289
930.100.010	289
930.100.194	289
930.505.100	289
934.230.102	282
934.235.105	282
934.245.104	282
934.250.100	282
934.260.106	282
934.450.031	292
934.460.030	292
934.480.035	292
934.550.035	292
934.560.034	292
934.580.032	292
934.650.032	292
934.660.031	292
934.680.036	292
934.750.036	292
934.760.035	292
934.780.033	292
937.004.014	235
937.004.106	235
937.006.011	235
937.006.022	235
937.006.103	235
937.014.013	235
937.014.024	235
937.014.105	235
937.106.015	235
937.106.100	235
937.114.010	235
937.114.102	235
937.406.013	235
937.406.105	235
938.004.034	292
938.005.036	292
938.106.035	186
938.208.036	186
938.410.034	292
938.714.103	266
938.716.100	235
938.718.104	235
938.720.101	266
940.614.032	268
940.615.034	268
940.714.036	268

Reference	pp.
940.715.031	268
941.620.035	282
941.625.031	282
941.630.034	282
941.635.030	282
941.640.033	282
941.645.036	282
941.650.032	282
941.655.035	282
941.660.031	282
941.665.034	282
941.670.030	282
941.675.033	282
941.680.036	282
941.685.032	282
941.690.035	282
941.915.063	281
941.920.066	281
941.925.062	281
941.930.065	281
941.935.061	281
941.940.064	281
941.945.060	281
942.300.063	282
943.000.004	281
943.000.015	281
943.000.026	281
944.112.105	234
944.805.105	234
947.009.044	272
947.510.056	234
947.512.053	234
947.514.050	234
947.518.051	234
947.522.052	234
947.610.053	234
947.612.050	234
947.614.054	234
947.616.051	234
947.618.055	234
947.810.054	234
947.812.051	234
947.814.055	234
947.818.056	234
947.822.050	234
947.910.051	234
947.912.055	234
947.914.052	234
947.918.053	234
948.222.052	234
948.515.035	234
948.613.035	234
948.713.054	234
948.813.036	234
948.913.055	234
949.500.101	144
950.040.033	189
950.050.032	189
950.080.036	189
950.730.045	267

Reference	pp.
950.735.041	267
950.740.044	267
950.745.040	267
950.750.043	267
950.755.046	267
950.760.042	267
951.211.063	42
951.213.060	42
951.610.063	41
952.518.033	265
952.810.062	372
953.130.043	267
953.130.054	267
953.135.046	267
953.135.050	267
953.140.042	267
953.140.053	267
953.145.045	267
953.145.056	267
953.150.041	267
953.150.052	267
953.155.044	267
953.155.055	267
953.160.040	267
953.160.051	267
953.165.043	267
953.165.054	267
953.610.066	372
955.313.030	570
955.515.035	570
957.022.032	518
960.000.005	289
960.000.016	289
960.000.020	289
960.300.003	290
960.300.014	290
960.300.025	290
960.300.062	290
960.700.005	290
960.700.016	290
960.700.020	290
960.700.064	290
961.000.003	290
961.000.014	290
961.000.025	290
961.200.004	290
961.200.015	290
961.200.026	290
961.200.063	290
961.310.302	446
961.412.001	337
961.512.064	337
961.618.000	329
961.618.066	329
982.435.031	317
986.132.033	714
986.915.031	18
987.312.064	121
988.717.063	41

Brief guide to the catalogue

Page structure

In order to help the user, a heading has been included on each page showing that page's relation to the rest of the catalogue products and which also places each individual product in the context of the product group. So, for example, if you are on the page dealing with the technical data of the sub-section "**MARC** RUNNERS: SINGLE EXTENSION", section "**MARC concealed runners**", in **chapter 6** of "RUNNERS", the heading will read as shown in the image below. Likewise, the chapter is indicated in the bottom corner of each page in a grey square.

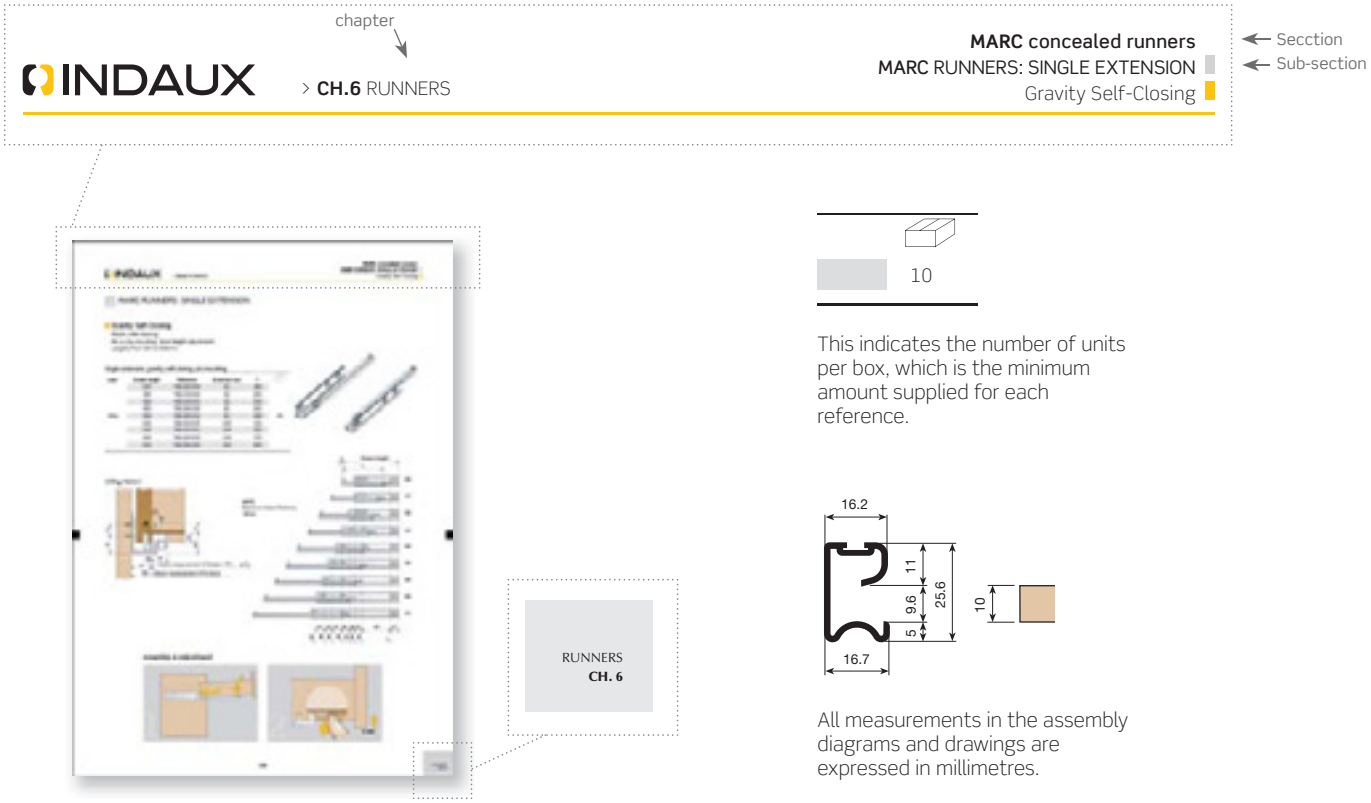

This indicates the number of units per box, which is the minimum amount supplied for each reference.

All measurements in the assembly diagrams and drawings are expressed in millimetres.

Conditions of use for this catalogue

- The images, drawings and technical information are for information purposes only and do not entail any commitment by the company.
- We reserve the right to make any technical modifications to the details listed in the catalogue.
- We accept no responsibility for printing or layout errors.
- We reserve the copyright of this catalogue. Any partial or full reproduction or copy of the catalogue by any methods is only permitted prior express written authorisation.

Commercial Network

MAIN HEADQUARTERS

> **SPAIN**

INDUSTRIAS AUXILIARES (INDAUX) S.A.U
San Prudencio, s/n
20808 Getaria (Guipúzcoa)
Apdo. Correos 132
20800 Zarautz (Guipúzcoa)
ESPAÑA - SPAIN
Tel. +34 943 140 300 / Fax +34 943 140 534
e-mail indaux@indaux.com

e-mail info@indaux.com
www.indaux.com

SUBSIDIARIES

> **UNITED KINGDOM & EIRE**

INDAUX UK SALES OFFICE
MGA House, Ray Mill Road East
Maidenhead SL6 8ST - Berkshire
UNITED KINGDOM
Tel. +44 1628 780 250 / Fax +44 1628 780 251
e-mail uk@indaux.com

> **GERMANY**

INDAUX DEUTSCHLAND VERTRIEBSBÜRO
Nickelstraße 17,
33378 Rheda-Wiedenbrück / Lintel
DEUTSCHLAND
Tel. +49 5242 406 076 / Fax 05242 406 077
e-mail deutschland@indaux.com

> **FRANCE**

INDAUX FRANCE
Résidence de l'Aumarière, Appart. 120 bât. C
Rue Edouard Lalo
85500 Les Herbiers
FRANCE
Tel. +33 251 679 330
Fax +33 251 672 138
e-mail france@indaux.com

> **BRASIL**

INDAUX DO BRASIL
Rua Nelsson Carraro 1267
Bairro Santo Antao
95700-000 BENTO GONCALVES-RS
BRASIL
Tel. / Fax +55 54 34531916
e-mail brazil@indaux.com

> **U.S.A**

INDAUX USA SALES OFFICE
1206 Ascot Court
HIGH POINT, NC 2726
USA
Tel. +1 336 210 3965
e-mail usa@indaux.com

INDAUX
FURNITURE FITTINGS MANUFACTURER

INDUSTRIAS AUXILIARES (INDAUX), S.A.U.
San Prudencio, s/n
20808 Getaria (Gipúzcoa)
Apto. Correos 132
20800 Zarautz (Guipúzcoa)
ESPAÑA - SPAIN
Telf. +34 943 140 300 **Fax** +34 943 140 534
e-mail indaux@indaux.com

100.810.986 / 2011

www.indaux.com
email info@indaux.com

INDAUX S.A.U.
AENOR
ER
Empresa Registrada
UNE-EN ISO 9001
ER-1616/2000
CERTIFIED
IQNet
MANAGEMENT SYSTEM